

500W Unidirectional TVS Diode

APPLICATIONS

- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Personal Digital Assistants (PDA's)
- ◆ Notebooks, Desktops, and Servers
- ◆ Portable Instrumentation
- ◆ Peripherals
- ◆ Pagers

IEC COMPATIBILITY



- ◆ IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- ◆ IEC61000-4-4 (EFT) 40A (5/50 η s)
- ◆ IEC61000-4-5 (Lightning) 24A (8/20 μ s)

FEATURES

- ◆ 500 Watts Peak Pulse Power per Line ($t_p=8/20\mu$ s)
- ◆ Protects one I/O or power line
- ◆ Low clamping voltage
- ◆ Working voltages: 3.3V, 5V, 12V, 15V, 24V, 36V
- ◆ Low leakage current

MECHANICAL CHARACTERISTICS

- ◆ JEDEC SOD-323 Package
- ◆ Molding Compound Flammability Rating : UL 94V-O
- ◆ Weight 5 Milligrams (Approximate)
- ◆ Quantity Per Reel : 3,000pcs
- ◆ Reel Size : 7 inch
- ◆ Lead Finish : Lead Free

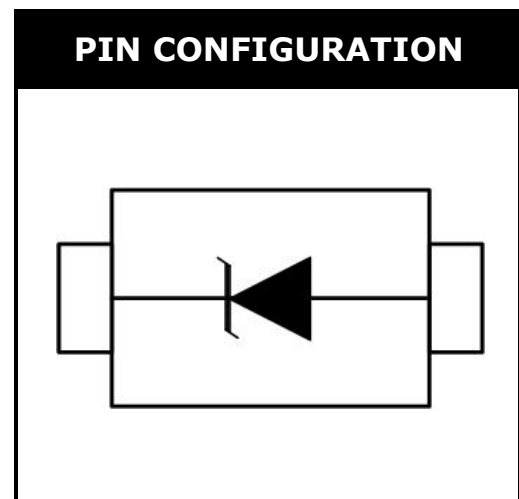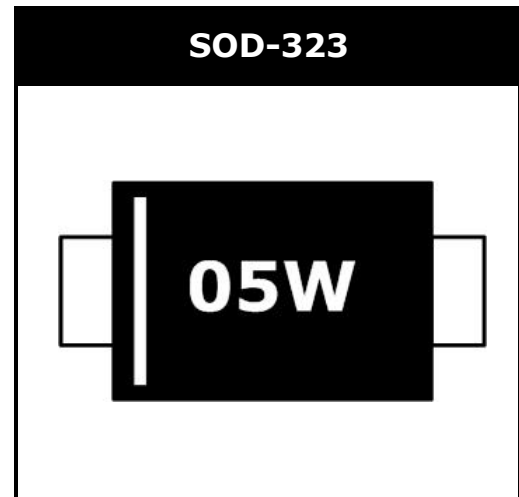

DEVICE CHARACTERISTICS



MAXIMUM RATINGS (@ 25°C Unless Otherwise Specified)

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (tp=8/20μs waveform)	P _{PP}	500	Watts
Lead Soldering Temperature	T _L	260 (10 sec.)	°C
Operating Temperature Range	T _J	-55 ~ 150	°C
Storage Temperature Range	T _{STG}	-55 ~ 150	°C


ELECTRICAL CHARACTERISTICS PER LINE (@ 25°C Unless Otherwise Specified)

PART NUMBER	DEVICE MARKING	V _{RWM}	V _B	I _T	V _C	V _C		I _R	C _T
		(V) (max.)	(V) (min.)	(mA)	@1A (max.)	(max.)	(@A)	(μA) (max.)	(pF) (max.)
SD03	03W	3.3	4	1	6.5	10.9	30	40	500
SD05	05W	5	6	1	9.8	13.5	24	10	350
SD12	12W	12	13.3	1	19	25.9	15	1	150
SD15	15W	15	16.7	1	24	30	12	1	100
SD24	24W	24	26.7	1	43	48	8	1	90
SD36	36W	36	40	1	60	75	5	1	75

ESD Pulse Waveform (Per IEC 61000-4-2)

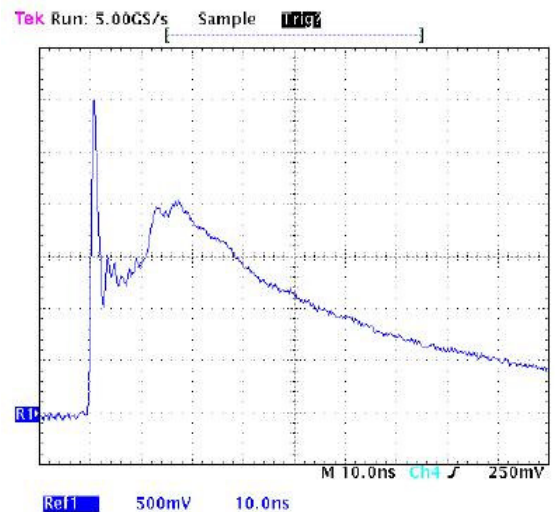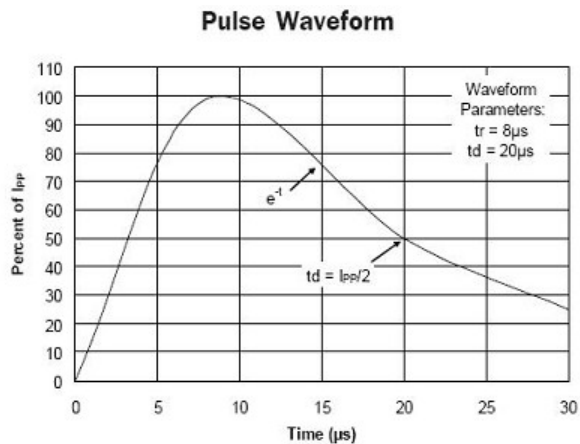


SOD-323 PACKAGE OUTLINE & DIMENSIONS

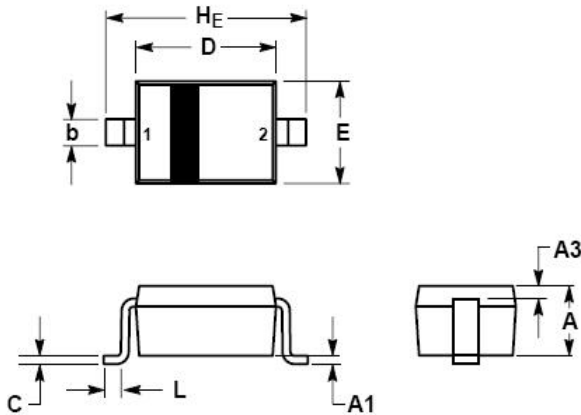

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.031	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A3	0.15 REF			0.006 REF		
b	0.25	0.32	0.4	0.010	0.012	0.016
C	0.089	0.12	0.177	0.003	0.005	0.007
D	1.60	1.70	1.80	0.062	0.066	0.070
E	1.15	1.25	1.35	0.045	0.049	0.053
L	0.08			0.003		
HE	2.30	2.50	2.70	0.090	0.098	0.105

*** SOLDERING FOOTPRINT**

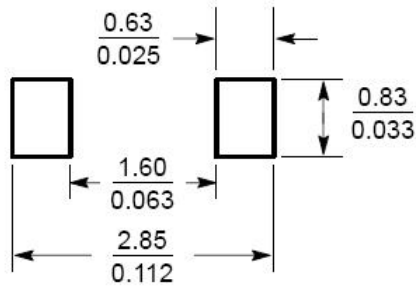

SHANGHAI LEIDITECH ELECTRONICS TECHNOLOGY CO., LTD
 Phone: +86- 021-50827201
 Email:sale1@leiditech.com
<http://www.leiditech.com>