



LT1881/LT1882

Dual and Quad Rail-to-Rail Output, Picoamp Input Precision Op Amps

FEATURES

- Offset Voltage: 50 μ V Maximum (LT1881A)
- Input Bias Current: 200pA Maximum (LT1881A)
- Offset Voltage Drift: 0.8 μ V/ $^{\circ}$ C Maximum
- Rail-to-Rail Output Swing
- Supply Range: 2.7V to 36V
- Operates with Single or Split Supplies
- Open-Loop Voltage Gain: 1 Million Minimum
- 1mA Maximum Supply Current Per Amplifier
- Stable at $A_V = 1$, $C_L = 1000\text{pF}$
- Standard Pinouts

APPLICATIONS

- Thermocouple Amplifiers
- Bridge Transducer Conditioners
- Instrumentation Amplifiers
- Battery-Powered Systems
- Photo Current Amplifiers

DESCRIPTION

The LT®1881 and LT1882 op amps bring high accuracy input performance to amplifiers with rail-to-rail output swing. Input bias currents and capacitive load driving capabilities are superior to the similar LT1884 and LT1885 amplifiers, at the cost of a slight loss in speed. Input offset voltage is trimmed to less than 50 μ V and the low drift maintains this accuracy over the operating temperature range. Input bias currents are an ultralow 200pA maximum.

The amplifiers work on any total power supply voltage between 2.7V and 36V (fully specified from 5V to ± 15 V). Output voltage swings to within 40mV of the negative supply and 220mV of the positive supply make these amplifiers good choices for low voltage single supply operation.


Capacitive loads up to 1000pF can be driven directly in unity-gain follower applications.

The dual LT1881 and LT1881A are available with standard pinouts in S8 and PDIP packages. The quad LT1882 is in a 14-pin SO package. For a higher speed device with similar DC specifications, see the LT1884/LT1885.


LT, LT, LTC and LTM are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

16-Bit Voltage Output DAC on ± 5 V Supply

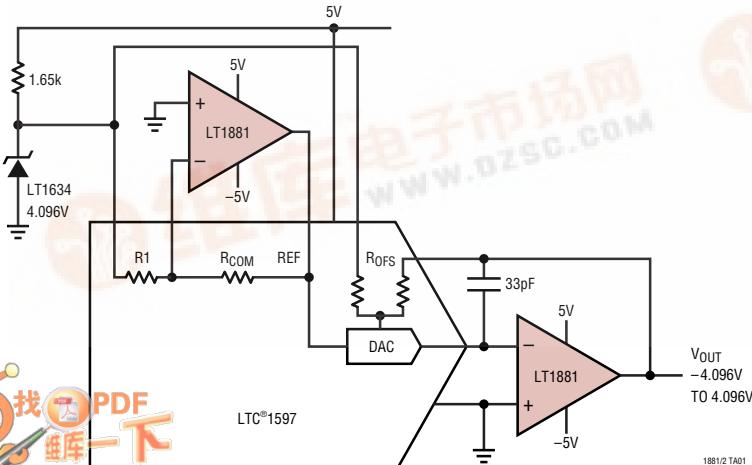

TC V_{OS} Distribution, Industrial Grade

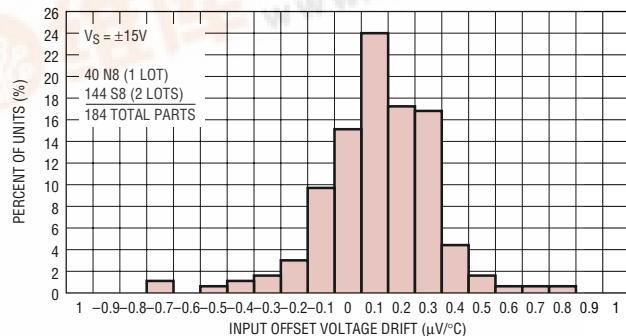

1881/2 TA01a

LT1881/LT1882

ABSOLUTE MAXIMUM RATINGS (Note 1)

| | | | |
|--|----------------|--|----------------|
| Supply Voltage (V^+ to V^-) | 40V | Operating Temperature Range (Note 4) | -40°C to 85°C |
| Differential Input Voltage (Note 2) | $\pm 10V$ | Specified Temperature Range (Note 5) ... | -40°C to 85°C |
| Input Voltage | V^+ to V^- | Maximum Junction Temperature | 150°C |
| Input Current (Note 2) | $\pm 10mA$ | Storage Temperature Range | -65°C to 150°C |
| Output Short-Circuit Duration (Note 3) | Indefinite | Lead Temperature (Soldering, 10 sec)..... | 300°C |

PACKAGE/ORDER INFORMATION

| TOP VIEW | ORDER PART NUMBER | TOP VIEW | ORDER PART NUMBER |
|--|--|---|----------------------|
| | LT1881CN8 LT1881IN8 LT1881CS8 LT1881IS8 LT1881ACN8 LT1881AIN8 LT1881ACS8 LT1881AIS8 | | LT1882CS LT1882IS |
| N8 PACKAGE 8-LEAD PDIP | S8 PACKAGE 8-LEAD PLASTIC SO | S PACKAGE 14-LEAD PLASTIC SO | |
| $T_{JMAX} = 150^\circ C, \theta_{JA} = 130^\circ C/W$ (N8) $T_{JMAX} = 150^\circ C, \theta_{JA} = 190^\circ C/W$ (S8) | | $T_{JMAX} = 150^\circ C, \theta_{JA} = 150^\circ C/W$ | |
| S8 PART MARKING | | Order Options Tape and Reel: Add #TR Lead Free: Add #PBF Lead Free Tape and Reel: Add #TRPBF Lead Free Part Marking: http://www.linear.com/leadfree/ | |
| 1881 1881I 1881A 1881AI | | | |

Consult LTC marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ C$.
 Single supply operation $V_S = 5V, 0V; V_{CM} = V_S/2$ unless otherwise noted. (Note 5)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------------------|--|--|-----|-----|-----|---------------|
| V_{OS} | Input Offset Voltage (LT1881A) | $0^\circ C < T_A < 70^\circ C$ $-40^\circ C < T_A < 85^\circ C$ | ● | 25 | 50 | μV |
| | | | ● | 85 | 110 | μV |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage (LT1881/LT1882) | $0^\circ C < T_A < 70^\circ C$ $-40^\circ C < T_A < 85^\circ C$ | ● | 30 | 80 | μV |
| | | | ● | 125 | 150 | μV |
| $\Delta V_{OS}/\Delta TIME$ | Input Offset Voltage Drift (Note 6) | $0^\circ C < T_A < 70^\circ C$ $-40^\circ C < T_A < 85^\circ C$ | ● | 0.3 | 0.8 | $\mu V/C$ |
| | Long-Term Input Offset Voltage Stability | | ● | 0.3 | | $\mu V/month$ |
| I_{OS} | Input Offset Current (LT1881A) | $0^\circ C < T_A < 70^\circ C$ $-40^\circ C < T_A < 85^\circ C$ | ● | 100 | 200 | pA |
| | | | ● | 250 | 300 | pA |
| | Input Offset Current (LT1881/LT1882) | $0^\circ C < T_A < 70^\circ C$ $-40^\circ C < T_A < 85^\circ C$ | ● | 150 | 500 | pA |
| | | | ● | 600 | 700 | pA |

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. Single supply operation $V_S = 5\text{V}, 0\text{V}; V_{CM} = V_S/2$ unless otherwise noted. (Note 5)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS | |
|-----------|---|--|------------------|----------------------------|----------------------------|--|----|
| I_B | Input Bias Current (LT1881A) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 100 250 300 | 200 pA pA | pA | |
| | Input Bias Current (LT1881/LT1882) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 150 600 700 | 500 pA pA | pA | |
| | Input Noise Voltage | 0.1Hz to 10Hz | | | 0.5 | $\mu\text{V}_{\text{P-P}}$ | |
| e_n | Input Noise Voltage Density | $f = 1\text{kHz}$ | | | 14 | $\text{nV}/\sqrt{\text{Hz}}$ | |
| i_n | Input Noise Current Density | $f = 1\text{kHz}$ | | | 0.03 | $\text{pA}/\sqrt{\text{Hz}}$ | |
| R_{IN} | Input Resistance | Differential Mode Common Mode | ● ● | 20 100 | | $\text{M}\Omega$ $\text{G}\Omega$ | |
| C_{IN} | Input Capacitance | | ● | 2 | | pF | |
| V_{CM} | Input Voltage Range | | ● | $V^- + 1.0$ $V^- + 1.2$ | $V^+ - 1.0$ $V^+ - 1.2$ | V V | |
| CMRR | Common Mode Rejection Ratio | $1\text{V} < V_{CM} < 4\text{V}$ $1.2\text{V} < V_{CM} < 3.8\text{V}$ | ● | 106 104 | 128 | dB dB | |
| PSRR | Power Supply Rejection Ratio | $V^- = 0\text{V}, V_{CM} = 1.5\text{V}$ $0^\circ\text{C} < T_A < 85^\circ\text{C}, 2.7\text{V} < V^+ < 32\text{V}$ $T_A = -40^\circ\text{C}, 3\text{V} < V^+ < 32\text{V}$ | ● | 106 106 | 132 132 | dB dB | |
| | Minimum Operating Supply Voltage | | ● | | 2.4 2.7 | V | |
| A_{VOL} | Large-Signal Voltage Gain | $R_L = 10\text{k}; 1\text{V} < V_{OUT} < 4\text{V}$ | ● ● | 500 350 | 1600 | V/mV V/mV | |
| | | $R_L = 2\text{k}; 1\text{V} < V_{OUT} < 4\text{V}$ | ● ● | 300 250 | 800 | V/mV V/mV | |
| | | $R_L = 1\text{k}; 1\text{V} < V_{OUT} < 4\text{V}$ | ● ● | 250 200 | 400 | V/mV V/mV | |
| V_{OL} | Output Voltage Swing Low | No Load $I_{SINK} = 100\mu\text{A}$ $I_{SINK} = 1\text{mA}$ $I_{SINK} = 5\text{mA}$ | ● ● ● ● | 20 25 70 270 | 40 50 150 600 | mV mV mV mV | |
| V_{OH} | Output Voltage Swing High (Referred to V^+) | No Load $I_{SOURCE} = 100\mu\text{A}$ $I_{SOURCE} = 1\text{mA}$ $I_{SOURCE} = 5\text{mA}$ | ● ● ● ● | 120 130 180 360 | 220 230 300 600 | mV mV mV mV | |
| I_S | Supply Current Per Amplifier | $V_S = 3\text{V}, 0\text{V}$ | ● | 0.45 | 0.65 | 0.85 1.2 | mA |
| | | $V_S = 5\text{V}, 0\text{V}$ | ● | 0.5 | 0.65 | 0.9 1.4 | mA |
| | | $V_S = 12\text{V}, 0\text{V}$ | ● | 0.5 | 0.70 | 1.0 1.5 | mA |
| I_{SC} | Short-Circuit Current | V_{OUT} Short to GND V_{OUT} Short to V^+ | ● ● | 15 15 | 30 30 | mA mA | |
| GBW | Gain Bandwidth Product | $f = 20\text{kHz}$ | | 0.35 | 1.0 | MHz | |
| | Channel Separation | $f = 1\text{kHz}$ | | | 120 | dB | |
| t_S | Settling Time | $0.01\%, V_{OUT} = 1.5\text{V}$ to 3.5V , $A_V = -1, R_L = 2\text{k}$ | | | 30 | μs | |

LT1881/LT1882

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. Single supply operation $V_S = 5\text{V}, 0\text{V}; V_{CM} = V_S/2$ unless otherwise noted. (Note 5)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------|---|--|-----|--------------|------------|--|
| SR ⁺ | Slew Rate Positive | $A_V = -1$ | ● | 0.15 0.12 | 0.35 | $\text{V}/\mu\text{s}$ $\text{V}/\mu\text{s}$ |
| SR ⁻ | Slew Rate Negative | $A_V = -1$ | ● | 0.11 0.08 | 0.18 | $\text{V}/\mu\text{s}$ $\text{V}/\mu\text{s}$ |
| FPBW | Full-Power Bandwidth | $V_{OUT} = 4\text{V}_{P-P}$ (Note 10) | ● | 8.75 6.35 | 14 | kHz kHz |
| ΔV_{OS} | Offset Voltage Match (LT1881A) | (Note 7) $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● | 30 | 70 | μV |
| | | ● | 125 | 125 | 160 | μV |
| | | ● | 160 | 175 | 235 | μV |
| | Offset Voltage Match (LT1881/LT1882) | (Note 7) $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● | 35 | 125 | μV |
| ● | Offset Voltage Match Drift | (Notes 6, 7) | ● | 0.4 | 1.2 | $\mu\text{V}/^\circ\text{C}$ |
| ΔI_{B+} | Noninverting Bias Current Match (LT1881A) | (Notes 7, 8) $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● | 200 | 300 | pA |
| | | ● | 400 | 400 | 500 | pA |
| | Noninverting Bias Current Match (LT1881/LT1882) | (Notes 7, 8) $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● | 250 | 700 | pA |
| | | ● | 900 | 900 | 1000 | pA |
| $\Delta CMRR$ | Common Mode Rejection Match | (Notes 7, 9) | ● | 102 | 125 | dB |
| $\Delta PSRR$ | Power Supply Rejection Match (Notes 7, 9) | $V^- = 0\text{V}, V_{CM} = 1.5\text{V}$ $0^\circ\text{C} < T_A < 85^\circ\text{C}, 2.7\text{V} < V^+ < 32\text{V}$ $T_A = -40^\circ\text{C}, 3\text{V} < V^+ < 32\text{V}$ | ● | 104 104 | 126 126 | dB dB |

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. Split supply operation $V_S = \pm 15\text{V}, V_{CM} = 0\text{V}$ unless otherwise noted. (Note 5)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------------------|--|--|--------|------------|-------------------|--|
| V_{OS} | Input Offset Voltage (LT1881A) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ | ● | 25 | 50 | μV |
| | | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● | 85 110 | 85 110 | μV μV |
| | Input Offset Voltage (LT1881/LT1882) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 30 | 80 | μV |
| | | | ● ● | 125 150 | 125 150 | μV μV |
| $\Delta V_{OS}/\Delta T$ | Input Offset Voltage Drift (Note 6) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 0.3 0.3 | 0.8 0.8 | $\mu\text{V}/^\circ\text{C}$ $\mu\text{V}/^\circ\text{C}$ |
| $\Delta V_{OS}/\Delta TIME$ | Long-Term Input Offset Voltage Stability | | | 0.3 | | $\mu\text{V/month}$ |
| I_{OS} | Input Offset Current (LT1881A) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ | ● | 150 | 200 | pA |
| | | $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● | 250 300 | 250 300 | pA pA |
| | Input Offset Current (LT1881/LT1882) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 150 | 500 600 700 | pA pA pA |

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. Split supply operation $V_S = \pm 15\text{V}$, $V_{CM} = 0\text{V}$ unless otherwise noted. (Note 5)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS | |
|-----------------|--|--|------------------|----------------------------|----------------------------|--|----------|
| I_B | Input Bias Current (LT1881A) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 150 250 300 | 200 250 300 | pA pA pA | |
| | | | | | | | |
| | Input Bias Current (LT1881/LT1882) | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 150 600 700 | 500 600 700 | pA pA pA | |
| | | | | | | | |
| | Input Noise Voltage | 0.1Hz to 10Hz | | | 0.5 | $\mu\text{V}_{\text{P-P}}$ | |
| e_n | Input Noise Voltage Density | $f = 1\text{kHz}$ | | | 14 | $\text{nV}/\sqrt{\text{Hz}}$ | |
| i_n | Input Noise Current Density | $f = 1\text{kHz}$ | | | 0.03 | $\text{pA}/\sqrt{\text{Hz}}$ | |
| R_{IN} | Input Resistance | Differential Mode Common Mode | ● ● | 20 100 | | $\text{M}\Omega$ $\text{G}\Omega$ | |
| C_{IN} | Input Capacitance | | ● | | 2 | pF | |
| V_{CM} | Input Voltage Range | | ● | $V^- + 1.0$ $V^- + 1.2$ | $V^+ - 1.0$ $V^+ - 1.2$ | V V | |
| CMRR | Common Mode Rejection Ratio | $-13.5\text{V} < V_{CM} < 13.5\text{V}$ | ● | 114 | 130 | dB | |
| +PSRR | Positive Power Supply Rejection Ratio | $V^- = -15\text{V}$, $V_{CM} = 0\text{V}$; $1.5\text{V} < V^+ < 18\text{V}$ | ● | 110 | 132 | dB | |
| -PSRR | Negative Power Supply Rejection Ratio | $V^+ = 15\text{V}$, $V_{CM} = 0\text{V}$; $-1.5\text{V} < V^- < -18\text{V}$ | ● | 106 | 132 | dB | |
| | Minimum Operating Supply Voltage | | ● | | ± 1.2 ± 1.35 | V | |
| A_{VOL} | Large-Signal Voltage Gain | $R_L = 10\text{k}; -13.5\text{V} < V_{OUT} < 13.5\text{V}$ | ● | 1000 700 | 1600 | V/mV V/mV | |
| | | $R_L = 2\text{k}; -13.5\text{V} < V_{OUT} < 13.5\text{V}$ | ● | 175 125 | 420 | V/mV V/mV | |
| | | $R_L = 1\text{k}; -12\text{V} < V_{OUT} < 12\text{V}$ | ● | 90 65 | 230 | V/mV V/mV | |
| V_{OL} | Output Voltage Swing Low (Referred to V_{EE}) | No Load $I_{SINK} = 100\mu\text{A}$ $I_{SINK} = 1\text{mA}$ $I_{SINK} = 5\text{mA}$ | ● ● ● ● | 20 25 70 270 | 40 50 150 600 | mV mV mV mV | |
| V_{OH} | Output Voltage Swing High (Referred to V_{CC}) | No Load $I_{SOURCE} = 100\mu\text{A}$ $I_{SOURCE} = 1\text{mA}$ $I_{SOURCE} = 5\text{mA}$ | ● ● ● ● | 160 160 180 360 | 220 230 300 600 | mV mV mV mV | |
| I_S | Supply Current Per Amplifier | $V_S = \pm 15\text{V}$ | ● | 0.5 | 0.85 | 1.1 1.6 | mA mA |
| I_{SC} | Short-Circuit Current | V_{OUT} Short to V^- | ● | 20 15 | 40 | mA | |
| | | V_{OUT} Short to V^+ | ● | 20 15 | 30 | mA | |
| GBW | Gain Bandwidth Product | $f = 20\text{kHz}$ | | 0.4 | 0.85 | MHz | |
| | Channel Separation | $f = 1\text{kHz}$ | | | 120 | dB | |
| t_S | Settling Time | 0.01% , $V_{OUT} = -5\text{V}$ to 5V , $A_V = -1$, $R_L = 2\text{k}$ | | | 35 | μs | |
| SR ⁺ | Slew Rate Positive | $A_V = -1$ | ● | 0.21 0.18 | 0.4 | $\text{V}/\mu\text{s}$ $\text{V}/\mu\text{s}$ | |

LT1881/LT1882

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$. Split supply operation $V_S = \pm 15\text{V}$, $V_{CM} = 0\text{V}$ unless otherwise noted. (Note 5)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------|--|--|--------|--------------|--------------------|--|
| SR ⁻ | Slew Rate Negative | $A_V = -1$ | ● | 0.13 0.1 | 0.20 | $\text{V}/\mu\text{s}$ $\text{V}/\mu\text{s}$ |
| FPBW | Full-Power Bandwidth | $V_{OUT} = 28\text{V}_{P-P}$ (Note 10) | ● | 1.47 1.13 | 2.25 | kHz kHz |
| ΔV_{OS} | Offset Voltage Match (LT1881/LT1882) | (Note 5) $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 42 | 125 175 235 | μV μV μV |
| | | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 35 | 70 125 160 | μV μV μV |
| | Offset Voltage Match Drift | (Notes 6, 7) | ● | 0.4 | 1.1 | $\mu\text{V}/^\circ\text{C}$ |
| ΔI_{B+} | Noninverting Bias Current Match (LT1881/LT1882) | (Notes 7, 8) $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 240 | 700 900 1000 | pA pA pA |
| | | $0^\circ\text{C} < T_A < 70^\circ\text{C}$ $-40^\circ\text{C} < T_A < 85^\circ\text{C}$ | ● ● | 200 | 300 400 500 | pA pA pA |
| $\Delta CMRR$ | Common Mode Rejection Match | (Notes 7, 9) | ● | 110 | 125 | dB |
| $\Delta PSRR$ | Positive Power Supply Rejection Match | $V^- = -15\text{V}$, $V_{CM} = 0\text{V}$, $1.5\text{V} < V^+ < 18\text{V}$, (Notes 7, 9) | ● | 108 | 130 | dB |
| $\Delta PSRR$ | Negative Power Supply Rejection Match | $V^+ = 15\text{V}$, $V_{CM} = 0\text{V}$, $-1.5\text{V} < V^- < -18\text{V}$, (Notes 7, 9) | ● | 104 | 130 | dB |

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: The inputs are protected by internal resistors and back-to-back diodes. If the differential input voltage exceeds $\pm 0.7\text{V}$, the input current should be limited externally to less than 10mA.

Note 3: A heat sink may be required to keep the junction temperature below absolute maximum.

Note 4: The LT1881C, LT1882C, LT1881I and LT1882I are guaranteed functional over the operating temperature range of -40°C to 85°C .

Note 5: The LT1881C and LT1882C are designed, characterized and expected to meet specified performance from -40°C to 85°C but are not

tested or QA sampled at these temperatures. The LT1881I and LT1882I are guaranteed to meet specified performance from -40°C to 85°C .

Note 6: This parameter is not 100% tested.

Note 7: Matching parameters are the difference between amplifiers A and B in the LT1881; and between amplifiers A and D and B and C in the LT1882.


Note 8: This parameter is the difference between the two noninverting input bias currents.

Note 9: $\Delta CMRR$ and $\Delta PSRR$ are defined as follows: CMRR and PSRR are measured in $\mu\text{V}/\text{V}$ on each amplifier. The difference is calculated in $\mu\text{V}/\text{V}$ and then converted to dB.

Note 10: Full power bandwidth is calculated from the slew rate: $FPBW = SR/2\pi V_P$.


TYPICAL PERFORMANCE CHARACTERISTICS

Supply Current per Amplifier vs Supply Voltage

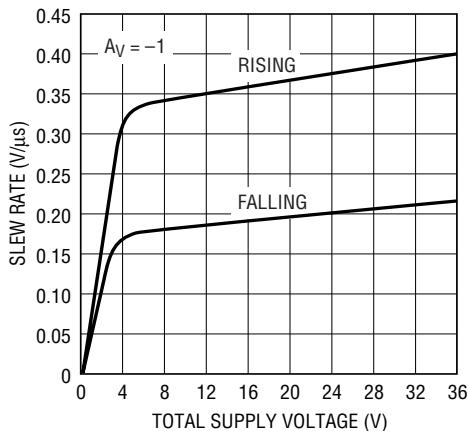


1881/2 G02

Slew Rate vs Supply Voltage

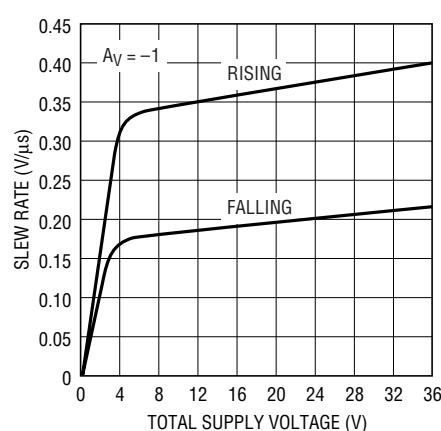


1881/2 G02

Slew Rate vs Temperature

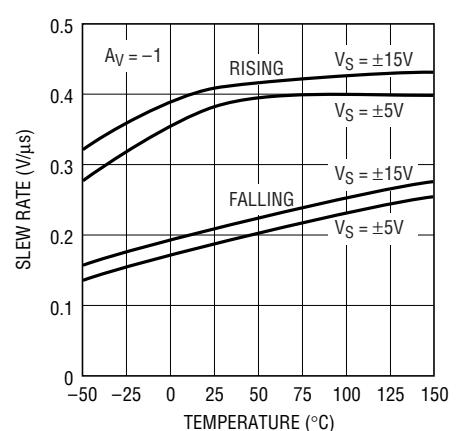


1881/2 G03

Settling Time vs Output Step

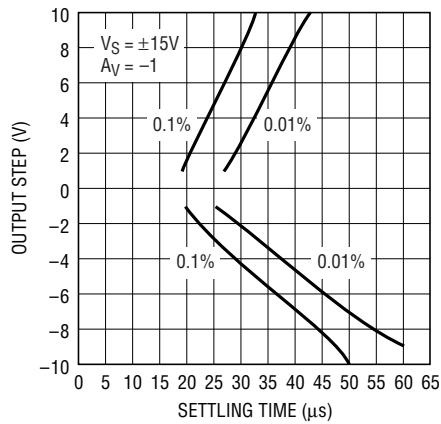


1881/2 G04

Settling Time vs Output Step

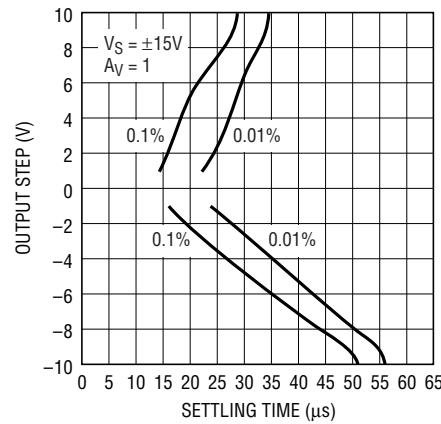


1881/2 G05

Gain Bandwidth Product vs Supply Voltage

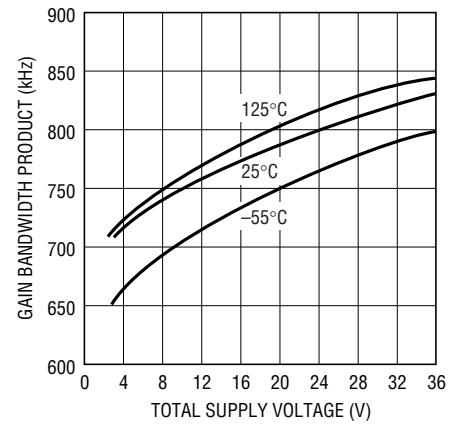


1881/2 G06

Phase Margin vs Supply Voltage

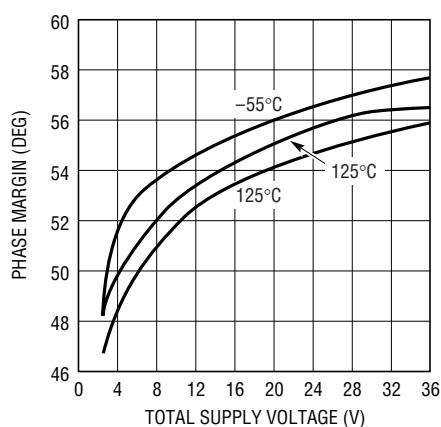


1881/2 G07

Gain vs Frequency, $A_V = -1$

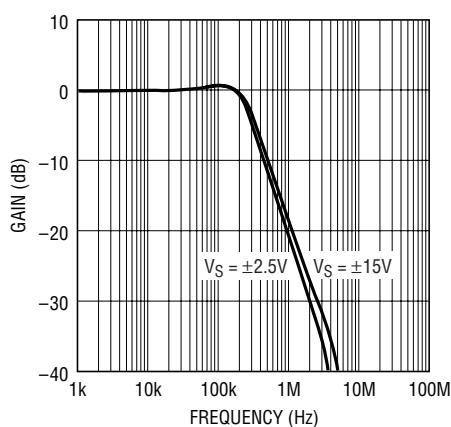

1881/2 G08

Gain vs Frequency, $A_V = 1$

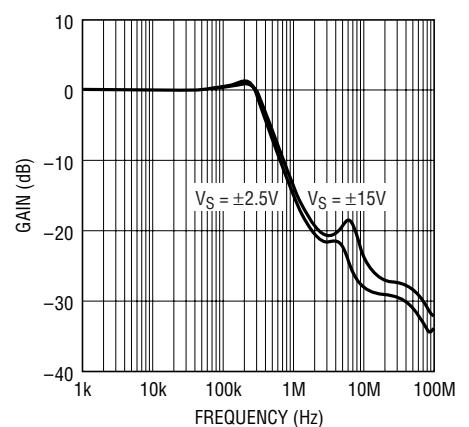


1881/2 G09

LT1881/LT1882


TYPICAL PERFORMANCE CHARACTERISTICS

**Gain vs Frequency with C_{LOAD} ,
 $A_V = 1$**

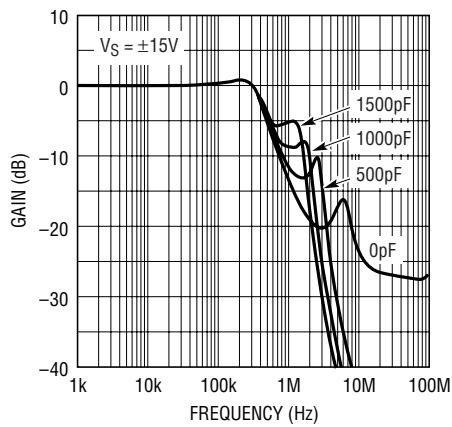


1881/2 G10

**Gain vs Frequency with C_{LOAD} ,
 $A_V = -1$**

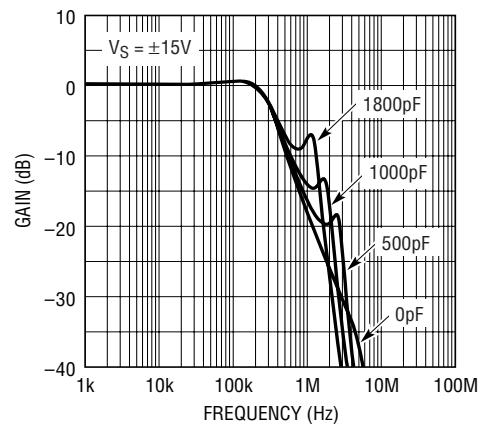


1881/2 G11

Large Signal Response, $A_V = -1$

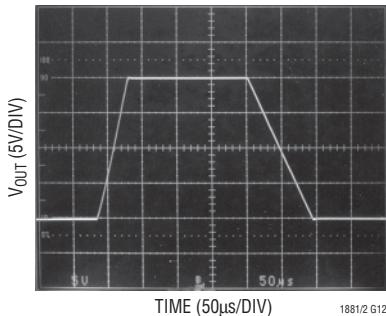


1881/2 G12

Large Signal Response, $A_V = 1$

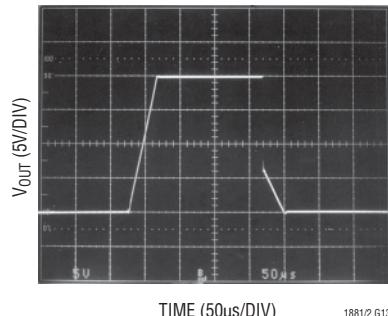


1881/2 G13

**Small Signal Response, $A_V = -1$,
No Load**

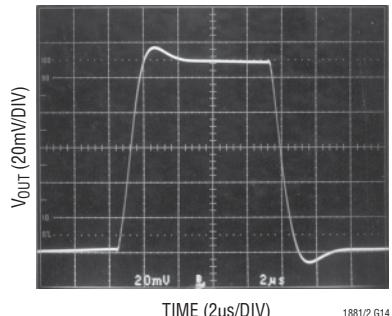


1881/2 G14

**Small Signal Response, $A_V = -1$,
 $C_L = 1000pF$**

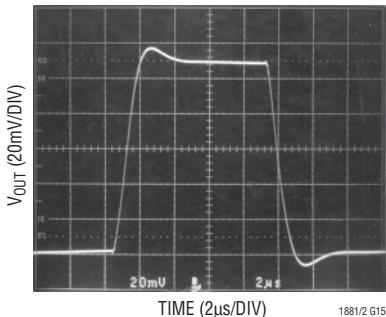


1881/2 G15

**Small Signal Response, $A_V = 1$,
 $R_L = 2k$**

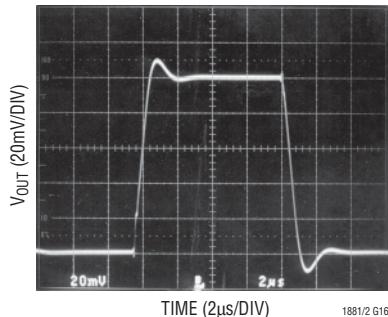

1881/2 G16


**Small Signal Response, $A_V = 1$,
 $C_L = 500pF$**

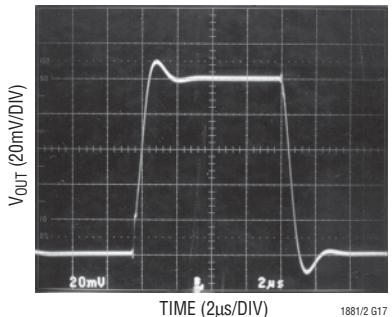

1881/2 G17


TYPICAL PERFORMANCE CHARACTERISTICS

LT1881 V_{OS} Distribution, $T_A = 25^\circ\text{C}$

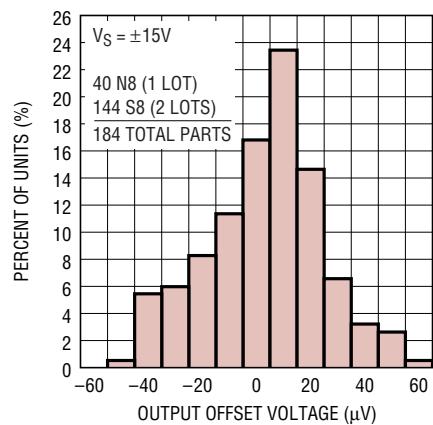


1881/2 G18

LT1881IS8 Voltage Offset vs Temperature

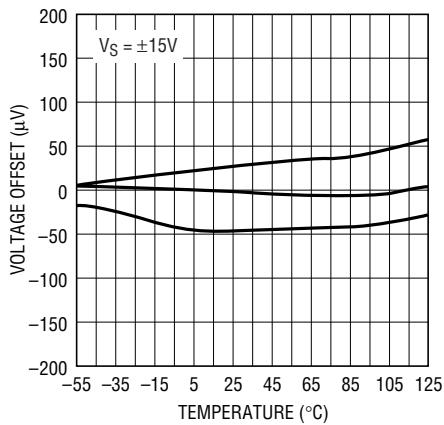


1881/2 G19

Warm-Up Drift vs Time

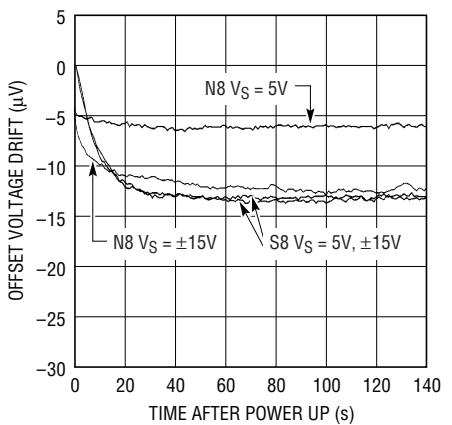


1881/2 G20

LT1881 Input Bias Current vs Common Mode Voltage

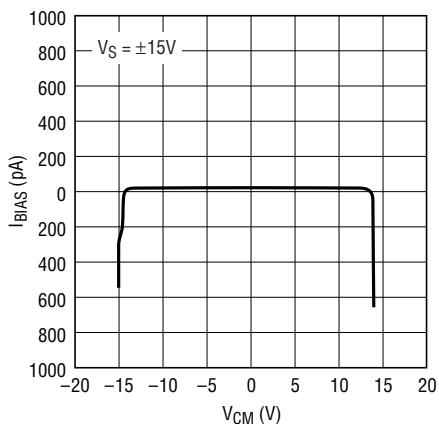


1881/2 G21

LT1881 Input Bias Current vs Temperature

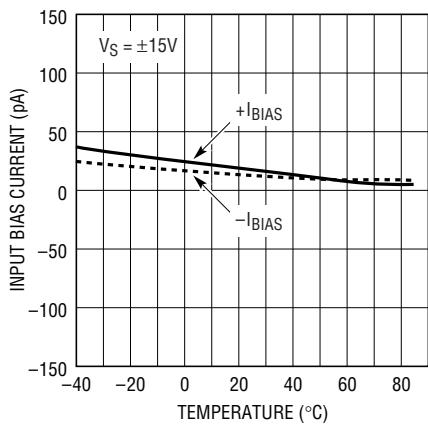


1881/2 G22

LT1881 Input Common Mode Range vs Supply Voltage

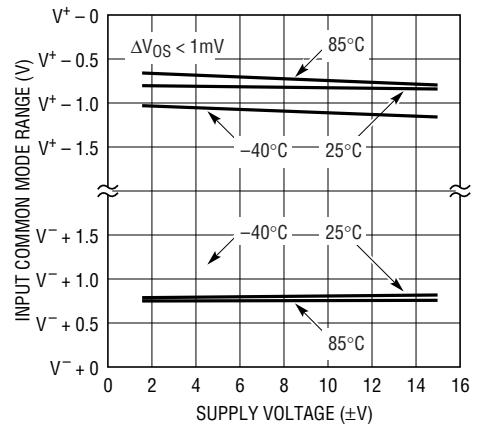


1881/2 G23

LT1881 Input Common Mode Voltage vs Temperature

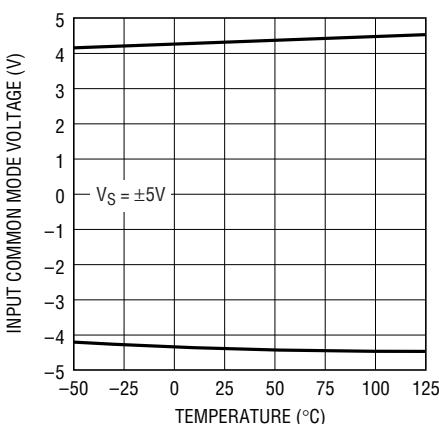


1881/2 G24

LT1881 Output Voltage Swing vs Supply Voltage

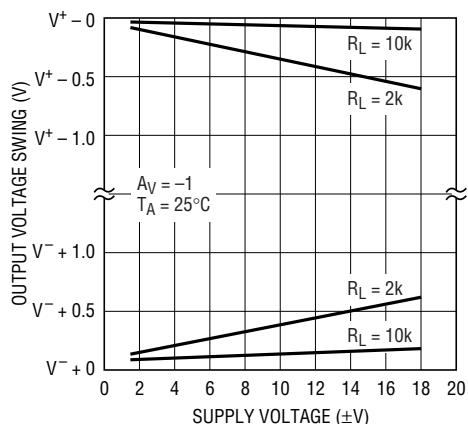

1881/2 G25

LT1881 Output Saturation Voltage vs Load Current (Output High)

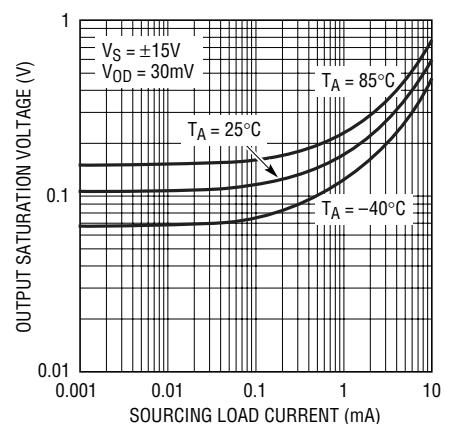


1881/2 G26

18812fa

LT1881/LT1882


TYPICAL PERFORMANCE CHARACTERISTICS

LT1881 Output Saturation Voltage vs Load Current (Output Low)

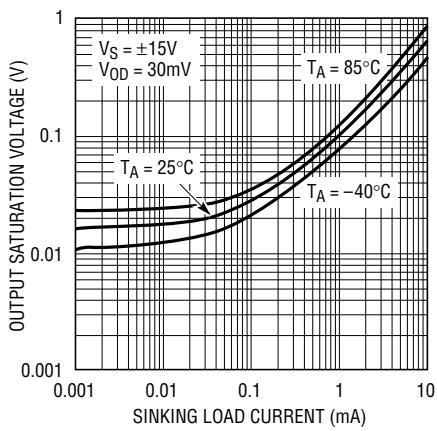


1881/2 G27

LT1881 Output Short-Circuit Current vs Temperature

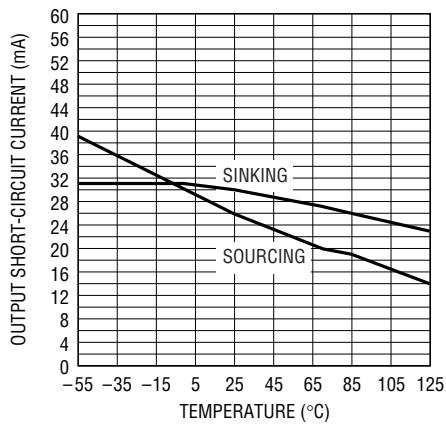


1881/2 G28

LT1881 Output Voltage vs Large Input Voltage

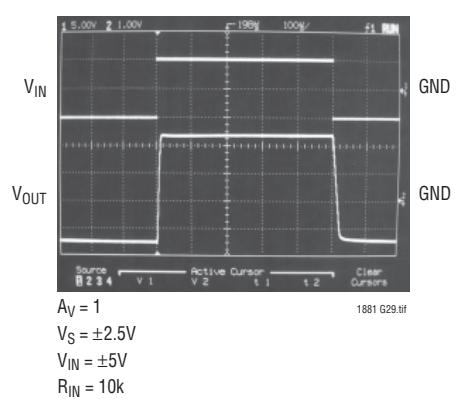


1881 G29.tif

LT1881 Open-Loop Gain vs Frequency

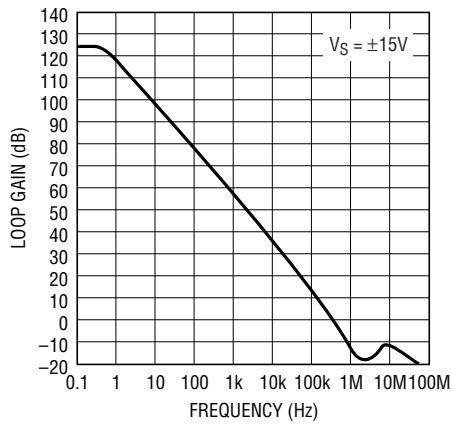


1881/2 G30

LT1881 Open-Loop Gain and Phase vs Frequency

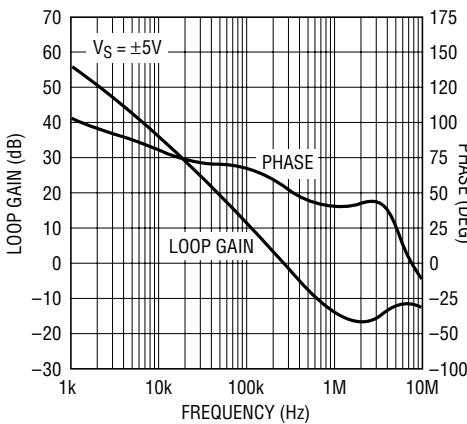


1881/2 G31

LT1881 Channel Separation vs Frequency

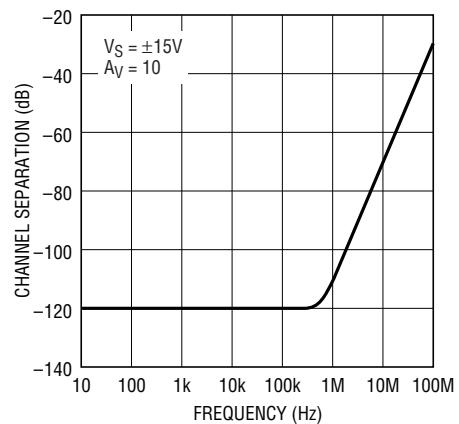


1881/2 G32

Gain Bandwidth Product vs Temperature

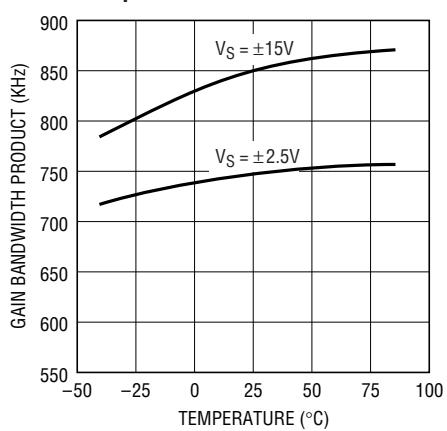


1881/2 G33

Output Impedance vs Frequency

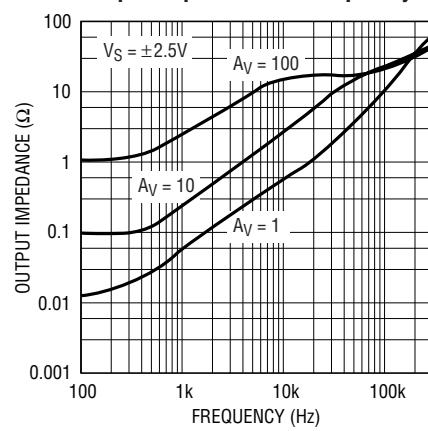

1881/2 G34


LT1881 PSRR vs Frequency

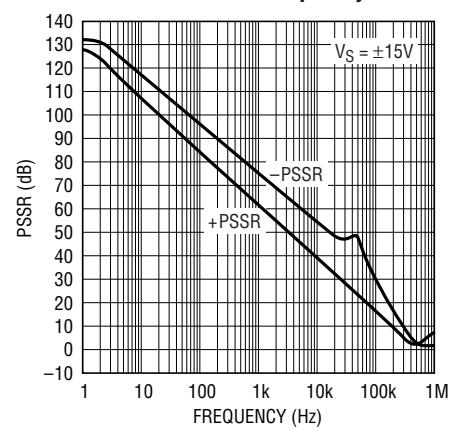

1881/2 G35


TYPICAL PERFORMANCE CHARACTERISTICS

Common Mode Rejection Ratio vs Frequency

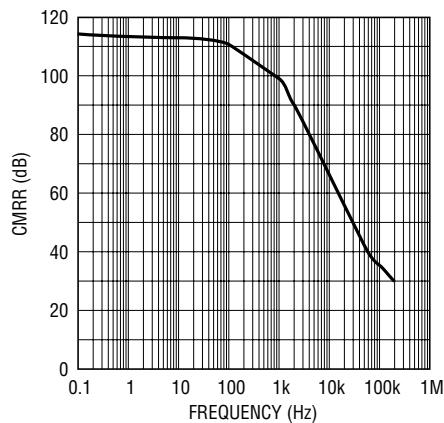


1881/2 G36

LT1881 0.1Hz to 10Hz Noise

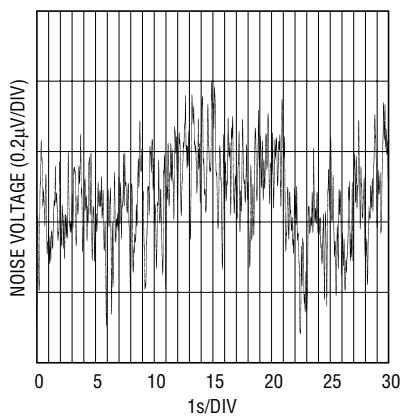


1881/2 G37

LT1881 Noise Voltage vs Frequency

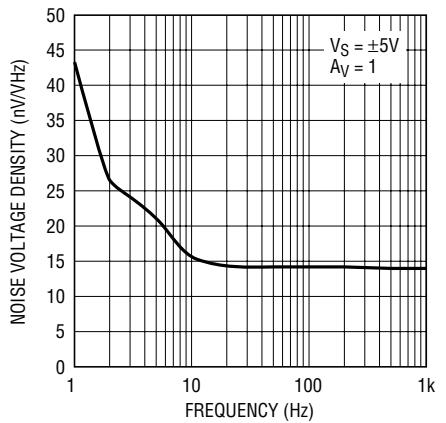


1881/2 G38

LT1881 Noise Current Density vs Frequency

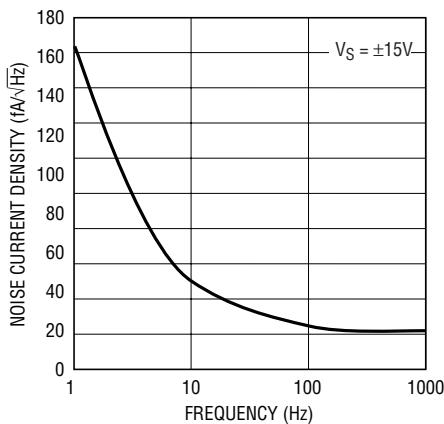


1881/2 G39

LT1881A Total Noise vs Source Resistance

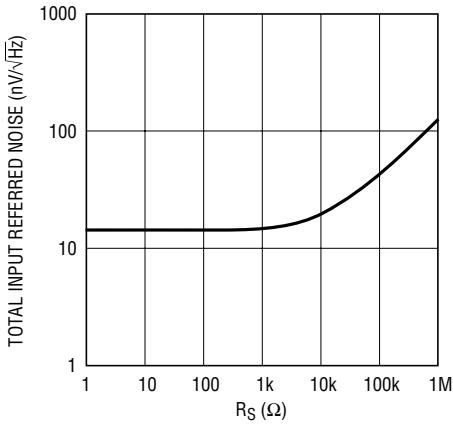


1881/2 G36

LT1881 Overshoot vs Capacitive Load

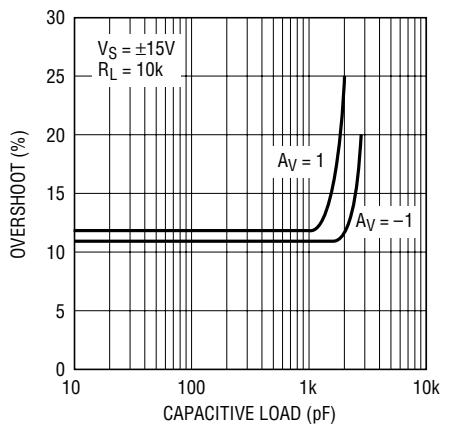


1881/2 G41

LT1881 Series Output Resistance vs Capacitive Load

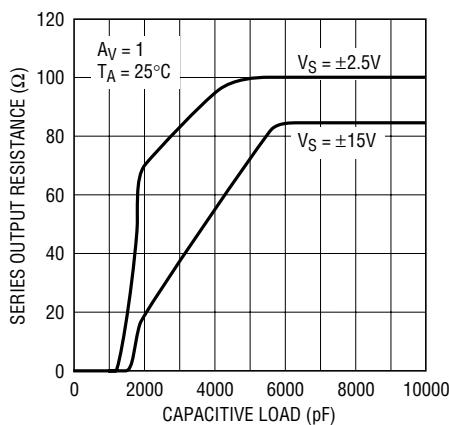


1881/2 G42

LT1881 Undistorted Output Swing vs Frequency

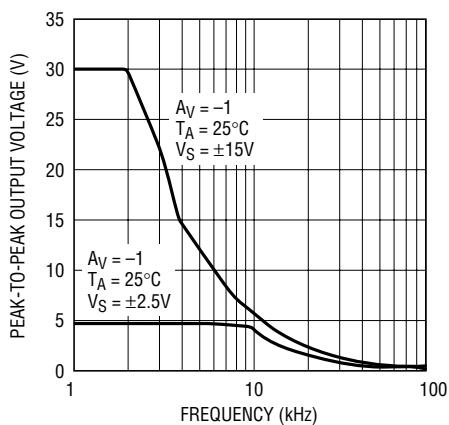

1881/2 G43


LT1881 THD + Noise vs Frequency

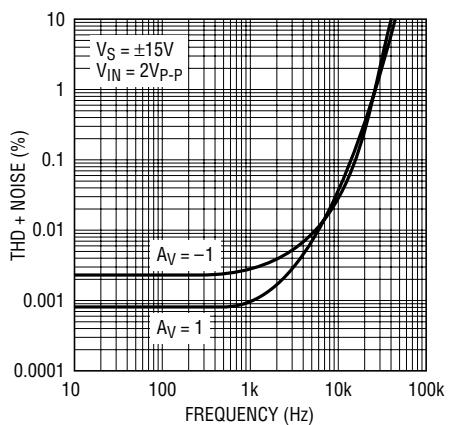


1881/2 G44

LT1881/LT1882


TYPICAL PERFORMANCE CHARACTERISTICS

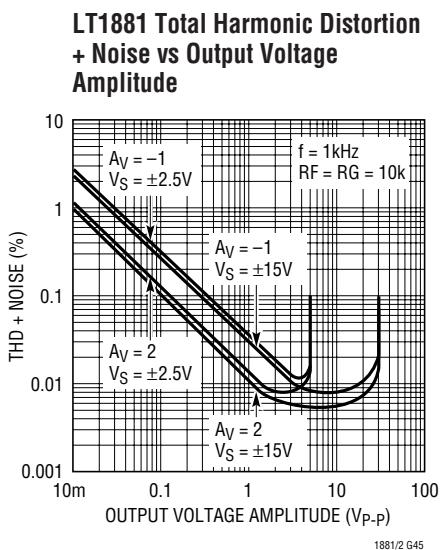


LT1881 Open-Loop Gain

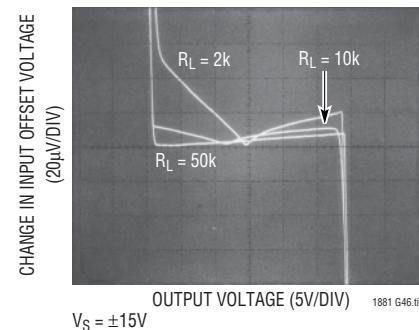


LT1881 Settling Time/Output Step 0.01%

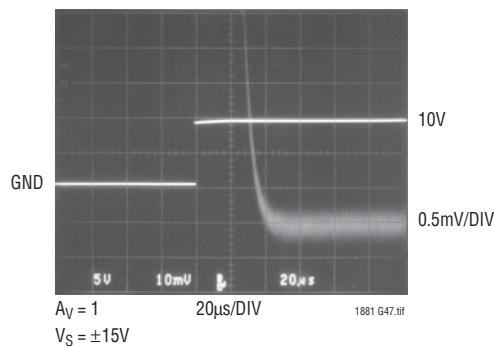


LT1881 Settling Time/Output Step 0.01%

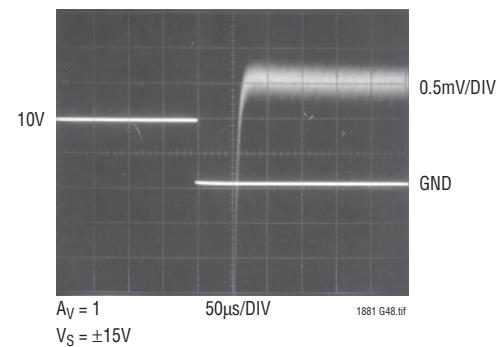

LT1881 Gain vs Temperature

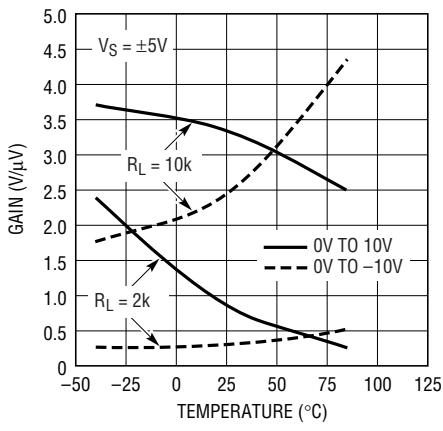

LT1881 Gain vs Load Resistance

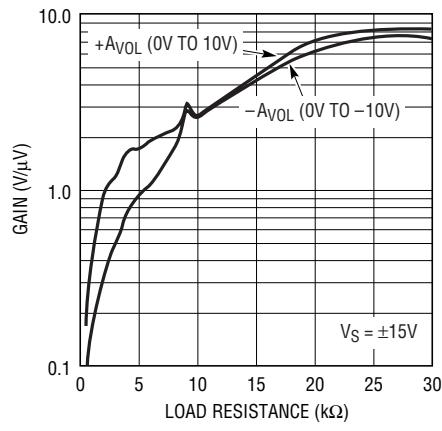

APPLICATIONS INFORMATION

The LT1881 dual and LT1882 quad op amps feature exceptional input precision with rail-to-rail output swing. The amplifiers are similar to the LT1884 and LT1885 devices. The LT1881 and LT1882 offer superior capacitive load driving capabilities over the LT1884 and LT1885 in low voltage gain configurations. Offset voltages are trimmed to less than 50 μ V and input bias currents are less than 200pA on the "A" grade devices. Obtaining beneficial advantage of these precision input characteristics depends upon proper applications circuit design and board layout.

Preserving Input Precision

Preserving the input voltage accuracy of the LT1881/LT1882 requires that the applications circuit and PC board layout do not introduce errors comparable to or greater than the 30 μ V offset. Temperature differentials across the input connections can generate thermocouple voltages of 10's of microvolts. PC board layouts should keep connections to the amplifier's input pins close together and away from heat dissipating components. Air currents across the board can also generate temperature differentials.

The extremely low input bias currents, 150pA, allow high accuracy to be maintained with high impedance sources and feedback networks. The LT1881/LT1882's low input bias currents are obtained by using a cancellation circuit on-chip. This causes the resulting I_{BIAS+} and I_{BIAS-} to be uncorrelated, as implied by the I_{OS} specification being greater than the I_{BIAS} . The user should not try to balance the input resistances in each input lead, as is commonly recommended with most amplifiers. The impedance at either input should be kept as small as possible to minimize total circuit error.

PC board layout is important to insure that leakage currents do not corrupt the low I_{BIAS} of the amplifier. In high precision, high impedance circuits, the input pins should be surrounded by a guard ring of PC board interconnect, with the guard driven to the same common mode voltage as the amplifier inputs.

Input Common Mode Range

The LT1881 and LT1882 outputs are able to swing nearly to each power supply rail, but the input stage is limited to operating between $V^- + 1V$ and $V^+ - 1V$. Exceeding this common mode range will cause the gain to drop to zero; however, no phase reversal will occur.

Input Protection

The inverting and noninverting input pins of the LT1881 and LT1882 have limited on-chip protection. ESD protection is provided to prevent damage during handling. The input transistors have voltage clamping and limiting resistors to protect against input differentials up to 10V. Short transients above this level will also be tolerated. If the input pins can see a sustained differential voltage above 10V, external limiting resistors should be used to prevent damage to the amplifier. A 1k resistor in each input lead will provide protection against a 30V differential voltage.


Capacitive Loads

The LT1881 and LT1882 can drive capacitive loads up to 1000pF in unity-gain. The capacitive load driving increases as the amplifier is used in higher gain configurations. Capacitive load driving may be increased by decoupling the capacitance from the output with a small resistance.

LT1881/LT1882

PACKAGE DESCRIPTION

N8 Package
8-Lead PDIP (Narrow 0.300)
(LTC DWG # 05-08-1510)

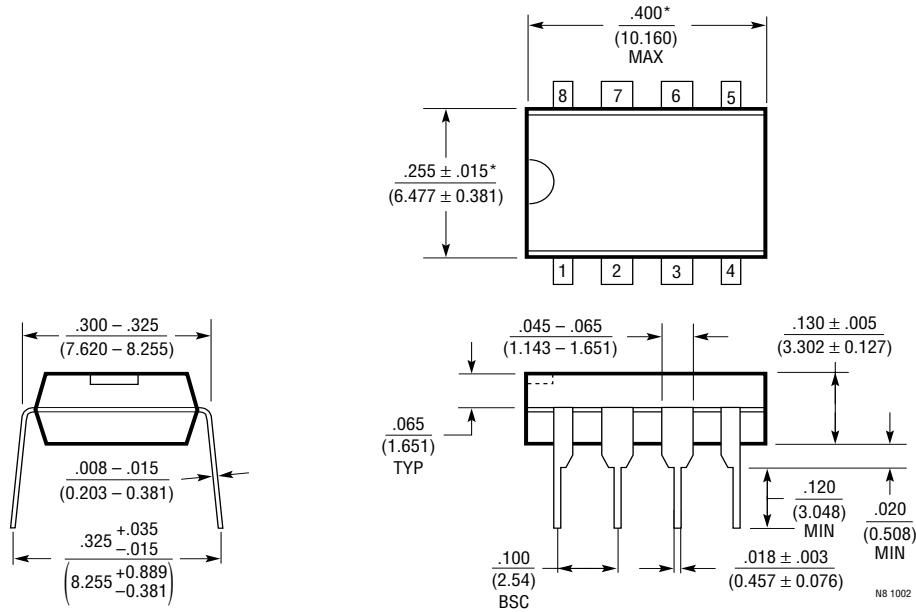


NOTE:

1. DIMENSIONS ARE INCHES
MILLIMETERS


*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

PACKAGE DESCRIPTION

S8 Package
8-Lead Plastic Small Outline (Narrow 0.150)
(LTC DWG # 05-08-1610)

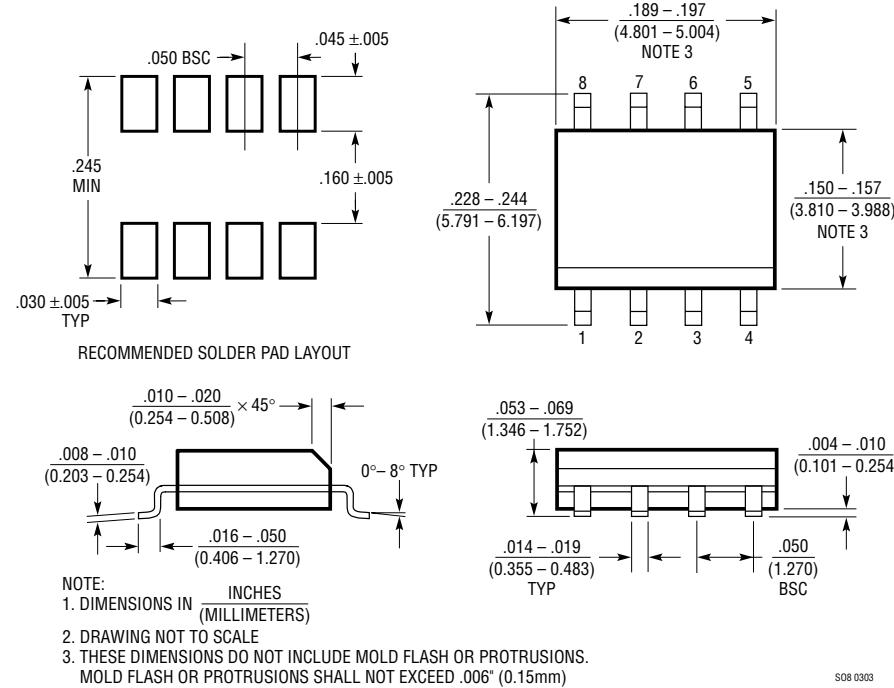


S Package
14-Lead Plastic Small Outline (Narrow 0.150)
(LTC DWG # 05-08-1610)

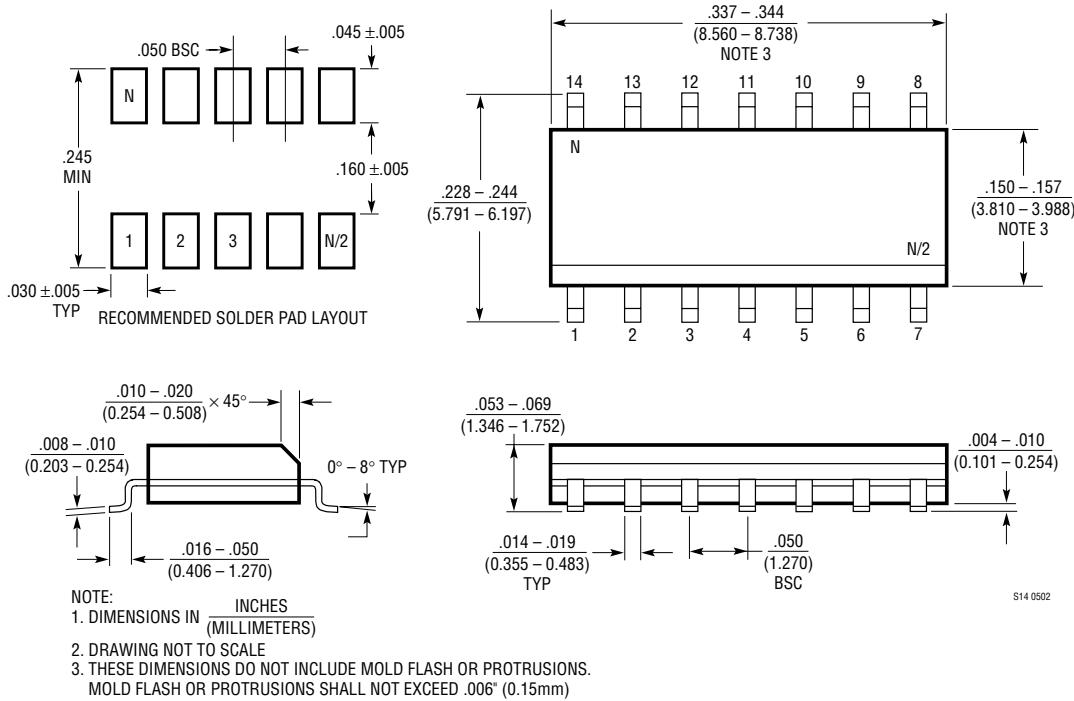

LT1881/LT1882

TYPICAL APPLICATION

-50°C to 600°C Digital Thermometer Operates on 3.3V

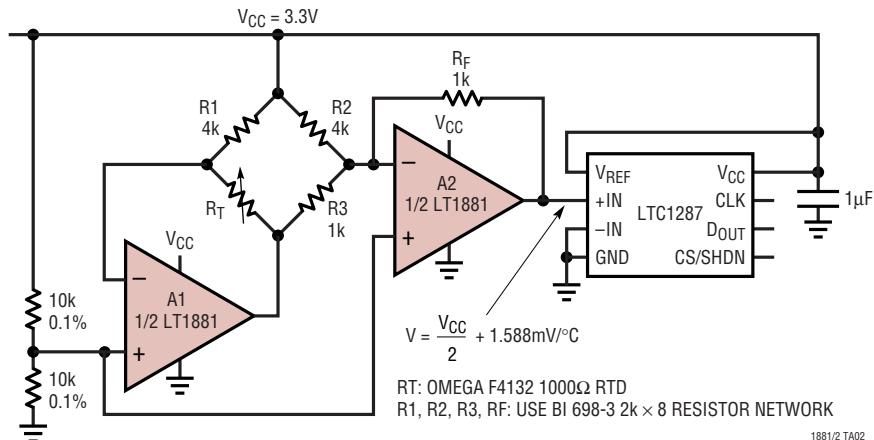

RELATED PARTS

| PART NUMBER | DESCRIPTION | COMMENTS |
|---------------|--|--|
| LT1112/LT1114 | Dual/Quad Picoamp Input Op Amp | V _{OS} = 60µV Max |
| LT1167 | Gain Programmable Instrumentation Amp | Gain Error = 0.08% Max |
| LT1677 | Low Noise, Rail-to-Rail Precision Op Amp | $\text{e}_n = 3.2\text{nV}/\sqrt{\text{Hz}}$ |
| LT1793 | Low Noise JFET Op Amp | I _B = 10pA Max |
| LT1880 | SOT-23 Picoamp Input Precision Op Amp | 150µV Max V _{OS} , -40°C to 85°C Operation Guaranteed, SOT-23 Package |
| LT1884/LT1885 | Dual/Quad Picoamp Input Op Amp | 3 Times Faster than LT1881/LT1882 |
| LTC2050 | Zero Drift Op Amp in SOT-23 | V _{OS} = 3µV Max, Rail-to-Rail Output |