


- **Bidirectional Transceivers**
- **Meet or Exceed the Requirements of ANSI Standards TIA/EIA-422-B and TIA/EIA-485-A and ITU Recommendations V.11 and X.27**
- **Designed for Multipoint Transmission on Long Bus Lines in Noisy Environments**
- **3-State Driver and Receiver Outputs**
- **Individual Driver and Receiver Enables**
- **Wide Positive and Negative Input/Output Bus Voltage Ranges**
- **Driver Output Capability . . . ± 60 mA Max**
- **Thermal Shutdown Protection**
- **Driver Positive and Negative Current Limiting**
- **Receiver Input Impedance . . . 12 k Ω Min**
- **Receiver Input Sensitivity . . . ± 200 mV**
- **Receiver Input Hysteresis . . . 50 mV Typ**
- **Operate From Single 5-V Supply**

D OR P PACKAGE
(TOP VIEW)



description

The SN65176B and SN75176B differential bus transceivers are monolithic integrated circuits designed for bidirectional data communication on multipoint bus transmission lines. They are designed for balanced transmission lines and meet ANSI Standards TIA/EIA-422-B and TIA/EIA-485-A and ITU Recommendations V.11 and X.27.

The SN65176B and SN75176B combine a 3-state differential line driver and a differential input line receiver, both of which operate from a single 5-V power supply. The driver and receiver have active-high and active-low enables, respectively, that can be connected together externally to function as a direction control. The driver differential outputs and the receiver differential inputs are connected internally to form differential input/output (I/O) bus ports that are designed to offer minimum loading to the bus when the driver is disabled or $V_{CC} = 0$. These ports feature wide positive and negative common-mode voltage ranges, making the device suitable for party-line applications.

The driver is designed for up to 60 mA of sink or source current. The driver features positive and negative current limiting and thermal shutdown for protection from line-fault conditions. Thermal shutdown is designed to occur at a junction temperature of approximately 150°C. The receiver features a minimum input impedance of 12 k Ω , an input sensitivity of ± 200 mV, and a typical input hysteresis of 50 mV.

The SN65176B and SN75176B can be used in transmission-line applications employing the SN75172 and SN75174 quadruple differential line drivers and SN75173 and SN75175 quadruple differential line receivers.

The SN65176B is characterized for operation from -40°C to 105°C and the SN75176B is characterized for operation from 0°C to 70°C .

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

Function Tables

DRIVER


| INPUT D | ENABLE DE | OUTPUTS | |
|------------|--------------|---------|---|
| | | A | B |
| H | H | H | L |
| L | H | L | H |
| X | L | Z | Z |

RECEIVER


| DIFFERENTIAL INPUTS A-B | ENABLE RE | OUTPUT R |
|----------------------------|--------------|-------------|
| $V_{ID} \geq 0.2 V$ | L | H |
| $-0.2 V < V_{ID} < 0.2 V$ | L | ? |
| $V_{ID} \leq -0.2 V$ | L | L |
| X | H | Z |
| Open | L | ? |

H = high level, L = low level, ? = indeterminate,
X = irrelevant, Z = high impedance (off)

logic symbol†

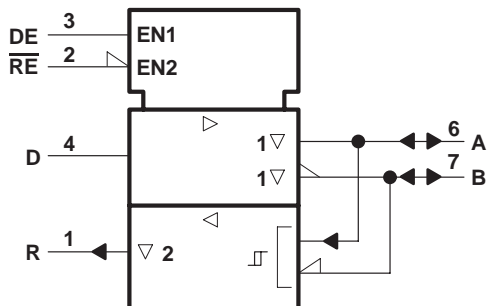

logic diagram (positive logic)

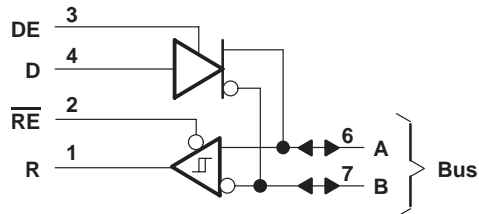


† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

schematics of inputs and outputs

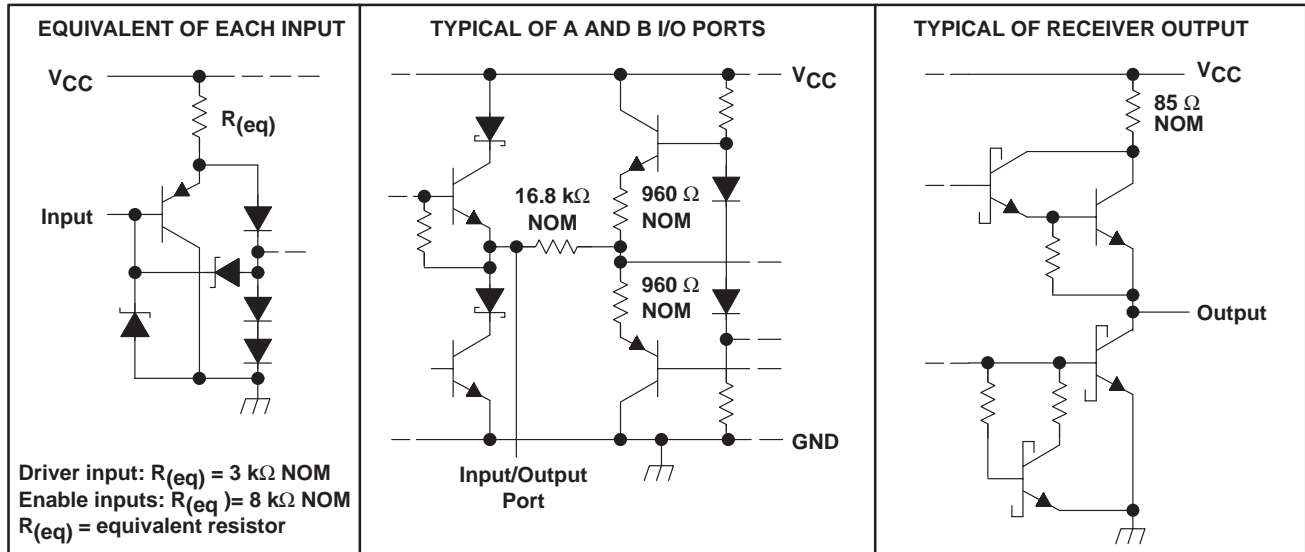

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

| | |
|--|----------------|
| Supply voltage, V_{CC} (see Note 1) | 7 V |
| Voltage range at any bus terminal | -10 V to 15 V |
| Enable input voltage, V_I | 5.5 V |
| Package thermal impedance, θ_{JA} (see Note 2): D package | 197°C/W |
| P package | 104°C/W |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |
| Storage temperature range, T_{stg} | -65°C to 150°C |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential input/output bus voltage, are with respect to network ground terminal.
 2. The package thermal impedance is calculated in accordance with JESD 51, except for through-hole packages, which use a trace length of zero.

recommended operating conditions

| | | MIN | TYP | MAX | UNIT |
|--|----------------------------|------|-----|----------|---------|
| Supply voltage, V_{CC} | | 4.75 | 5 | 5.25 | V |
| Voltage at any bus terminal (separately or common mode), V_I or V_{IC} | | | | 12 | V |
| | | | | -7 | |
| High-level input voltage, V_{IH} | D, DE, and \overline{RE} | 2 | | | V |
| Low-level input voltage, V_{IL} | D, DE, and \overline{RE} | | | 0.8 | V |
| Differential input voltage, V_{ID} (see Note 3) | | | | ± 12 | V |
| High-level output current, I_{OH} | Driver | | | -60 | mA |
| | Receiver | | | -400 | μ A |
| Low-level output current, I_{OL} | Driver | | | 60 | mA |
| | Receiver | | | 8 | |
| Operating free-air temperature, T_A | SN65176B | -40 | | 105 | °C |
| | SN75176B | 0 | | 70 | |

NOTE 3: Differential-input/output bus voltage is measured at the noninverting terminal A with respect to the inverting terminal B.

SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

DRIVER SECTION

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS† | | MIN | TYP‡ | MAX | UNIT |
|--------------------|---|--|-----------------------|-------------------------------|------|----------|------|
| V _{IK} | Input clamp voltage | I _I = -18 mA | | | | -1.5 | V |
| V _O | Output voltage | I _O = 0 | | 0 | | 6 | V |
| V _{OD1} | Differential output voltage | I _O = 0 | | 1.5 | 3.6 | 6 | V |
| V _{OD2} | Differential output voltage | R _L = 100 Ω, | See Figure 1 | 1/2 V _{OD1} or 2‡ | | | V |
| | | R _L = 54 Ω, | See Figure 1 | 1.5 | 2.5 | 5 | V |
| V _{OD3} | Differential output voltage | See Note 4 | | 1.5 | | 5 | V |
| Δ V _{OD} | Change in magnitude of differential output voltage§ | R _L = 54 Ω or 100 Ω, See Figure 1 | | | | ±0.2 | V |
| V _{OCC} | Common-mode output voltage | | | | | +3 -1 | V |
| Δ V _{OCC} | Change in magnitude of common-mode output voltage§ | | | | | ±0.2 | V |
| I _O | Output current | Output disabled, See Note 5 | V _O = 12 V | | | 1 | mA |
| | | | V _O = -7 V | | | -0.8 | |
| I _{IH} | High-level input current | V _I = 2.4 V | | | | 20 | μA |
| I _{IL} | Low-level input current | V _I = 0.4 V | | | | -400 | μA |
| I _{OS} | Short-circuit output current | V _O = -7 V | | | | -250 | mA |
| | | V _O = 0 | | | | 150 | |
| | | V _O = V _{CC} | | | | 250 | |
| | | V _O = 12 V | | | | 250 | |
| I _{CC} | Supply current (total package) | No load | Outputs enabled | | 42 | 70 | mA |
| | | | Outputs disabled | | 26 | 35 | |

† The power-off measurement in ANSI Standard TIA/EIA-422-B applies to disabled outputs only and is not applied to combined inputs and outputs.

‡ All typical values are at V_{CC} = 5 V and T_A = 25°C.

§ Δ|V_{OD}| and Δ|V_{OCC}| are the changes in magnitude of V_{OD} and V_{OCC}, respectively, that occur when the input is changed from a high level to a low level.

¶ The minimum V_{OD2} with a 100-Ω load is either 1/2 V_{OD1} or 2 V, whichever is greater.

NOTES: 4. See ANSI Standard TIA/EIA-485-A, Figure 3.5, Test Termination Measurement 2.

5. This applies for both power on and off; refer to ANSI Standard TIA/EIA-485-A for exact conditions. The TIA/EIA-422-B limit does not apply for a combined driver and receiver terminal.

switching characteristics, V_{CC} = 5 V, R_L = 110 kΩ, T_A = 25°C (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|--------------------|-------------------------------------|------------------------|--------------|-----|-----|-----|------|
| t _{d(OD)} | Differential-output delay time | R _L = 54 Ω, | See Figure 3 | | 15 | 22 | ns |
| t _{t(OD)} | Differential-output transition time | | | | 20 | 30 | ns |
| t _{PZH} | Output enable time to high level | See Figure 4 | | | 85 | 120 | ns |
| t _{PZL} | Output enable time to low level | See Figure 5 | | | 40 | 60 | ns |
| t _{PHZ} | Output disable time from high level | See Figure 4 | | | 150 | 250 | ns |
| t _{PLZ} | Output disable time from low level | See Figure 5 | | | 20 | 30 | ns |

SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

SYMBOL EQUIVALENTS

| DATA-SHEET PARAMETER | TIA/EIA-422-B | TIA/EIA-485-A |
|----------------------|---------------------------|--|
| V_O | V_{oa}, V_{ob} | V_{oa}, V_{ob} |
| $ V_{OD1} $ | V_o | V_o |
| $ V_{OD2} $ | $V_t (R_L = 100 \Omega)$ | $V_t (R_L = 54 \Omega)$ |
| $ V_{OD3} $ | | V_t (Test Termination Measurement 2) |
| $\Delta V_{OD} $ | $ V_t - \bar{V}_t $ | $ V_t - \bar{V}_t $ |
| V_{OC} | $ V_{os} $ | $ V_{os} $ |
| $\Delta V_{OC} $ | $ V_{os} - \bar{V}_{os} $ | $ V_{os} - \bar{V}_{os} $ |
| I_{OS} | $ I_{sa} , I_{sb} $ | |
| I_O | $ I_{xa} , I_{xb} $ | I_{ia}, I_{ib} |

RECEIVER SECTION

electrical characteristics over recommended ranges of common-mode input voltage, supply voltage, and operating free-air temperature (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|--|-------------------------------------|-------|------|------|------|
| V_{IT+} Positive-going input threshold voltage | $V_O = 2.7 V, I_O = -0.4 mA$ | | | 0.2 | V |
| V_{IT-} Negative-going input threshold voltage | $V_O = 0.5 V, I_O = 8 mA$ | -0.2‡ | | | V |
| V_{hys} Input hysteresis voltage ($V_{IT+} - V_{IT-}$) | | | 50 | | mV |
| V_{IK} Enable Input clamp voltage | $I_I = -18 mA$ | | | -1.5 | V |
| V_{OH} High-level output voltage | $V_{ID} = 200 mV,$ See Figure 2 | | 2.7 | | V |
| V_{OL} Low-level output voltage | $V_{ID} = -200 mV,$ See Figure 2 | | | 0.45 | V |
| I_{OZ} High-impedance-state output current | $V_O = 0.4 V$ to $2.4 V$ | | | ±20 | µA |
| I_I Line input current | Other input = 0 V, See Note 6 | | | 1 | mA |
| | | | | -0.8 | |
| I_{IH} High-level enable input current | $V_{IH} = 2.7 V$ | | | 20 | µA |
| I_{IL} Low-level enable input current | $V_{IL} = 0.4 V$ | | | -100 | µA |
| r_I Input resistance | $V_I = 12 V$ | | 12 | | kΩ |
| I_{OS} Short-circuit output current | | -15 | | -85 | mA |
| I_{CC} Supply current (total package) | No load | | | 42 | mA |
| | | | | 26 | |

† All typical values are at $V_{CC} = 5 V, T_A = 25^\circ C$.

‡ The algebraic convention, in which the less positive (more negative) limit is designated minimum, is used in this data sheet for common-mode input voltage and threshold voltage levels only.

NOTE 6: This applies for both power on and power off. Refer to EIA Standard TIA/EIA-485-A for exact conditions.

SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

switching characteristics, $V_{CC} = 5\text{ V}$, $C_L = 15\text{ pF}$, $T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--|-----|-----|-----|------|
| t_{PLH} Propagation delay time, low- to high-level output | $V_{ID} = 0\text{ to }3\text{ V}$, See Figure 6 | | 21 | 35 | ns |
| t_{PHL} Propagation delay time, high- to low-level output | | | 23 | 35 | ns |
| t_{PZH} Output enable time to high level | See Figure 7 | | 10 | 20 | ns |
| t_{PZL} Output enable time to low level | | | 12 | 20 | ns |
| t_{PHZ} Output disable time from high level | See Figure 7 | | 20 | 35 | ns |
| t_{PLZ} Output disable time from low level | | | 17 | 25 | ns |

PARAMETER MEASUREMENT INFORMATION

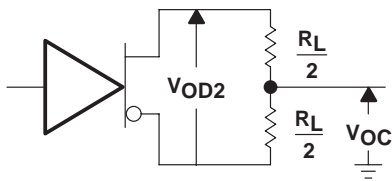


Figure 1. Driver V_{OD} and V_{OC}



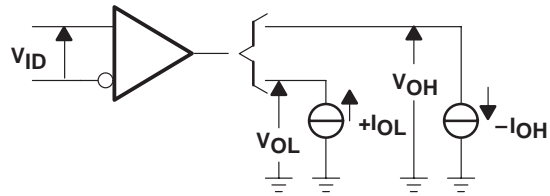


Figure 2. Receiver V_{OH} and V_{OL}

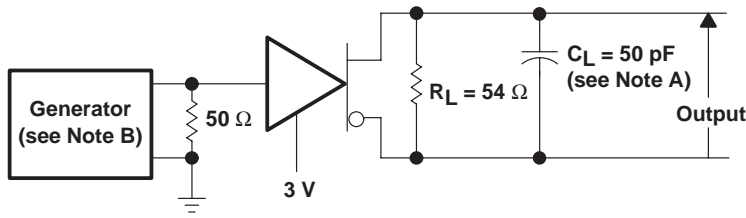

TEST CIRCUIT

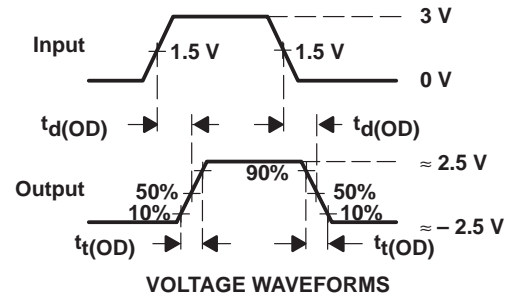


VOLTAGE WAVEFORMS

- NOTES: A. C_L includes probe and jig capacitance.
 B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1\text{ MHz}$, 50% duty cycle, $t_r \leq 6\text{ ns}$, $t_f \leq 6\text{ ns}$, $Z_O = 50\ \Omega$.

Figure 3. Driver Test Circuit and Voltage Waveforms


SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

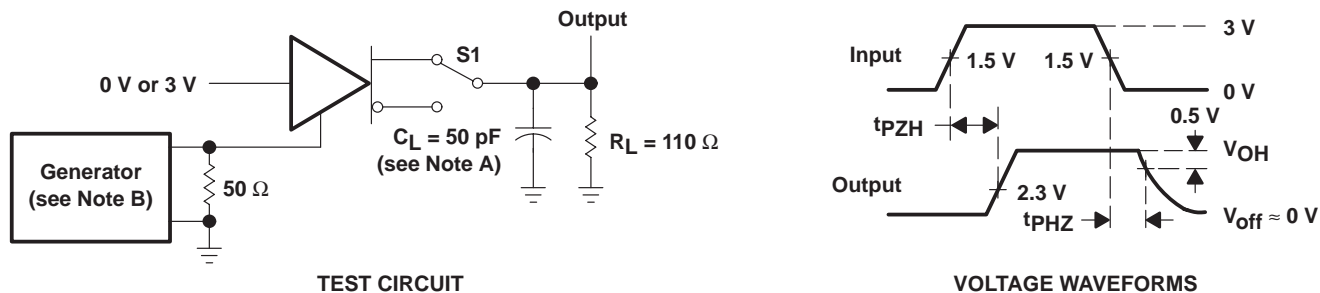


- NOTES: A. C_L includes probe and jig capacitance.
 B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 4. Driver Test Circuit and Voltage Waveforms

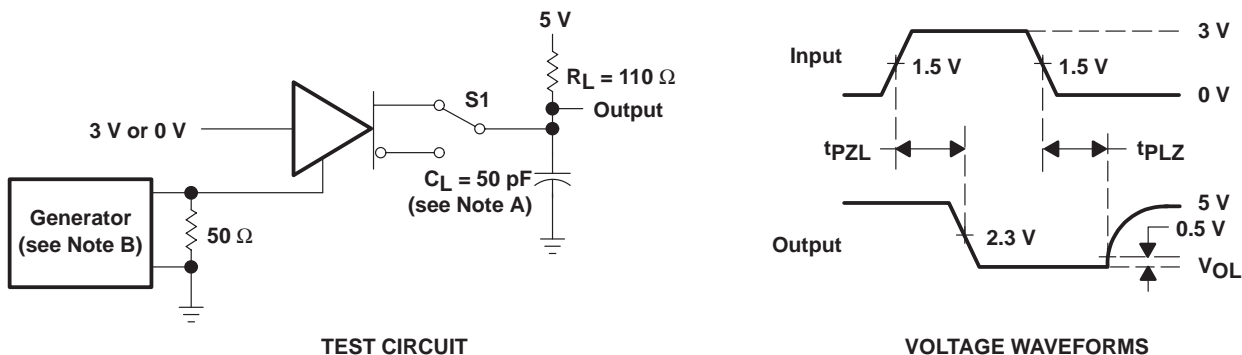

- NOTES: A. C_L includes probe and jig capacitance.
 B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 5. Driver Test Circuit and Voltage Waveforms

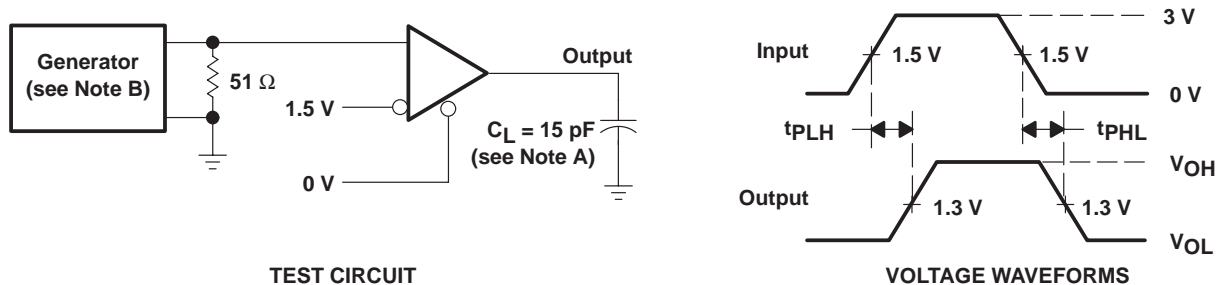


- NOTES: A. C_L includes probe and jig capacitance.
 B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 6. Receiver Test Circuit and Voltage Waveforms

SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

PARAMETER MEASUREMENT INFORMATION

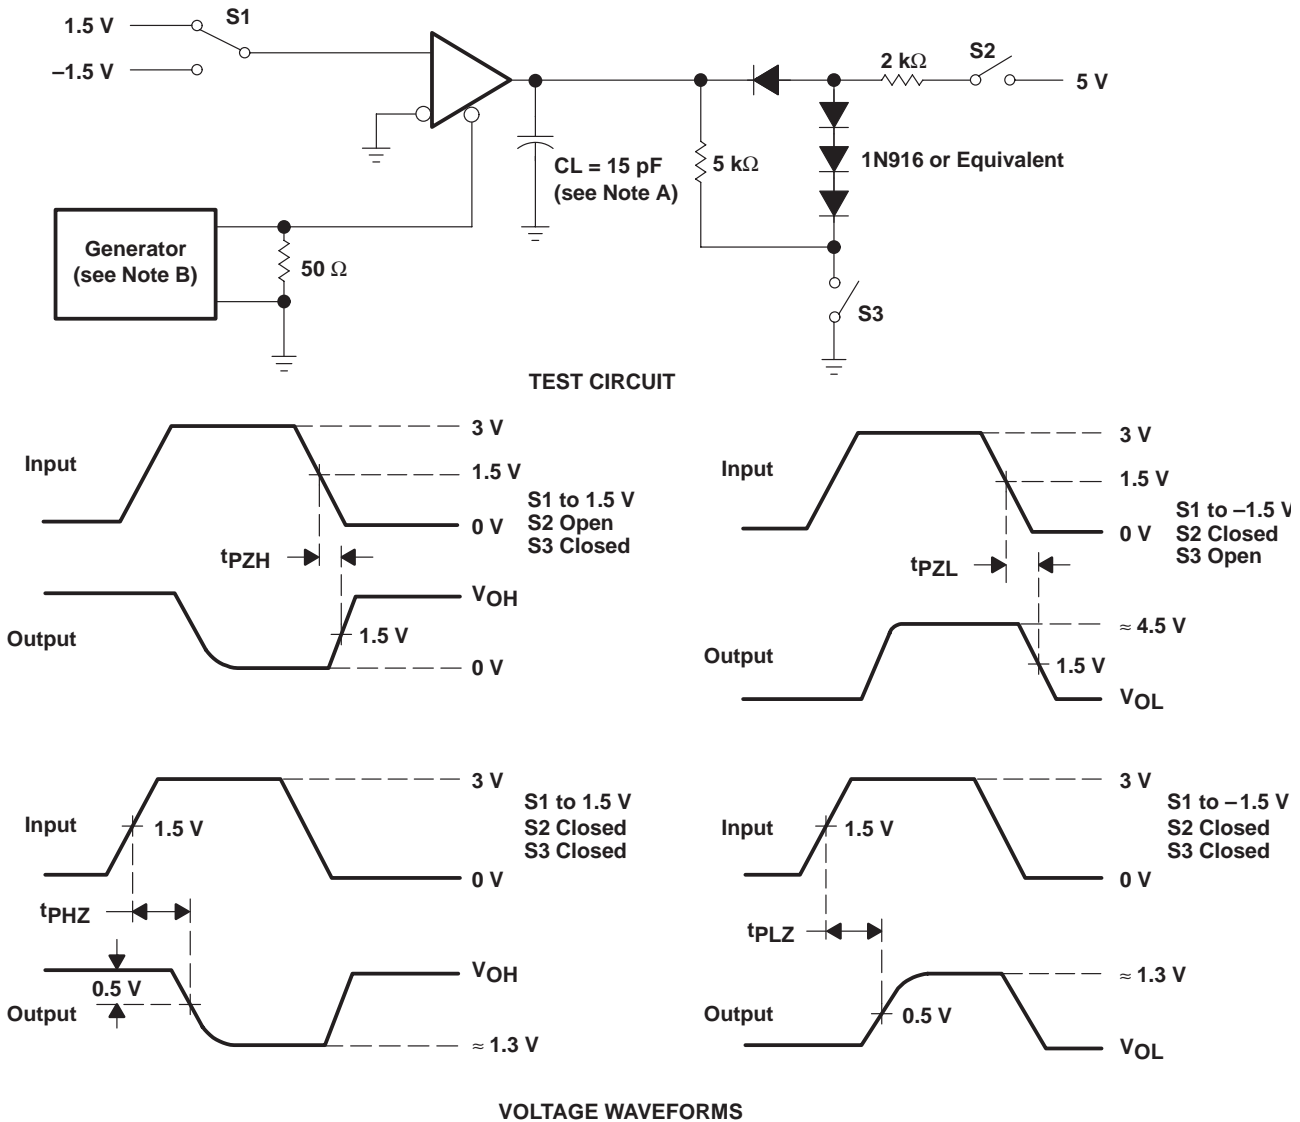

- NOTES: A. C_L includes probe and jig capacitance.
 B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_0 = 50 \Omega$.

Figure 7. Receiver Test Circuit and Voltage Waveforms

SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

TYPICAL CHARACTERISTICS

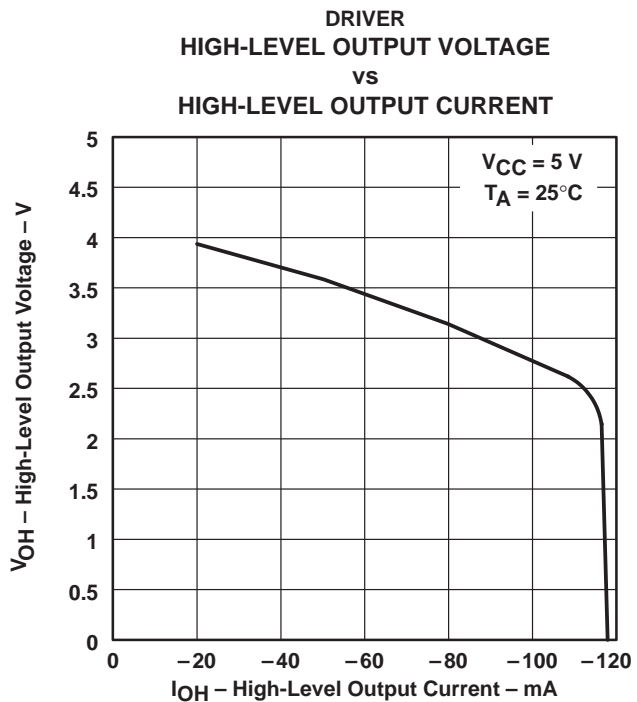


Figure 8

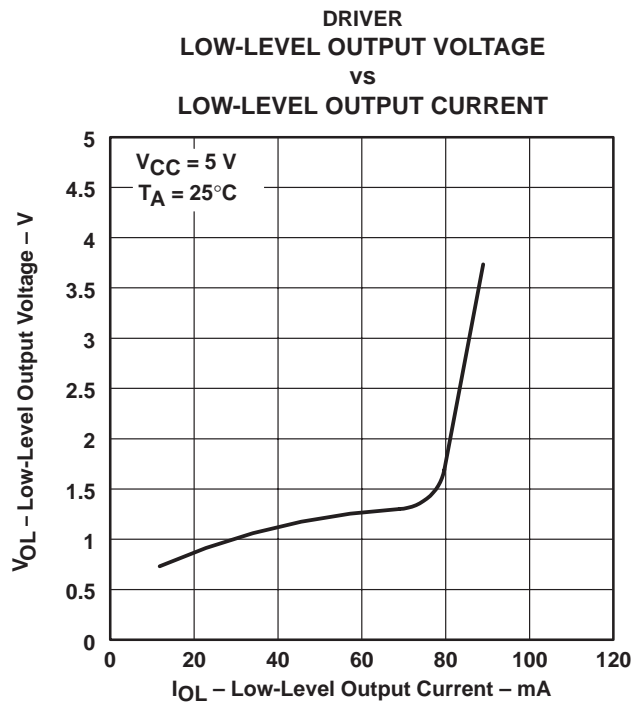


Figure 9

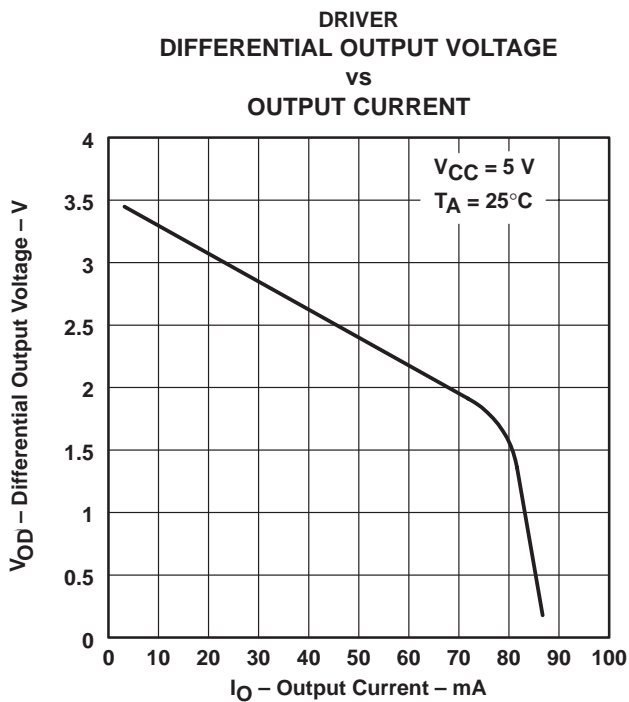


Figure 10

SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

TYPICAL CHARACTERISTICS


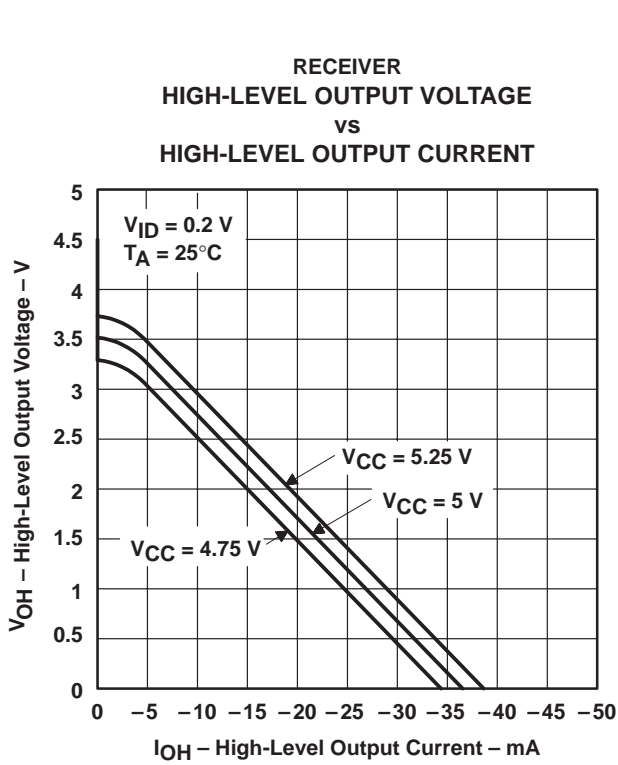


Figure 11

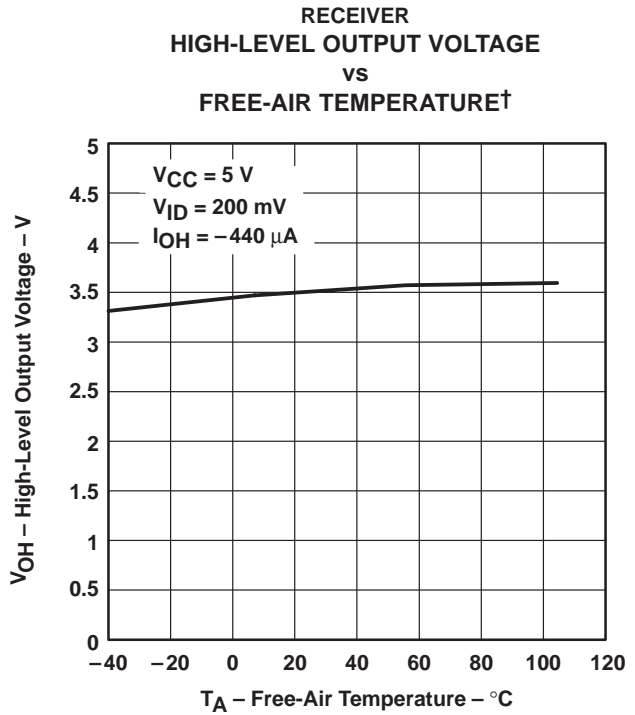

† Only the 0°C to 70°C portion of the curve applies to the SN75176B.

Figure 12

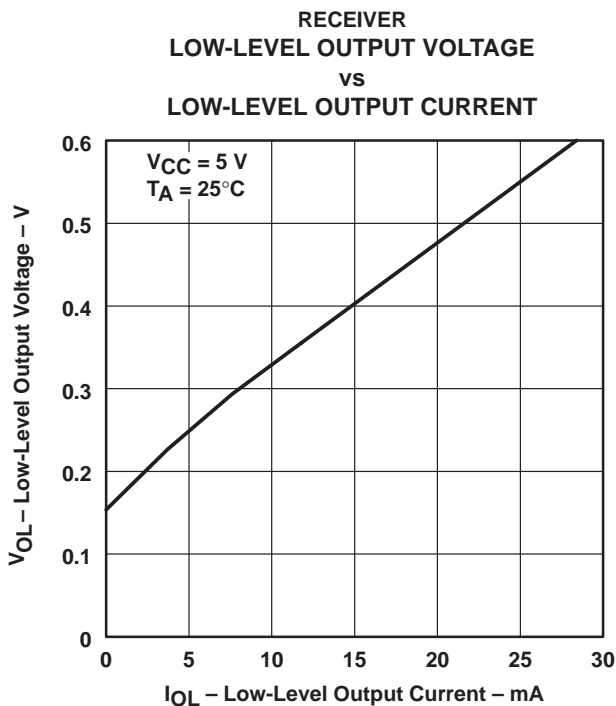


Figure 13



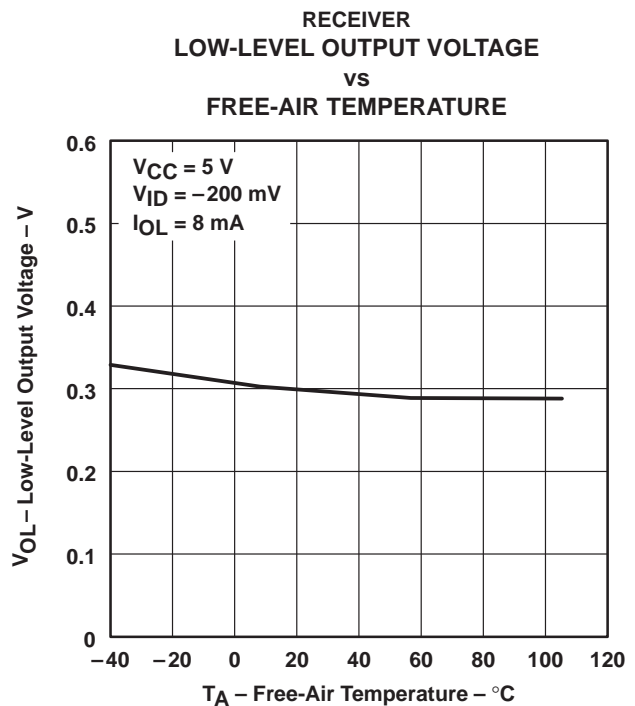


Figure 14


SN65176B, SN75176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS101B – JULY 1985 – REVISED JUNE 1999

TYPICAL CHARACTERISTICS

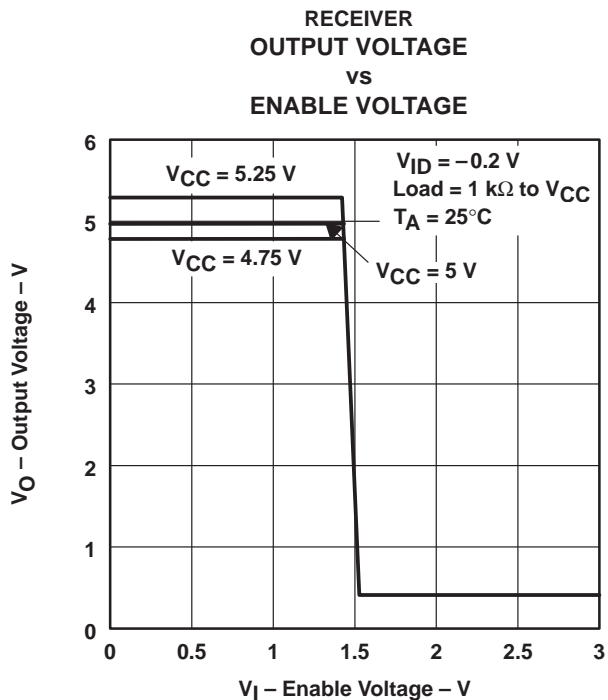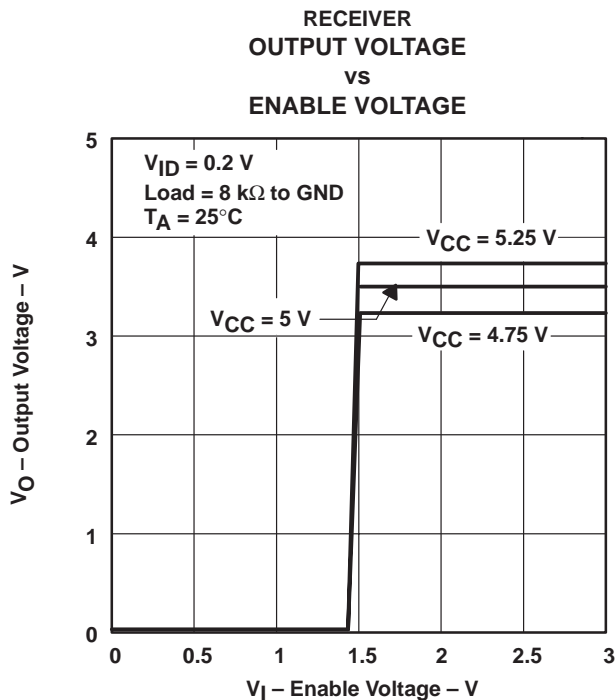

APPLICATION INFORMATION

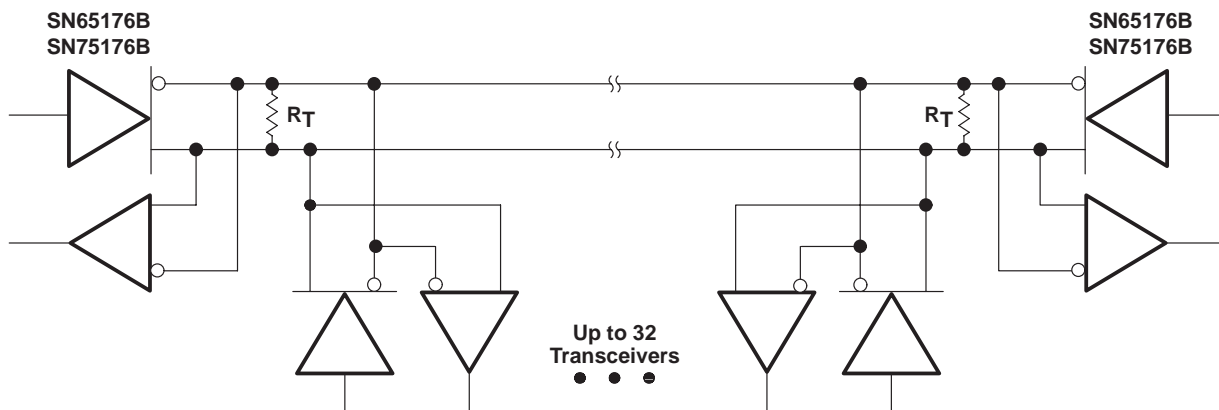

NOTE A: The line should be terminated at both ends in its characteristic impedance ($R_T = Z_0$). Stub lengths off the main line should be kept as short as possible.

Figure 17. Typical Application Circuit

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.