




NPN general purpose Transistor

2SC4617

FEATURES

- Reduces board space.
- High h_{FE} , 210-460 (typical).
- Low $V_{CE(sat)}$, <0.5V.
- Available in 8mm, 7-inch/3000 Unit Tape and reel.

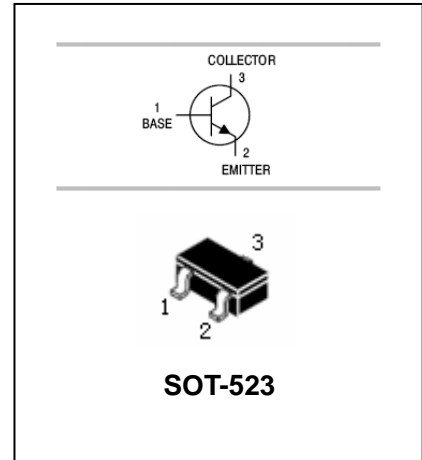

APPLICATIONS

- General purpose switching and amplification.

ORDERING INFORMATION

Type No.	Marking	Package Code
2SC4617	BQ/BR/BS	SOT-523

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	50	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current -Continuous	0.1	A
P_C	Collector Dissipation	125	mW
T_j, T_{stg}	Junction and Storage Temperature	-55 to +150	°C



NPN general purpose Transistor

2SC4617

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=50\mu A, I_E=0$	50			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1.0mA, I_B=0$	50			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=50\mu A, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=30V, I_E=0$			0.5	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=4V, I_C=0$			0.5	μA
DC current gain	h_{FE}	$V_{CE}=6V, I_C=1mA$	120		560	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=60mA, I_B=5.0mA$			0.4	V
Transition frequency	f_T	$V_{CE}=12V, I_C=2.0mA, f=30MHz$		180		MHz
Collector output capacitance	C_{ob}	$V_{CB}=12V, I_C=0, f=1MHz$			2.0	Pf

CLASSIFICATION OF H_{FE}

RANK	Q	R	S
RANGE	120-270	180-390	270-560
MARKING	BQ	BR	BS

NPN general purpose Transistor

2SC4617

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

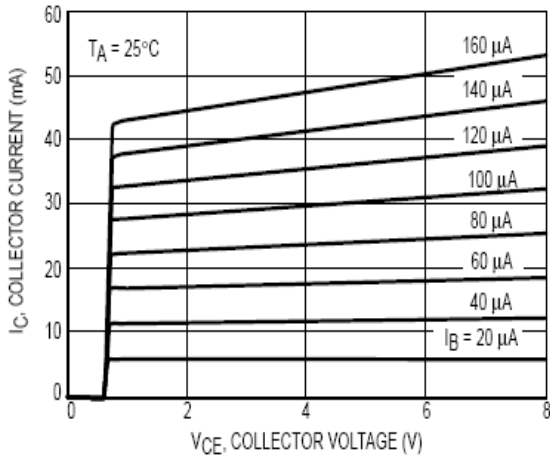


Figure 1. $I_C - V_{CE}$

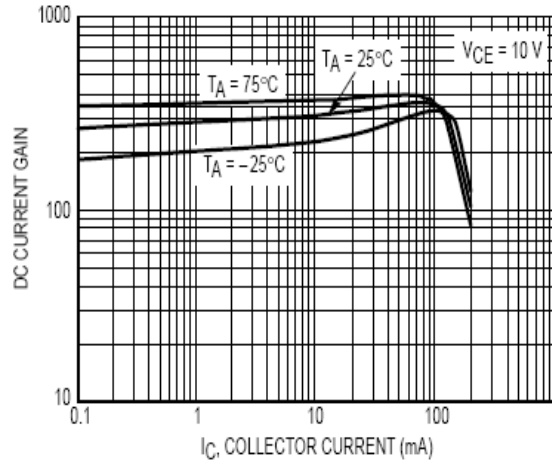


Figure 2. DC Current Gain

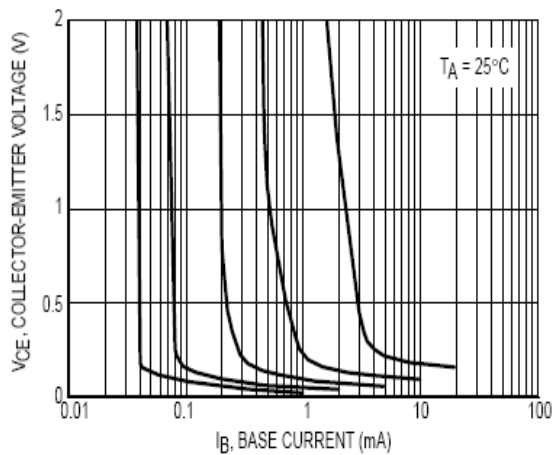


Figure 3. Collector Saturation Region

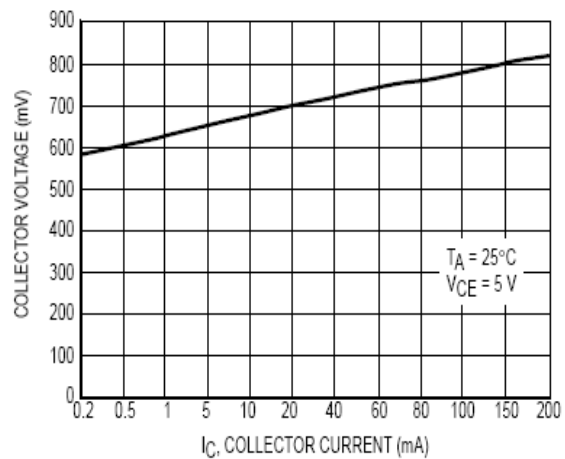


Figure 4. On Voltage

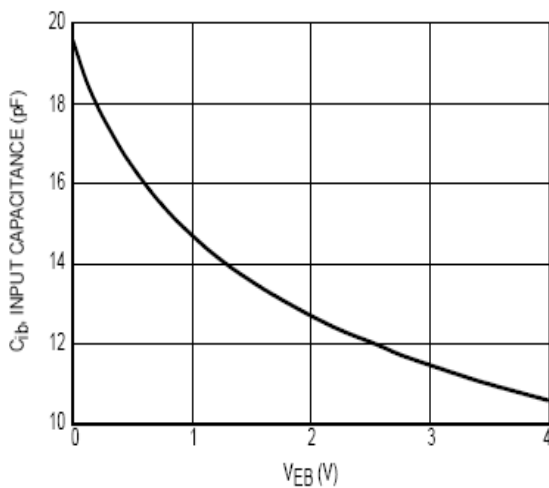


Figure 5. Capacitance

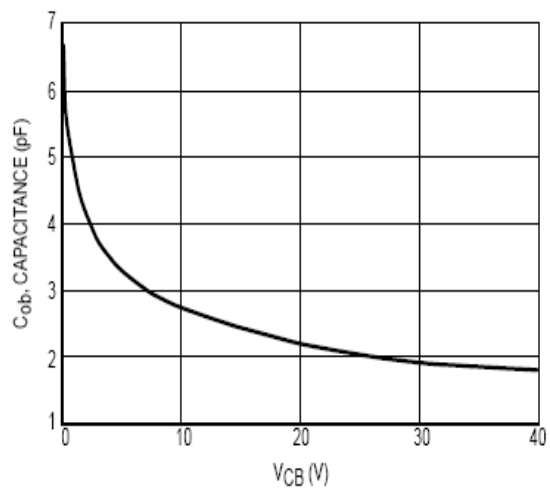


Figure 6. Capacitance



NPN general purpose Transistor

2SC4617


PACKAGE OUTLINE

Plastic surface mounted package

SOT-523

SOT-523		
Dim	Min	Max
A	1.5	1.7
B	0.75	0.85
C	0.6	0.8
D	0.15	0.3
G	0.9	1.1
H	0.02	0.1
J	0.1Typical	
K	1.45	1.75
All Dimensions in mm		

SOLDERING FOOTPRINT

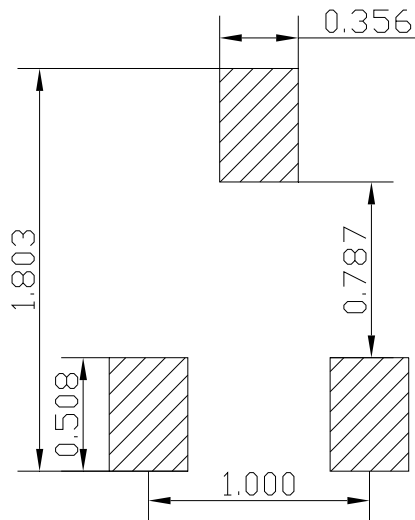

Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
2SC4617	SOT-523	3000/Tape&Reel