


Linear Integrated Circuits

CA3035, CA3035V1

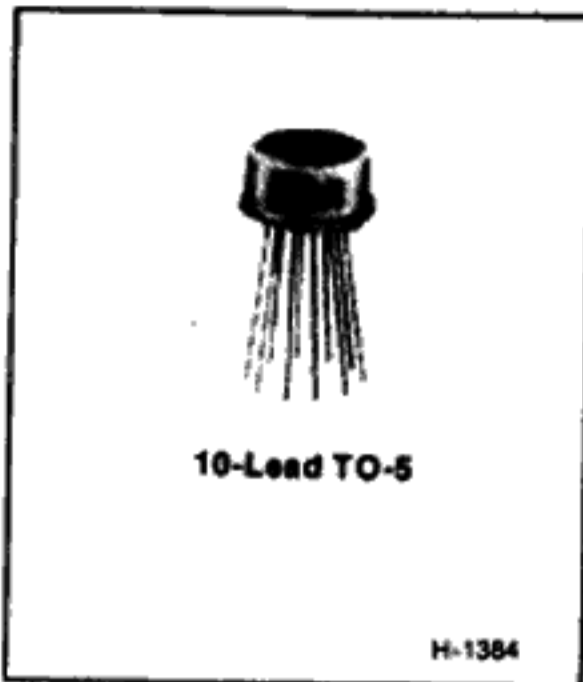

Ultra-High-Gain Wide-Band Amplifier Array

Features:

- Three separate amplifiers - gain and bandwidth for each amplifier can be adjusted with suitable external circuitry
- Amplifiers operable independently or in cascade
- Exceptionally high cascade voltage gain - 129 dB typ. at 40 kHz
- Low noise performance
- Wide-band response
- All amplifiers single-ended - only one power supply required
- Wide operating temperature range - -55°C to $+125^{\circ}\text{C}$

- Built-in temperature compensation
- Hermetically sealed, all-welded 10-lead TO-5 style metal package with straight or formed leads

Applications:

- Three individual general-purpose amplifiers
- Ideal for service in remote-control amplifiers - e.g., TV receivers
- Available in two electrically identical versions: CA3035 with straight leads; CA3035V1 with formed leads

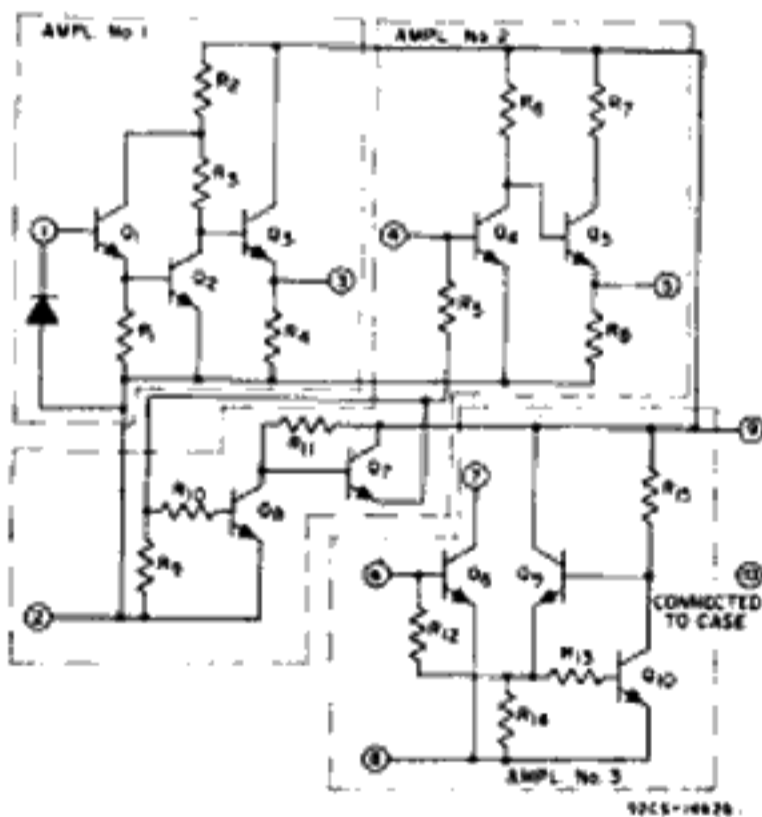


Fig. 1 - Schematic Diagram for CA3035 and CA3035V1

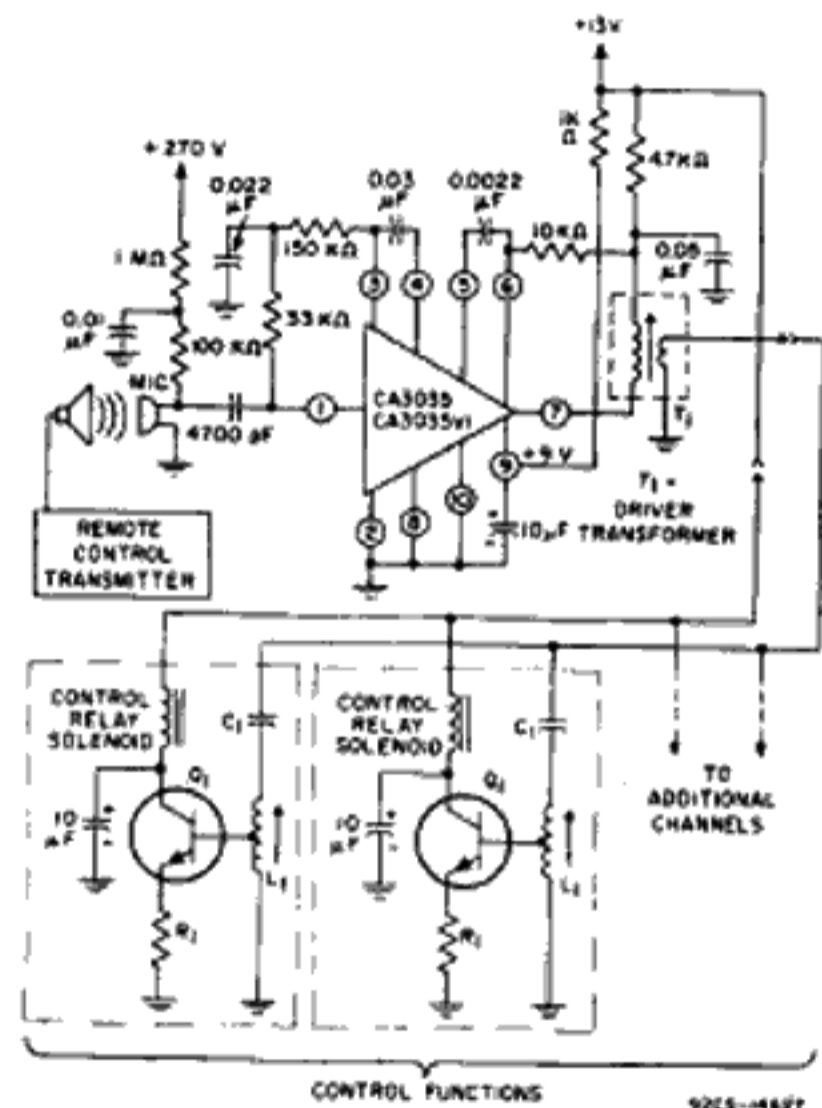


Fig. 2 - Typical Remote Control System

CA3035, CA3035V1

ABSOLUTE-MAXIMUM RATINGS:

Operating Temperature Range -55°C to +125°C
 Storage Temperature Range -65°C to +200°C
 Device Dissipation 300 mW
 Input Voltage 1 V p-p
 Supply Voltage +15V

ELECTRICAL CHARACTERISTICS AT T_A = 25°C

CHARACTERISTICS	SYMBOLS	SPECIAL TEST CONDITIONS	TEST CIRCUITS AND CHARACTERISTICS CURVES	LIMITS			UNITS
				CA3035, CA3035V1			
				Min.	Typ.	Max.	
STATIC CHARACTERISTICS							
Quiescent Operating Voltage	V3	V _{CC} = +9V	Fig.3	-	2	-	V
	V5			-	1.9	-	V
	V7			-	4.9	-	V
Total Current Drain	I _d	V _{CC} = +9V, R _{L3} = 5KΩ	Fig.3	3.5	5	7.5	mA
DYNAMIC CHARACTERISTICS							
Voltage Gain: Amplifier No.1 Amplifier No.2 Amplifier No.3	A ₁	f = 40 kHz, V _{CC} = +9V		40	44	-	dB
	A ₂			40	46	-	dB
	A ₃			38	42	-	dB
Output Voltage Swing	V _{out}	R _{L1} = 10KΩ R _{L2} = 10KΩ R _{L3} = 5KΩ Sinusoidal Output, V _{CC} = +9V		-	2	-	V _{p-p}
	V _{1out}			-	2.6	-	V _{p-p}
	V _{3out}			-	8	-	V _{p-p}
Input Resistance: Amplifier No.1 Amplifier No.2 Amplifier No.3	R _{1in}	f = 40 kHz		-	50K	-	Ω
	R _{2in}			-	2K	-	Ω
	R _{3in}			-	670	-	Ω
Output Resistance	R _{1out}	f = 40 kHz		-	270	-	Ω
	R _{2out}			-	170	-	Ω
	R _{3out}			-	100K	-	Ω
Bandwidth at -3dB point: Amplifier No.1 Amplifier No.2 Amplifier No.3	BW ₁	V _{CC} = +9V	Fig.5 Fig.6 Fig.7	-	500	-	kHz
	BW ₂			-	2.5	-	MHz
	BW ₃			-	2.5	-	MHz
Noise Figure Amplifier No.1	NF ₁	f = 1 kHz, R _S = 1KΩ	Fig.4	-	6	7	dB
Sensitivity		V _{CC} = +13 V Relay 1K1 Current = 7.5 mA	Fig.2	-	100	150	μV

Linear Integrated Circuits

CA3035, CA3035V1

STATIC CHARACTERISTICS TEST CIRCUIT


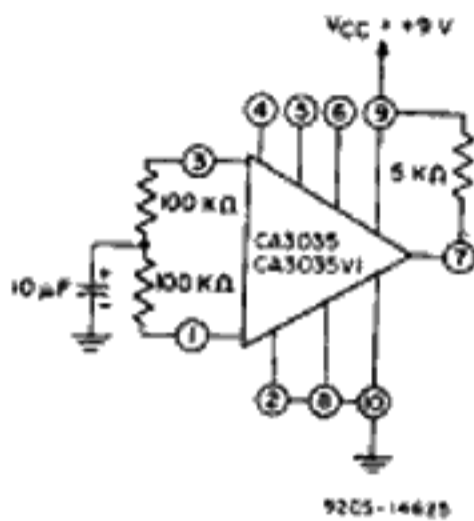


Fig.3

NOISE FIGURE TEST CIRCUIT

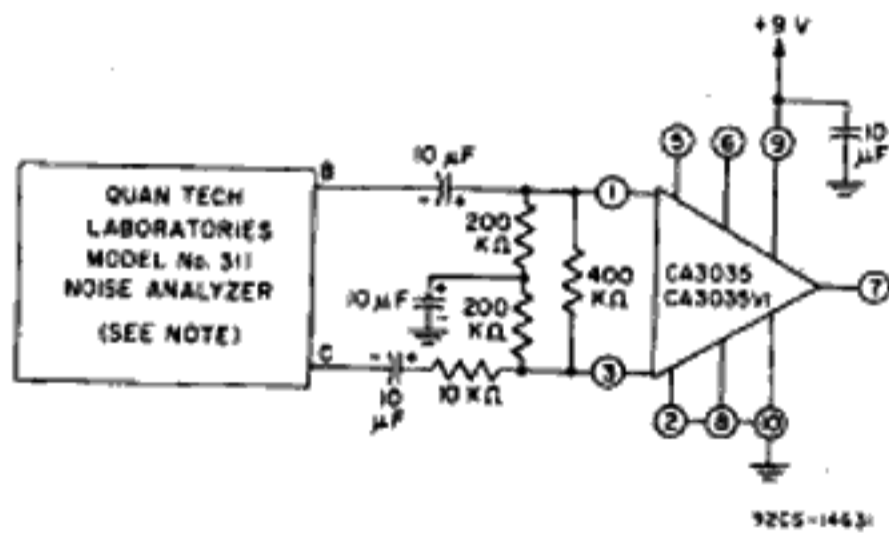

NOTE: SET ALL INTERNAL POWER SUPPLIES ON QUAN TECH NOISE ANALYZER TO ZERO VOLTS.

Fig.4

TYPICAL 1st-AMPLIFIER RESPONSE

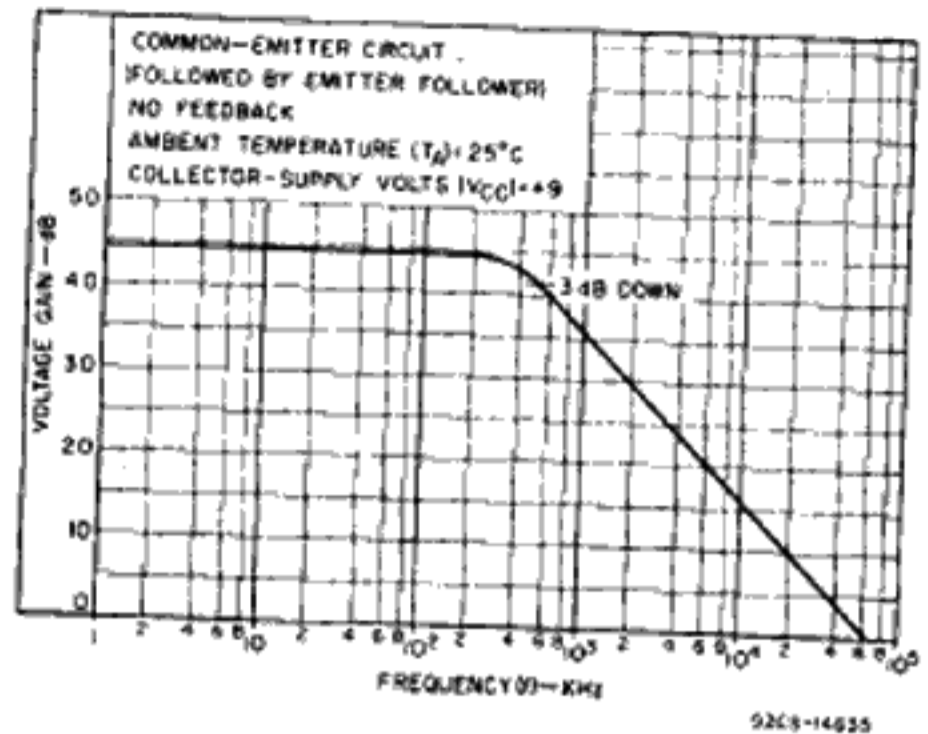


Fig.5

TYPICAL 2nd-AMPLIFIER RESPONSE

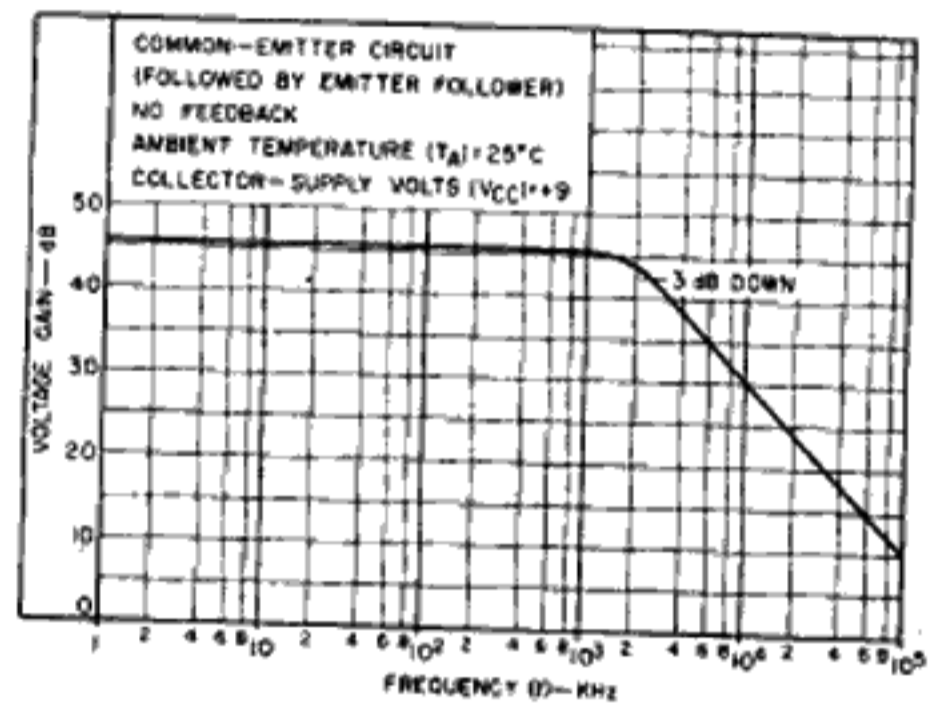


Fig.6

TYPICAL 3rd-AMPLIFIER RESPONSE

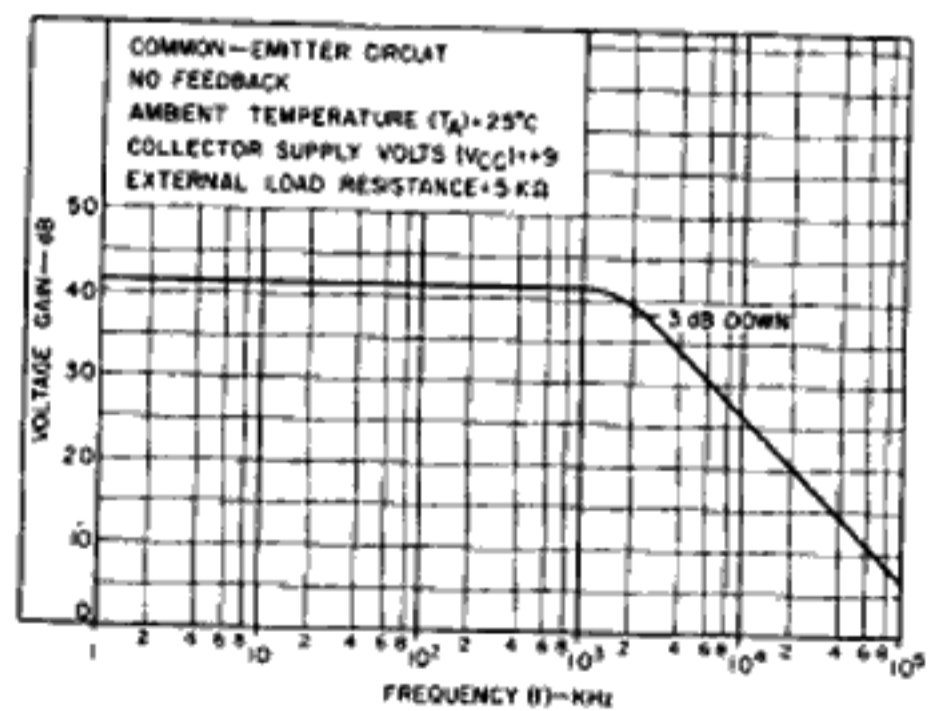


Fig.7