



RO2001

567.15 MHz SAW Resonator



TO39-3 Case

- **Ideal for Baseband CATV Downconverter LOs**
- **True One-Port Configuration**
- **Quartz Stability**
- **Rugged, Hermetic, Low-Profile TO39 Case**

The RO2001 is a true one-port, surface-acoustic-wave (SAW) resonator in a low-profile TO39 case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency oscillators operating at 567.15 MHz. Although it is suitable for a wide variety of oscillator applications, this resonator is designed for the second LO in CATV downconverters with the high IF at 612 MHz and the output at 45 MHz (baseband).

Absolute Maximum Ratings

Rating	Value	Units
CW RF Power Dissipation	+10	dBm
DC Voltage Between Terminals	±30	VDC
Case Temperature	-40 to +85	°C

Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units			
Center Frequency at 25 °C	Absolute Frequency	2, 3, 4, 5	567.050		576.250	MHz			
	Tolerance from 567.150 MHz						Δf _C	±100	kHz
Insertion Loss	IL	2, 5, 6		6.0	7.0	dB			
Quality Factor	Unloaded Q	5, 6, 7		9,600					
	50 Ω Loaded Q						Q _L	4,800	
Temperature Stability	Turnover Temperature	T _O	56	71	86	°C			
	Turnover Frequency	f _O					6, 7, 8	f _C + 44	kHz
	Frequency Temperature Coefficient	FTC						0.037	ppm/°C ²
Frequency Aging	Absolute Value during the First Year	f _A	1	≤10		ppm/yr			
DC Insulation Resistance between Any Two Pins		5	1.0			MΩ			
RF Equivalent RLC Model	Motional Resistance	R _M	5, 7, 9	100	124	Ω			
	Motional Inductance	L _M					269.397	μH	
	Motional Capacitance	C _M					0.292315	fF	
	Pin 1 to Pin 2 Static Capacitance	C _O					5, 6, 9	0.8	1.1
	Transducer Static Capacitance	C _P	5, 6, 7, 9	0.8		pF			
Test Fixture Shunt Induc-		L _{TEST}	2, 7	72		nH			
Lid Symbolization	RFM RO2001								



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

Notes:

1. Frequency aging is the change in f_C with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
2. The center frequency, f_C, is measured at the minimum insertion loss point, IL_{MIN}, with the resonator in the 50 Ω test system (VSWR ≤ 1.2:1). The shunt inductance, L_{TEST}, is tuned for parallel resonance with C_O at f_C. Typically, f_O-OSCILLATOR or f_O-TRANSMITTER is less than the resonator f_C.
3. One or more of the following United States patents apply: 4,454,488 and 4,616,197 and others pending.
4. Typically, equipment designs utilizing this device require emissions testing and government approval, which is the responsibility of the equipment manufacturer. Unless noted otherwise, case temperature T_C = +25°C±2°C. The design, manufacturing process, and specifications of this device are subject to change without notice.
7. Derived mathematically from one or more of the following directly measured parameters: f_C, IL, 3 dB bandwidth, f_C versus T_C, and C_O.
8. The turnover temperature, T_O, is the temperature of maximum (or turnover) frequency, f_O. The nominal center frequency at any case temperature, TC, may be calculated from: f = f_O [1 - FTC (T_O - T_C)²].
9. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance C_O is the static (nonmotional) capacitance between pin1 and pin 2 measured at low frequency (10 MHz) with a capacitance meter. The measurement includes case parasitic capacitance with a floating case. For usual grounded case applications (with ground connected to either pin 1 or pin 2 and to the case), add approximately 0.25pF to C_O.


567.15 MHz

SAW Resonator

Electrical Connections

This one-port, two-terminal SAW resonator is bidirectional. The terminals are interchangeable with the exception of circuit board layout.


Pin	Connection
1	Terminal 1
2	Terminal 2
3	Case Ground




Typical Test Circuit

The test circuit inductor, L_{TEST} , is tuned to resonate with the static capacitance, C_O at F_C .

Electrical Test:

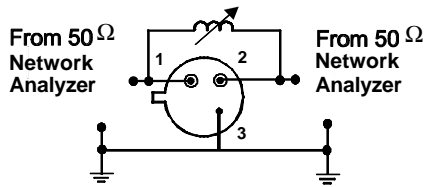


Power Test:

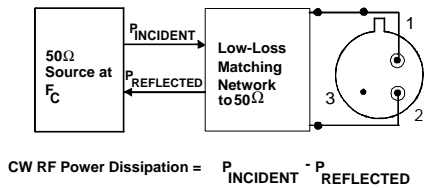


Typical Application Circuits

Typical Low-Power Transmitter Application:

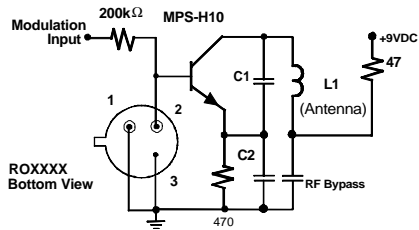


Typical Local Oscillator Application:

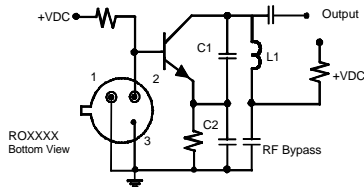


Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include oscillator temperature characteristics.

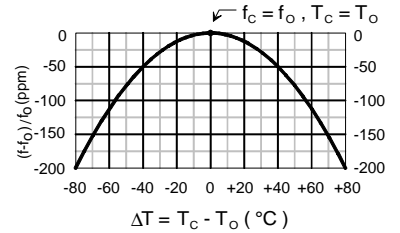


Equivalent LC Model

The following equivalent LC model is valid near resonance:

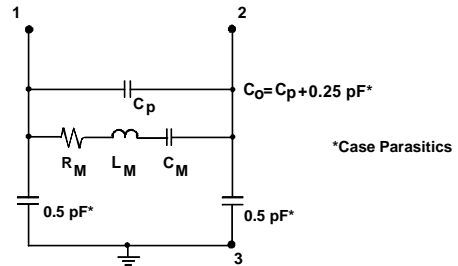

Case Design

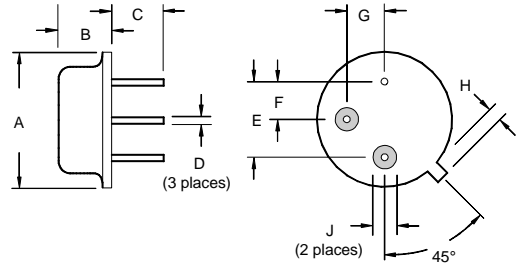

Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A		9.30		0.366
B		3.18		0.125
C	2.50	3.50	0.098	0.138
D	0.46 Nominal		0.018 Nominal	
E	5.08 Nominal		0.200 Nominal	
F	2.54 Nominal		0.100 Nominal	
G	2.54 Nominal		0.100 Nominal	
H		1.02		0.040
J	1.40		0.055	