



PT6100 Series

1 AMP ADJUSTABLE POSITIVE STEP-DOWN
INTEGRATED SWITCHING REGULATOR

Revised 5/15/98

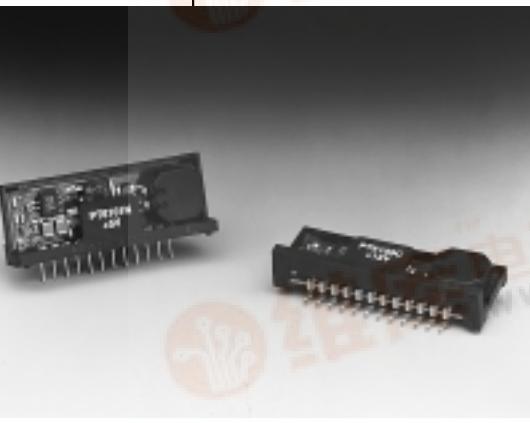

Standard Application

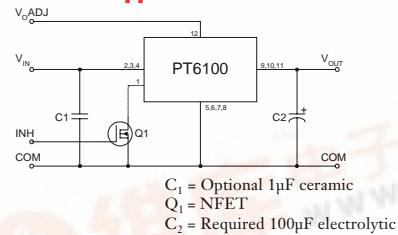

Specifications

Characteristics (T _a =25°C unless noted)	Symbols	Conditions	PT6100 SERIES			
			Min	Typ	Max	Units
Output Current	I _o	Over V _{in} range	0.1*	—	1.0	A
Short Circuit Current	I _{sc}	V _{in} = V _{in} min	—	3.5	—	Apk
Input Voltage Range (Note: inhibit function cannot be used with V _{in} above 30V.)	V _{in}	0.1 ≤ I _o ≤ 1.0 A	V _o = 3.3V V _o = 5V V _o = 12V	9 9 16	26 30/38** 30/38**	V
Output Voltage Tolerance	ΔV _o	Over V _{in} Range, I _o = 1.0 A T _a = 0°C to +60°C	—	±1.0	±2.0	%V _o
Line Regulation	Reg _{line}	Over V _{in} range	—	±0.25	±0.5	%V _o
Load Regulation	Reg _{load}	0.1 ≤ I _o ≤ 1.0 A	—	±0.25	±0.5	%V _o
V _o Ripple/Noise	V _n	V _{in} =V _{in} min, I _o =1.0 A	—	±2	—	%V _o
Transient Response with C _o = 100µF	t _{tr} V _{os}	50% load change V _o over/undershoot	— —	100 5.0	200	µSec
Efficiency	η	V _{in} =9V, I _o =0.5A, V _o =3.3V V _{in} =9V, I _o =0.5A, V _o =5V V _{in} =16V, I _o =0.5A, V _o =12V	— — —	84 89 91	— — —	%
Switching Frequency	f _o	Over V _{in} and I _o ranges	400	500	600	kHz
Shutdown Current	I _{sc}	V _{in} = 15V	—	100	—	µA
Quiescent Current	I _{ql}	I _o = 0A, V _{in} = 10V	—	10	—	mA
Output Voltage Adjustment Range	V _o	Below V _o Above V _o	See Application Notes.			
Absolute Maximum Operating Temperature Range	T _a		-40	—	+85	°C
Recommended Operating Temperature Range	T _a	Free Air Convection, V _o = 3.3V (40-60LFM) V _{in} =24V, I _o =0.75A	-40 -40 -40	— — —	+85*** +85*** +80***	°C
Thermal Resistance	θ _{ja}	Free Air Convection (40-60LFM)	V _o = 3.3V V _o = 5V V _o = 12V	— — —	50 40 40	°C/W
Storage Temperature	T _s		-40	—	+125	°C
Mechanical Shock		Per Mil-STD-883D, Method 2002.3 1 msec, Half Sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2 20-2000 Hz, Soldered in a PC board	—	10	—	G's
Weight			—	5.0	—	grams

*SR will operate down to no load with reduced specifications.

** Input voltage cannot exceed 30V when the inhibit function is used. ***See Thermal Derating chart.

Note: The PT6100 Series requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications.

The PT6100 Series is a line of High-Performance 1 Amp, 12-Pin SIP (Single In-line Package) Integrated Switching Regulators (ISRs) designed to meet the on-board power conversion needs of battery powered or other equipment requiring high efficiency and small size. This high performance ISR family offers a unique combination of features combining 90% typical efficiency with open-collector on/off control and adjustable output voltage. Quiescent current in the shutdown mode is less than 100µA.

Pin-Out Information

Pin	Function
1	Inhibit (30V max)
2	V _{in}
3	V _{in}
4	V _{in}
5	GND
6	GND
7	GND
8	GND
9	V _{out}
10	V _{out}
11	V _{out}
12	V _{out} Adj


Ordering Information

PT6101□	= +5 Volts
PT6102□	= +3.3 Volts
PT6103□	= +12 Volts

PT Series Suffix (PT1234X)

Case/Pin Configuration

Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C




PT6100 Series

CHARACTERISTIC DATA


PT6102, 3.3 VDC

(See Note 1)


Efficiency vs Output Current

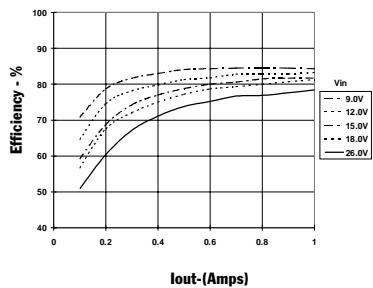


Ripple vs Output Current

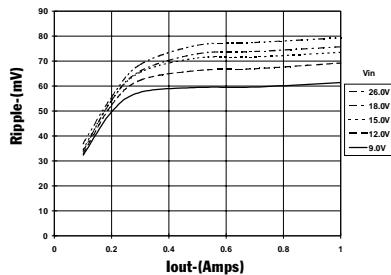

Thermal Derating (T_a) (See Note 2)




Power Dissipation vs Output Current

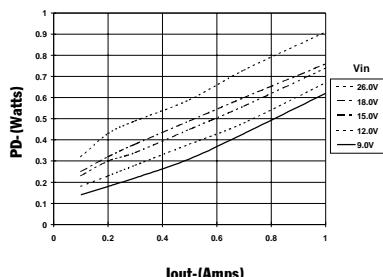


PT6101, 5.0 VDC

(See Note 1)


Efficiency vs Output Current

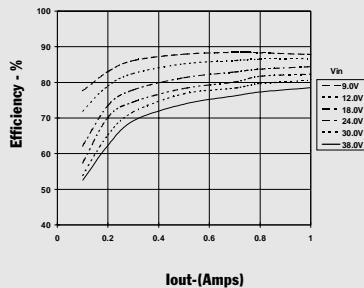


Ripple vs Output Current

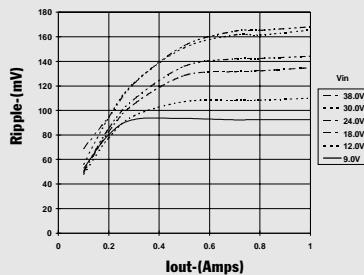

Thermal Derating (T_a) (See Note 2)

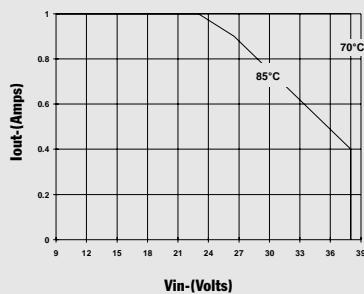


Power Dissipation vs Output Current

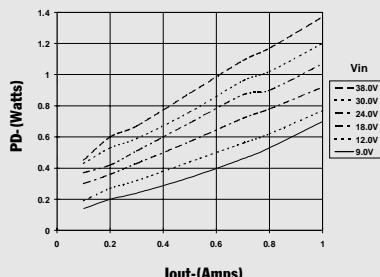


PT6103, 12.0 VDC

(See Note 1)


Efficiency vs Output Current

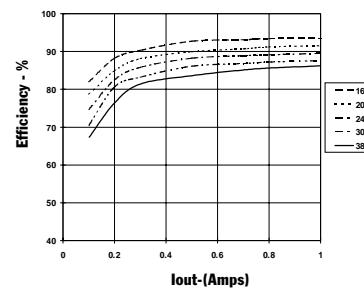


Ripple vs Output Current

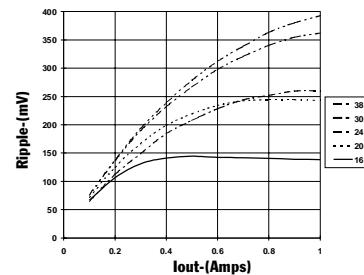

Thermal Derating (T_a) (See Note 2)



Power Dissipation vs Output Current

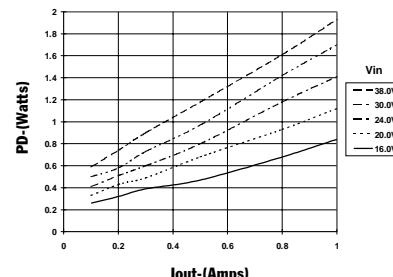

Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

Note 2: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)

[More Application Notes](#)

Adjusting the Output Voltage of the Wide Input Range Bus ISRs

The output voltage of the Power Trends' Wide Input Range Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model for either series as V_a (min) and V_a (max).

Adjust Up: An increase in the output voltage is obtained by adding a resistor R2, between pin 12 (V_o adjust) and pins 5-8 (GND).

Adjust Down: Add a resistor (R1), between pin 12 (V_o adjust) and pins 9-11(V_{out}).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor; either (R1) or R2 as appropriate.

Notes:

1. Use only a single 1% resistor in either the (R1) or R2 location. Place the resistor as close to the ISR as possible.
2. Never connect capacitors from V_o adjust to either GND or V_{out} . Any capacitance added to the V_o adjust pin will affect the stability of the ISR.
4. Adjustments to the output voltage may place additional limits on the maximum and minimum input voltage for the part. The revised maximum and minimum input voltage limits must comply with the following requirements. Note that the minimum input voltage limits are also model dependent.

$$V_{in}(\text{max}) = (8 \times V_a)V \text{ or } *30/38V, \text{ whichever is less.}$$


PT6x0x/PT6x1x series:

$$V_{in}(\text{min}) = (V_a + 4)V \text{ or } 9V, \text{ whichever is highest.}$$

PT6x2x series:

$$V_{in}(\text{min}) = (V_a + 2.5)V \text{ or } 7.5V, \text{ whichever is highest.}$$

* Limit is 30V when inhibit function is used.

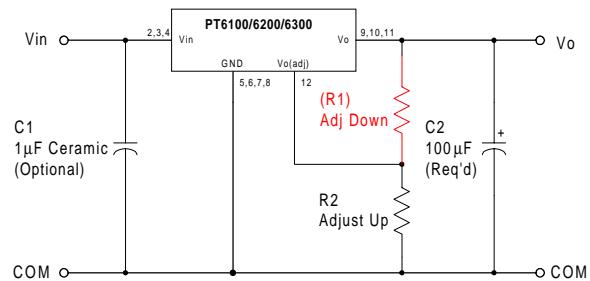Figure 1

The values of (R1) [adjust down], and R2 [adjust up], can also be calculated using the following formulae.

$$(R1) = \frac{R_o(V_a - 1.25)}{V_o - V_a} \text{ k}\Omega$$

$$R2 = \frac{1.25 R_o}{V_a - V_o} \text{ k}\Omega$$

Where: V_o = Original output voltage

V_a = Adjusted output voltage

R_o = The resistance value from Table 1

Table 1
ISR ADJUSTMENT RANGE AND FORMULA PARAMETERS

1Adc Rated	PT6102	PT6101	PT6121	PT6103
	PT6122			
2Adc Rated	PT6213		PT6212	PT6214
	PT6223		PT6222	
3Adc Rated	PT6303		PT6302	PT6304
	PT6323		PT6322	
V_o (nom)	3.3	5.0	5.0	12.0
V_a (min)	1.89	1.88	2.18	2.43
V_a (max)	6.07	11.25	8.5	22.12
R_o (kΩ)	66.5	150.0	90.9	243.0

For assistance or to order, call **(800) 531-5782**

PT6100/6120/6210/6220/6300/6320 Series

A p p l i c a t i o n N o t e s

Table 2

ISR ADJUSTMENT RESISTOR VALUES

1Adc Rated	PT6102	PT6101	PT6103
	PT6122	PT6121	
2Adc Rated	PT6213		PT6212
	PT6223		PT6222
3Adc Rated	PT6303		PT6304
	PT6323		PT6322
V_o (nom)	3.3	5.0	5.0
V_a (req.d)			12.0
1.9	(30.9)kΩ	(31.5)kΩ	
2.0	(38.4)kΩ	(37.5)kΩ	
2.1	(47.1)kΩ	(44.0)kΩ	
2.2	(57.4)kΩ	(50.9)kΩ	(30.8)kΩ
2.3	(69.8)kΩ	(58.3)kΩ	(35.4)kΩ
2.4	(85.0)kΩ	(66.3)kΩ	(40.2)kΩ
2.5	(104.0)kΩ	(75.0)kΩ	(45.5)kΩ
2.6	(128.0)kΩ	(84.4)kΩ	(51.1)kΩ
2.7	(161.0)kΩ	(94.6)kΩ	(57.3)kΩ
2.8	(206.0)kΩ	(106.0)kΩ	(64.0)kΩ
2.9	(274.0)kΩ	(118.0)kΩ	(71.4)kΩ
3.0	(388.0)kΩ	(131.0)kΩ	(79.5)kΩ
3.1	(615.0)kΩ	(146.0)kΩ	(88.5)kΩ
3.2	(1300.0)kΩ	(163.0)kΩ	(98.5)kΩ
3.3		(181.0)kΩ	(53.8)kΩ
3.4	831.0kΩ	(202.0)kΩ	(110.0)kΩ
3.5	416.0kΩ	(225.0)kΩ	(136.0)kΩ
3.6	227.0kΩ	(252.0)kΩ	(153.0)kΩ
3.7	208.0kΩ	(283.0)kΩ	(171.0)kΩ
3.8	166.0kΩ	(319.0)kΩ	(193.0)kΩ
3.9	139.0kΩ	(361.0)kΩ	(219.0)kΩ
4.0	119.0kΩ	(413.0)kΩ	(250.0)kΩ
4.1	104.0kΩ	(475.0)kΩ	(288.0)kΩ
4.2	92.4kΩ	(533.0)kΩ	(335.0)kΩ
4.3	83.1kΩ	(654.0)kΩ	(396.0)kΩ
4.4	75.6kΩ	(788.0)kΩ	(477.0)kΩ
4.5	69.3kΩ	(975.0)kΩ	(591.0)kΩ
4.6	63.9kΩ	(1260.0)kΩ	(761.0)kΩ
4.7	59.4kΩ	(1730.0)kΩ	(1050.0)kΩ
4.8	55.4kΩ		(115.0)kΩ
4.9	52.0kΩ		(120.0)kΩ
5.0	48.9kΩ		(125.0)kΩ
5.1	46.2kΩ	1880.0kΩ	1140.0kΩ
5.2	43.8kΩ	937.0kΩ	568.0kΩ
5.3	41.6kΩ	625.0kΩ	379.0kΩ
5.4	39.6kΩ	469.0kΩ	284.0kΩ
5.5	37.8kΩ	375.0kΩ	227.0kΩ
5.6	36.1kΩ	313.0kΩ	189.0kΩ
5.7	34.6kΩ	268.0kΩ	162.0kΩ
5.8	33.3kΩ	234.0kΩ	142.0kΩ
5.9	32.0kΩ	208.0kΩ	126.0kΩ
6.0	30.8kΩ	188.0kΩ	114.0kΩ

R1 = (Red) R2 = Black

ISR ADJUSTMENT RESISTOR VALUES (Cont)

1Adc Rated	PT6101	PT6103
	PT6121	
2Adc Rated		PT6212
		PT6222
3Adc Rated		PT6302
		PT6322
V_o (nom)	5.0	5.0
V_a (req.d)		12.0
6.2	156.0kΩ	94.7kΩ
6.4	134.0kΩ	81.2kΩ
6.6	117.0kΩ	71.0kΩ
6.8	104.0kΩ	63.1kΩ
7.0	93.8kΩ	56.8kΩ
7.2	85.2kΩ	51.6kΩ
7.4	78.1kΩ	47.3kΩ
7.6	72.1kΩ	43.7kΩ
7.8	67.0kΩ	40.6kΩ
8.0	62.5kΩ	37.9kΩ
8.2	58.6kΩ	35.5kΩ
8.4	55.1kΩ	33.4kΩ
8.6	52.1kΩ	(525.0)kΩ
8.8	49.3kΩ	(573.0)kΩ
9.0	46.9kΩ	(628.0)kΩ
9.5	41.7kΩ	(802.0)kΩ
10.0	37.5kΩ	(1060.0)kΩ
10.5	34.1kΩ	(1500.0)kΩ
11.0	31.3kΩ	
11.5		
12.0		
12.5		608.0kΩ
13.0		304.0kΩ
13.5		203.0kΩ
14.0		152.0kΩ
14.5		122.0kΩ
15.0		101.0kΩ
15.5		86.8kΩ
16.0		75.9kΩ
16.5		67.5kΩ
17.0		60.8kΩ
17.5		55.2kΩ
18.0		50.6kΩ
18.5		46.7kΩ
19.0		43.4kΩ
19.5		40.5kΩ
20.0		38.0kΩ
20.5		35.7kΩ
21.5		33.8kΩ
21.5		32.0kΩ
22.0		30.4kΩ