

PQxxxEH01Z Series

Low Voltage Operation Low Power-Loss Voltage Regulators

■ Features

- Low voltage operation (Minimum operating voltage: 2.35V)
2.5V input → available 1.5 to 1.8V output
- Large output current type (Io: 1A)
- Low dissipation current
(Dissipation current at no load: MAX. 2mA
Output OFF-state dissipation current: MAX.5μA)
- Low power-loss
- Built-in overcurrent and overheat protection functions
- TO-263 package

■ Applications

- Peripheral equipment of personal computers
- Power supplies for various electronic equipment such as DVD player or STB

■ Model Line-up

Output current (I _O)	Package type	Output voltage (V _O)		
		1.5V	1.8V	2.5V
1A	Taping	PQ015EH01ZP	PQ018EH01ZP	PQ025EH01ZP
	Sleeve	PQ015EH01ZZ	PQ018EH01ZZ	PQ025EH01ZZ

■ **Absolute Maximum Ratings** (Ta=25°C)

Parameter	Symbol	Rating	Unit
Input voltage	V_{IN}	10	V
①ON/OFF control terminal voltage	V_C	10	V
Output current	I_O	1	A
②Power dissipation	P_D	35	W
③Junction temperature	T_j	150	°C
Operating temperature	T_{opr}	-40 to +85	°C
Storage temperature	T_{stg}	-40 to +150	°C
Soldering temperature	T_{sol}	260 (10s)	°C


*1 All are open except GND and applicable terminals.

※2 P_D: With infinite heat sink

※3 Overheat protection may operate at $T_j=125^{\circ}\text{C}$ to 150°C .

■ Outline Dimensions

(Unit : mm)

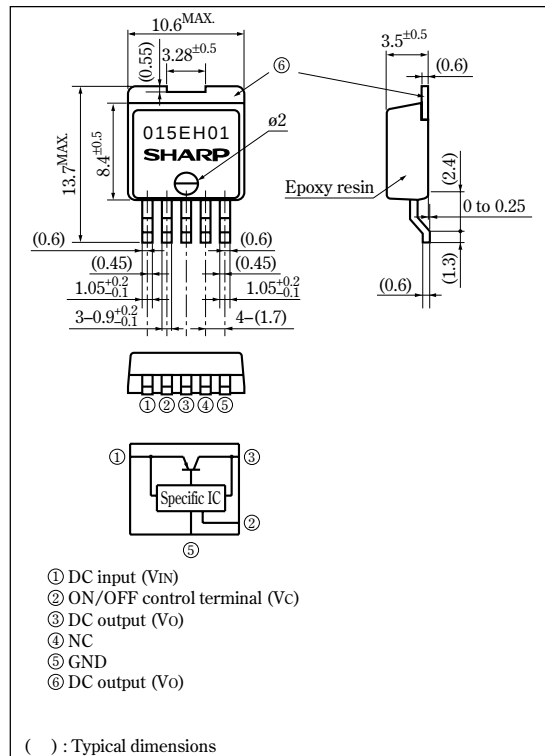

• Please refer to the chapter " Handling Precautions ".

SHARP

Notice	In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
Internet	Internet address for Electronic Components Group http://sharp-world.com/ec/

■ Electrical Characteristics (Unless otherwise specified, condition shall be $V_{IN}=V_O(TYP)+1V$, $I_O=0.5A$, $V_C=2.7V$, $T_a=25^{\circ}C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage	V_{IN}	—	Refer to below table			V
Output voltage	V_O	—	Refer to below table			V
Load regulation	R_{egL}	$I_O=5mA$ to $1A$	—	0.2	2.0	%
Line regulation	R_{egI}	$V_{IN}=V_O(TYP)+1V$ to $V_O(TYP)+6V$, $I_O=5mA$	—	0.1	1.0	%
Temperature coefficient of output voltage	T_CV_O	$T_J=0$ to $125^{\circ}C$, $I_O=5mA$	—	± 0.01	—	%/ $^{\circ}C$
Ripple rejection	RR	Refer to Fig.2	45	60	—	dB
※4 ON-state voltage for control	$V_{C(ON)}$	—	2	—	—	V
ON-state current for control	$I_{C(ON)}$	—	—	—	200	μA
OFF-state voltage for control	$V_{C(OFF)}$	—	—	—	0.8	V
OFF-state current for control	$I_{C(OFF)}$	$V_C=0.4V$	—	—	2	μA
Quiescent current	I_q	$I_O=0A$	—	1	2	mA
Output OFF-state dissipation current	I_{qs}	$I_O=0A$, $V_C=0.4V$	—	—	5	μA

※4 In case of opening control terminal ②, output voltage turns off

■ Input Voltage Line-up

Model No.	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
PQ015EH01Z	V_{IN}	$I_O=0.5A$, $V_C=2.7V$, $T_a=25^{\circ}C$	2.35	—	10	V
PQ018EH01Z	V_{IN}		2.35	—	10	V
PQ025EH01Z	V_{IN}		3	—	10	V

■ Output Voltage Line-up

Model No.	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
PQ015EH01Z	V_O	$V_{IN}=V_O(TYP)+1V$, $I_O=0.5A$, $V_C=2.7A$, $T_a=25^{\circ}C$	1.45	1.5	1.55	V
PQ018EH01Z	V_O		1.75	1.8	1.85	V
PQ025EH01Z	V_O		2.438	2.5	2.562	V

Fig.1 Test Circuit

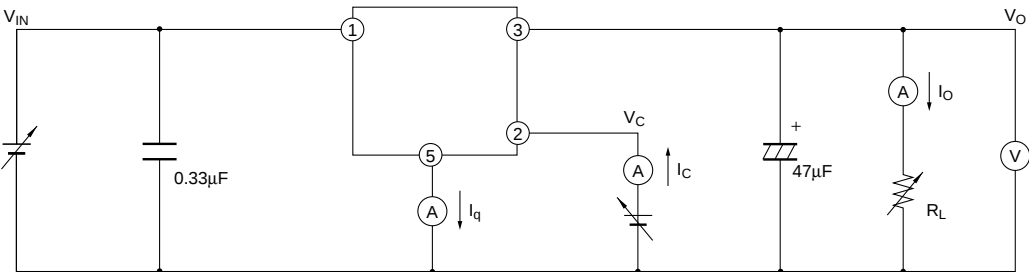


Fig.2 Test Circuit for Ripple Rejection

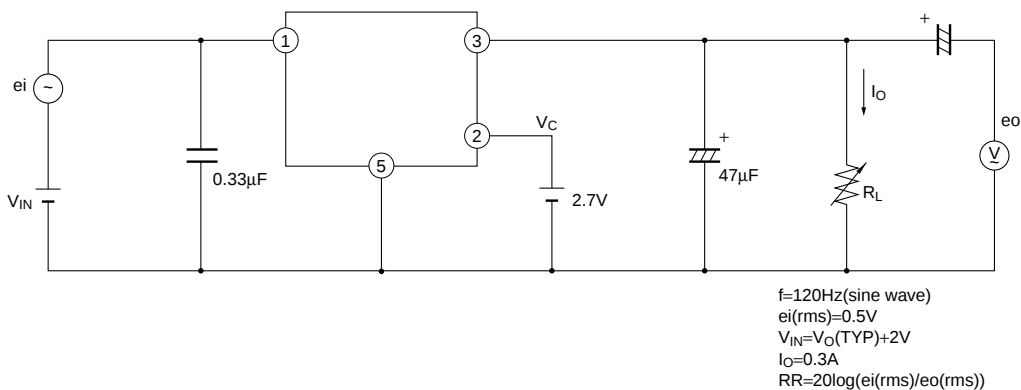


Fig.3 Power Dissipation vs. Ambient Temperature

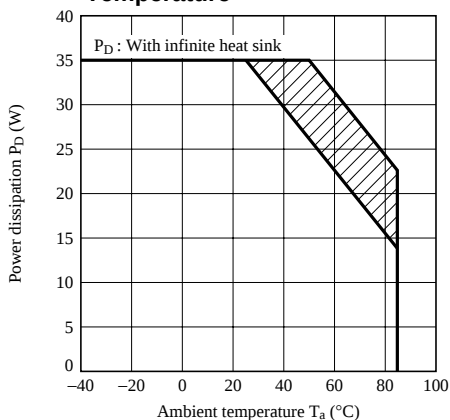


Fig.4 Overcurrent Protection Characteristics (Typical Value, PQ015EH01Z)

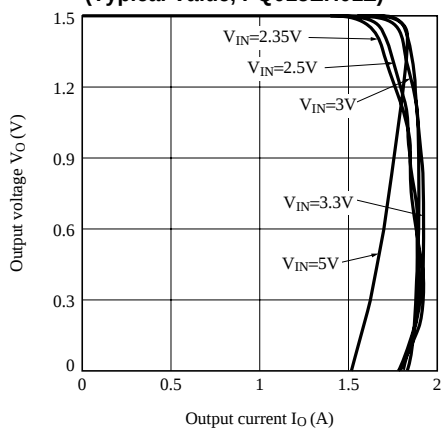


Fig.5 Overcurrent Protection Characteristics (Typical Value, PQ018EH01Z)

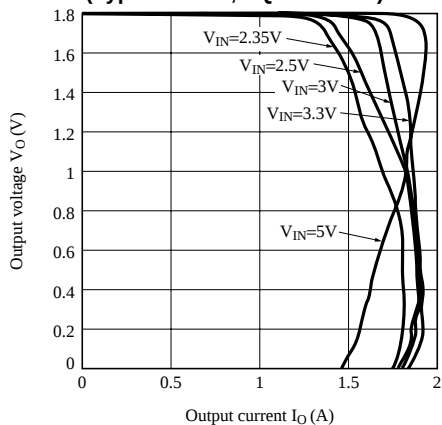


Fig.6 Overcurrent Protection Characteristics (Typical Value, PQ025EH01Z)

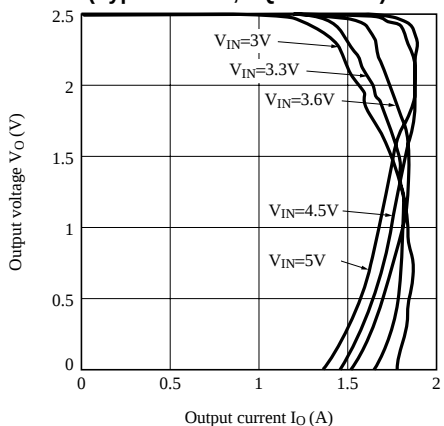


Fig.7 Output Voltage vs. Ambient Temperature (PQ015EH01Z)

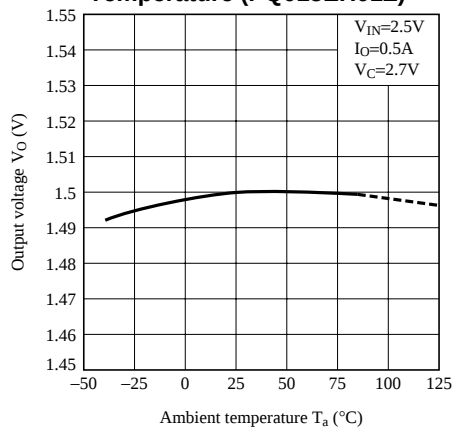


Fig.8 Output Voltage vs. Ambient Temperature (PQ018EH01Z)

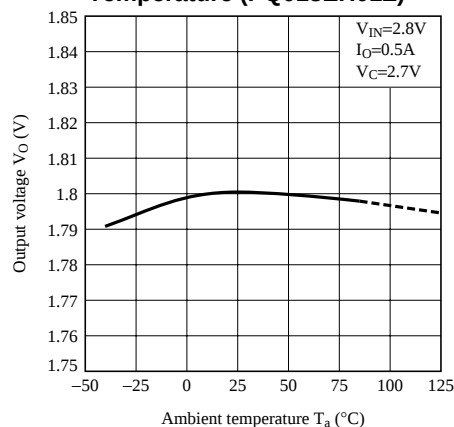


Fig.9 Output Voltage vs. Ambient Temperature (PQ025EH01Z)

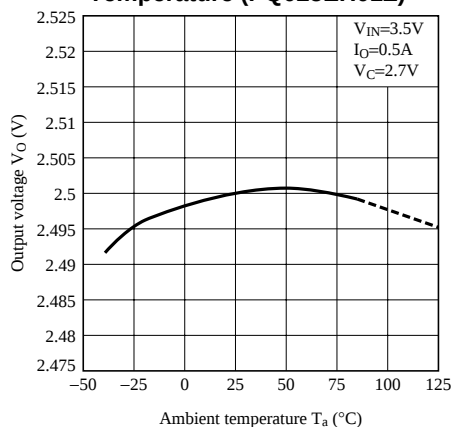


Fig.10 Output Voltage vs. Input Voltage (PQ015EH01Z)

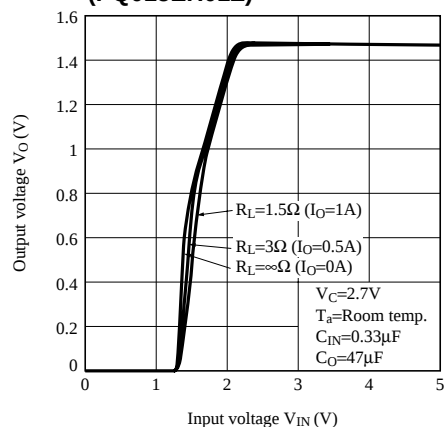


Fig.11 Output Voltage vs. Input Voltage (PQ018EH01Z)

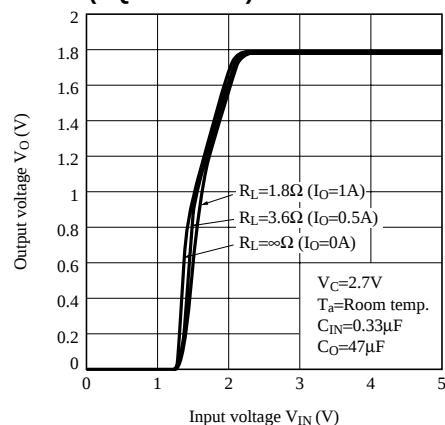


Fig.12 Output Voltage vs. Input Voltage (PQ025EH01Z)

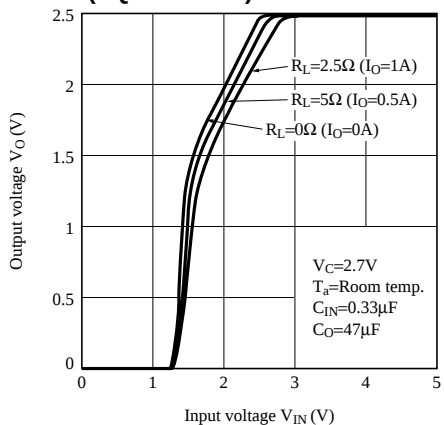


Fig.13 Circuit Operating Current vs. Input Voltage (PQ015EH01Z)

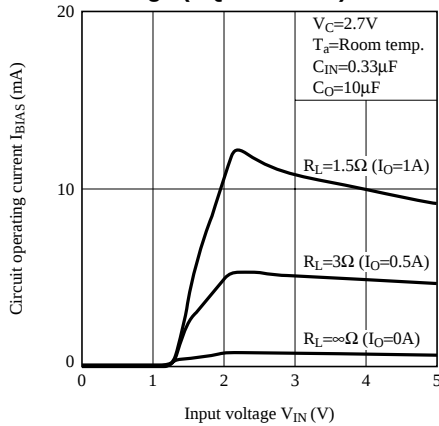


Fig.14 Circuit Operating Current vs. Input Voltage (PQ018EH01Z)

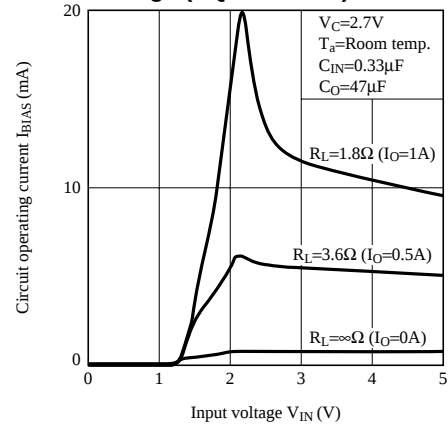


Fig.15 Circuit Operating Current vs. Input Voltage (PQ025EH01Z)

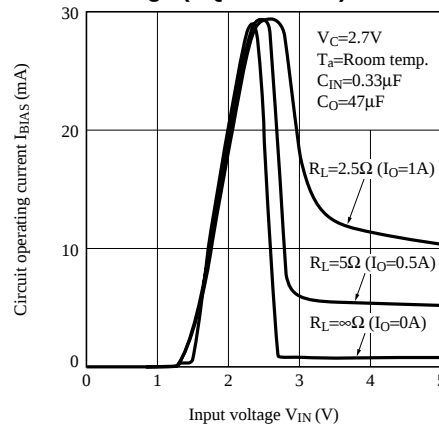


Fig.16 Quiescent Current vs. Junction Temperature

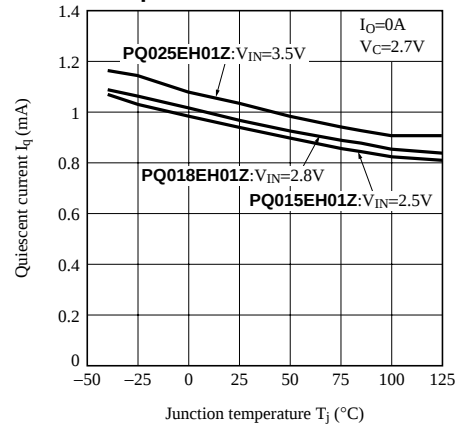


Fig.17 ON-OFF Threshold Voltage vs. Ambient Temperature (PQ018EH01Z)

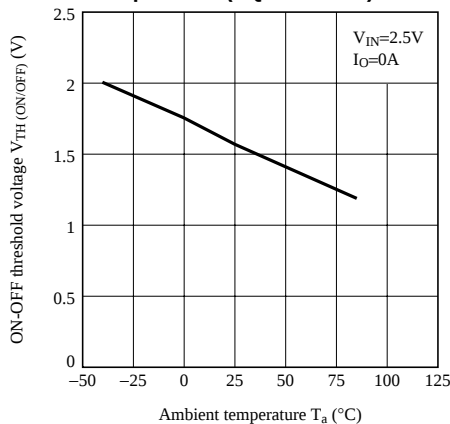


Fig.18 Ripple Rejection vs. Input Ripple Frequency

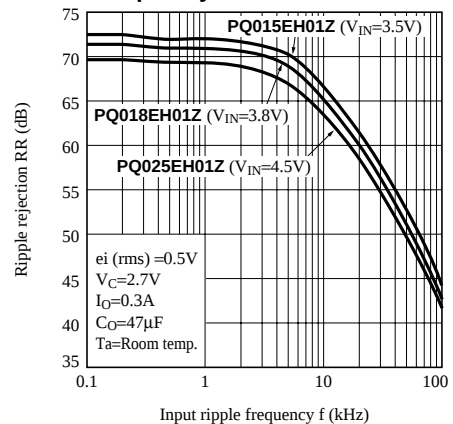


Fig.19 Ripple Rejection vs. Output Current




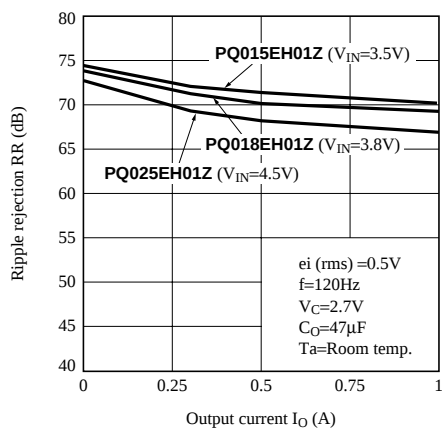


Fig.20 Power Dissipation vs. Ambient Temperature (Typical Value)

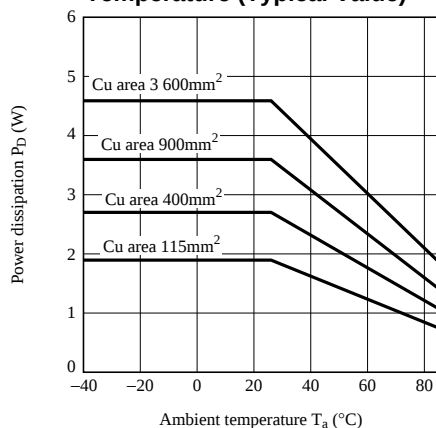

Material : Glass-cloth epoxy resin
 Size : 60×60×1.6mm
 Cu thickness : 65μm

Fig.21 Typical Application

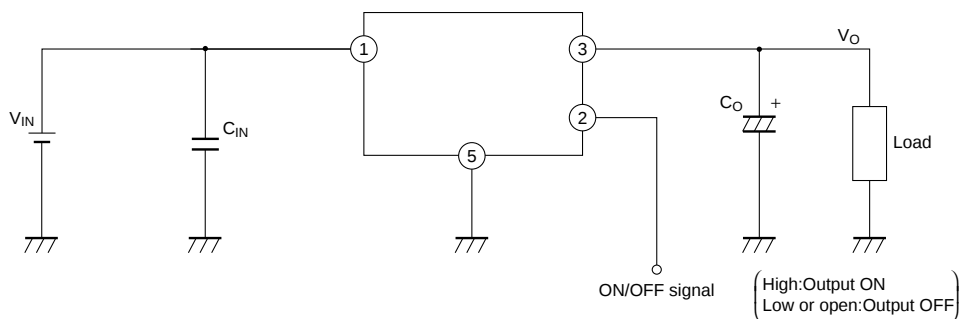

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.