

**CARLO GAVAZZI**

- TRMS AC/DC over + under, over+over, under+under current and voltage monitoring relays
- DC process signal plus/minus monitoring relay (DIC01)
- Selection of measuring range by DIP-switches
- Adjustable current and voltage on relative scale
- Adjustable hysteresis on relative scale
- Separately adjustable delay functions (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 1 or 2 x 8 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DIC01) or plug-in module (PIC01)
- 45 mm Euronorm housing (DIC01) or 36 mm plug-in module (PIC01)
- LED indication for relay(s), alarm and power supply ON
- Galvanically separated power supply

## Ordering Key

time delay. Only for DIC01 each set level can work with a single SPDT relay. Owing to the built-in latch function, the ON-position of the relay output can be maintained. Inhibit function can be used to avoid relay operation when not desired (maintenance, transitions). The LED's indicate the state of the alarm and the output relays.

**DIC 01 D B23 AVO**

Housing \_\_\_\_\_  
Function \_\_\_\_\_  
Type \_\_\_\_\_  
Item number \_\_\_\_\_  
Output \_\_\_\_\_  
Power supply \_\_\_\_\_  
Range \_\_\_\_\_

## Type Selection

Mounting	Output	Supply: 24 VDC	Supply: 24/48 VAC	Supply: 115/230 VAC
DIN-rail	2 x SPDT	DIC 01 D 724 AV0	DIC 01 D B48 AV0	DIC 01 D B23 AV0
Plug-in	SPDT	PIC 01 C 724 AV0	PIC 01 C B48 AV0	PIC 01 C B23 AV0

## Input Specifications

<b>Input</b>	<b>CT ranges</b>		<b>AAC rms</b>	<b>Max. curr.</b>
Current level Voltage level DC levels (DIC01 only)	DIC01: Terminals Y1, Y2 PIC01: Terminals 6, 7 DIC01: Terminals Y1, Y3 PIC01: Terminals 5, 7 Connecting terminals Z3, Y1	MI and MP ranges (0.4 to 4 V <sub>p</sub> input) 1-ph.: 3-ph.: MI 5 MP 3005 MI 20 MP 3020 MI 100 MP 3100 MI 500 MP 3500	0.5 to 5 A 2 to 20 A 10 to 100 A 50 to 500 A	20 AAC 50 AAC 250 AAC 750 AAC
<b>Current ranges</b> 0.5 to 5 mA AC/DC 2 to 20 mA AC/DC -5 to 5 mA DC } (DIC01 only) -20 to 20 mA DC } Max. current for 1 s	<b>Internal resis.</b> 50 Ω 50 Ω 50 Ω 50 Ω	<b>Max. curr.</b> 35 mA 55 mA 35 mA 55 mA 100 mA	A82 ranges (2 to 20 mA input) A82-10/20 25 A82-10/20 50 A82-10/20 100 A82-10/20 250 A82-10/20 500	2.5 to 25 A 5 to 50 A 10 to 100 A 25 to 250 A 50 to 500 A
<b>Voltage ranges</b> 0.1 to 1 V AC/DC 1 to 10 V AC/DC 0.4 to 4 V <sub>p</sub> AC -1 to 1 VDC } (DIC01 only) -10 to 10 VDC } Max. voltage for 1 s	<b>Internal resis.</b> > 10 kΩ > 10 kΩ > 10 kΩ > 10 kΩ > 10 kΩ	<b>Max. volt.</b> 7 V 20 V 100 V 7 V 20 V 100 V	E82-20 ranges (2 to 20 mA input) E82-20 25 E82-20 50	2.5 to 25 A 5 to 50 A
		<b>Note:</b> The input voltage cannot raise over 300 VAC/DC with respect to ground (PIC01 only)		

## Input Specifications (cont.)

<b>Note:</b> MP 3... current transformers not suitable for under current measurements due to the output signal of the device (see data sheet)	
<b>Contact input</b> DIC01 PIC01 Disabled Enabled Latch disable	Terminals Z1, Y1 Terminals 8, 9 > 10 k $\Omega$ < 500 $\Omega$ > 500 ms

## Output Specifications

<b>Output</b> Rated insulation voltage	1 or 2 x SPDT relays 250 VAC
<b>Contact ratings</b> (AgSnO <sub>2</sub> ) Resistive loads DC 12 Small inductive loads AC 15 DC 13	$\mu$ 8 A @ 250 VAC 5 A @ 24 VDC 2.5 A @ 250 VAC 2.5 A @ 24 VDC
<b>Mechanical life</b>	$\geq 30 \times 10^6$ operations
<b>Electrical life</b>	$\geq 10^5$ operations (at 8 A, 250 V, $\cos \varphi = 1$ )
<b>Operating frequency</b>	$\leq 7200$ operations/h
<b>Dielectric strength</b> Dielectric voltage Rated impulse withstand volt.	$\geq 2$ kVAC (rms) 4 kV (1.2/50 $\mu$ s)

## Supply Specifications

<b>Power supply</b> Rated operational voltage through terminals: A1, A2 or A3, A2 (DIC01) 2, 10 or 11, 10 (PIC01) 724: B48: B23:	Overvoltage cat. III (IEC 60664, IEC 60038)  24 VDC $\pm 20\%$ , insulated 24/48 VAC $\pm 15\%$ 45 to 65 Hz, insulated 115/230 VAC $\pm 15\%$ 45 to 65 Hz, insulated	<b>Dielectric voltage</b> Supply to input Supply to output Input to output	<b>DC supply</b> 2 kV 4 kV 4 kV	<b>AC supply</b> 4 kV 4 kV 4 kV
		<b>Rated operational power</b> AC DC	5 VA 3 W	

## General Specifications

<b>Power ON delay</b>	1 s $\pm$ 0.5 s or 6 s $\pm$ 0.5 s	<b>Environment</b> Degree of protection Pollution degree Operating temperature Storage temperature	(EN 60529) IP 20 3 (DIC01), 2 (PIC01) -20 to 60°C, R.H. < 95% -30 to 80°C, R.H. < 95%
<b>Reaction time</b>  Alarm ON delay Alarm OFF delay	(input signal variation from -20% to +20% or from +20% to -20% of set value) < 100 ms < 100 ms	<b>Housing dimensions</b> Din-rail version Plug-in version	45 x 80 x 99.5 mm 36 x 80 x 87 mm
<b>Accuracy</b> Temperature drift Delay ON alarm Repeatability	(15 min warm-up time) $\pm 1000$ ppm/°C $\pm 10\%$ on set value $\pm 50$ ms $\pm 0.5\%$ on full-scale	<b>Weight</b>	Approx. 250 g
<b>Indication for</b> Power supply ON Alarm ON  Output relay ON	LED, green LED, red (flashing 2 Hz during delay time) 1 or 2 x LED(s), yellow	<b>Screw terminals</b> Tightening torque	Max. 0.5 Nm acc. to IEC 60947
		<b>CE-Marking</b>	Yes

## Mode of Operation

DIC01 and PIC01 monitor both AC and DC current and voltage. DIC01 can also monitor positive and negative DC voltage connecting terminals Y1 and Z3.

**Example 1**  
(no contact input - under+over voltage - 2 x SPDT N.D. relays (1 x SPDT for PIC01) - TRMS)

DIC01: One relay operates when the voltage drops below the under voltage set point for more than the respective delay time. It releases when

the voltage exceeds the set level plus the set hysteresis. The other relay operates when the voltage exceeds the over voltage set point for more than the respective delay time. It releases when the voltage drops below the set level minus hysteresis.

PIC01: The relay operates when the voltage drops below the under voltage set level for more than the respective set delay time or when it exceeds the over voltage set level for more than the relative set delay time. The relay releases when the voltage exceeds the under voltage set level plus hysteresis and

## Mode of Operation (cont.)

it drops below the over voltage set level minus hysteresis (the hysteresis is the same for both set levels).

### Example 2

(latch enable active - under+under current - 2 x SPDT relays (1 x SPDT for PIC01) - TRMS)

DIC01: Each relay operates and latches when the current drops below the respective set level for more than the respective delay time. Provided that the current has exceeded the respective set level plus hysteresis, each relay releases when the contact input's connection is interrupted.

PIC01: The relay operates when the current drops below the higher set level for more than the respective delay time. Provided that the

current has exceeded the higher set level plus hysteresis the relay releases when the contact input's connection is interrupted.

### Note

Different delay times can be used for appropriate reaction according to the set points.

### Example 3

(inhibit enable active - over+over current with MI CT - DPDT relay (SPDT for PIC01) - TRMS)

Provided that the contact input's connection is interrupted, the relay operates when the current flowing in the MI CT exceeds the lower set level for more than the respective delay time. It releases when the current drops below the lower set level minus hysteresis or

when the contact input's pins are connected.

### Example 4

(inhibit enable active - over+over current with A82-10 CT - DPDT relay (1 x SPDT for PIC01) - TRMS)

Provided that the contact input's connection is interrupted, the relay operates when the current flowing in the A82-10 CT exceeds the lower set level for more than its delay time. It releases when the current drops below the lower set level minus hysteresis or when the contact input's pins are connected.

### Example 5 (DIC01 only)

(no contact input - under+over voltage - 2 x SPDT N.D. relays - plus/minus DC)

One relay operates when the

voltage drops below the under voltage set point for more than the respective delay time. It releases when the voltage exceeds the set level plus the set hysteresis. The other relay operates when the voltage exceeds the over voltage set point for more than the respective delay time. It releases when the voltage drops below the set level minus hysteresis.

In this case the spare front label has to be placed on the device for proper level adjustment.

### Note

When the inhibit contact is opened, if the input signal is already in alarm position, the delay time needs to elapse before relay(s) activation.

## Function/Range/Level and Time Delay Setting

### Selection of measuring range:

The selection between current and voltage is automatically selected through the input connectors.

TRMS or positive/negative DC monitoring selectable by short-circuiting terminals Y1 and Z3 (DIC01 only).

DIP-switch selector (1 to 2)

1 2

ON ☐ 0.5 to 5 mA AC/DC  
-5 to 5 mA DC  
0.1 to 1 V AC/DC  
-1 to 1 VDC

☐ 2 to 20 mA AC/DC  
-20 to 20 mA DC  
0.4 to 4 V<sub>p</sub> AC

☐ 1 to 10 V AC/DC  
-10 to 10 V DC

### Selection of function:

DIP-switch selector (3 to 6 and 1 A, 2 A)

3

☐ Relay(s) de-energized in normal condition.  
☐ Relay(s) energized in normal condition.

4

☐ Power ON delay 1 ± 0.5 s  
☐ Power ON delay 6 ± 0.5 s

5

☐ Contact input as latch function enable. When the contact is closed the latch function is activated. The reset of the latch condition occurs when the contact is open or by power down.

☐ Contact input as inhibit of alarm enable. When the contact is closed the relay remains in normal position even if the alarm condition occurs.

6

☐ Set point 1 over voltage/-current monitoring relay. The alarm condition occurs when voltage/current input is over the set point value.

☐ Set point 1 under voltage/-current monitoring relay. The alarm condition occurs when voltage/current input is under the set point value.

1A

ON ☐ Set point 2 over voltage/-current monitoring relay. The alarm condition occurs when voltage/current input is over the set point value.

☐ Set point 2 under voltage/-current monitoring relay. The alarm condition occurs when voltage/current input is under the set point value.

2A

ON ☐ 2 x SPDT relays (DIC01)  
☐ 1 x DPDT relay (PIC01)

### Selection of level, time delay and hysteresis:

Upper knob:  
Setting of hysteresis on relative scale: 0 to 30% on set value.


Centre knobs:  
Current level setting on relative scale: 10 to 110% on full scale.

Lower knobs:  
Setting of delay on alarm time on absolute scale (0.1 to 30 s).




Wiring Diagrams


Example 1

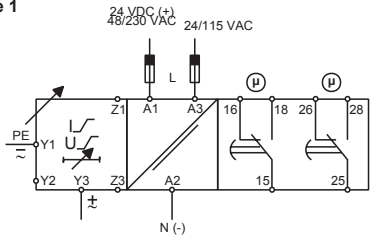


Example 2

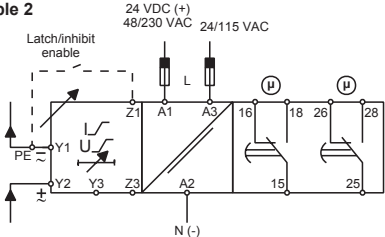


Example 3

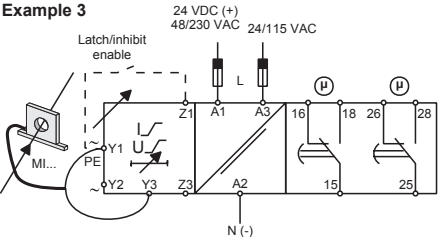


Example 4

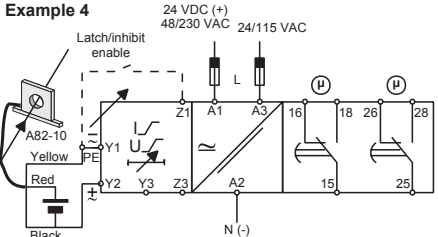


Example 5

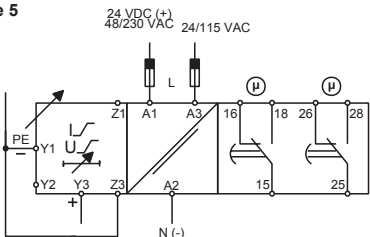


Example 1




Example 2



Example 3

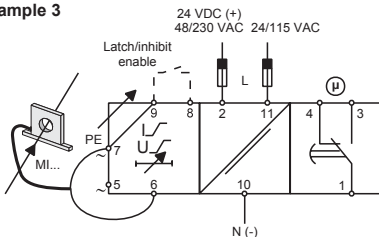


Example 4

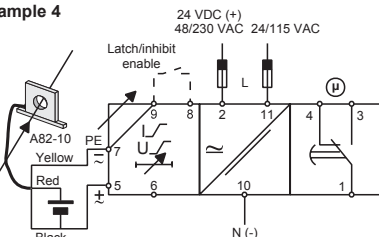


## Operation Diagrams


### Over+over voltage/current

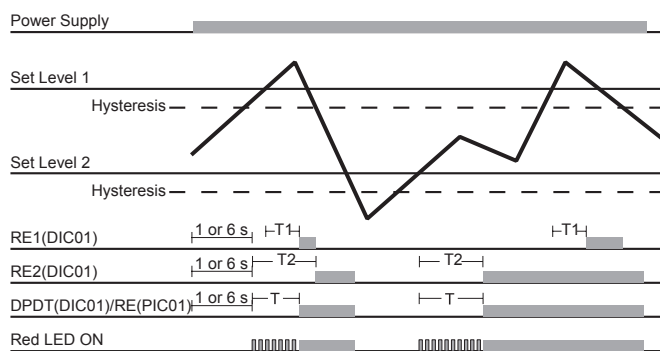


### Over+over voltage/current - Latch

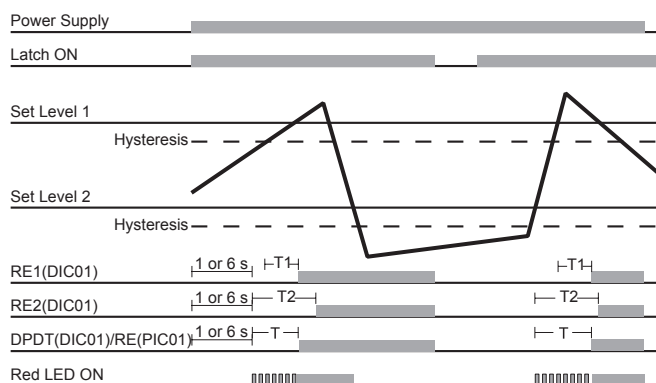

### Over+under voltage/current - N.E. relay(s)

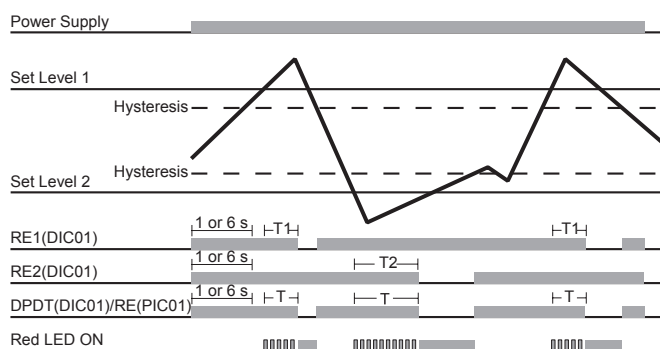

### Over+under voltage/current - Inhibit - N.E. relay(s)

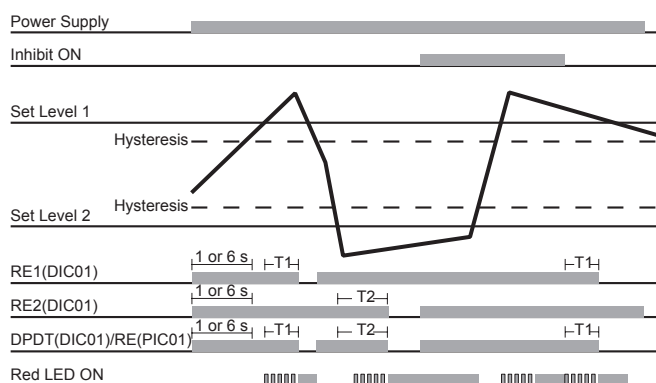

### Under+under voltage/current

