

# PC905

## Long Creepage Distance Photocoupler with Built-in Voltage Detection Circuit

- \* Lead forming type (I type ) is also available. (PC905I)
- \*\* TÜV (DIN-VDE0884 ) approved type is also available as an option.

### ■ Features


1. Built-in voltage deviation detection circuit
2. Long creepage distance type  
(Creepage distance : 8mm or more)
3. Conforms to European Safety Standard  
(Internal insulation distance : 0.5mm or more)
4. High collector-emitter voltage ( $V_{CE0}$  : 70V)
5. High isolation voltage between input and output ( $V_{iso}$  : 5 000V<sub>rms</sub>)
6. Recognized by UL, file No. E64380  
Approved by BSI (BS415 : No. 6990, BS7002 : No. 7567)  
Approved by SEMKO No. 963501101  
Approved by DEMKO No. 392592

### ■ Applications

1. Switching power supplies

### ■ Outline Dimensions

( Unit : mm )

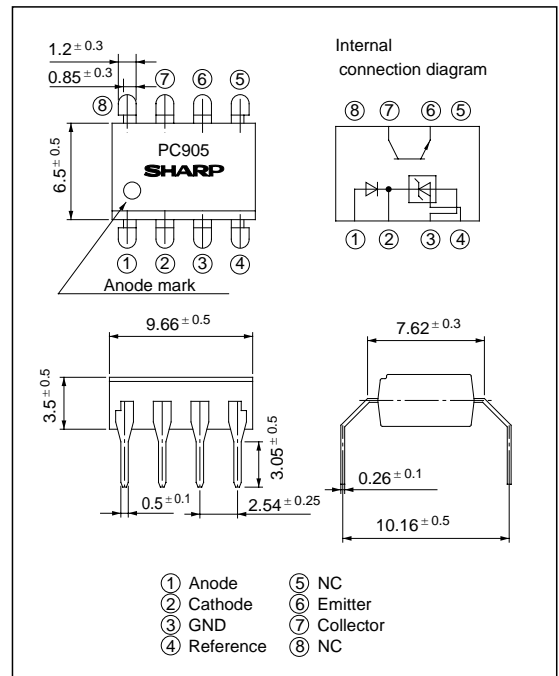

### ■ Absolute Maximum Ratings

( $T_a = 25^\circ\text{C}$ )

	Parameter	Symbol	Rating	Unit
Input	Anode current	$I_A$	50	mA
	Anode voltage	$V_A$	30	V
	Reference input current	$I_{REF}$	10	mA
	Power dissipation	$P$	250	mW
Output	Collector-emitter voltage	$V_{CE0}$	70	V
	Emitter-collector voltage	$V_{ECO}$	6	V
	Collector current	$I_C$	50	mA
	Collector power dissipation	$P_C$	150	mW
	Total power dissipation	$P_{tot}$	350	mW
	*1 Isolation voltage	$V_{iso}$	5 000	V <sub>rms</sub>
	Operating temperature	$T_{opr}$	- 25 to + 85	$^\circ\text{C}$
	Storage temperature	$T_{stg}$	- 40 to + 125	$^\circ\text{C}$
	*2 Soldering temperature	$T_{sol}$	260	$^\circ\text{C}$

\*1 40 to 60% RH, AC for 1 minute

\*2 For 10 seconds

## Electro-optical Characteristics

( $T_a = 25^\circ\text{C}$  unless otherwise specified.)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	Fig.
Input	Reference voltage	$V_{REF}$	$V_K = V_{REF}, I_A = 10\text{mA}$	2.40	2.495	2.60	V	1
	*3 Temperature change in reference voltage	$V_{REF}(\text{dev})$	$V_K = V_{REF}, I_A = 10\text{mA}, T_a = -25 \text{ to } +85^\circ\text{C}$	-	8	40	mV	1
	Voltage variation ratio in reference voltage	$\Delta V_{REF} / \Delta V_A$	$I_A = 10\text{mA}, \Delta V_A = 30\text{V} - V_{REF}$	-	-1.4	-5	mV/V	2
	Reference input current	$I_{REF}$	$I_A = 10\text{mA}, R_3 = 10\text{k}\Omega$	-	2	10	$\mu\text{A}$	3
	*4 Temperature change in reference input current	$I_{REF}(\text{dev})$	$I_A = 10\text{mA}, R_3 = 10\text{k}\Omega, T_a = -25 \text{ to } +85^\circ\text{C}$	-	0.4	3	$\mu\text{A}$	3
	Minimum drive current	$I_{MIN}$	$V_K = V_{REF}$	-	1	2	mA	1
	OFF-state anode current	$I_{OFF}$	$V_A = 30\text{V}, V_{REF} = \text{GND}$	-	0.1	2	$\mu\text{A}$	4
	Anode-cathode forward voltage	$V_F$	$V_K = V_{REF}, I_A = 10\text{mA}$	-	1.2	1.4	V	1
Output	Collector dark current	$I_{CEO}$	$V_{CE} = 20\text{V}$	-	$10^{-9}$	$10^{-7}$	A	5
Transfer characteristics	*5 Current transfer ratio	CTR	$V_K = V_{REF}, I_A = 10\text{mA}, V_{CE} = 5\text{V}$	40	-	320	%	6
	Collector-emitter saturation voltage	$V_{CE}(\text{sat})$	$V_K = V_{REF}, I_A = 20\text{mA}, I_C = 1\text{mA}$	-	0.1	0.2	V	6
	Isolation resistance	$R_{ISO}$	40 to 60% RH, DC500V	$5 \times 10^{10}$	$1 \times 10^{11}$	-	$\Omega$	-
	Floating capacitance	$C_f$	$V = 0, f = 1\text{MHz}$	-	0.6	1.0	pF	-


\*3  $V_{REF}(\text{dev}) = V_{REF}(\text{MAX.}) - V_{REF}(\text{MIN.})$

\*4  $I_{REF}(\text{dev}) = I_{REF}(\text{MAX.}) - I_{REF}(\text{MIN.})$

\*5  $\text{CTR} = I_C / I_A \times 100(\%)$

## Test Circuit

Fig. 1

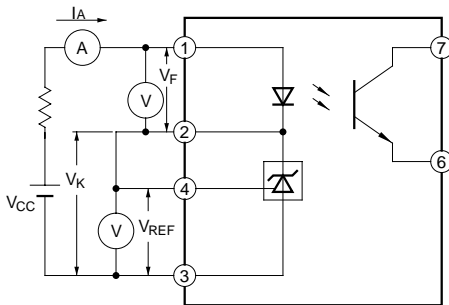

$V_K$ : Voltage between terminals ② and ③

$V_{REF}$ : Voltage between terminals ③ and ④

Fig. 2

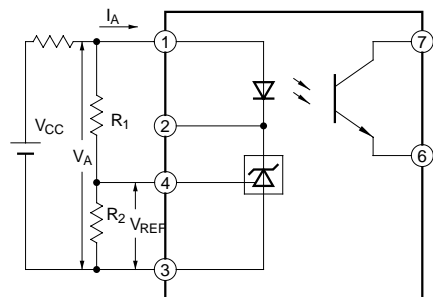


Fig. 3

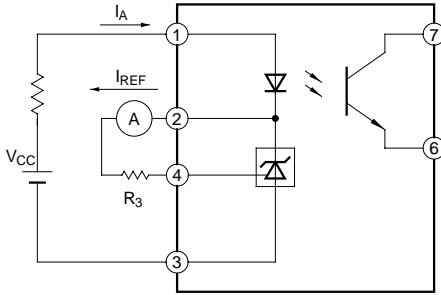


Fig. 4

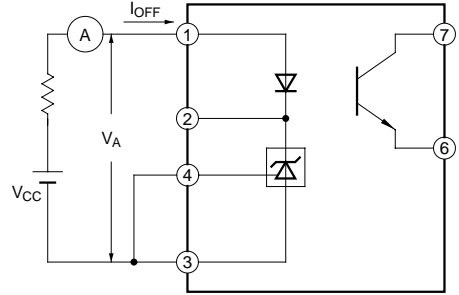


Fig. 5

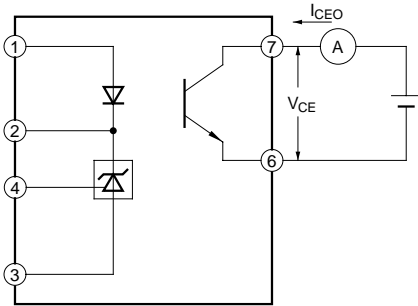


Fig. 6

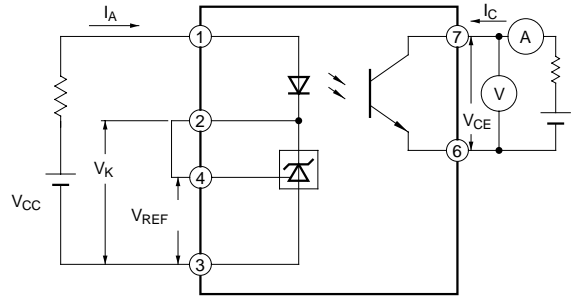


Fig. 7 Anode Current vs. Ambient Temperature



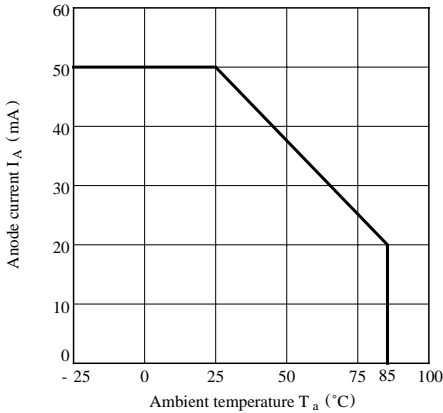



Fig. 8 Input Power Dissipation vs. Ambient Temperature

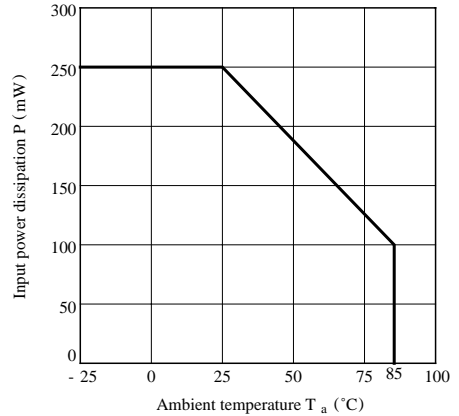


**Fig. 9 Collector Power Dissipation vs. Ambient Temperature**

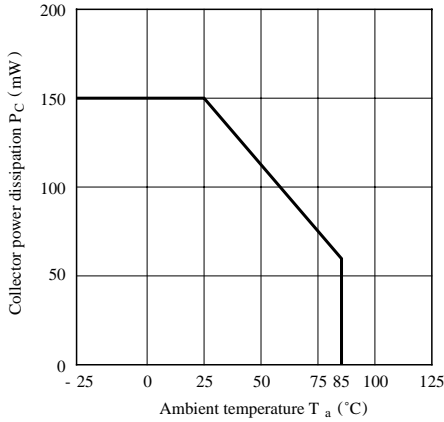


**Fig.10 Power Dissipation vs. Ambient Temperature**

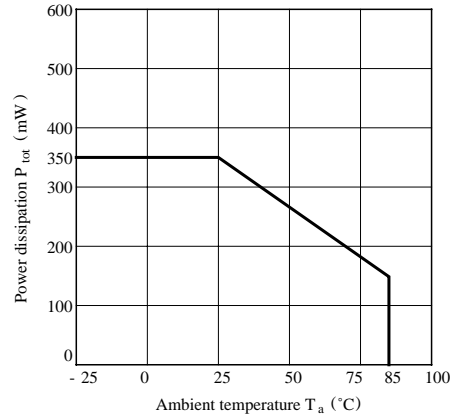


**Fig.11 Relative Current Transfer Ratio vs. Ambient Temperature**

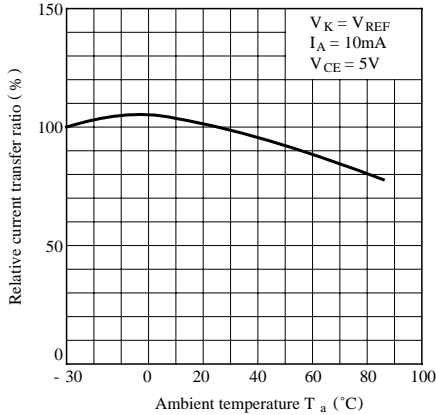


**Fig.12 Collector Dark Current vs. Ambient Temperature**

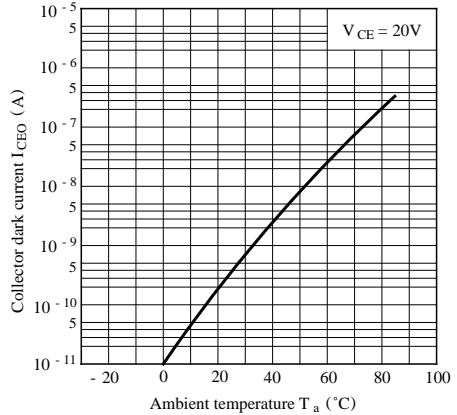


**Fig.13-a Anode Current vs. Reference Voltage**

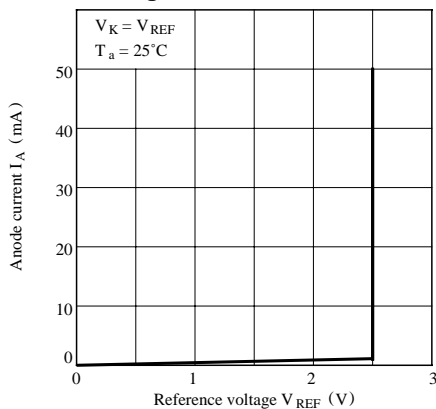


**Fig.13-b Anode Current vs. Reference Voltage**

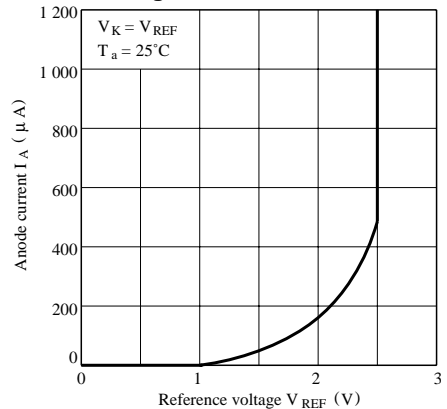


**Fig.14 OFF-state Anode Current vs. Ambient Temperature**

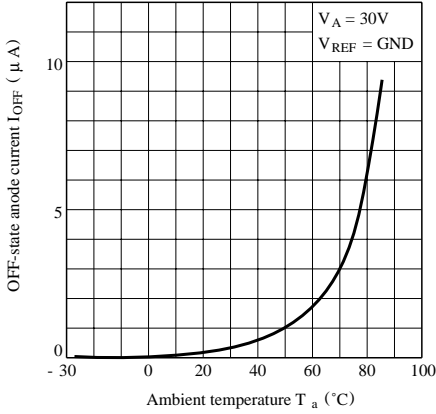


**Fig.15 Reference Voltage vs. Ambient Temperature**

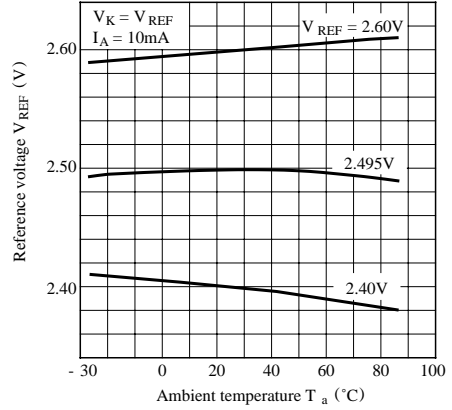


**Fig.16 Reference Input Current vs. Ambient Temperature**

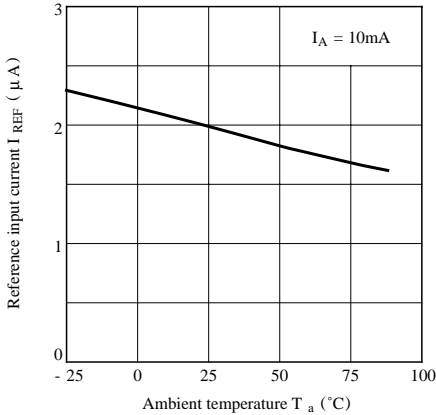

**Fig.17 Reference Voltage Change vs. Anode Voltage**

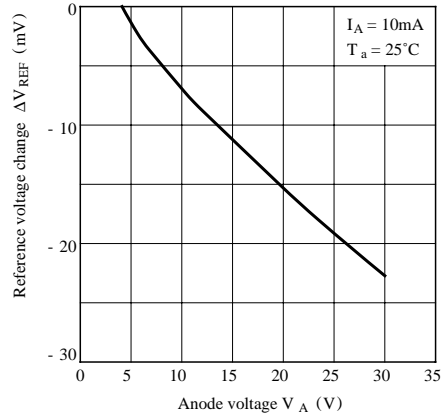

**Fig.18-a Voltage Gain (1) vs. Frequency**

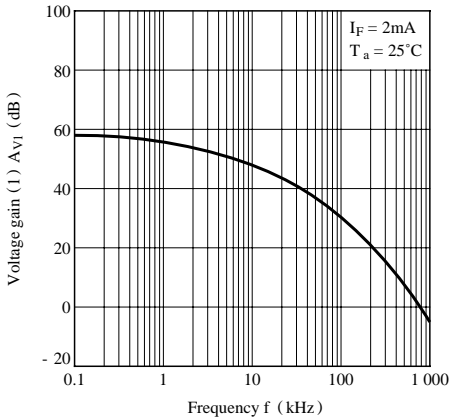

**Test Circuit for Voltage Gain (1) vs. Frequency**


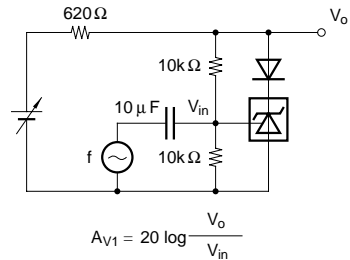


Fig.18-b Voltage Gain (2) vs. Frequency

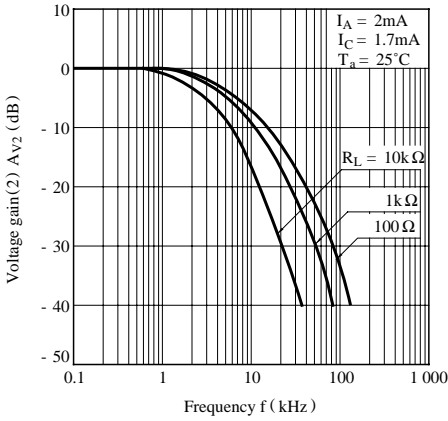

Test Circuit for Voltage Gain (2) vs. Frequency


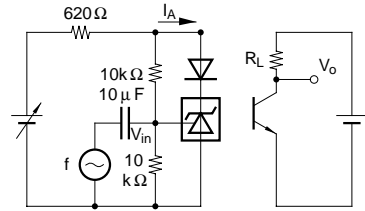


Fig.19 Anode Current vs. Load Capacitance

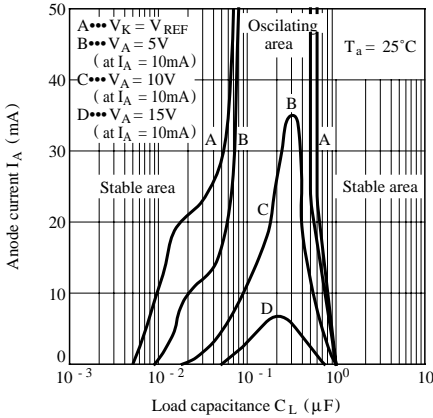

Test Circuit for Anode Current vs. Load Capacitance




Fig.20 Collector-emitter Saturation Voltage vs. Ambient Temperature


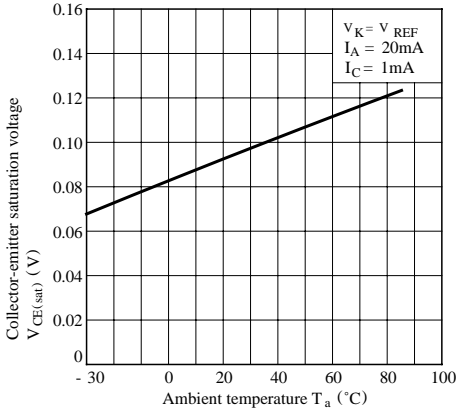


Fig.21 Current Transfer Ratio vs. Anode Current

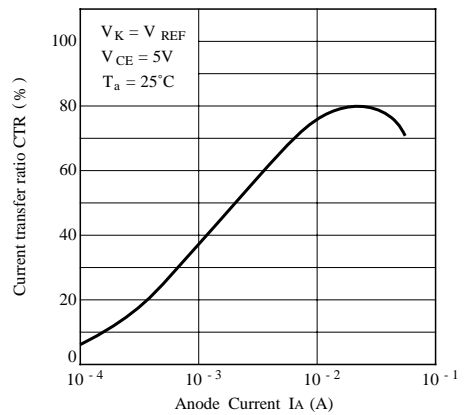

■ Precautions for Use

Handle this product the same as with other integrated circuits against static electricity.

- As for other general cautions, refer to the chapter "Precautions for Use"

**NOTICE**

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
  - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
    - Personal computers
    - Office automation equipment
    - Telecommunication equipment [terminal]
    - Test and measurement equipment
    - Industrial control
    - Audio visual equipment
    - Consumer electronics
  - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
    - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
    - Traffic signals
    - Gas leakage sensor breakers
    - Alarm equipment
    - Various safety devices, etc.
  - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
    - Space applications
    - Telecommunication equipment [trunk lines]
    - Nuclear power control equipment
    - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.