



SAW Components

Data Sheet B7301

Data Sheet

A large, stylized EPCOS logo is superimposed on a grayscale background that features a globe and a circuit board. The logo is rendered in a light, glowing font. The background also contains faint, repeating watermarks of the "维库电子市场网" (Wiku Electronic Market Network) logo and the URL "WWW.DZSC.COM".



SAW Components

B7301

Low-Loss Filter for Mobile Communication

400,0 MHz

Data Sheet





Chip Sized SAW Package DCS8A

Features

- Low-loss IF filter for mobile telephone
- Channel selection in GSM, PCN, PCS systems
- **Chip Sized SAW Package**
- Balanced and unbalanced operation possible
- expansion coil for minimum insertion attenuation and optimum bandwidth adjustment

Terminals


- Gold-plated Ni



Dimensions in mm, approx. weight 0,05 g

Pin configuration

- | | |
|---------|----------------------------------|
| 1 | Input |
| 2 | Input ground or balanced input |
| 6 | Output |
| 5 | Output ground or balanced output |
| 3, 4, 7 | Ground |
| 8 | Expansion coil |



| Type | Ordering code | Marking and Package according to | Packing according to |
|-------|-------------------|----------------------------------|----------------------|
| B7301 | B39401-B7301-A910 | C61157-A7-A65 | F61074-V8102-Z000 |

Electrostatic Sensitive Device (ESD)

Maximum ratings

| | | | |
|----------------------------|-----------|-----------|-----|
| Operable temperature range | T_A | - 30/+ 85 | °C |
| Storage temperature range | T_{stg} | - 40/+ 85 | °C |
| DC voltage | V_{DC} | 0 | V |
| Source power | P_s | 10 | dBm |



SAW Components

B7301

Low-Loss Filter for Mobile Communication

400,0 MHz

Data Sheet




Characteristics

| | |
|-------------------------------|---|
| Operating temperature range: | $T = -25\text{ °C} \dots +80\text{ °C}$ |
| Terminating source impedance: | $Z_S = 640\Omega \parallel 100\text{ nH}$ |
| Terminating load impedance: | $Z_L = 640\Omega \parallel 120\text{ nH}$ |

| | | min. | typ. | max. | |
|--|-----------------------|------|---------------------|------|------------------------------|
| Nominal frequency | f_N | — | 400,00 | — | MHz |
| Maximum insertion attenuation (Including losses in matching circuit) | α_{\max} | — | 4,3 | 6,0 | dB |
| Amplitude ripple (p-p) $f_N - 83.0\text{ kHz} \dots f_N + 83.0\text{ kHz}$ | $\Delta\alpha$ | — | 0,2 | 2,0 | dB |
| Group delay ripple (p-p) $f_N - 83.0\text{ kHz} \dots f_N + 83.0\text{ kHz}$ | $\Delta\tau$ | — | 0,4 | 1,0 | μs |
| Relative attenuation (relative to α_{\max}) | α_{rel} | | | | |
| $f_N - 30,00\text{ MHz} \dots f_N - 1,50\text{ MHz}$ | | 37 | 53 | — | dB |
| $f_N - 1,50\text{ MHz} \dots f_N - 0,80\text{ MHz}$ | | 22 | 46 | — | dB |
| $f_N - 0,80\text{ MHz} \dots f_N - 0,60\text{ MHz}$ | | 12 | 48 | — | dB |
| $f_N - 0,60\text{ MHz} \dots f_N - 0,40\text{ MHz}$ | | 9 | 25 | — | dB |
| $f_N + 0,40\text{ MHz} \dots f_N + 0,60\text{ MHz}$ | | 9 | 18 | — | dB |
| $f_N + 0,60\text{ MHz} \dots f_N + 0,80\text{ MHz}$ | | 12 | 31 | — | dB |
| $f_N + 0,80\text{ MHz} \dots f_N + 1,50\text{ MHz}$ | | 22 | 39 | — | dB |
| $f_N + 1,50\text{ MHz} \dots f_N + 30,00\text{ MHz}$ | | 37 | 50 | — | dB |
| Impedance within pass band | | | | | |
| Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$ | | — | $640 \parallel 1,6$ | — | $\Omega \parallel \text{pF}$ |
| Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$ | | — | $640 \parallel 1,4$ | — | $\Omega \parallel \text{pF}$ |
| Temperature coefficient of frequency ¹⁾ | TC_f | — | -0,038 | — | ppm/K ² |
| Frequency inversion point | T_0 | — | 36 | — | °C |

¹⁾ Temperature dependence of f_c : $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$

Test matching network to 50 Ω , low pass example (actual element values depend on PCB layout. S-parameters of transformers TOKO B5FL available on request):

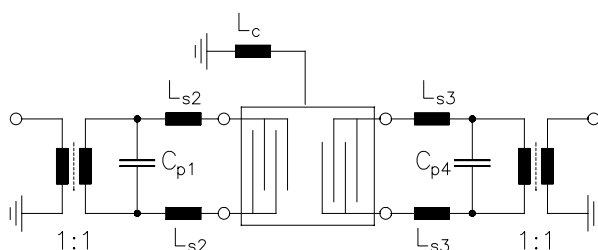

$$\begin{aligned} L_c &= 39\text{ nH} \\ C_{p1} &= C_{p4} = 6,8\text{ pF} \\ L_{s2} &= L_{s3} = 33\text{ nH} \end{aligned}$$



SAW Components

B7301


Low-Loss Filter for Mobile Communication

400,0 MHz


Data Sheet



Transfer function (pass band):

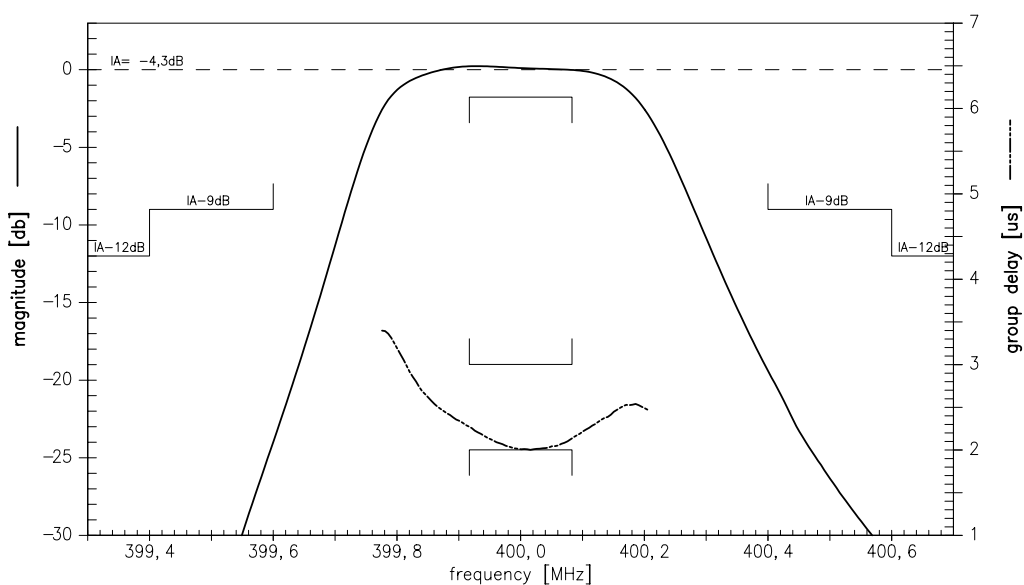

Transfer function (wide band):

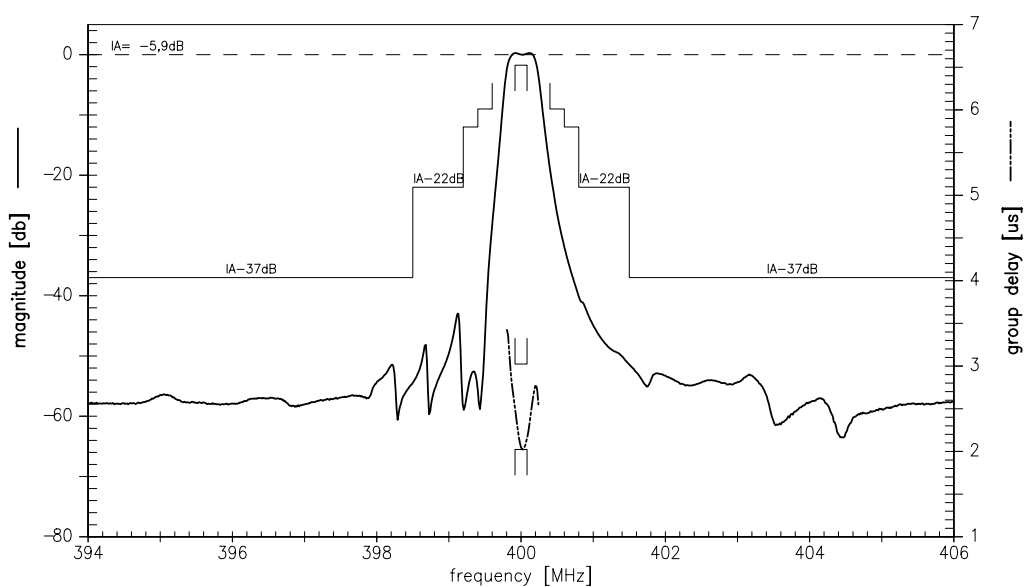



| | |
|---|---|
| SAW Components | B7301 |
| Low-Loss Filter for Mobile Communication | 400,0 MHz |
| Data Sheet |  |

Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E MF
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.