


SMD Type

IC

Three-Terminal Positive Voltage Regulator

LM78L15

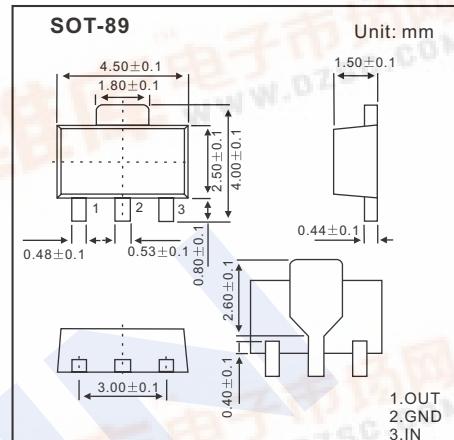

■ Features

- Maximum Output current I_o : 0.1A
- Output Voltage V_o : 15V
- Continuous Total Dissipation P_d : 0.5W ($T_a = 25^\circ\text{C}$)


■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	V_I	35	V
Operating Junction Temperature Range	T_{OPR}	-55 ~ +125	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

■ Electrical Characteristics ($V_I=23\text{V}$, $I_o=40\text{mA}$, $C_i=0.33\text{ }\mu\text{F}$, $C_o=0.1\text{ }\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$	14.4	15	15.6	V
		$T_J = 0 \sim 125^\circ\text{C}$, $17.5\text{V} \leq V_I \leq 30\text{V}$, $I_o=1\text{mA} \sim 40\text{mA}$	14.25	15	15.75	V
		$T_J = 0 \sim 125^\circ\text{C}$, $V_I = 23\text{V}$, $I_o=1\text{mA} \sim 70\text{mA}$	14.25	15	15.75	V
Load Regulation	ΔV_o	$T_J = 25^\circ\text{C}$, $V_I = 23\text{V}$, $I_o=1\text{mA} \sim 100\text{mA}$		25	150	mV
		$T_J = 25^\circ\text{C}$, $V_I = 23\text{V}$, $I_o=1\text{mA} \sim 40\text{mA}$		15	75	mV
Line Regulation	ΔV_o	$T_J = 25^\circ\text{C}$, $17.5\text{V} \leq V_I \leq 30\text{V}$, $I_o = 40\text{mA}$		65	300	mV
		$T_J = 25^\circ\text{C}$, $19\text{V} \leq V_I \leq 30\text{V}$, $I_o = 40\text{mA}$		58	250	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		4.6	6.5	mA
Quiescent current Change	ΔI_Q	$T_J = 0 \sim 125^\circ\text{C}$, $19\text{V} \leq V_I \leq 30\text{V}$, $I_o = 40\text{mA}$		1.5		mA
		$T_J = 0 \sim 125^\circ\text{C}$, $V_I = 23\text{V}$, $1\text{mA} \leq I_o \leq 40\text{mA}$		0.1		
Output Noise Voltage	V_N	$T_J = 25^\circ\text{C}$, $10\text{Hz} \leq f \leq 100\text{KHz}$		82		μV
Ripple Rejection	RR	$T_J = 0 \sim 125^\circ\text{C}$, $18.5\text{V} \leq V_I \leq 28.5\text{V}$, $f = 120\text{Hz}$	34	39		dB
Dropout Voltage	V_D	$T_J = 25^\circ\text{C}$		1.7		V






■ Typical Application

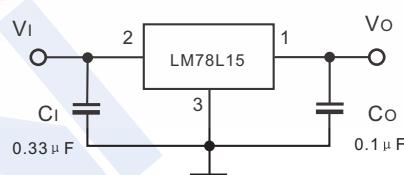

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

LM78L15

■ Typical Characteristics

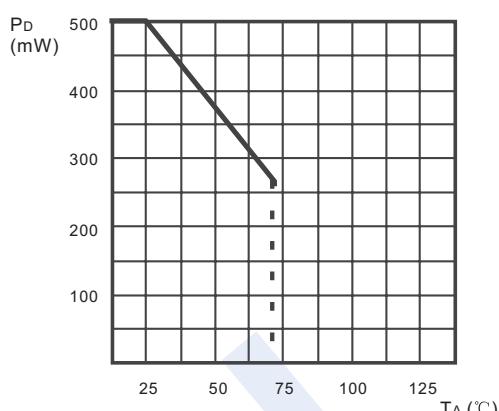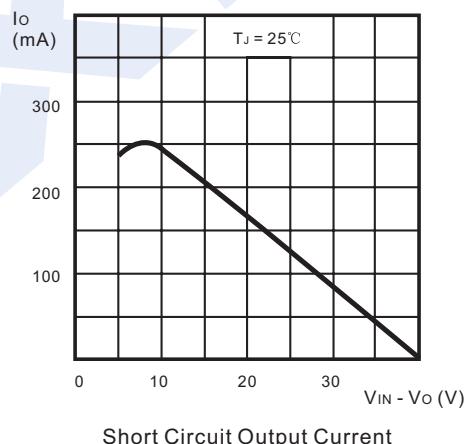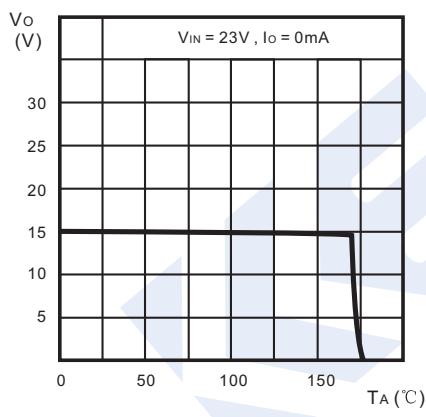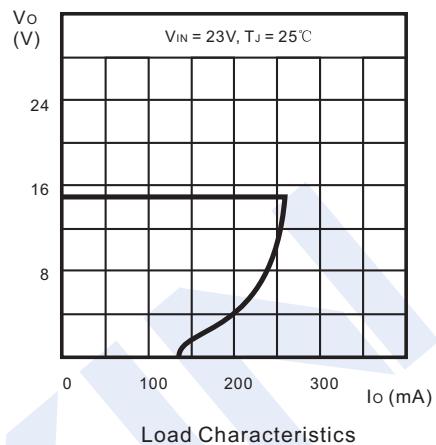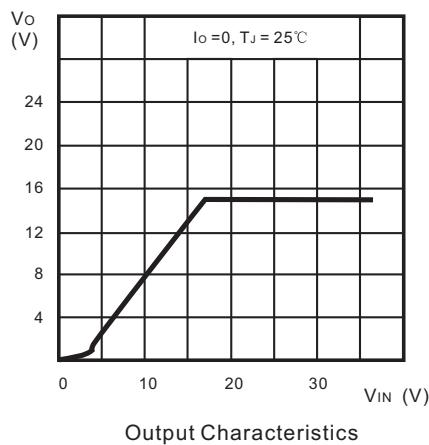

Power Dissipation vs. Ambient Temperature