


# Xinger®

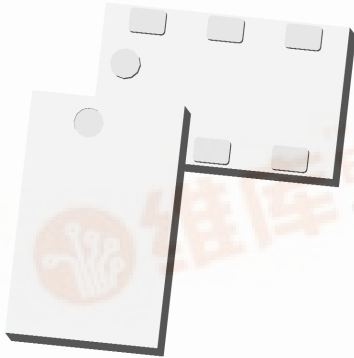

## Ultra Low Profile 0805 Balun 50Ω to 200Ω Balanced

### Description



The BD0826J50200A00 is a low profile sub-miniature balanced to unbalanced transformer designed for differential inputs and output locations on next generation wireless chipsets in an easy to use surface mount package covering the GSM, DCS, PCS, UMTS, CDMA and 802.11 b+g+n frequencies. The BD0826J50200A00 is ideal for high volume manufacturing and is higher performance than traditional ceramic, and lumped element baluns. The BD0826J50200A00 has an unbalanced port impedance of 50Ω and a 200Ω balanced port impedance. This transformation enables single ended signals to be applied to differential ports on modern integrated chipsets. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The BD0826J50200A00 is available on tape and reel for pick and place high volume manufacturing.

### Detailed Electrical Specifications: Specifications subject to change without notice.

Features:	Parameter	ROOM (25°C)			Unit
		Min.	Typ.	Max	
• 800 – 2600 MHz	Frequency	800		2600	MHz
• 0.7mm Height Profile	Unbalanced Port Impedance		50		Ω
• 50 Ohm to 2 x 100 Ohm	Balanced Port Impedance		200		Ω
• GSM/DCS/PCS/UMTS/CDMA	Return Loss	8.5	13		dB
• Low Insertion Loss	Insertion Loss*		1.2	1.5	dB
• Input to Output DC Isolation	Amplitude Balance		0.4	1.3	dB
• Surface Mountable	Phase Balance		3	7	Degrees
• Tape & Reel	CMRR		30		dB
• Non-conductive Surface	Power Handling			2	Watts
• RoHS Compliant	Operating Temperature	-55		+85	°C

\* Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)

### Outline Drawing





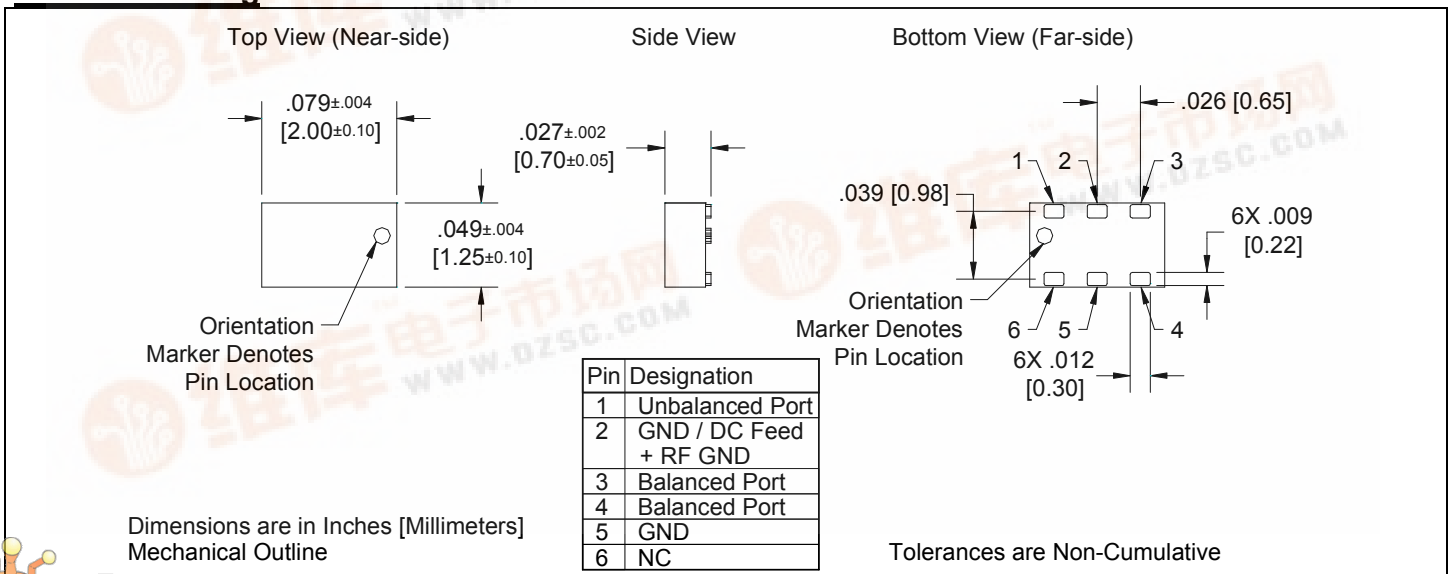


# Model BD0826J50200A00

Rev C




## Typical Broadband Performance: 500 MHz. to 8.0 GHz.

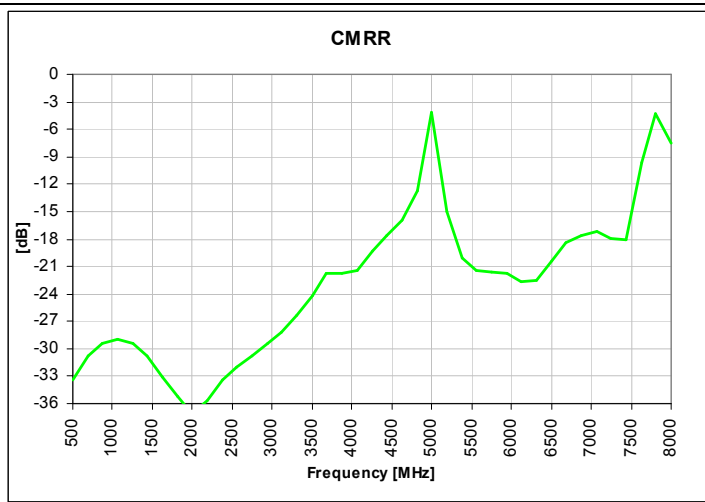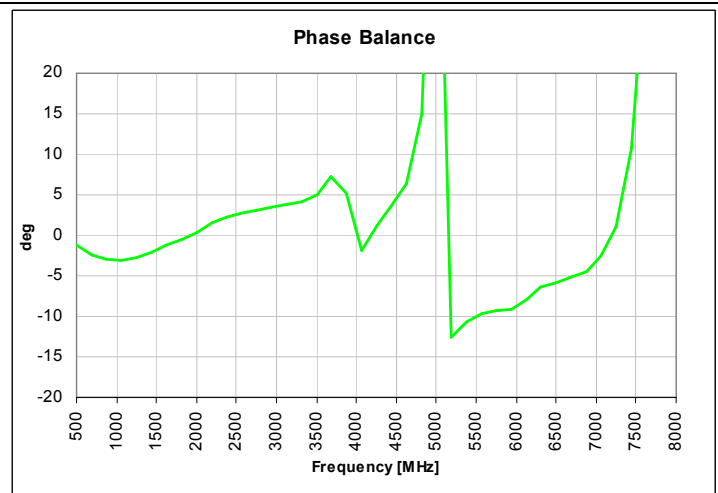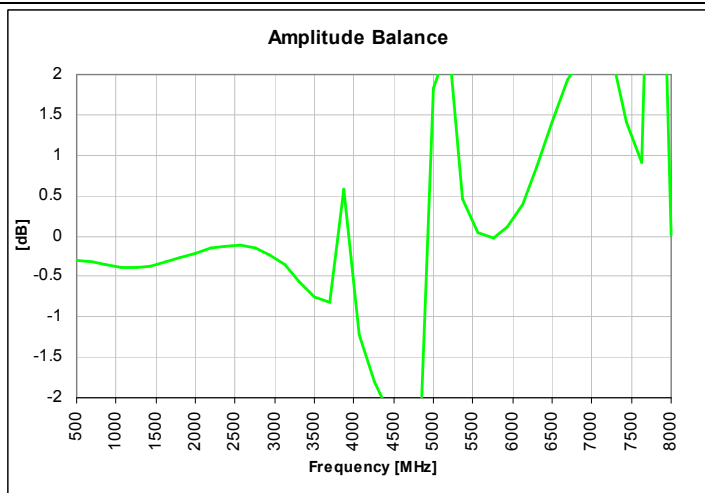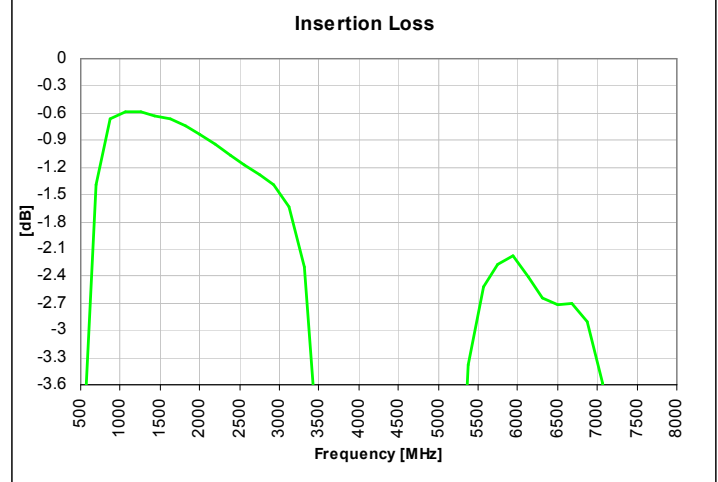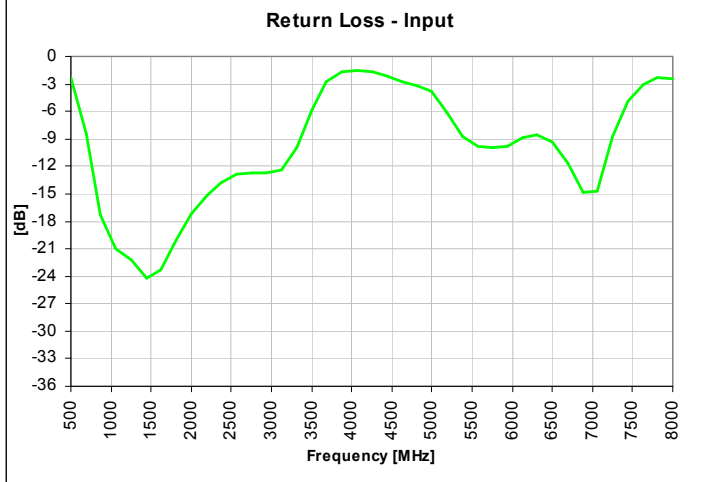


USA/Canada: (315) 432-8909  
Toll Free: (800) 411-6596

Available on Tape and Reel for Pick and Place



### Typical Performance: 700 MHz. to 2700 MHz.

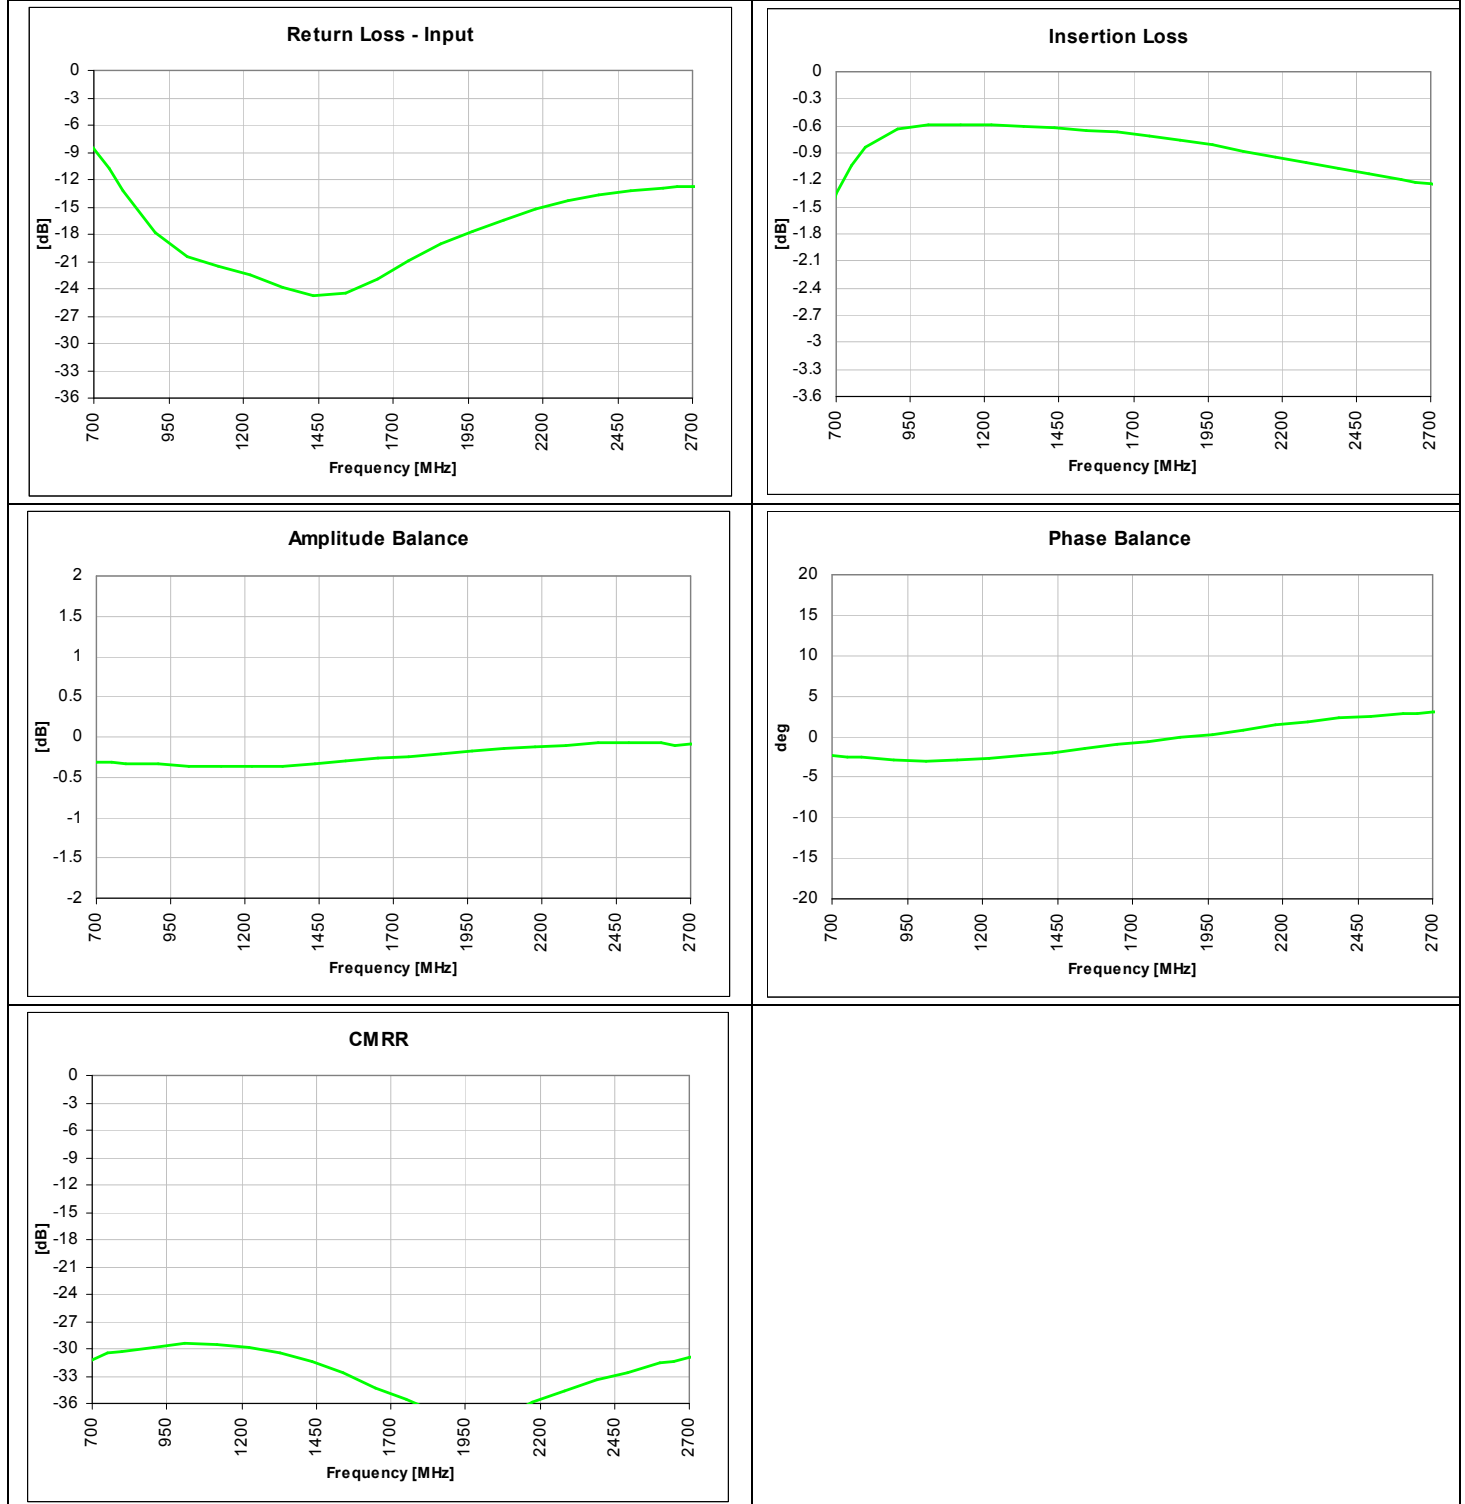


## Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.


All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability having X and Y thermal coefficient of expansion (CTE) of 17 ppm/°C.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

### No Bias Footprint


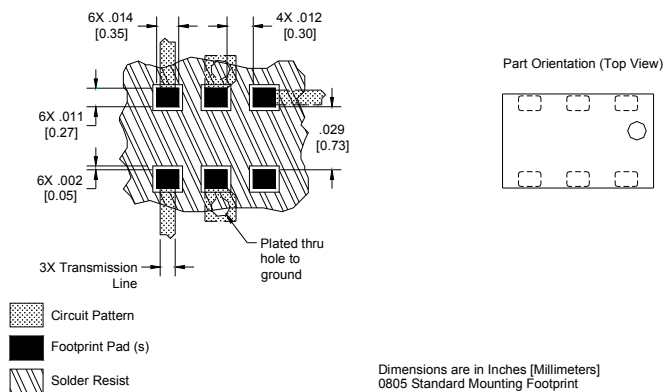


### DC Bias Footprint

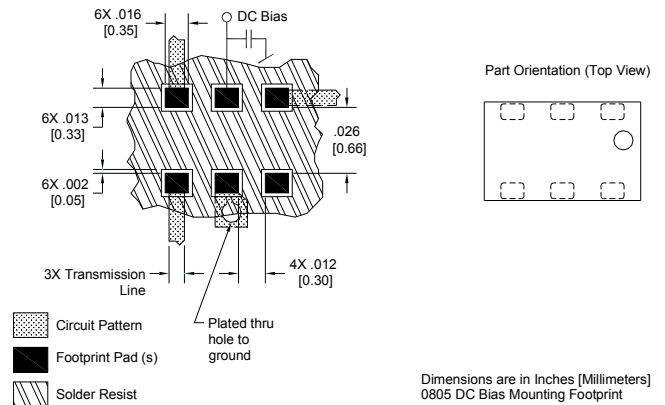

### Packaging and Ordering Information

Parts are available in reel and are packaged per EIA 481-2. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel. See Model Numbers below for further ordering information.

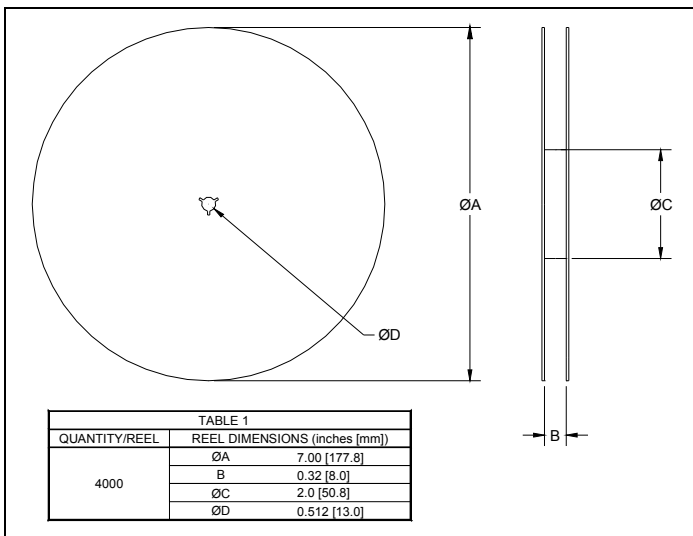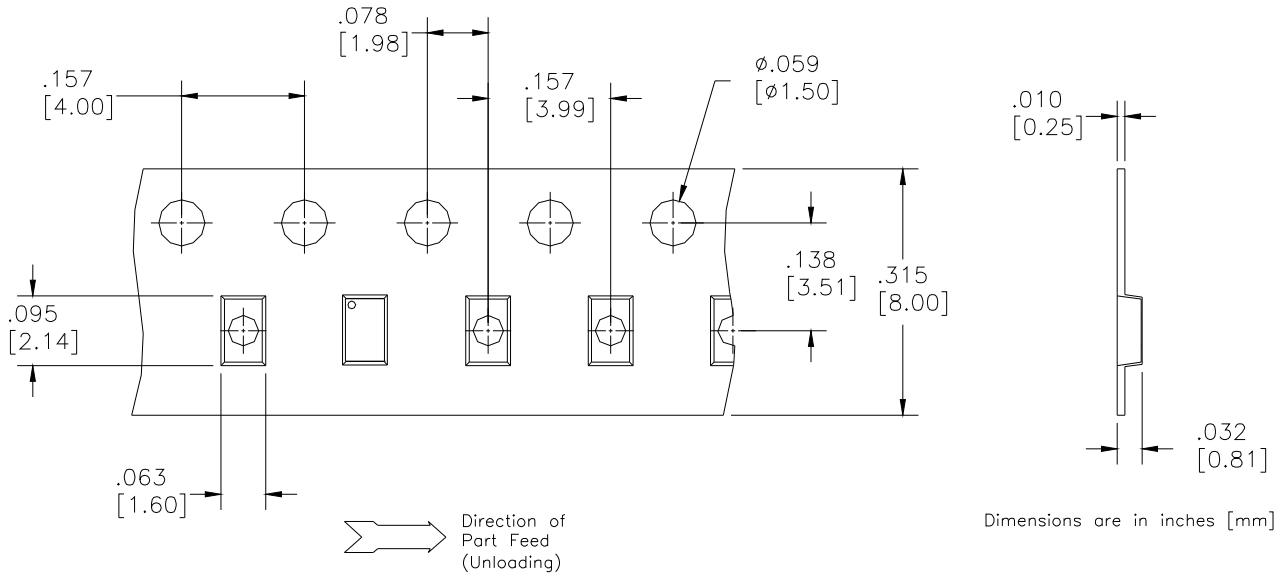

# BD 2425 J 50 100 A 00

Function	Frequency	Package Dimensions	Unbalanced Impedance	Balanced Impedance + Coupling	Plating Finish	Codes
<b>B = Balun</b> <b>BD = Balun + DC</b> <b>F = Filter</b> <b>FB = Filter / Balun</b> <b>C = 3dB Coupler</b> <b>DC = Directional</b> <b>J = RF Jumper</b> <b>X = RF cross over</b>	<b>0110 = 100 – 1000 MHz</b> <b>0810 = 800 – 1000 MHz</b> <b>0922 = 950 – 2150 MHz</b> <b>0826 = 800 – 6200 MHz</b> <b>1222 = 1200 – 2200 MHz</b> <b>1416 = 1400 – 1600 MHz</b> <b>1722 = 1700 – 2200 MHz</b> <b>2326 = 2300 – 2600 MHz</b> <b>2425 = 2400 – 2500 MHz</b> <b>3150 = 3100 – 5000 MHz</b> <b>3436 = 3400 – 3600 MHz</b> <b>4859 = 4800 – 5900MHz</b> <b>5153 = 5100 – 5300 MHz</b> <b>5159 = 5100 – 5900 MHz</b> <b>5759 = 5700 – 5900 MHz</b>	<b>A = 150 x 150 mils</b> (4mm x 4mm) <b>C = 120 x 120 mils</b> (3mm x 3mm) <b>E = 100 x 80 mils</b> (2.5mm x 2mm) <b>J = 80 x 50 mils</b> (2mm x 1.25mm) <b>L = 60 x 30 mils</b> (1.5mm x 0.75mm) <b>N = 40 x 40 mils</b> (1mm x 1mm)	50 = 50 Ohm 75 = 75 Ohm	25 = 25 Ω Balanced 30 = 30 Ω Balanced 50 = 50 Ω Balanced 75 = 75 Ω Balanced 100 = 100 Ω Balanced 150 = 150 Ω Balanced 200 = 200 Ω Balanced 300 = 300 Ω Balanced 400 = 400 Ω Balanced 03 = 3dB Hybrid 10 = 10dB Directional 20 = 20dB Directional	A = Gold P = Tin-Lead	

