查询30WQ06FN供应商 捷多邦，专业PCB打样工厂，24小时加急出货

Bulletin PD-20522 rev. E 03/03

International
IOR Rectifier

30WQ06FN

SCHOTTKY RECTIFIER

3.5 Amp

D-Pak (TO-252AA)

Major Ratings and Characteristics

Characteristics	30WQ06FN	Units
$I_{F(AV)}$ Rectangular waveform	3.5	A
V_{RRM}	60	V
I_{FSM} @ tp = 5 µs sine	490	A
V_F @ 3 Apk, T_J = 125°C	0.53	V
T_J	-40 to 150	°C

Description/ Features

The 30WQ06FN surface mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC board. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Popular D-PAK outline
- Small foot print, surface mountable
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

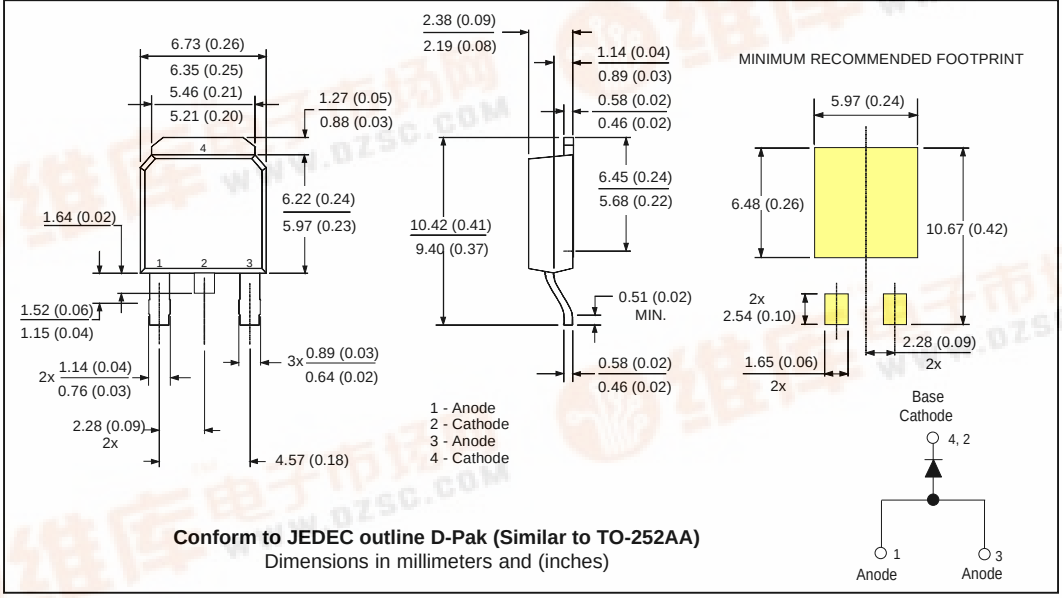

Conform to JEDEC outline D-Pak (Similar to TO-252AA)
Dimensions in millimeters and (inches)

找PDF 维库一下 pdf.dzsc.com

Voltage Ratings

Part number		30WQ06FN
V_R	Max. DC Reverse Voltage (V)	60
V_{RWM}	Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

	Parameters	30WQ...	Units	Conditions	
$I_{F(AV)}$	Max. Average Forward Current * See Fig. 5	3.5	A	50% duty cycle @ T_C = 133°C, rectangular wave form	
I_{FSM}	Max. Peak One Cycle Non-Repetitive	490	A	5µs Sine or 3µs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied
	Surge Current * See Fig. 7	70		10ms Sine or 6ms Rect. pulse	
E_{AS}	Non-Repetitive Avalanche Energy	6.0	mJ	T_J = 25 °C, I_{AS} = 1 Amp, L = 12 mH	
I_{AR}	Repetitive Avalanche Current	1.0	A	Current decaying linearly to zero in 1 µsec Frequency limited by T_J max. V_A = 1.5 x V_R typical	

Electrical Specifications

	Parameters	30WQ...	Units	Conditions	
V_{FM}	Max. Forward Voltage Drop * See Fig. 1 (1)	0.61	V	@ 3A	T_J = 25 °C
		0.76	V	@ 6A	
		0.53	V	@ 3A	T_J = 125 °C
		0.65	V	@ 6A	
I_{RM}	Max. Reverse Leakage Current * See Fig. 2 (1)	2	mA	T_J = 25 °C	V_R = rated V_R
		30	mA	T_J = 125 °C	
$V_{F(TO)}$	Threshold Voltage	0.38	V	T_J = T_J max.	
r_t	Forward Slope Resistance	34.31	mΩ		
C_T	Typical Junction Capacitance	145	pF	V_R = 5V_{DC}, (test signal range 100Khz to 1Mhz) 25 °C	
L_S	Typical Series Inductance	5.0	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change	10000	V/µs	(Rated V_R)	

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

	Parameters	30WQ...	Units	Conditions
T_J	Max. Junction Temper. Range (*)	-40 to 150	°C	
T_{stg}	Max. Storage Temperature Range	-40 to 150	°C	
R_{thJC}	Max. Thermal Resistance Junction to Case	4.7	°C/W	DC operation * See Fig. 4
wt	Approximate Weight	0.3 (0.01)	g (oz.)	
	Case Style	D - PAK		Similar to TO-252AA

(*) $\frac{dPtot}{dTj} < \frac{1}{Rth(j\text{-}a)}$ thermal runaway condition for a diode on its own heatsink

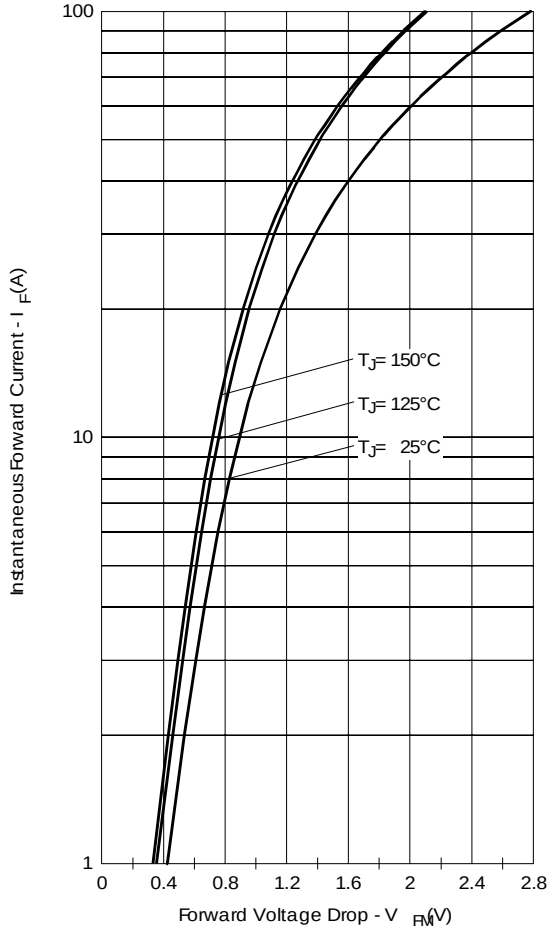

Fig. 1 - Maximum Forward Voltage Drop Characteristics

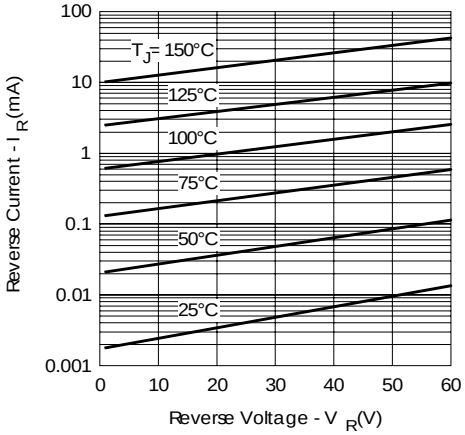

Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

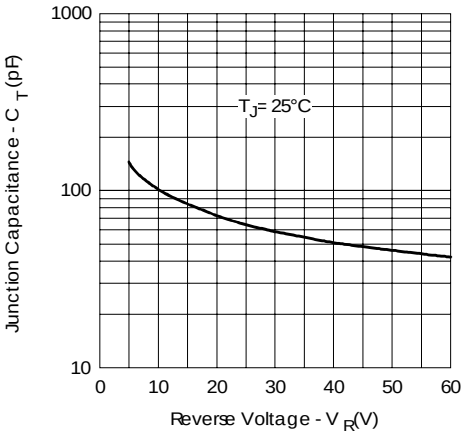

Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

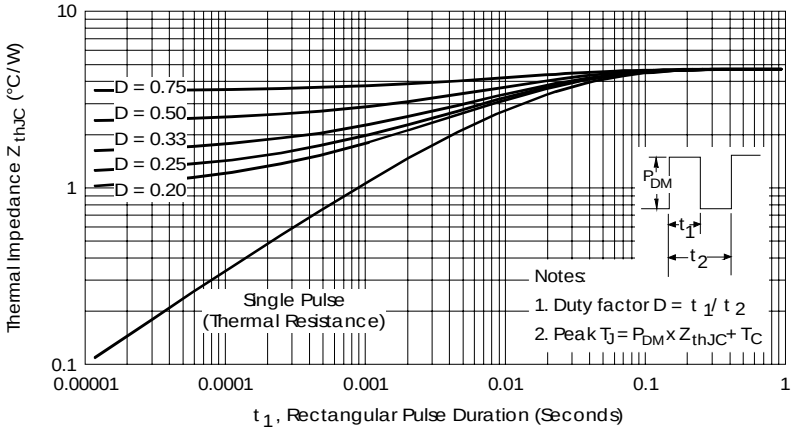

Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

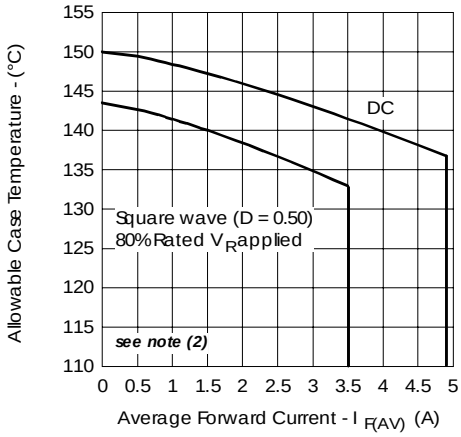

Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

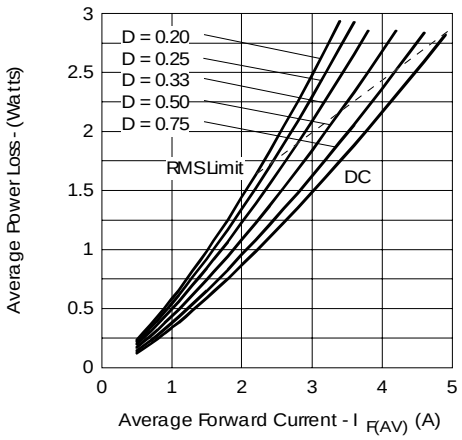

Fig. 6 - Forward Power Loss Characteristics

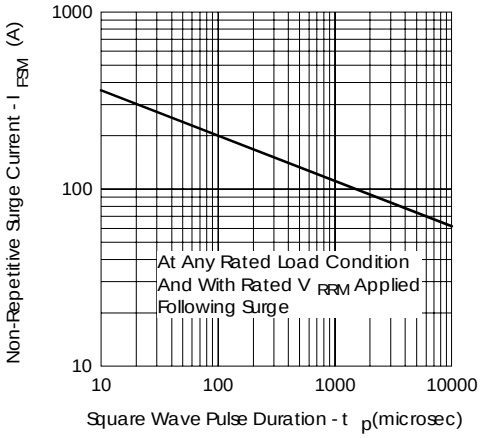

Fig. 7 - Maximum Non-Repetitive Surge Current

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = 80% rated V_R

Marking Information

EXAMPLE: THIS IS AN 30WQ06FN

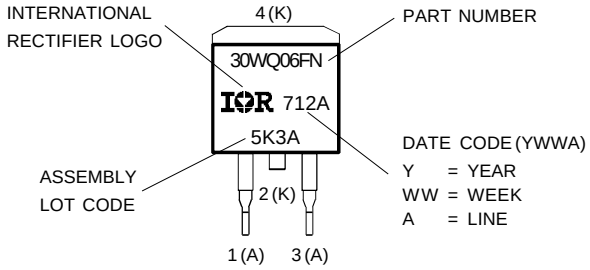

Tape & Reel Information

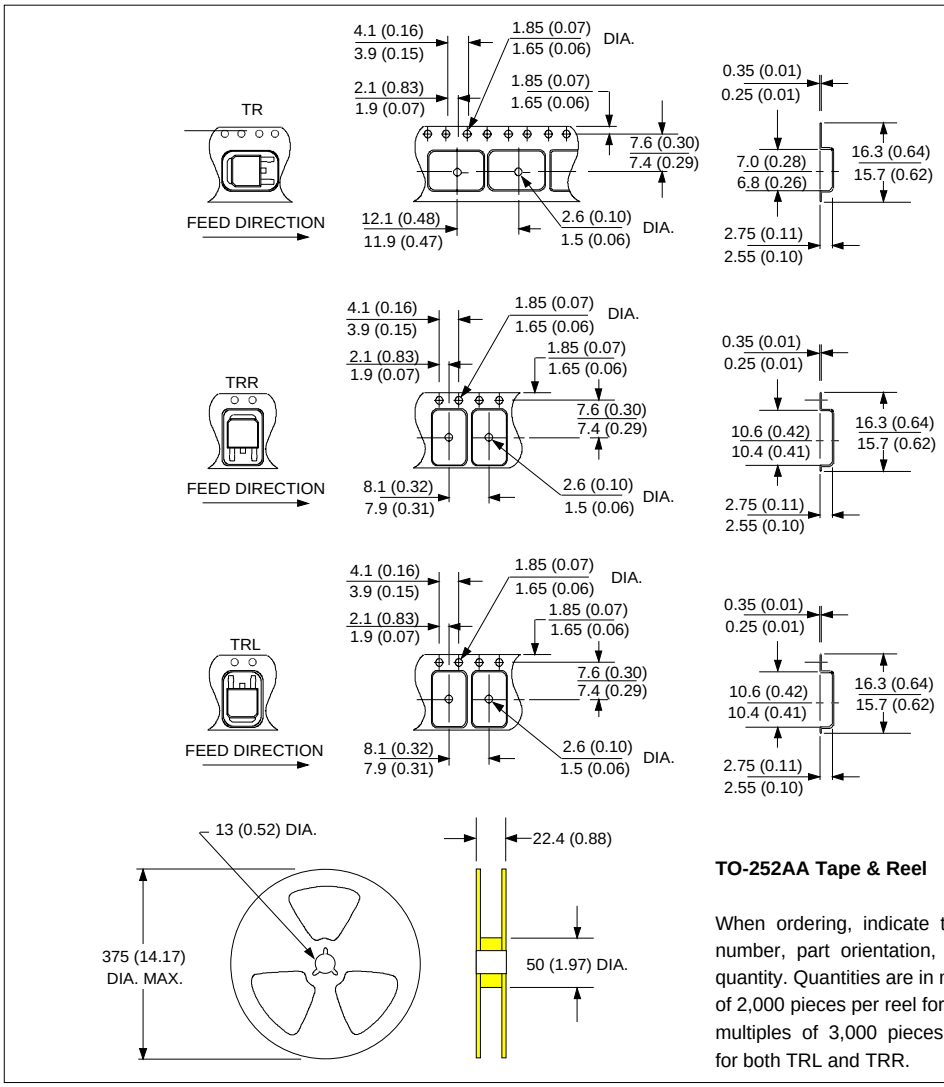

TO-252AA Tape & Reel

When ordering, indicate the p
number, part orientation, and
quantity. Quantities are in multi
of 2,000 pieces per reel for TR a
multiples of 3,000 pieces per
for both TRL and TRR.

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 03/03