

75 Ω VIDEO LINE DRIVER

FEATURES

- Gain Set by External Components (6 dB typ.)
- Internal 75 Ω Driver
- Active High ON/OFF Control with Internal Pull-up
- Very Low Standby Current (typ. $I_{STBY} \leq 25 \mu A$)
- Very Small SOT23-6 Package
- Single +5 V Power Supply Operation



APPLICATIONS

- Video Equipment
- Digital Cameras
- CCD Cameras
- TV Monitors
- Video Tape Recorders
- LCD Projectors

DESCRIPTION

Operating from a single +5 V supply, the TK15404 is a single-channel video driver IC that takes a standard video signal as the analog input and provides a buffered analog output for driving a 150 Ω load (series 75 Ω resistor and 75 Ω cable load). The standard video input signal (1 V_{P-P}) is typically amplified 6 dB using external components to produce a 2 V_{P-P} signal into an AC-coupled 150 Ω load. During standby (Pin 1 grounded), the TK15404 consumes only 120 μW of power. Nominal power dissipation (no input) is typically 32 mW.

The TK15404M is available in the very small SOT23-6 surface mount package.

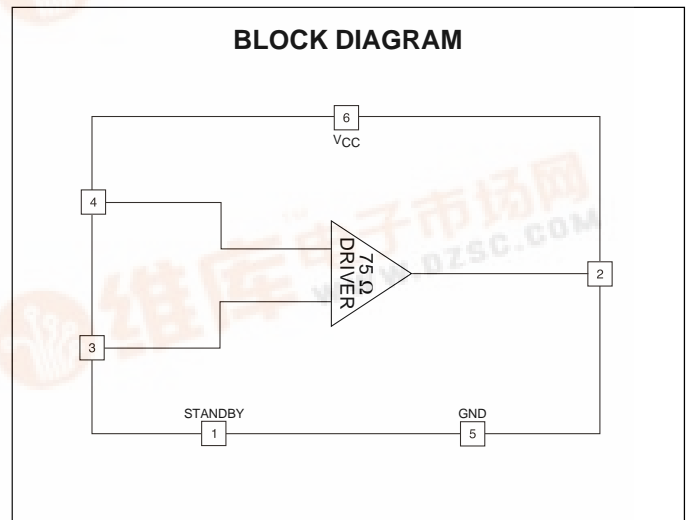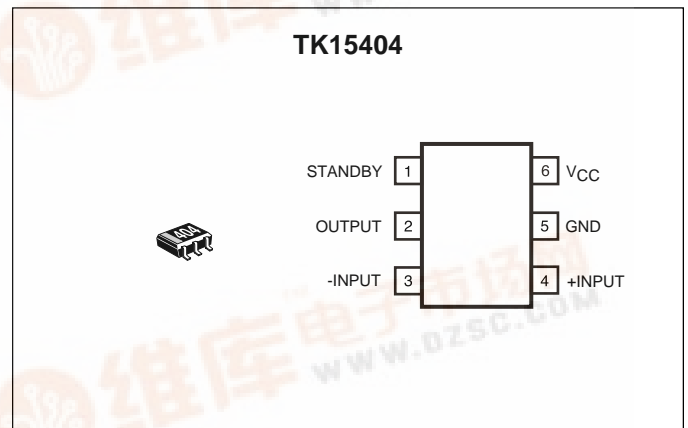

ORDERING INFORMATION

TK15404M □□

Tape/Reel Code

TAPE/REEL CODE
TL: Tape Left



TK15404

TK15404M ABSOLUTE MAXIMUM RATINGS

Supply Voltage 6 V Storage Temperature Range -55 to +150 °C
 Operating Voltage 4.5 to 5.5 V Operating Temperature Range -25 to +75 °C
 Power Dissipation (Note 1) 150 mW


TK15404M ELECTRICAL CHARACTERISTICS

Test conditions: $V_{CC} = 5.0\text{ V}$, $V_{IN} = 1.0\text{ V}_{P-P}$, $R_L = 150\ \Omega$, $T_A = 25\ ^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CC}	Supply Current	No input		6.3	8.5	mA
I_{STBY}	Standby Supply Current	Pin 1 Grounded		24.0	50.0	μA
I_{OS}	Standby Terminal Current	Pin 1 in Standby mode		24.0	50.0	μA
V_{THL}	Standby Threshold Voltage (High to Low)	Pin 1 Operating to Standby mode	GND	0.1	0.3	V
V_{TLH}	Standby Threshold Voltage (Low to High)	Pin 1 Standby to Operating mode	1.8	2.0	V_{CC}	V
GVA	Voltage Gain	$f_{in} = 1\text{ MHz}$ (Note 2)	5.7	6.0	6.3	dB
fr 1	Frequency Response 1	$f_{in} = 1\text{ MHz} / 5\text{ MHz}$		0.0		dB
fr 2	Frequency Response 2	$f_{in} = 1\text{ MHz} / 10\text{ MHz}$		-0.6		dB
THD	Total Harmonic Distortion	$f_{in} = 1.0\text{ kHz}$		0.2	1.0	%
$V_{OUT(MAX)}$	Maximum Output Voltage	THD = 10% point	1.0	1.2		Vrms
S/N	Signal to Noise Ratio	Pedestal signal		-70		dB
DG	Differential Gain	Staircase signal input	-3.0		+3.0	%
DP	Differential Phase	Staircase signal input	-3.0		+3.0	deg
GVO	Open Circuit Voltage Gain			40		dB
BW	Frequency Band Width			20		MHz
SR	Slew Rate			70		V/ μS
C_{IN}	Input Capacitance			9		pF
R_{IN}	Input Resistance			1.6		M Ω

Note 1: Power dissipation is 150 mW when in free air. Derate at 1.2 mW/°C for operation above 25°C.

Note 2: Set by external components.

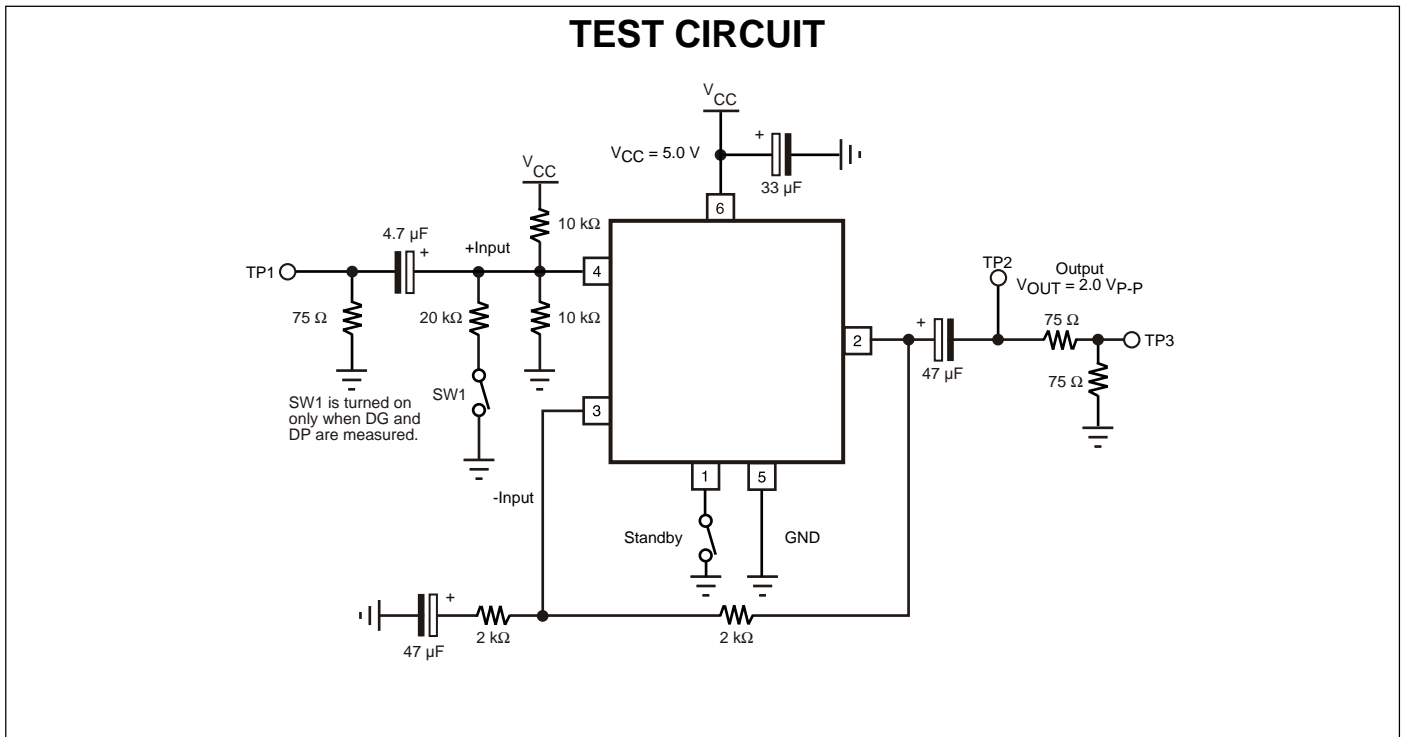

MEASUREMENT METHOD

1. Supply Current (I_{CC})

The Pin 6 current is measured with no input signal and the Standby Pin (Pin 1) open.

2. Standby Supply Current (I_{STBY})

The Pin 6 current is measured when the Standby Pin (Pin 1) is connected to ground.

3. Standby Terminal Current (I_{OS})

The Pin 1 current is measured when Pin 1 is connected to ground.

4. Threshold Voltage (High to Low) (V_{THL})

The Pin 1 voltage is measured at the point which changes the device from operating mode into standby mode.

5. Threshold Voltage (Low to High) (V_{TLH})

The Pin 1 voltage is measured at the point which changes the device from standby mode into operating mode.

6. Voltage Gain (GVA)

The voltage gain equation is as follows:

$$GVA = 20 \log_{10} V_2/V_1$$

Where V_1 is the input voltage at TP1 and V_2 is the measured output voltage at TP2.

7. Frequency Response (fr)

The frequency response equation is as follows:

$$fr = 20 \log_{10} V_2/V_1$$

Where V_1 is the measured TP3 voltage when the TP1 input frequency is set to 1 MHz and V_2 is the measured TP3 voltage when the TP1 input frequency is set to 5 MHz. Furthermore, V_1 is the measured TP3 voltage when the TP1 input frequency is set to 1 MHz and V_2 is the measured TP3 voltage when the TP1 input frequency is set to 10 MHz.

TK15404

MEASUREMENT METHOD

8. Total Harmonic Distortion (THD)

The TP3 signal is measured when a 1 kHz 1 V_{P-P} input signal is applied to TP1.

9. Maximum Output Voltage (V_{OUT(MAX)})

A 1 kHz input signal is applied to TP1 and the amplitude is slowly increased. The output voltage at TP2 is measured at the point the THD reaches 10%.

10. Signal to Noise Ratio (S/N)

The signal to noise ratio is measured at TP3 when a pedestal input signal is applied to TP1.

11. Differential Gain (DG)

SW1 is closed to change the input bias voltage.



The differential gain is measured at TP3 when a staircase waveform of 10 steps is applied to TP1.

12. Differential Phase (DP)







SW1 is closed to change the input bias voltage.

The differential phase is measured at TP3 when a staircase waveform of 10 steps is applied to TP1.







TYPICAL PERFORMANCE CHARACTERISTICS

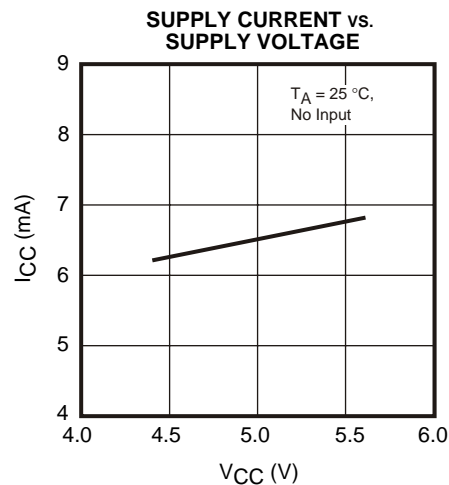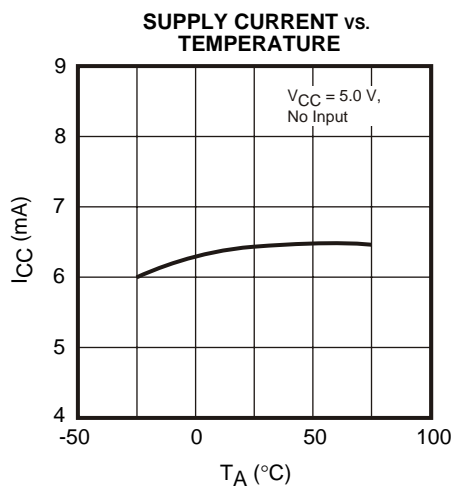

TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

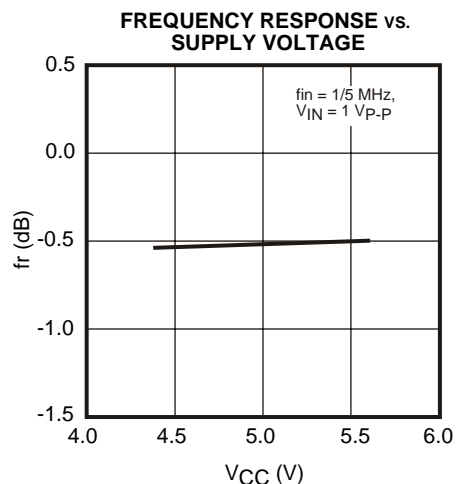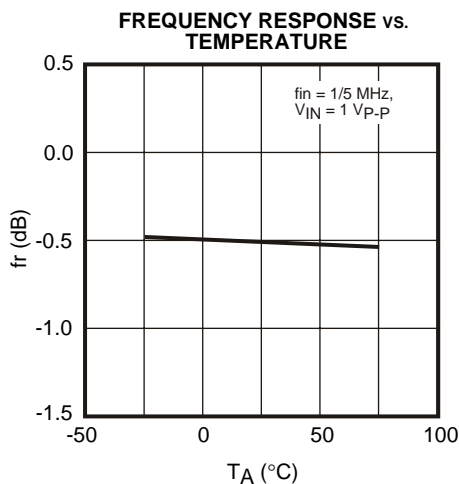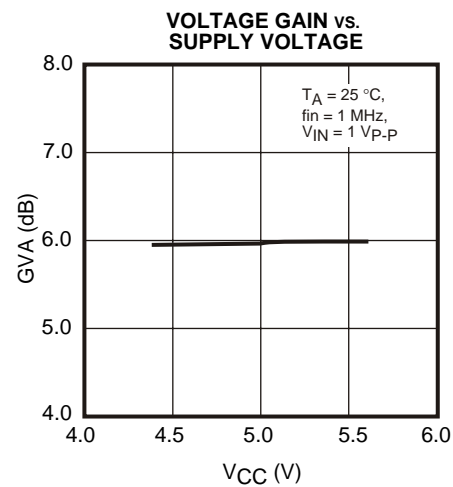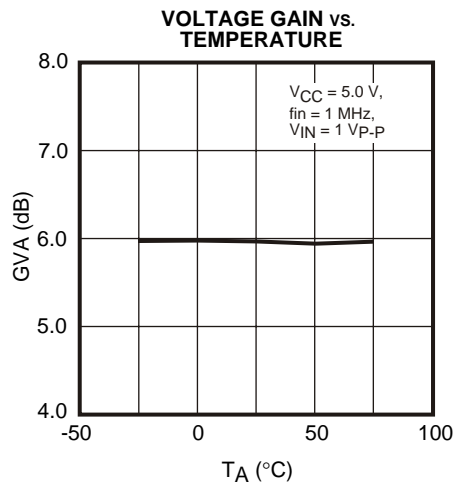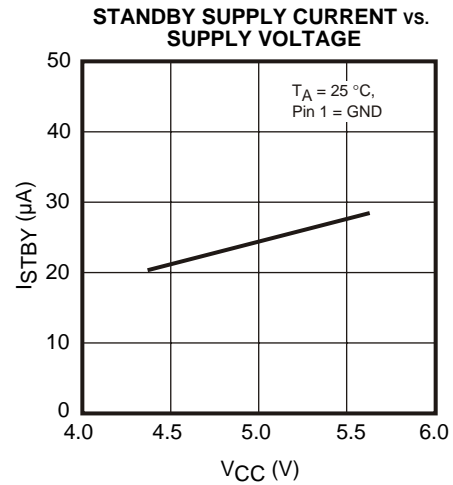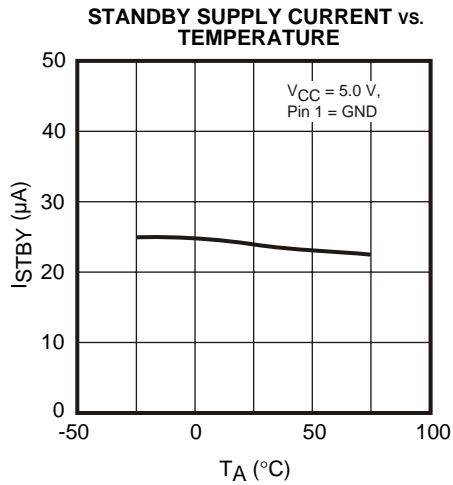


TYPICAL PERFORMANCE CHARACTERISTICS (CONT.)

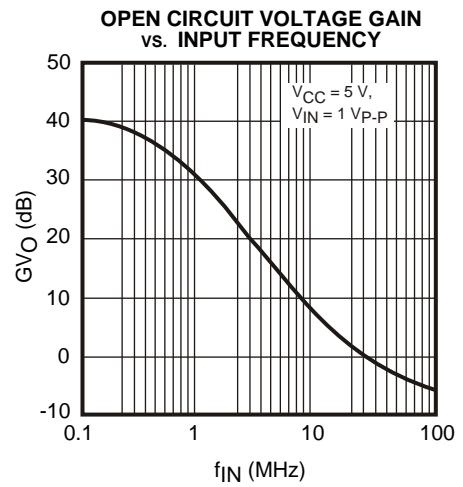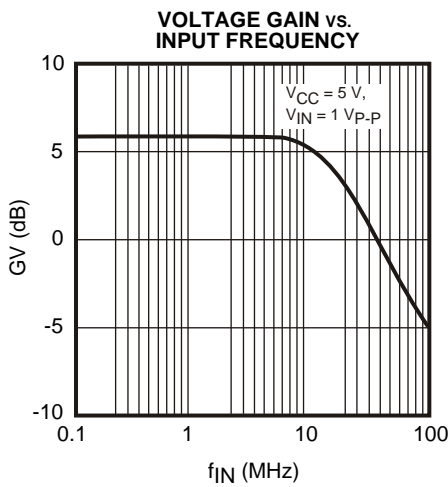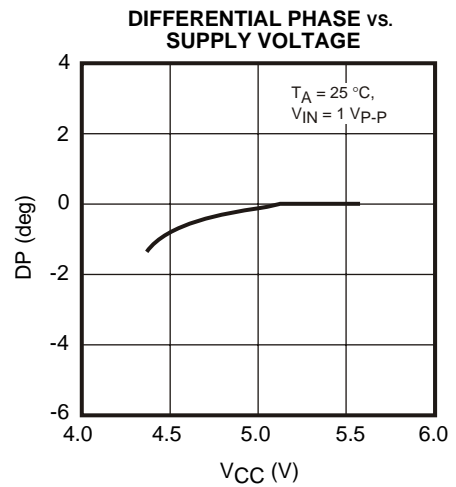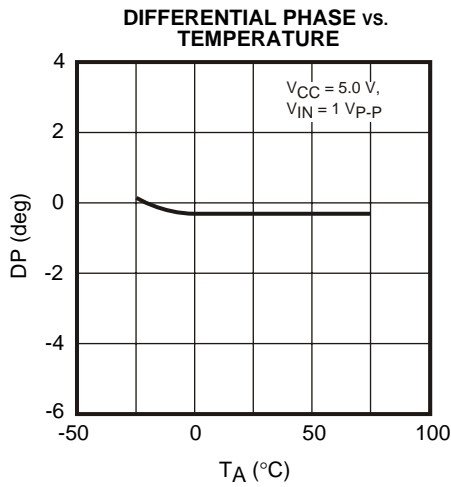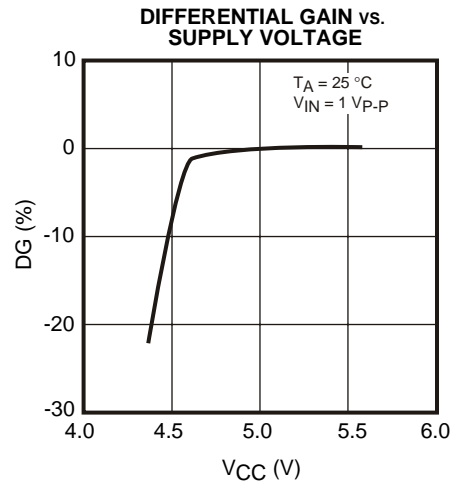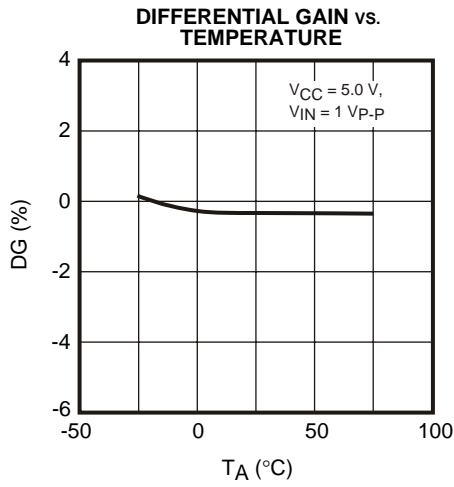

PIN FUNCTION DESCRIPTION

TERMINAL			INTERNAL EQUIVALENT CIRCUIT	DESCRIPTION
PIN NO.	SYMBOL	VOLTAGE		
1	STANDBY	1.4 V		Standby Logic Terminal. The device is in the standby mode when Pin 1 is connected to Low. The device is in the operating mode when Pin 1 is connected to High or Open.
2	OUTPUT			Output Terminal. The output is available to drive a $75 \Omega + 75 \Omega$ load.
3 4	-INPUT +INPUT			Pin 3: Inverting Signal Input Terminal. Pin 4: Non-inverting Input Terminal.
5	GND	GND		GND Terminal
6	V_{cc}	V_{cc}		Power Supply Terminal

PACKAGE OUTLINE

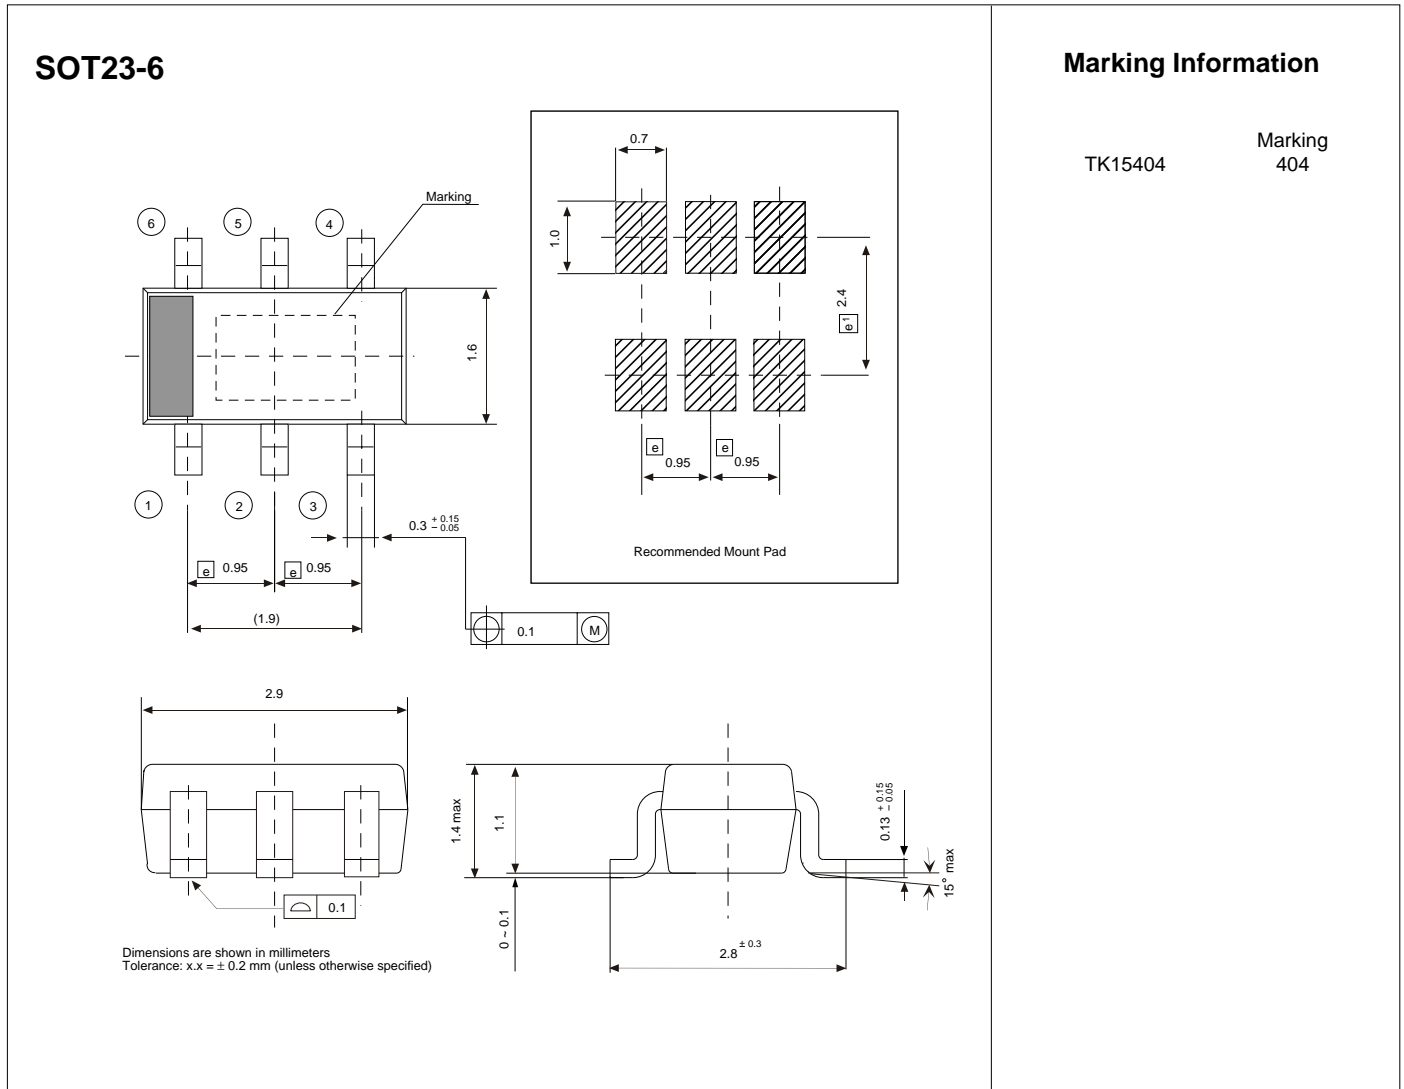

Toko America, Inc. Headquarters
 1250 Feehanville Drive, Mount Prospect, Illinois 60056
 Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
 Toko America, Inc.
 1250 Feehanville Drive
 Mount Prospect, IL 60056
 Tel: (847) 297-0070
 Fax: (847) 699-7864

Western Regional Office
 Toko America, Inc.
 2480 North First Street, Suite 260
 San Jose, CA 95131
 Tel: (408) 432-8281
 Fax: (408) 943-9790

Eastern Regional Office
 Toko America, Inc.
 107 Mill Plain Road
 Danbury, CT 06811
 Tel: (203) 748-6871
 Fax: (203) 797-1223

Semiconductor Technical Support
 Toko Design Center
 4755 Forge Road
 Colorado Springs, CO 80907
 Tel: (719) 528-2200
 Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.