



General-Purpose CMOS Rail-to-Rail Amplifiers

AD8541/AD8542/AD8544

FEATURES

- Single-supply operation: 2.7 V to 5.5 V**
- Low supply current: 45 μ A/amplifier**
- Wide bandwidth: 1 MHz**
- No phase reversal**
- Low input currents: 4 pA**
- Unity gain stable**
- Rail-to-rail input and output**

APPLICATIONS

- ASIC input or output amplifiers**
- Sensor interfaces**
- Piezoelectric transducer amplifiers**
- Medical instrumentations**
- Mobile communications**
- Audio outputs**
- Portable systems**

GENERAL DESCRIPTION

The AD8541/AD8542/AD8544 are single, dual, and quad rail-to-rail input and output single-supply amplifiers featuring very low supply current and 1 MHz bandwidth. All are guaranteed to operate from a 2.7 V single supply as well as a 5 V supply. These parts provide 1 MHz bandwidth at a low current consumption of 45 μ A per amplifier.

Very low input bias currents enable the AD8541/AD8542/AD8544 to be used for integrators, photodiode amplifiers, piezoelectric sensors, and other applications with high source impedance. The supply current is only 45 μ A per amplifier, ideal for battery operation.

Rail-to-rail inputs and outputs are useful to designers buffering ASICs in single-supply systems. The AD8541/AD8542/AD8544 are optimized to maintain high gains at lower supply voltages, making them useful for active filters and gain stages.

The AD8541/AD8542/AD8544 are specified over the extended industrial temperature range (-40°C to $+125^{\circ}\text{C}$). The AD8541 is available in 8-lead SOIC, 5-lead SC70, and 5-lead SOT-23 packages. The AD8542 is available in 8-lead SOIC, 8-lead MSOP, and 8-lead TSSOP surface-mount packages. The AD8544 is available in 14-lead narrow SOIC and 14-lead TSSOP surface-mount packages. All MSOP, SC70, and SOT versions are available in tape and reel only.

PIN CONFIGURATIONS




Figure 1. 5-Lead SC70 and 5-Lead SOT-23
(KS and RJ Suffixes)




Figure 2. 8-Lead SOIC
(R Suffix)




Figure 3. 8-Lead SOIC, 8-Lead MSOP, and 8-Lead TSSOP
(R, RM, and RU Suffixes)




Figure 4. 14-Lead SOIC and 14-Lead TSSOP
(R and RU Suffixes)

AD8541/AD8542/AD8544

TABLE OF CONTENTS

Features	1	Typical Performance Characteristics	7
Applications.....	1	Theory of Operation	12
General Description	1	Notes on the AD854x Amplifiers.....	12
Pin Configurations	1	Applications.....	13
Revision History	2	Notch Filter	13
Specifications.....	3	Comparator Function	13
Electrical Characteristics.....	3	Photodiode Application	14
Absolute Maximum Ratings.....	6	Outline Dimensions.....	15
Thermal Resistance	6	Ordering Guide	17
ESD Caution.....	6		

REVISION HISTORY

1/07—Rev. D to Rev. E

Updated Format.....	Universal
Changes to Photodiode Application Section	14
Changes to Ordering Guide	17

8/04—Rev. C to Rev. D

Changes to Ordering Guide	5
Changes to Figure 3.....	10
Updated Outline Dimensions	12

1/03—Rev. B to Rev. C

Updated Format.....	Universal
Changes to General Description	1
Changes to Ordering Guide	5
Changes to Outline Dimensions.....	12



SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

$V_S = 2.7 \text{ V}$, $V_{CM} = 1.35 \text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 1.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	1	6	6	mV
Input Bias Current	I_B	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	4	60	7	pA
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		100	100	pA
Input Offset Current	I_{OS}	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	0.1	30	1000	pA
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		50	50	pA
Input Voltage Range		0	2.7	2.7	V	
Common-Mode Rejection Ratio	$CMRR$	$V_{CM} = 0 \text{ V}$ to 2.7 V	40	45	45	dB
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	38		38	dB
Large Signal Voltage Gain	A_V	$R_L = 100 \text{ k}\Omega$, $V_O = 0.5 \text{ V}$ to 2.2 V	100	500	500	V/mV
		$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	50		50	V/mV
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2		2	V/mV
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		4	4	$\mu\text{V}/^\circ\text{C}$
Bias Current Drift	$\Delta I_B/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$		100	100	fA/ $^\circ\text{C}$
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		2000	2000	fA/ $^\circ\text{C}$
Offset Current Drift	$\Delta I_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		25	25	fA/ $^\circ\text{C}$
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	$I_L = 1 \text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2.575	2.65	2.65	V
Output Voltage Low	V_{OL}	$I_L = 1 \text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2.550	35	100	V
		$V_{OUT} = V_S - 1 \text{ V}$		125	125	mV
Output Current	I_{OUT}			15	15	mA
	$\pm I_{SC}$			± 20	± 20	mA
Closed-Loop Output Impedance	Z_{OUT}	$f = 200 \text{ kHz}$, $A_V = 1$		50	50	Ω
POWER SUPPLY						
Power Supply Rejection Ratio	$PSRR$	$V_S = 2.5 \text{ V}$ to 6 V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	65	76	76	dB
Supply Current/Amplifier	I_{SY}	$V_O = 0 \text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	60	38	55	dB
					75	μA
						μA
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 100 \text{ k}\Omega$	0.4	0.75	0.75	V/ μs
Settling Time	t_s	To 0.1% (1 V step)		5	5	μs
Gain Bandwidth Product	GBP			980	980	kHz
Phase Margin	Φ_o			63	63	Degrees
NOISE PERFORMANCE						
Voltage Noise Density	e_n	$f = 1 \text{ kHz}$		40	40	nV/ $\sqrt{\text{Hz}}$
	e_n	$f = 10 \text{ kHz}$		38	38	nV/ $\sqrt{\text{Hz}}$
Current Noise Density	i_n			<0.1	<0.1	pA/ $\sqrt{\text{Hz}}$



AD8541/AD8542/AD8544

$V_S = 3.0 \text{ V}$, $V_{CM} = 1.5 \text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 2.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	1	6	mV	
Input Bias Current	I_B	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	4	60	pA	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		100	pA	
Input Offset Current	I_{OS}	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	0.1	30	pA	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		50	pA	
Input Voltage Range		$0 \leq V_{CM} \leq 3 \text{ V}$	0	3	V	
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0 \text{ V}$ to 3 V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	40	45	dB	
Large Signal Voltage Gain	A_{VO}	$R_L = 100 \text{ k}\Omega$, $V_O = 0.5 \text{ V}$ to 2.2 V $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	100	500	V/mV	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	50		V/mV	
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2	4	$\mu\text{V}/^\circ\text{C}$	
Bias Current Drift	$\Delta I_B/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$		100	fA/ $^\circ\text{C}$	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		2000	fA/ $^\circ\text{C}$	
Offset Current Drift	$\Delta I_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		25	fA/ $^\circ\text{C}$	
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	$I_L = 1 \text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2.875	2.955	V	
Output Voltage Low	V_{OL}	$I_L = 1 \text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2.850	32	V	
		$V_{OUT} = V_S - 1 \text{ V}$		100	mV	
Output Current	I_{OUT}	$V_{OUT} = V_S - 1 \text{ V}$		125	mV	
	$\pm I_{SC}$			18	mA	
Closed-Loop Output Impedance	Z_{OUT}	$f = 200 \text{ kHz}$, $A_V = 1$		± 25	mA	
				50	Ω	
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = 2.5 \text{ V}$ to 6 V $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	65	76	dB	
Supply Current/Amplifier	I_{SY}	$V_O = 0 \text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	60	40	μA	
				60	μA	
				75	μA	
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 100 \text{ k}\Omega$	0.4	0.8	V/ μs	
Settling Time	t_s	To 0.01% (1 V step)		5	μs	
Gain Bandwidth Product	GBP			980	kHz	
Phase Margin	Φ_o			64	Degrees	
NOISE PERFORMANCE						
Voltage Noise Density	e_n	$f = 1 \text{ kHz}$		42	nV/ $\sqrt{\text{Hz}}$	
	e_n	$f = 10 \text{ kHz}$		38	nV/ $\sqrt{\text{Hz}}$	
Current Noise Density	i_n			<0.1	pA/ $\sqrt{\text{Hz}}$	



AD8541/AD8542/AD8544

$V_S = 5.0 \text{ V}$, $V_{CM} = 2.5 \text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 3.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	V_{OS}	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	1	6	7	mV
Input Bias Current	I_B	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	4	60	100	pA
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$			1000	pA
Input Offset Current	I_{OS}	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	0.1	30	50	pA
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$			500	pA
Input Voltage Range			0	5	5	V
Common-Mode Rejection Ratio	$CMRR$	$V_{CM} = 0 \text{ V}$ to 5 V	40	48	48	dB
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	38		38	dB
Large Signal Voltage Gain	A_{VO}	$R_L = 100 \text{ k}\Omega$, $V_O = 0.5 \text{ V}$ to 2.2 V	20	40	40	V/mV
		$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	10		10	V/mV
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2		2	V/mV
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		4	4	$\mu\text{V}/^\circ\text{C}$
Bias Current Drift	$\Delta I_B/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$		100	100	$\text{fA}/^\circ\text{C}$
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		2000	2000	$\text{fA}/^\circ\text{C}$
Offset Current Drift	$\Delta I_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		25	25	$\text{fA}/^\circ\text{C}$
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	$I_L = 1 \text{ mA}$	4.9	4.965	4.965	V
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	4.875		4.875	V
Output Voltage Low	V_{OL}	$I_L = 1 \text{ mA}$	25	100	100	mV
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		125	125	mV
Output Current	I_{OUT}	$V_{OUT} = V_S - 1 \text{ V}$	30		30	mA
$\pm I_{SC}$			± 60		± 60	mA
Closed-Loop Output Impedance	Z_{OUT}	$f = 200 \text{ kHz}$, $A_V = 1$	45		45	Ω
POWER SUPPLY						
Power Supply Rejection Ratio	$PSRR$	$V_S = 2.5 \text{ V}$ to 6 V	65	76	76	dB
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	60		60	dB
Supply Current/Amplifier	I_{SY}	$V_O = 0 \text{ V}$	45	65	65	μA
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		85	85	μA
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 100 \text{ k}\Omega$, $C_L = 200 \text{ pF}$	0.45	0.92	0.92	$\text{V}/\mu\text{s}$
Full-Power Bandwidth	BW_P	1% distortion		70	70	kHz
Settling Time	t_s	To 0.1% (1 V step)		6	6	μs
Gain Bandwidth Product	GBP			1000	1000	kHz
Phase Margin	Φ_o			67	67	Degrees
NOISE PERFORMANCE						
Voltage Noise Density	e_n	$f = 1 \text{ kHz}$		42	42	$\text{nV}/\sqrt{\text{Hz}}$
		$f = 10 \text{ kHz}$		38	38	$\text{nV}/\sqrt{\text{Hz}}$
Current Noise Density	i_n			<0.1	<0.1	$\text{pA}/\sqrt{\text{Hz}}$



AD8541/AD8542/AD8544

ABSOLUTE MAXIMUM RATINGS

Table 4.

Parameter	Rating
Supply Voltage (V_S)	6 V
Input Voltage	GND to V_S
Differential Input Voltage ¹	± 6 V
Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	-40°C to +125°C
Junction Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 60 sec)	300°C

¹ For supplies less than 6 V, the differential input voltage is equal to $\pm V_S$.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 5.

Package Type	θ_{JA}	θ_{JC}	Unit
5-Lead SC70 (KS)	376	126	°C/W
5-Lead SOT-23 (RJ)	230	146	°C/W
8-Lead SOIC (R)	158	43	°C/W
8-Lead MSOP (RM)	210	45	°C/W
8-Lead TSSOP (RU)	240	43	°C/W
14-Lead SOIC (R)	120	36	°C/W
14-Lead TSSOP (RU)	240	43	°C/W

ESD CAUTION



ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

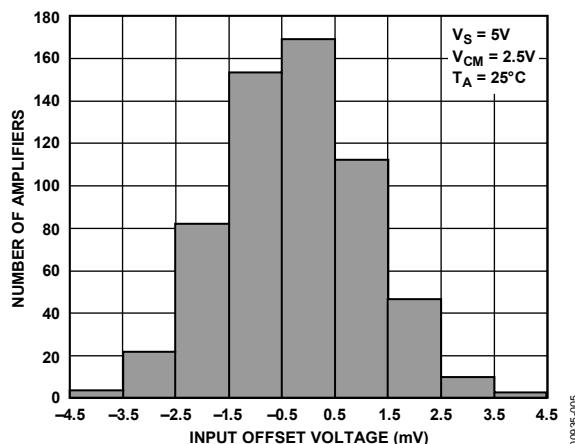


Figure 5. Input Offset Voltage Distribution

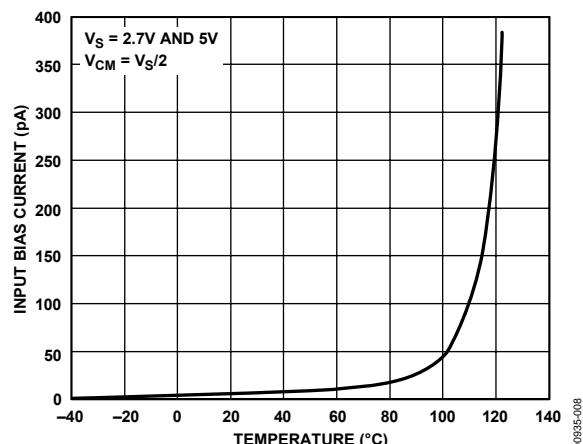


Figure 8. Input Bias Current vs. Temperature

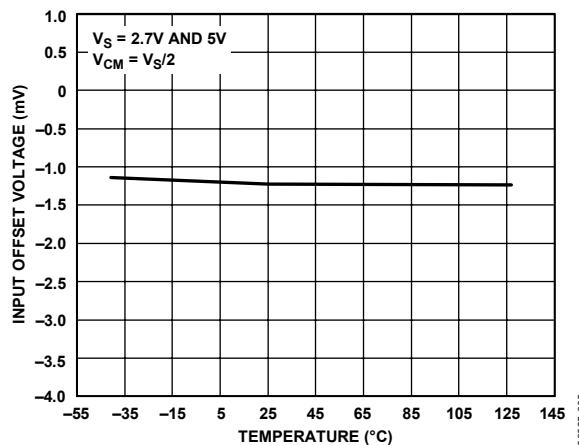


Figure 6. Input Offset Voltage vs. Temperature

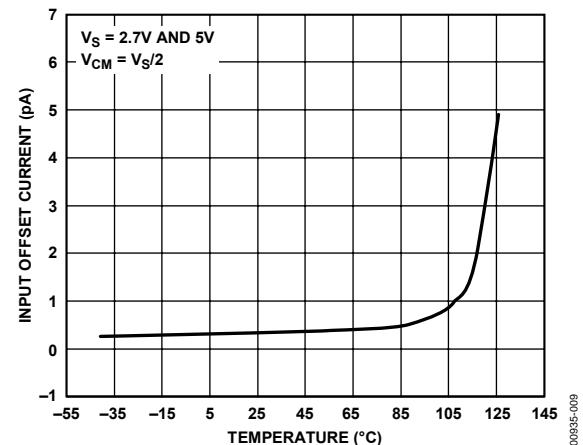


Figure 9. Input Offset Current vs. Temperature

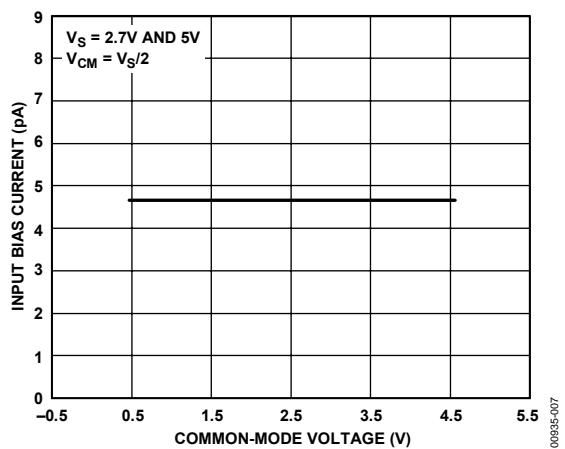


Figure 7. Input Bias Current vs. Common-Mode Voltage







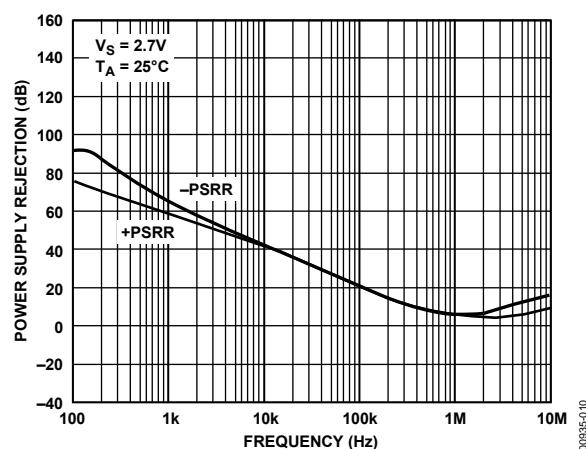


Figure 10. Power Supply Rejection Ratio vs. Frequency

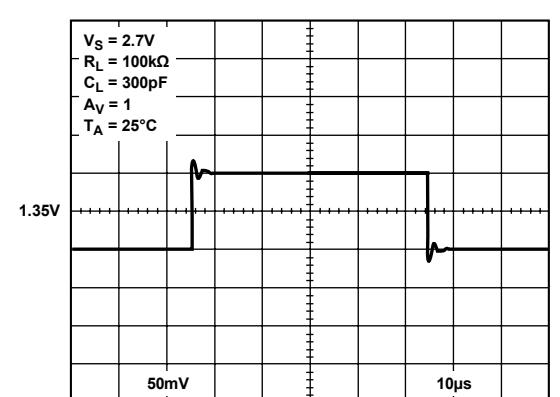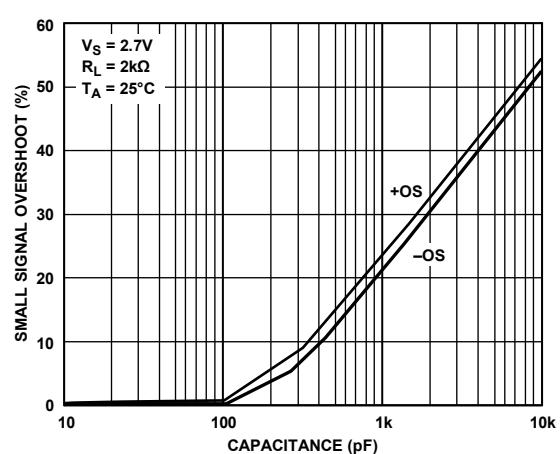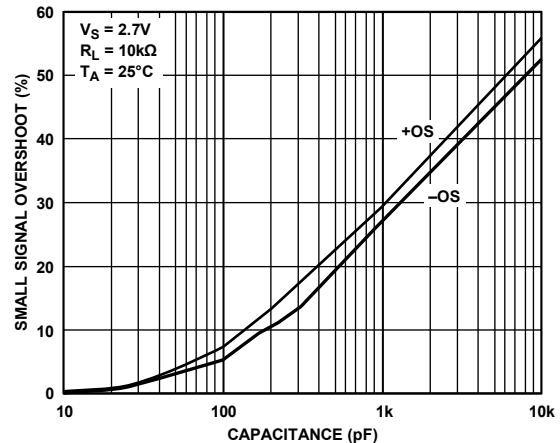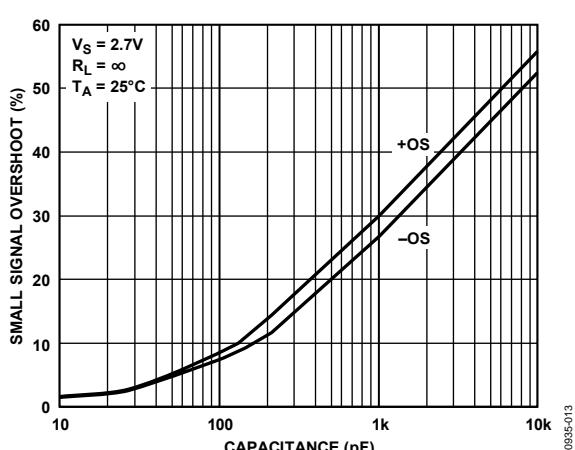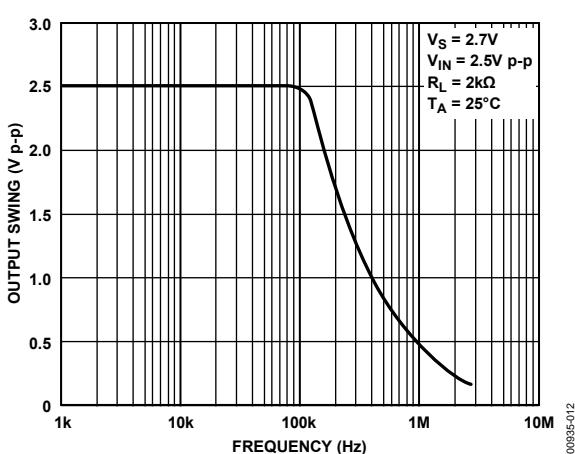

AD8541/AD8542/AD8544

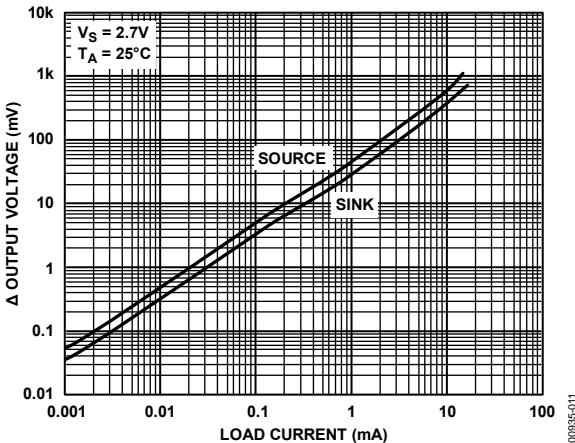

Rev. E | Page 8 of 20



AD8541/AD8542/AD8544

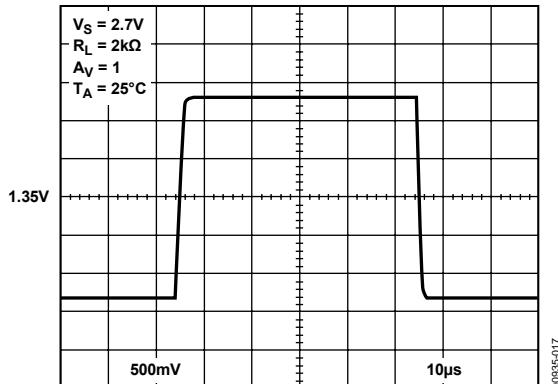


Figure 17. Large Signal Transient Response

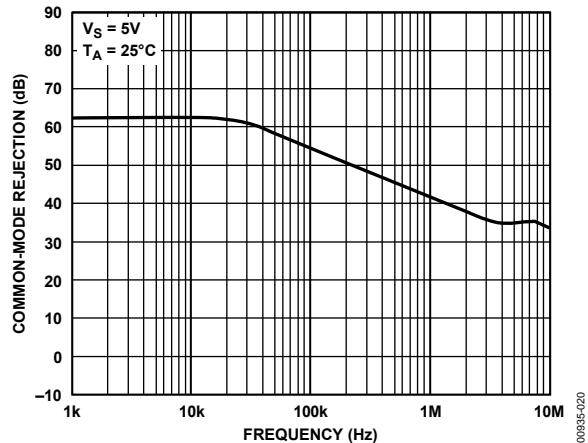


Figure 20. Common-Mode Rejection Ratio vs. Frequency

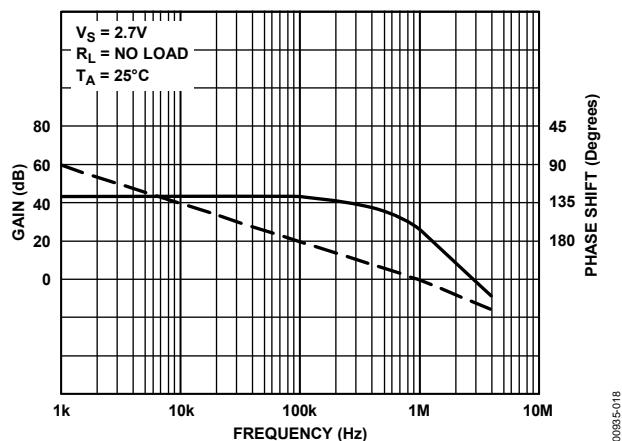


Figure 18. Open-Loop Gain and Phase vs. Frequency

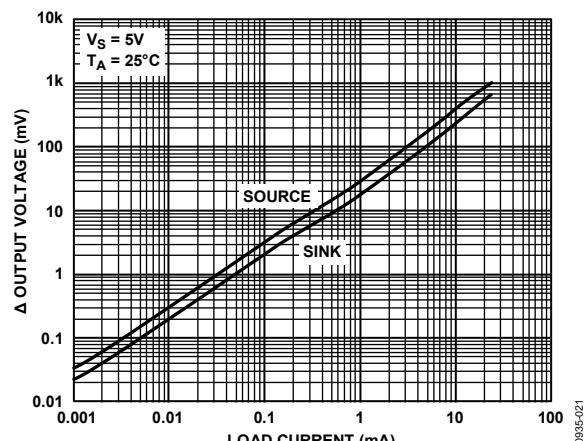


Figure 21. Output Voltage to Supply Rail vs. Frequency

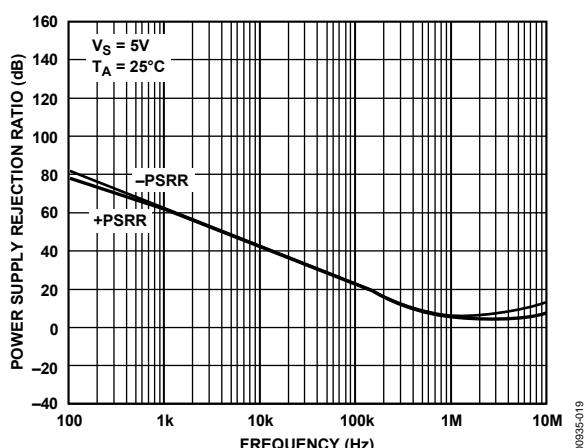


Figure 19. Power Supply Rejection Ratio vs. Frequency

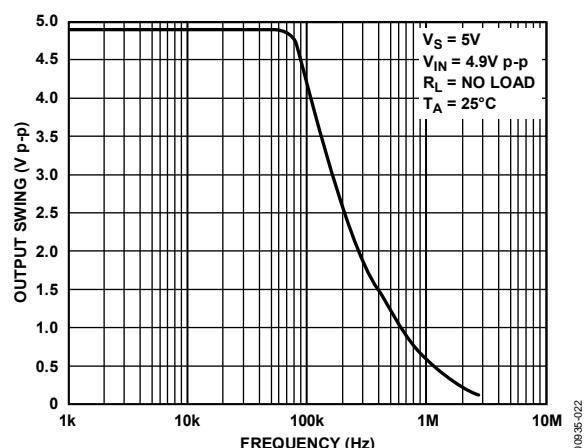


Figure 22. Closed-Loop Output Voltage Swing vs. Frequency



AD8541/AD8542/AD8544

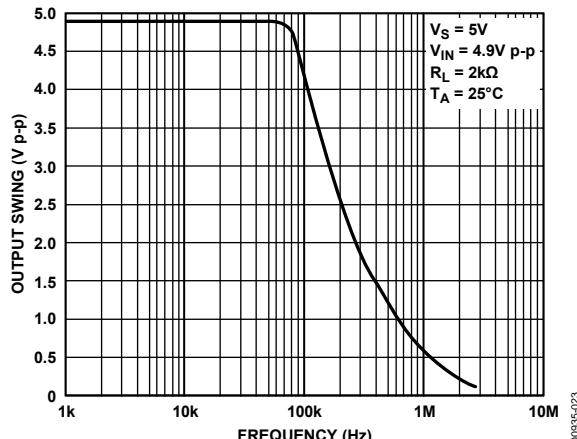


Figure 23. Closed-Loop Output Voltage Swing vs. Frequency

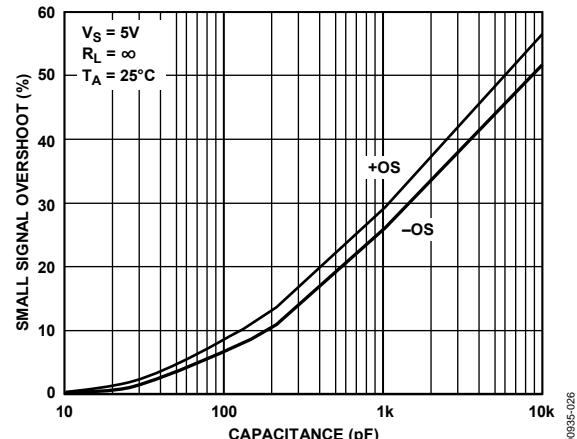


Figure 26. Small Signal Overshoot vs. Load Capacitance

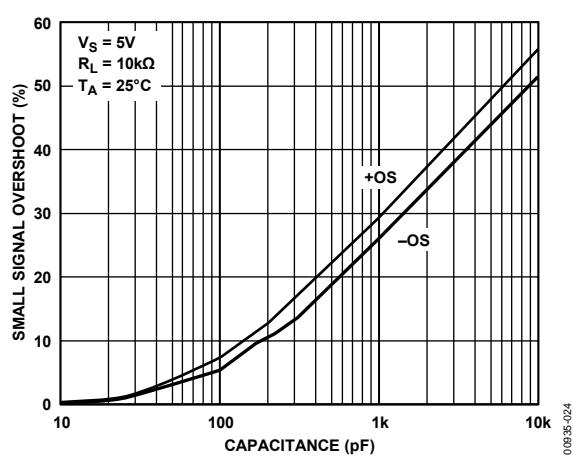


Figure 24. Small Signal Overshoot vs. Load Capacitance

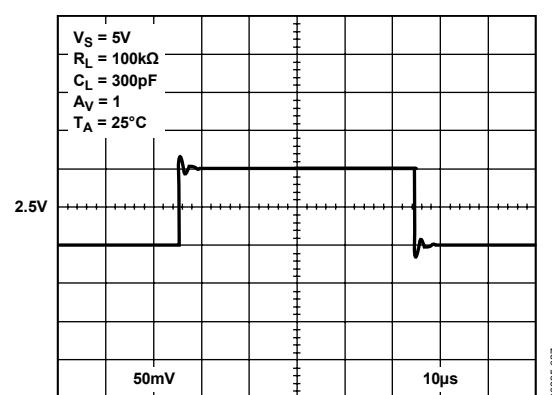


Figure 27. Small Signal Transient Response

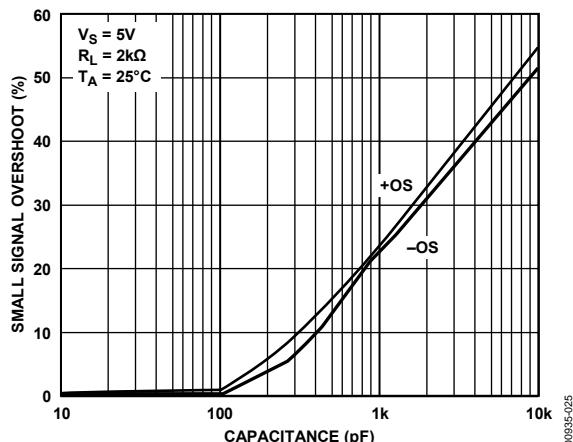


Figure 25. Small Signal Overshoot vs. Load Capacitance







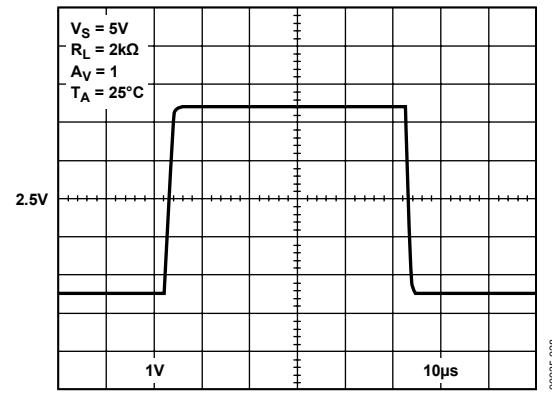


Figure 28. Large Signal Transient Response

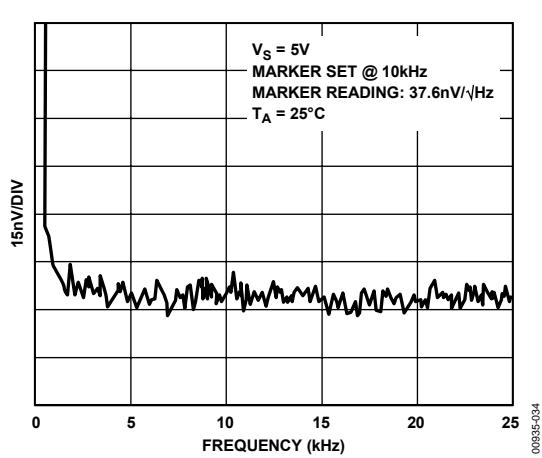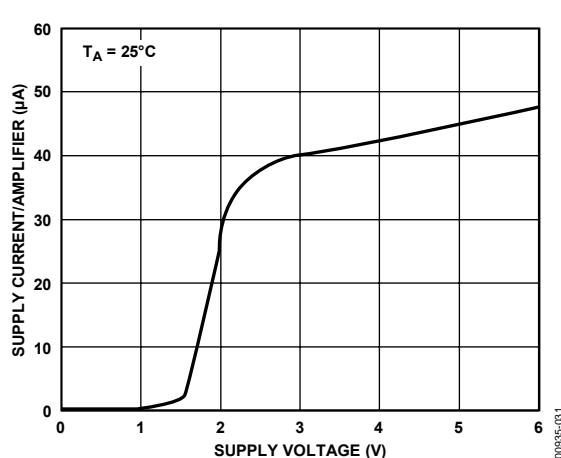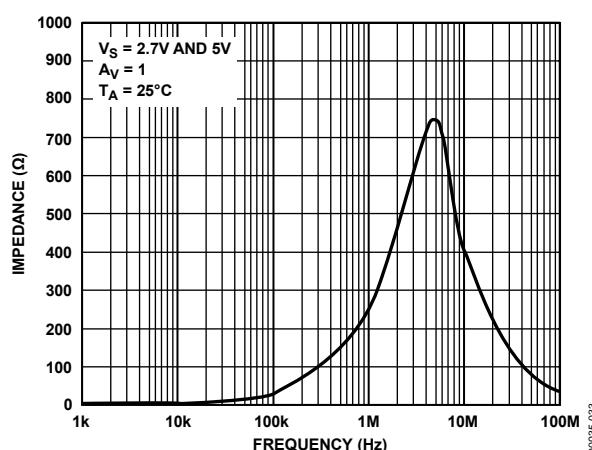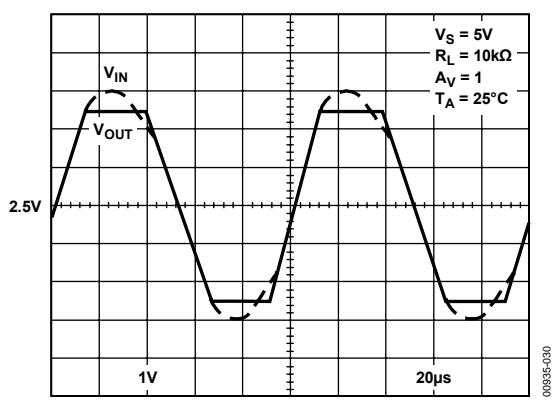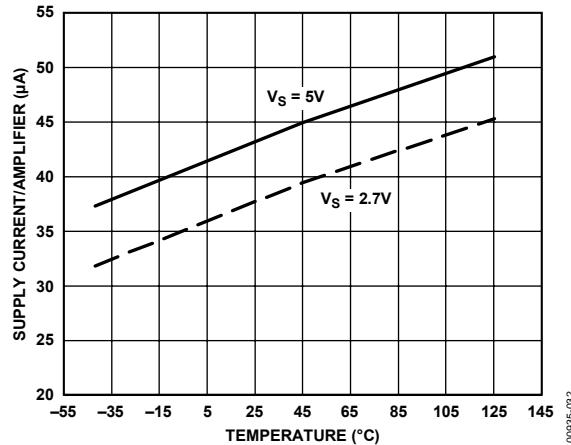

AD8541/AD8542/AD8544

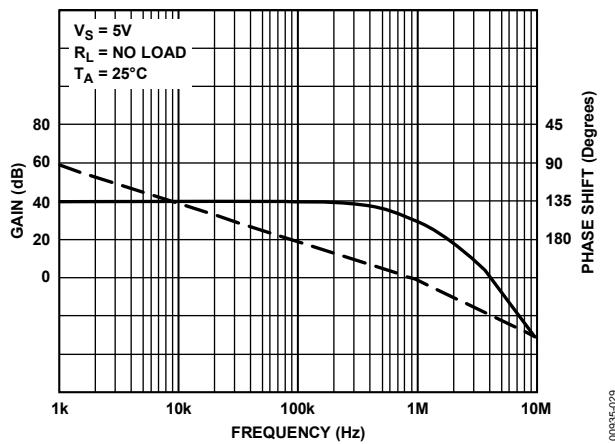

AD8541/AD8542/AD8544

THEORY OF OPERATION

NOTES ON THE AD854x AMPLIFIERS

The AD8541/AD8542/AD8544 amplifiers are improved performance, general-purpose operational amplifiers. Performance has been improved over previous amplifiers in several ways.

Lower Supply Current for 1 MHz Gain Bandwidth

The AD854x series typically uses 45 μ A of current per amplifier. This is much less than the 200 μ A to 700 μ A used in earlier generation parts with similar performance. This makes the AD854x series a good choice for upgrading portable designs for longer battery life. Alternatively, additional functions and performance can be added at the same current drain.

Higher Output Current

At 5 V single supply, the short-circuit current is typically 60 μ A. Even 1 V from the supply rail, the AD854x amplifiers can provide a 30 mA output current, sourcing or sinking.

Sourcing and sinking are strong at lower voltages, with 15 mA available at 2.7 V and 18 mA at 3.0 V. For even higher output currents, see the Analog Devices, Inc. [AD8531/AD8532/AD8534](#) parts, with output currents to 250 mA. Information on these parts is available from your Analog Devices representative, and data sheets are available at www.analog.com.

Better Performance at Lower Voltages

The AD854x family of parts was designed to provide better ac performance at 3.0 V and 2.7 V than previously available parts. Typical gain-bandwidth product is close to 1 MHz at 2.7 V. Voltage gain at 2.7 V and 3.0 V is typically 500,000. Phase margin is typically over 60°C, making the part easy to use.



APPLICATIONS

NOTCH FILTER

The AD854x have very high open-loop gain (especially with a supply voltage below 4 V), which makes it useful for active filters of all types. For example, Figure 35 illustrates the AD8542 in the classic twin-T notch filter design. The twin-T notch is desired for simplicity, low output impedance, and minimal use of op amps. In fact, this notch filter can be designed with only one op amp if Q adjustment is not required. Simply remove U2 as illustrated in Figure 36. However, a major drawback to this circuit topology is ensuring that all the Rs and Cs closely match. The components must closely match or notch frequency offset and drift causes the circuit to no longer attenuate at the ideal notch frequency. To achieve desired performance, 1% or better component tolerances or special component screens are usually required. One method to desensitize the circuit-to-component mismatch is to increase R2 with respect to R1, which lowers Q. A lower Q increases attenuation over a wider frequency range but reduces attenuation at the peak notch frequency.

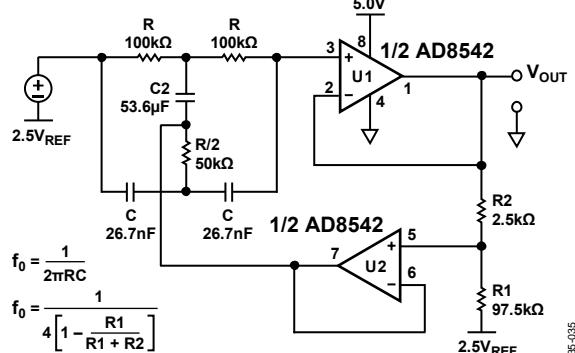


Figure 35. 60 Hz Twin-T Notch Filter, $Q = 10$

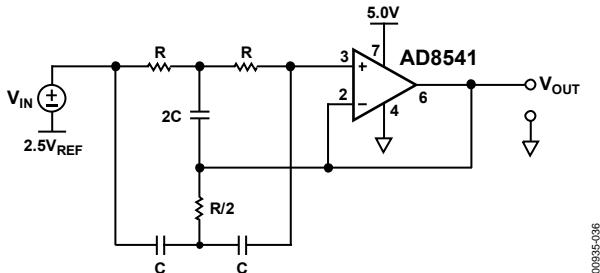


Figure 36. 60 Hz Twin-T Notch Filter, $Q = \infty$ (Ideal)

Figure 37 is an example of the AD8544 in a notch filter circuit. The frequency dependent negative resistance (FNDR) notch filter has fewer critical matching requirements than the twin-T notch and for the FNDR Q is directly proportional to a single resistor R1. While matching component values is still important, it is also much easier and/or less expensive to accomplish in the FNDR circuit. For example, the twin-T notch uses three capacitors with two unique values, whereas the FNDR circuit uses only two capacitors, which may be of the same value. U3 is simply a buffer that is added to lower the output impedance of the circuit.

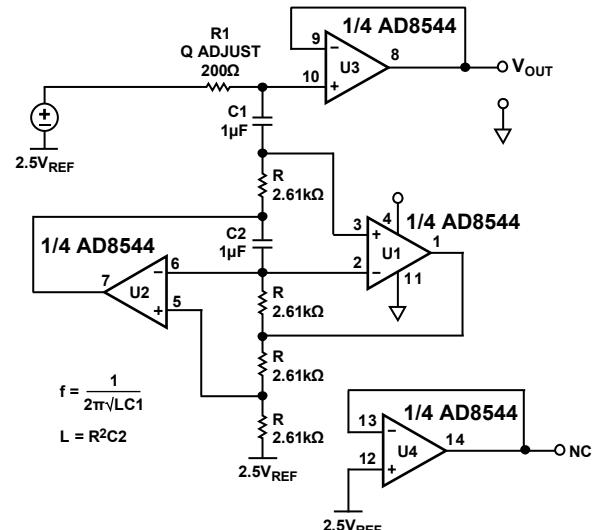


Figure 37. FNDR 60 Hz Notch Filter with Output Buffer

COMPARATOR FUNCTION

A comparator function is a common application for a spare op amp in a quad package. Figure 38 illustrates $\frac{1}{4}$ of the AD8544 as a comparator in a standard overload detection application. Unlike many op amps, the AD854x family can double as comparators because this op amp family has a rail-to-rail differential input range, rail-to-rail output, and a great speed vs. power ratio. R2 is used to introduce hysteresis. The AD854x, when used as comparators, have 5 μs propagation delay at 5 V and 5 μs overload recovery time.

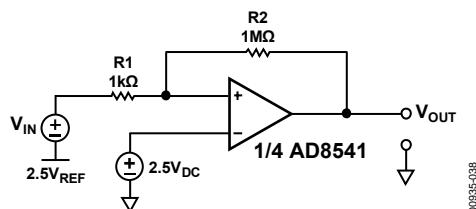


Figure 38. AD854x Comparator Application—Overload Detector



AD8541/AD8542/AD8544

PHOTODIODE APPLICATION

The AD854x family has very high impedance with an input bias current typically around 4 pA. This characteristic allows the AD854x op amps to be used in photodiode applications and other applications that require high input impedance. Note that the AD854x has significant voltage offset that can be removed by capacitive coupling or software calibration.

Figure 39 illustrates a photodiode or current measurement application. The feedback resistor is limited to 10 MΩ to avoid excessive output offset. Also, note that a resistor is not needed on the noninverting input to cancel bias current offset because the bias current-related output offset is not significant when compared to the voltage offset contribution. For best performance, follow the standard high impedance layout techniques, which include:

- Shielding the circuit.
- Cleaning the circuit board.
- Putting a trace connected to the noninverting input around the inverting input.
- Using separate analog and digital power supplies.


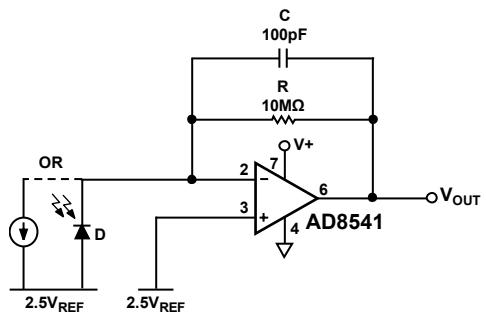


Figure 39. High Input Impedance Application—Photodiode Amplifier

00985-039




OUTLINE DIMENSIONS

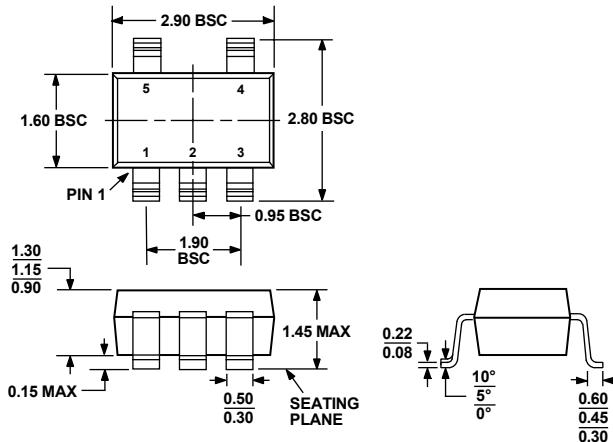


COMPLIANT TO JEDEC STANDARDS MO-178-AA

Figure 40. 5-Lead Small Outline Transistor Package [SOT-23]
(RJ-5)
Dimensions shown in millimeters

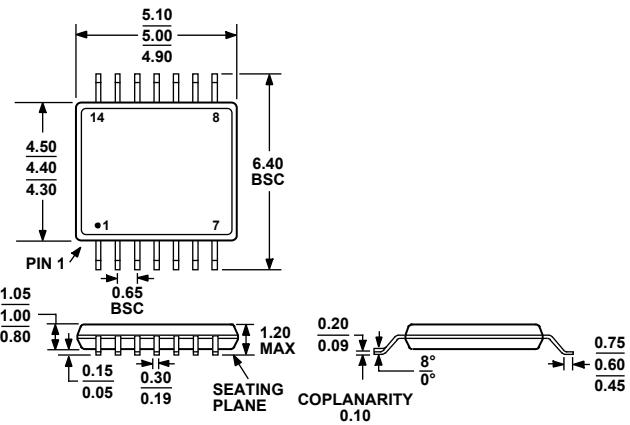


COMPLIANT TO JEDEC STANDARDS MO-153-AB-1

Figure 41. 14-Lead Thin Shrink Small Outline Package [TSSOP]
(RU-14)
Dimensions shown in millimeters

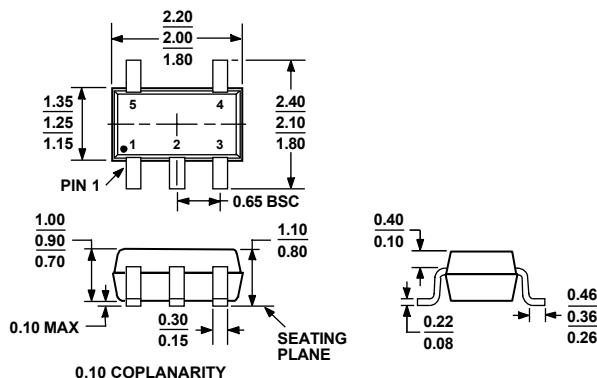

COMPLIANT TO JEDEC STANDARDS MO-203-AA

Figure 42. 5-Lead Thin Shrink Small Outline Transistor Package [SC70]
(KS-5)
Dimensions shown in millimeters

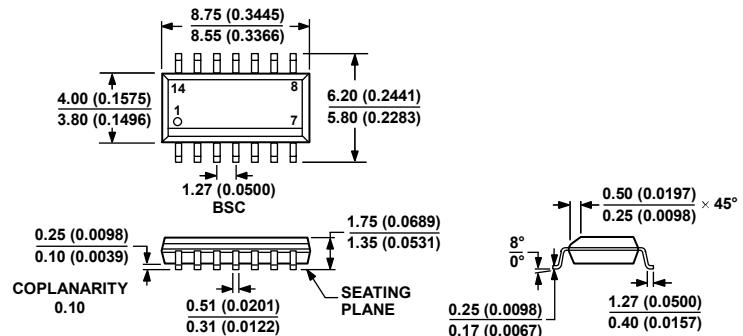


COMPLIANT TO JEDEC STANDARDS MS-012-AB

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 43. 14-Lead Standard Small Outline Package [SOIC_N]

Narrow Body
(R-14)
Dimensions shown in millimeters and (inches)


AD8541/AD8542/AD8544

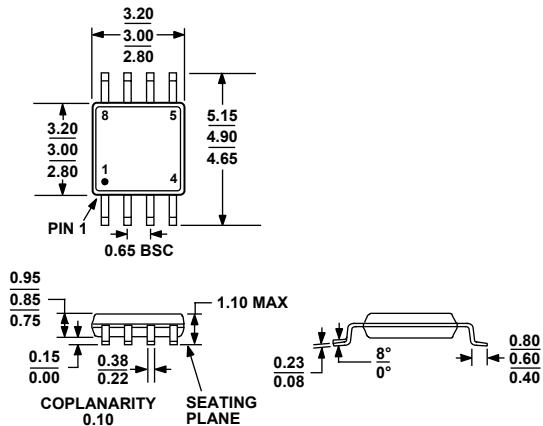

COMPLIANT TO JEDEC STANDARDS MO-187-AA

Figure 44. 8-Lead Mini Small Outline Package [MSOP]
(RM-8)


Dimensions shown in millimeters

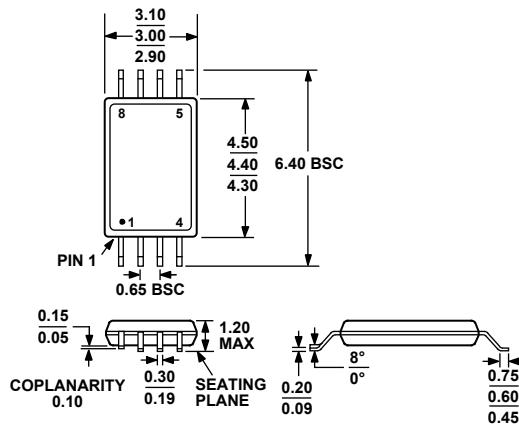

COMPLIANT TO JEDEC STANDARDS MO-153-AA

Figure 45. 8-Lead Thin Shrink Small Outline Package [TSSOP]
(RU-8)

Dimensions shown in millimeters

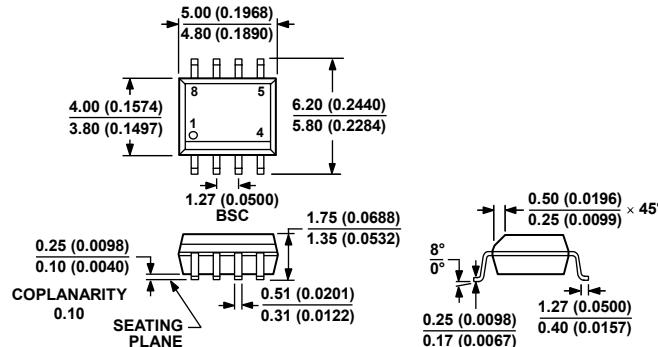

COMPLIANT TO JEDEC STANDARDS MS-012-AA

CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

060506-A

Figure 46. 8-Lead Standard Small Outline Package [SOIC_N]
Narrow Body
(R-8)

Dimensions shown in millimeters and (inches)

AD8541/AD8542/AD8544

ORDERING GUIDE

Model	Temperature Range	Package Description	Package Option	Branding
AD8541AKS-R2	–40°C to +125°C	5-Lead SC70	KS-5	A4B
AD8541AKS-REEL7	–40°C to +125°C	5-Lead SC70	KS-5	A4B
AD8541AKSZ-R2 ¹	–40°C to +125°C	5-Lead SC70	KS-5	A12
AD8541AKSZ-REEL7 ¹	–40°C to +125°C	5-Lead SC70	KS-5	A12
AD8541AR	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8541AR-REEL	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8541AR-REEL7	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8541ARZ ¹	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8541ARZ-REEL ¹	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8541ARZ-REEL7 ¹	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8541ART-R2	–40°C to +125°C	5-Lead SOT-23	RJ-5	A4A
AD8541ART-REEL	–40°C to +125°C	5-Lead SOT-23	RJ-5	A4A
AD8541ART-REEL7	–40°C to +125°C	5-Lead SOT-23	RJ-5	A4A
AD8541ARTZ-R2 ¹	–40°C to +125°C	5-Lead SOT-23	RJ-5	A4A#
AD8541ARTZ-REEL ¹	–40°C to +125°C	5-Lead SOT-23	RJ-5	A4A#
AD8541ARTZ-REEL7 ¹	–40°C to +125°C	5-Lead SOT-23	RJ-5	A4A#
AD8542AR	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8542AR-REEL	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8542AR-REEL7	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8542ARZ ¹	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8542ARZ-REEL ¹	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8542ARZ-REEL7 ¹	–40°C to +125°C	8-Lead SOIC_N	R-8	
AD8542ARM-R2	–40°C to +125°C	8-Lead MSOP	RM-8	AVA
AD8542ARM-REEL	–40°C to +125°C	8-Lead MSOP	RM-8	AVA
AD8542ARMZ-R2 ¹	–40°C to +125°C	8-Lead MSOP	RM-8	AVA#
AD8542ARMZ-REEL ¹	–40°C to +125°C	8-Lead MSOP	RM-8	AVA#
AD8542ARU	–40°C to +125°C	8-Lead TSSOP	RU-8	
AD8542ARU-REEL	–40°C to +125°C	8-Lead TSSOP	RU-8	
AD8542ARUZ ¹	–40°C to +125°C	8-Lead TSSOP	RU-8	
AD8542ARUZ-REEL ¹	–40°C to +125°C	8-Lead TSSOP	RU-8	
AD8544AR	–40°C to +125°C	14-Lead SOIC_N	R-14	
AD8544AR-REEL	–40°C to +125°C	14-Lead SOIC_N	R-14	
AD8544AR-REEL7	–40°C to +125°C	14-Lead SOIC_N	R-14	
AD8544ARZ ¹	–40°C to +125°C	14-Lead SOIC_N	R-14	
AD8544ARZ-REEL ¹	–40°C to +125°C	14-Lead SOIC_N	R-14	
AD8544ARZ-REEL7 ¹	–40°C to +125°C	14-Lead SOIC_N	R-14	
AD8544ARU	–40°C to +125°C	14-Lead TSSOP	RU-14	
AD8544ARU-REEL	–40°C to +125°C	14-Lead TSSOP	RU-14	
AD8544ARUZ ¹	–40°C to +125°C	14-Lead TSSOP	RU-14	
AD8544ARUZ-REEL ¹	–40°C to +125°C	14-Lead TSSOP	RU-14	

¹ Z = Pb-free part; # denotes lead-free product, may be top or bottom marked.



AD8541/AD8542/AD8544

NOTES



AD8541/AD8542/AD8544

NOTES



AD8541/AD8542/AD8544

NOTES