



RF Balun Transformers HHM Series - Surface Mount

Features: These products are intended for wireless LAN (Local Area Network) applications.

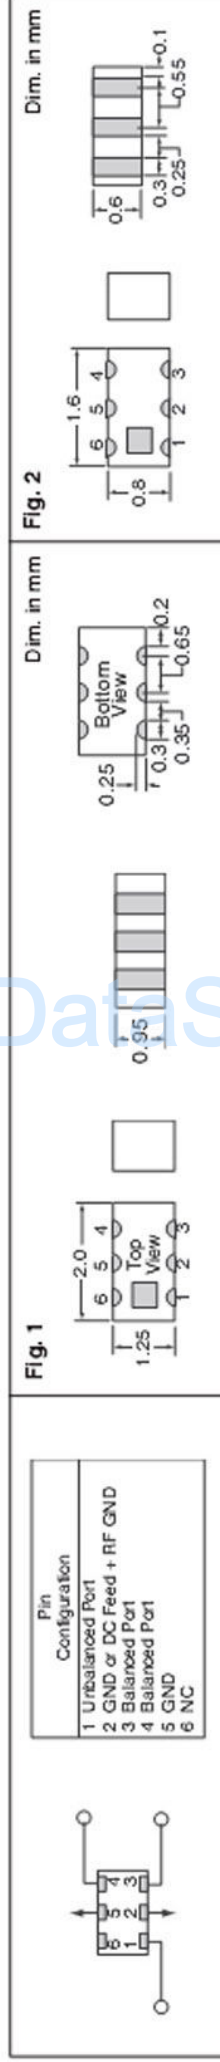


Fig. 1

Fig. 2

Fig.	Application	Operating Frequency (MHz)	Impedance In/Out (Ω)	Insertion Loss-max. (dB)	Difference of Phase (deg.)	Digi-Key Part No.	Cut Tape Price Each	Tape & Reel Pricing 2,000	TDK Part No.
1	Bluetooth and IEEE802.11b/g	2400 - 2500	50/50	1.2	180 \pm 10	445-1233-1-ND	1 2.05 10 1.54 100 1.03	635.19/M	HHM1517
	Bluetooth and IEEE802.11b/g	2400 - 2500	50/100	1.0	180 \pm 10	445-1234-1-ND	1 2.05 10 1.54 100 1.03	635.19/M	HHM1520
	Bluetooth and IEEE802.11b/g	2400 - 2500	50/200	1.0	180 \pm 10	445-1229-1-ND	1 2.05 10 1.54 100 1.03	635.19/M	HHM1521
	Wideband-LAN and IEEE802.11b/g	4900 - 5950	50/100	1.0	180 \pm 10	445-1231-1-ND	1 2.05 10 1.54 100 1.03	635.19/M	HHM1570B1
2	Wideband-LAN	5150 - 5975	50/100	1.0	180 \pm 10	445-1230-1-ND	1 2.05 10 1.54 100 1.03	635.19/M	HHM1562B
	Bluetooth and IEEE802.11b/g	2400 - 2500	50/100	1.2	180 \pm 10	445-1232-1-ND	1 2.05 10 1.54 100 1.03	635.19/M	HHM1711D1