

2SK615

Silicon N-Channel MOS FET

For switching

■ Features

- Low ON-resistance
- High-speed switching
- Allowing to be driven directly by CMOS and TTL
- M type package, allowing easy automatic and manual insertion as well as stand-alone fixing to the printed circuit board.

■ Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Drain to Source voltage	V_{DS}	80	V
Gate to Source voltage	V_{GSO}	20	V
Drain current	I_D	± 0.5	A
Max drain current	I_{DP}	± 1	A
Allowable power dissipation	P_D^*	1	W
Channel temperature	T_{ch}	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$



* PC board: Copper foil of the drain portion should have a area of 1cm^2 or more and the board thickness should be 1.7mm.

■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Conditions	min	typ	max	Unit
Drain to Source cut-off current	I_{DSS}	$V_{DS} = 60\text{V}, V_{GS} = 0$			10	μA
Gate to Source leakage current	I_{GSS}	$V_{GS} = 20\text{V}, V_{DS} = 0$			0.1	μA
Drain to Source breakdown voltage	V_{DSS}	$I_{DS} = 100\mu\text{A}, V_{GS} = 0$	80			V
Gate threshold voltage	V_{th}	$I_D = 1\text{mA}, V_{DS} = V_{GS}$	1.5		3.5	V
Drain to Source ON-resistance	$R_{DS(on)}^{*1}$	$I_D = 0.5\text{A}, V_{GS} = 10\text{V}$		2	4	Ω
Forward transfer admittance	$ Y_{fs} $	$I_D = 0.2\text{A}, V_{DS} = 15\text{V}, f = 1\text{kHz}$		300		mS
Input capacitance (Common Source)	C_{iss}	$V_{DS} = 10\text{V}, V_{GS} = 0, f = 1\text{MHz}$		45		pF
Output capacitance (Common Source)	C_{oss}			30		pF
Reverse transfer capacitance (Common Source)	C_{rss}			8		pF
Turn-on time	$t_{on}^{*1, 2}$			15		ns
Turn-off time	$t_{off}^{*1, 2}$			20		ns

*1 Pulse measurement


*2 t_{on} , t_{off} measurement circuit

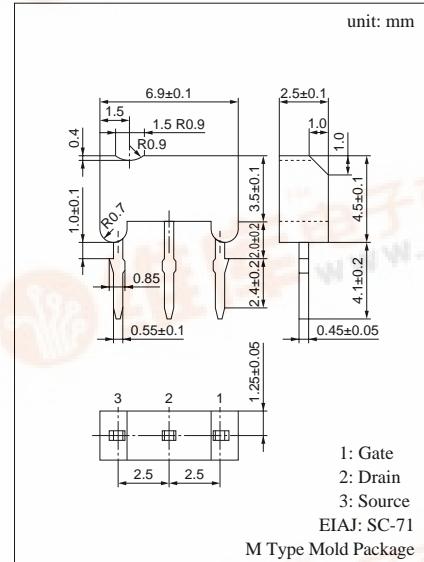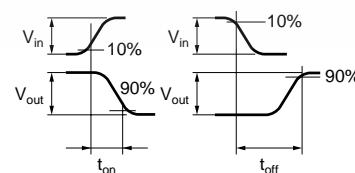


Silicon MOS FETs (Small Signal)

2SK615


P_D — Ta

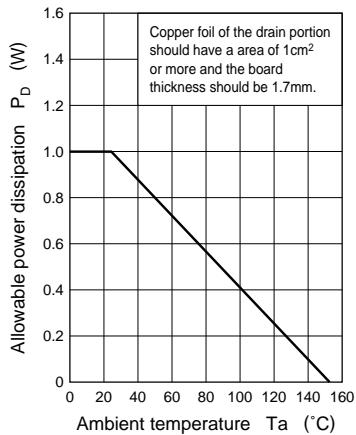


I_D — V_{DS}

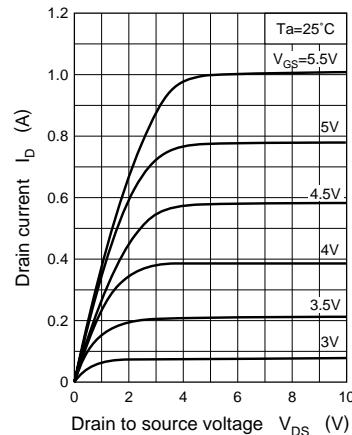


I_D — V_{GS}

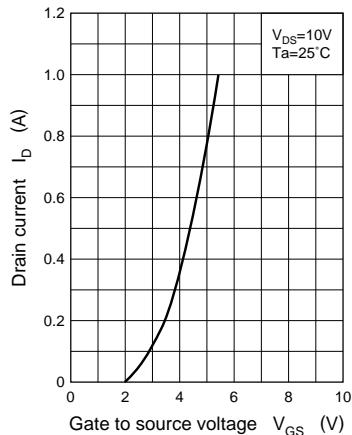


$|Y_{fs}|$ — V_{GS}

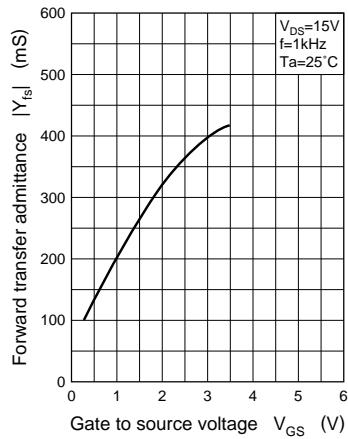

$C_{iss}, C_{oss}, C_{rss}$ — V_{DS}

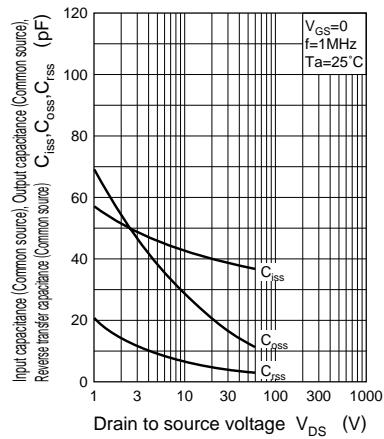

$R_{DS(on)}$ — V_{GS}

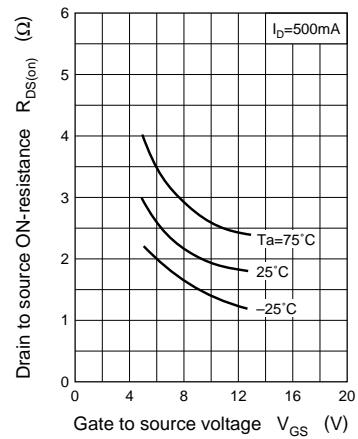

$R_{DS(on)}$ — Ta

