

# UF4001 THRU UF4007

## ULTRAFAST RECOVERY RECTIFIERS

Reverse Voltage – 50 to 1000 V


Forward Current – 1 A

### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultrafast recovery time for high efficiency
- Excellent high temperature switching
- Soft recovery characteristics

### Mechanical Data

- Case: molded plastic, DO-41
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting Position: Any

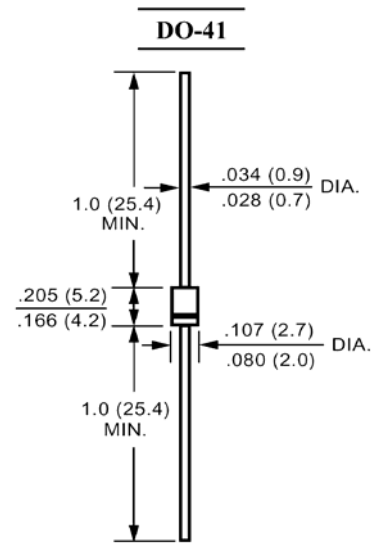

Dimensions in inches and (millimeters)

### Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	UF4001	UF4002	UF4003	UF4004	UF4005	UF4006	UF4007	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 0.375" (9.5mm) Lead Length at $T_A = 55^\circ\text{C}$	$I_{(AV)}$	1							A
Peak Forward Surge Current, 8.3 ms Single Half-sine -wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	30							A
Maximum Forward Voltage at 1 A DC	$V_F$	1			1.7			V	
Maximum Reverse Current $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_A = 100^\circ\text{C}$	$I_R$	5				500			$\mu\text{A}$
Typical Junction Capacitance <sup>1)</sup>	$C_J$	17							pF
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JA}$	60							$^\circ\text{C/W}$
Maximum Reverse Recovery Time <sup>3)</sup>	$t_{rr}$	50				75			ns
Operating and Storage Temperature Range	$T_J, T_{Stg}$	-55 to +150							$^\circ\text{C}$

<sup>1)</sup> Measured at 1 MHz and applied reverse voltage of 4 V DC.

<sup>2)</sup> Thermal resistance junction to ambient and from junction to lead at 0.375" (9.5mm) lead length P.C.B mounted.


<sup>3)</sup> Reverse recovery test conditions:  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .

**TOP DYNAMIC**




# UF4001 THRU UF4007


**FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVE**

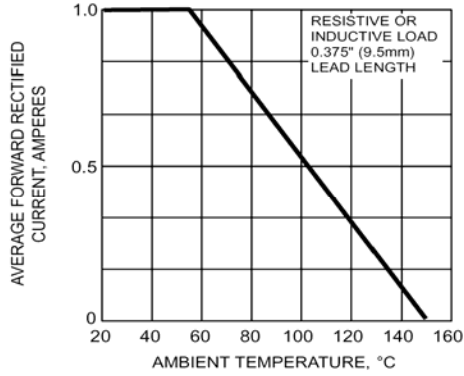


**FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

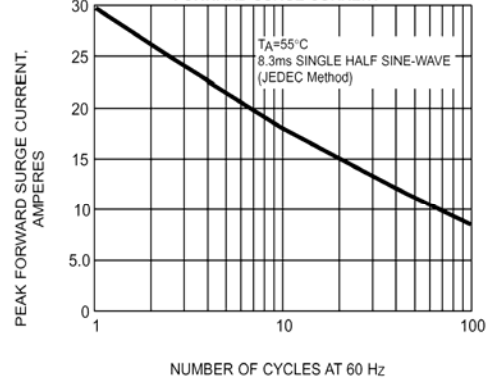


**FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

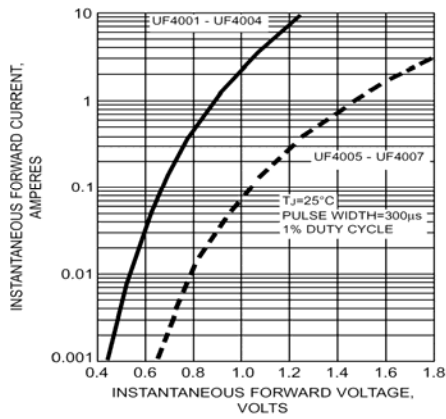

**FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS**

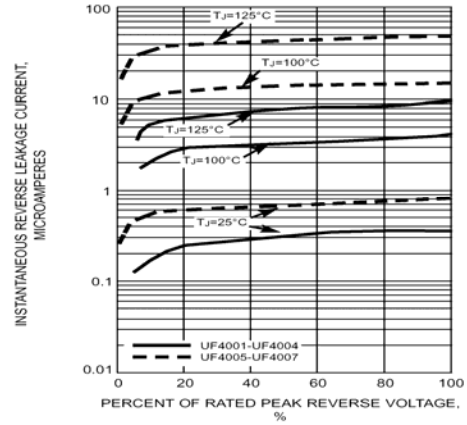

**FIG. 5 - TYPICAL JUNCTION CAPACITANCE**

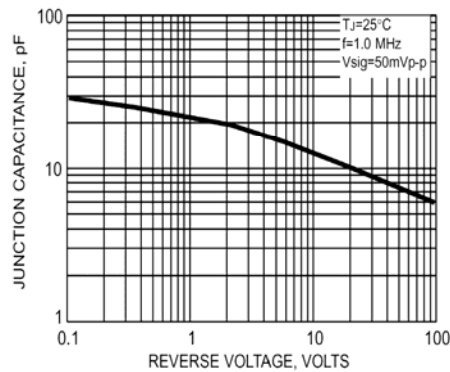

**TOP DYNAMIC**

