



ECP5™ and ECP5-5G™ Family

Data Sheet

DS1044 Version 1.6

February 2016

Copyright Notice

Copyright © 2014-2016 Lattice Semiconductor Corporation. All rights reserved. The contents of these materials contain proprietary and confidential information (including trade secrets, copyright, and other Intellectual Property interests) of Lattice Semiconductor Corporation and/or its affiliates. All rights are reserved. You are permitted to use this document and any information contained therein expressly and only for bona fide non-commercial evaluation of products and/or services from Lattice Semiconductor Corporation or its affiliates; and only in connection with your bona fide consideration of purchase or license of products or services from Lattice Semiconductor Corporation or its affiliates, and only in accordance with the terms and conditions stipulated. Contents, (in whole or in part) may not be reproduced, downloaded, disseminated, published, or transferred in any form or by any means, except with the prior written permission of Lattice Semiconductor Corporation and/or its affiliates. Copyright infringement is a violation of federal law subject to criminal and civil penalties. You have no right to copy, modify, create derivative works of, transfer, sublicense, publicly display, distribute or otherwise make these materials available, in whole or in part, to any third party. You are not permitted to reverse engineer, disassemble, or decompile any device or object code provided herewith. Lattice Semiconductor Corporation reserves the right to revoke these permissions and require the destruction or return of any and all Lattice Semiconductor Corporation proprietary materials and/or data.

Patents

The subject matter described herein may contain one or more inventions claimed in patents or patents pending owned by Lattice Semiconductor Corporation and/or its affiliates.

Trademark Acknowledgment

Lattice Semiconductor Corporation®, the Lattice Semiconductor logo, Silicon Image®, the Silicon Image logo, Instaport®, the Instaport logo, InstaPrevue®, Simplay®, Simplay HD®, the Simplay HD logo, Simplay Labs™, the Simplay Labs logo, the SiBEAM Snap™, the SiBEAM Snap logo, UltraGig™, the UltraGig logo are trademarks or registered trademarks of Lattice Semiconductor Corporation in the United States and/or other countries. HDMI® and the HDMI logo with High-Definition Multimedia Interface are trademarks or registered trademarks of, and are used under license from, HDMI Licensing, LLC. in the United States or other countries. MHL® and the MHL logo with Mobile High-Definition Link are trademarks or registered trademarks of, and are used under license from, MHL, LLC. in the United States and/or other countries. WirelessHD®, the WirelessHD logo, WiHD® and the WiHD logo are trademarks, registered trademarks or service marks of SiBeam, Inc. in the United States or other countries. HDMI Licensing, LLC; MHL, LLC; Simplay Labs, LLC; and SiBeam, Inc. are wholly owned subsidiaries of Lattice Semiconductor Corporation.

All other trademarks and registered trademarks are the property of their respective owners in the United States or other countries. The absence of a trademark symbol does not constitute a waiver of Lattice Semiconductor's trademarks or other intellectual property rights with regard to a product name, logo or slogan.

Export Controlled Document

This document contains materials that are subject to the U.S. Export Administration Regulations and may also be subject to additional export control laws and regulations (collectively "Export Laws") and may be used only in compliance with such Export Laws. Unless otherwise authorized by an officer of Lattice Semiconductor Corporation in writing, this document and the information contained herein (a) may not be used in relation to nuclear, biological or chemical weapons, or missiles capable of delivering these weapons, and (b) may not be re-exported or otherwise transferred to a third party who is known or suspected to be involved in relation to nuclear, biological or chemical weapons, or missiles capable of delivering these weapons, or to any sanctioned persons or entities.

Further Information

To request other materials, documentation, and information, contact your local Lattice Semiconductor sales office or visit the Lattice Semiconductor web site at www.latticesemi.com.

Disclaimers

These materials are provided on an "AS IS" basis. Lattice Semiconductor Corporation and its affiliates disclaim all representations and warranties (express, implied, statutory or otherwise), including but not limited to: (i) all implied warranties of merchantability, fitness for a particular purpose, and/or non-infringement of third party rights; (ii) all warranties arising out of course-of-dealing, usage, and/or trade; and (iii) all warranties that the information or results provided in, or that may be obtained from use of, the materials are accurate, reliable, complete, up-to-date, or produce specific outcomes. Lattice Semiconductor Corporation and its affiliates assume no liability or responsibility for any errors or omissions in these materials, makes no commitment or warranty to correct any such errors or omissions or update or keep current the information contained in these materials, and expressly disclaims all direct, indirect, special, incidental, consequential, reliance and punitive damages, including WITHOUT LIMITATION any loss of profits arising out of your access to, use or interpretation of, or actions taken or not taken based on the content of these materials. Lattice Semiconductor Corporation and its affiliates reserve the right, without notice, to periodically modify the information in these materials, and to add to, delete, and/or change any of this information.

Products and Services

The products and services described in these materials, and any other information, services, designs, know-how and/or products provided by Lattice Semiconductor Corporation and/or its affiliates are provided on "AS IS" basis, except to the extent that Lattice Semiconductor Corporation and/or its affiliates provides an applicable written limited warranty in its standard form license agreements, standard Terms and Conditions of Sale and Service or its other applicable standard form agreements, in which case such limited warranty shall apply and shall govern in lieu of all other warranties (express, statutory, or implied). EXCEPT FOR SUCH LIMITED WARRANTY, LATTICE SEMICONDUCTOR CORPORATION AND ITS AFFILIATES DISCLAIM ALL REPRESENTATIONS AND WARRANTIES (EXPRESS, IMPLIED, STATUTORY OR OTHERWISE), REGARDING THE INFORMATION, SERVICES, DESIGNS, KNOW-HOW AND PRODUCTS PROVIDED BY LATTICE SEMICONDUCTOR CORPORATION AND/OR ITS AFFILIATES, INCLUDING BUT NOT LIMITED TO, ALL IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND/OR NON-INFRINGEMENT OF THIRD PARTY RIGHTS. YOU ACKNOWLEDGE AND AGREE THAT SUCH INFORMATION, SERVICES, DESIGNS, KNOW-HOW AND PRODUCTS HAVE NOT BEEN DESIGNED, TESTED, OR MANUFACTURED FOR USE OR RESALE IN SYSTEMS WHERE THE FAILURE, MALFUNCTION, OR ANY INACCURACY OF THESE ITEMS CARRIES A RISK OF DEATH OR SERIOUS BODILY INJURY, INCLUDING, BUT NOT LIMITED TO, USE IN NUCLEAR FACILITIES, AIRCRAFT NAVIGATION OR COMMUNICATION, EMERGENCY SYSTEMS, OR OTHER SYSTEMS WITH A SIMILAR DEGREE OF POTENTIAL HAZARD. NO PERSON IS AUTHORIZED TO MAKE ANY OTHER WARRANTY OR REPRESENTATION CONCERNING THE PERFORMANCE OF THE INFORMATION, PRODUCTS, KNOW-HOW, DESIGNS OR SERVICES OTHER THAN AS PROVIDED IN THESE TERMS AND CONDITIONS.

Contents

| | |
|---|----|
| Acronyms in This Document | 9 |
| 1. General Description | 10 |
| 1.1. Features | 10 |
| 2. Architecture | 12 |
| 2.1. Overview | 12 |
| 2.2. PFU Blocks | 13 |
| 2.2.1. Slice | 14 |
| 2.2.2. Modes of Operation | 17 |
| 2.3. Routing | 18 |
| 2.4. Clocking Structure | 18 |
| 2.5. sysCLOCK PLL | 18 |
| 2.6. Clock Distribution Network | 19 |
| 2.7. Primary Clocks | 20 |
| 2.8. Dynamic Clock Control | 20 |
| 2.9. Dynamic Clock Select | 21 |
| 2.10. Edge Clock | 21 |
| 2.11. Clock Dividers | 22 |
| 2.12. DDRDLL | 23 |
| 2.13. sysMEM Memory | 24 |
| 2.13.1. sysMEM Memory Block | 24 |
| 2.13.2. Bus Size Matching | 25 |
| 2.13.3. RAM Initialization and ROM Operation | 25 |
| 2.13.4. Memory Cascading | 25 |
| 2.13.5. Single, Dual and Pseudo-Dual Port Modes | 25 |
| 2.13.6. Memory Core Reset | 26 |
| 2.14. sysDSP™ Slice | 26 |
| 2.14.1. sysDSP Slice Approach Compared to General DSP | 26 |
| 2.15. ECP5/ECP5-5G sysDSP Slice Architecture Features | 27 |
| 2.16. Programmable I/O Cells | 31 |
| 2.17. PIO | 33 |
| 2.17.1. Input Register Block | 33 |
| 2.17.2. Output Register Block | 34 |
| 2.18. Tristate Register Block | 35 |
| 2.19. DDR Memory Support | 36 |
| 2.19.1. DQS Grouping for DDR Memory | 36 |
| 2.19.2. DLL Calibrated DQS Delay and Control Block (DQSBUF) | 37 |
| 2.20. sysI/O Buffer | 39 |
| 2.20.1. sysI/O Buffer Banks | 39 |
| 2.20.2. Typical sysI/O I/O Behavior during Power-up | 40 |
| 2.20.3. Supported sysI/O Standards | 40 |
| 2.20.4. On-Chip Programmable Termination | 41 |
| 2.20.5. Hot Socketing | 41 |
| 2.21. SERDES and Physical Coding Sublayer | 42 |
| 2.21.1. SERDES Block | 44 |
| 2.21.2. PCS | 44 |
| 2.21.3. SERDES Client Interface Bus | 45 |
| 2.22. Flexible Dual SERDES Architecture | 45 |
| 2.23. IEEE 1149.1-Compliant Boundary Scan Testability | 45 |
| 2.24. Device Configuration | 46 |
| 2.24.1. Enhanced Configuration Options | 46 |
| 2.24.2. Single Event Upset (SEU) Support | 46 |
| 2.24.3. On-Chip Oscillator | 47 |

| | | |
|---------|---|----|
| 2.25. | Density Shifting | 47 |
| 3. | DC and Switching Characteristics..... | 48 |
| 3.1. | Absolute Maximum Ratings | 48 |
| 3.2. | Recommended Operating Conditions | 48 |
| 3.3. | Power Supply Ramp Rates..... | 49 |
| 3.4. | Power-On-Reset Voltage Levels | 49 |
| 3.5. | Power up Sequence..... | 49 |
| 3.6. | Hot Socketing Specifications | 49 |
| 3.7. | Hot Socketing Requirements..... | 50 |
| 3.8. | ESD Performance..... | 50 |
| 3.9. | DC Electrical Characteristics | 50 |
| 3.10. | ECP5/ECP5-5G Supply Current (Standby)..... | 51 |
| 3.11. | SERDES Power Supply Requirements | 52 |
| 3.12. | sysI/O Recommended Operating Conditions | 54 |
| 3.13. | sysI/O Single-Ended DC Electrical Characteristics | 55 |
| 3.14. | sysI/O Differential Electrical Characteristics | 56 |
| 3.14.1. | LVDS..... | 56 |
| 3.14.2. | SSTLD | 56 |
| 3.14.3. | LVC MOS33D..... | 56 |
| 3.14.4. | LVDS25E..... | 57 |
| 3.14.5. | BLVDS25..... | 58 |
| 3.14.6. | LVPECL33 | 59 |
| 3.14.7. | MLVDS25 | 60 |
| 3.14.8. | SLVS | 61 |
| 3.15. | Typical Building Block Function Performance | 62 |
| 3.16. | Derating Timing Tables..... | 63 |
| 3.17. | ECP5/ECP5-5G Maximum I/O Buffer Speed | 64 |
| 3.18. | ECP5/ECP5-5G External Switching Characteristics | 65 |
| 3.19. | sysCLOCK PLL Timing | 72 |
| 3.20. | SERDES High-Speed Data Transmitter..... | 73 |
| 3.21. | SERDES/PCS Block Latency | 74 |
| 3.22. | SERDES High-Speed Data Receiver | 75 |
| 3.23. | Input Data Jitter Tolerance..... | 75 |
| 3.24. | SERDES External Reference Clock..... | 76 |
| 3.25. | PCI Express Electrical and Timing Characteristics..... | 77 |
| 3.25.1. | PCIe (2.5 Gb/s) AC and DC Characteristics..... | 77 |
| 3.25.2. | PCIe (5 Gb/s) – Preliminary AC and DC Characteristics | 78 |
| 3.26. | CPRI LV2 E.48 Electrical and Timing Characteristics – Preliminary..... | 80 |
| 3.27. | XAUI/CPRI LV E.30 Electrical and Timing Characteristics | 81 |
| 3.27.1. | AC and DC Characteristics | 81 |
| 3.28. | CPRI LV E.24 Electrical and Timing Characteristics..... | 81 |
| 3.28.1. | AC and DC Characteristics | 81 |
| 3.29. | Gigabit Ethernet/SGMII/CPRI LV E.12 Electrical and Timing Characteristics | 82 |
| 3.29.1. | AC and DC Characteristics | 82 |
| 3.30. | SMPTE SD/HD-SDI/3G-SDI (Serial Digital Interface) Electrical and Timing Characteristics | 83 |
| 3.30.1. | AC and DC Characteristics | 83 |
| 3.31. | ECP5/ECP5-5G sysCONFIG Port Timing Specifications | 84 |
| 3.32. | JTAG Port Timing Specifications | 89 |
| 3.33. | Switching Test Conditions | 90 |
| 4. | Pinout Information | 92 |
| 4.1. | Signal Descriptions | 92 |
| 4.2. | PICs and DDR Data (DQ) Pins Associated with the DDR Strobe (DQS) Pin | 95 |
| 4.3. | Pin Information Summary | 96 |
| 4.3.1. | LFESUM/LFESUM5G | 96 |

| | |
|---|-----|
| 4.3.2. LFE5U | 97 |
| 5. Ordering Information | 99 |
| 5.1. ECP5/ECP5-5G Part Number Description | 99 |
| 5.2. Ordering Part Numbers | 101 |
| 5.2.1. Commercial | 101 |
| 5.2.2. Industrial | 102 |
| Supplemental Information | 105 |
| For Further Information | 105 |
| Revision History | 106 |

Figures

| | |
|---|----|
| Figure 2.1. Simplified Block Diagram, LFE5UM/LFE5UM5G-85 Device (Top Level) | 13 |
| Figure 2.2. PFU Diagram | 14 |
| Figure 2.3. Slice Diagram | 15 |
| Figure 2.4. Connectivity Supporting LUT5, LUT6, LUT7, and LUT8 | 16 |
| Figure 2.5. General Purpose PLL Diagram..... | 18 |
| Figure 2.6. LFE5UM/LFE5UM5G-85 Clocking..... | 20 |
| Figure 2.7. DCS Waveforms | 21 |
| Figure 2.8. Edge Clock Sources per Bank | 22 |
| Figure 2.9. ECP5/ECP5-5G Clock Divider Sources | 22 |
| Figure 2.10. DDRDLL Functional Diagram | 23 |
| Figure 2.11. ECP5/ECP5-5G DLL Top Level View (For LFE-45 and LFE-85) | 24 |
| Figure 2.12. Memory Core Reset | 26 |
| Figure 2.13. Comparison of General DSP and ECP5/ECP5-5G Approaches | 27 |
| Figure 2.14. Simplified sysDSP Slice Block Diagram | 29 |
| Figure 2.15. Detailed sysDSP Slice Diagram | 30 |
| Figure 2.16. Group of Four Programmable I/O Cells on Left/Right Sides | 32 |
| Figure 2.17. Input Register Block for PIO on Top Side of the Device | 33 |
| Figure 2.18. Input Register Block for PIO on Left and Right Side of the Device..... | 33 |
| Figure 2.19. Output Register Block on Top Side | 34 |
| Figure 2.20. Output Register Block on Left and Right Sides | 35 |
| Figure 2.21. Tristate Register Block on Top Side..... | 35 |
| Figure 2.22. Tristate Register Block on Left and Right Sides..... | 36 |
| Figure 2.23. DQS Grouping on the Left and Right Edges | 37 |
| Figure 2.24. DQS Control and Delay Block (DQSBUF) | 38 |
| Figure 2.25. ECP5/ECP5-5G Device Family Banks | 39 |
| Figure 2.26. On-Chip Termination | 41 |
| Figure 2.27. SERDES/PCS Duals (LFE5UM/LFE5UM5G-85) | 43 |
| Figure 2.28. Simplified Channel Block Diagram for SERDES/PCS Block | 44 |
| Figure 3.1. LVDS25E Output Termination Example | 57 |
| Figure 3.2. BLVDS25 Multi-point Output Example..... | 58 |
| Figure 3.3. Differential LVPECL33 | 59 |
| Figure 3.4. MLVDS25 (Multipoint Low Voltage Differential Signaling) | 60 |
| Figure 3.5. SLVS Interface | 61 |
| Figure 3.6. Receiver RX.CLK.Centered Waveforms | 69 |
| Figure 3.7. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms..... | 69 |
| Figure 3.8. Transmit TX.CLK.Centered and DDR Memory Output Waveforms..... | 69 |
| Figure 3.9. Transmit TX.CLK.Aligned Waveforms..... | 70 |
| Figure 3.10. DDRX71 Video Timing Waveforms..... | 70 |
| Figure 3.11. Receiver DDRX71_RX Waveforms..... | 71 |
| Figure 3.12. Transmitter DDRX71_TX Waveforms..... | 71 |
| Figure 3.13. Transmitter and Receiver Latency Block Diagram | 74 |
| Figure 3.14. SERDES External Reference Clock Waveforms..... | 76 |
| Figure 3.15. sysCONFIG Parallel Port Read Cycle..... | 85 |
| Figure 3.16. sysCONFIG Parallel Port Write Cycle..... | 86 |
| Figure 3.17. sysCONFIG Slave Serial Port Timing | 86 |
| Figure 3.18. Power-On-Reset (POR) Timing | 87 |
| Figure 3.19. sysCONFIG Port Timing | 87 |
| Figure 3.20. Configuration from PROGRAMN Timing | 88 |
| Figure 3.21. Wake-Up Timing | 88 |
| Figure 3.22. Master SPI Configuration Waveforms | 89 |
| Figure 3.23. JTAG Port Timing Waveforms | 90 |
| Figure 3.24. Output Test Load, LVTTTL and LVCMOS Standards | 90 |

Tables

| | |
|---|----|
| Table 1.1. ECP5 and ECP5-5G Family Selection Guide | 11 |
| Table 2.1. Resources and Modes Available per Slice | 14 |
| Table 2.2. Slice Signal Descriptions | 16 |
| Table 2.3. Number of Slices Required to Implement Distributed RAM | 17 |
| Table 2.4. PLL Blocks Signal Descriptions | 19 |
| Table 2.5. DDRDLL Ports List | 23 |
| Table 2.6. sysMEM Block Configurations | 25 |
| Table 2.7. Maximum Number of Elements in a Slice | 31 |
| Table 2.8. Input Block Port Description | 34 |
| Table 2.9. Output Block Port Description | 35 |
| Table 2.10. Tristate Block Port Description | 36 |
| Table 2.11. DQSBUF Port list description | 38 |
| Table 2.12. On-Chip Termination Options for Input Modes | 41 |
| Table 2.13. LFE5UM/LFE5UM5G SERDES Standard Support | 43 |
| Table 2.14. Available SERDES Duals per LFE5UM/LFE5UM5G Devices | 44 |
| Table 2.15. LFE5UM/LFE5UM5G Mixed Protocol Support | 45 |
| Table 2.16. Selectable Master Clock (MCLK) Frequencies During Configuration (Nominal) | 47 |
| Table 3.1. Absolute Maximum Ratings | 48 |
| Table 3.2. Recommended Operating Conditions | 48 |
| Table 3.3. Power Supply Ramp Rates | 49 |
| Table 3.4. Power-On-Reset Voltage Levels | 49 |
| Table 3.5. Hot Socketing Specifications | 49 |
| Table 3.6. Hot Socketing Requirements | 50 |
| Table 3.7. DC Electrical Characteristics | 50 |
| Table 3.8. ECP5/ECP5-5G Supply Current (Standby) | 51 |
| Table 3.9. ECP5 | 52 |
| Table 3.10. ECP5-5G | 53 |
| Table 3.11. sysI/O Recommended Operating Conditions | 54 |
| Table 3.12. LVDS | 56 |
| Table 3.13. LVDS25E DC Conditions | 57 |
| Table 3.14. BLVDS25 DC Conditions | 58 |
| Table 3.15. LVPECL33 DC Conditions | 59 |
| Table 3.16. MLVDS25 DC Conditions | 60 |
| Table 3.17. Input to SLVS | 61 |
| Table 3.18. Pin-to-Pin Performance | 62 |
| Table 3.19. Register-to-Register Performance | 63 |
| Table 3.20. ECP5/ECP5-5G Maximum I/O Buffer Speed | 64 |
| Table 3.21. ECP5/ECP5-5G External Switching Characteristics | 65 |
| Table 3.22. sysCLOCK PLL Timing | 72 |
| Table 3.23. Serial Output Timing and Levels | 73 |
| Table 3.24. Channel Output Jitter | 73 |
| Table 3.25. SERDES/PCS Latency Breakdown | 74 |
| Table 3.26. Serial Input Data Specifications | 75 |
| Table 3.27. Receiver Total Jitter Tolerance Specification | 75 |
| Table 3.28. External Reference Clock Specification (refclkp/refclkn) | 76 |
| Table 3.29. PCIe (2.5 Gb/s) | 77 |
| Table 3.30. PCIe (5 Gb/s) | 78 |
| Table 3.31. CPRI LV2 E.48 Electrical and Timing Characteristics | 80 |
| Table 3.32. Transmit | 81 |
| Table 3.33. Receive and Jitter Tolerance | 81 |
| Table 3.34. Transmit | 81 |

| | |
|---|----|
| Table 3.35. Receive and Jitter Tolerance | 82 |
| Table 3.36. Transmit | 82 |
| Table 3.37. Receive and Jitter Tolerance | 82 |
| Table 3.38. Transmit | 83 |
| Table 3.39. Receive | 83 |
| Table 3.40. Reference Clock | 83 |
| Table 3.41. ECP5/ECP5-5G sysCONFIG Port Timing Specifications | 84 |
| Table 3.42. JTAG Port Timing Specifications | 89 |
| Table 3.43. Test Fixture Required Components, Non-Terminated Interfaces | 91 |

Acronyms in This Document

A list of acronyms used in this document.

| Acronym | Definition |
|---------|---|
| ALU | Arithmetic Logic Unit |
| BGA | Ball Grid Array |
| CDR | Clock and Data Recovery |
| CRC | Cycle Redundancy Code |
| DCC | Dynamic Clock Control |
| DCS | Dynamic Clock Select |
| DDR | Double Data Rate |
| DLL | Delay Locked Loops |
| DSP | Digital Signal Processing |
| EBR | Embedded Block RAM |
| ECLK | Edge Clock |
| FFT | Fast Fourier Transforms |
| FIFO | First In First Out |
| FIR | Finite Impulse Response |
| LVC MOS | Low-Voltage Complementary Metal Oxide Semiconductor |
| LVDS | Low-Voltage Differential Signaling |
| LVPECL | Low Voltage Positive Emitter Coupled Logic |
| LV TTL | Low Voltage Transistor-Transistor Logic |
| LUT | Look Up Table |
| MLVDS | Multipoint Low-Voltage Differential Signaling |
| NVCM | Non Volatile Configuration Memory |
| PCI | Peripheral Component Interconnect |
| PCS | Physical Coding Sublayer |
| PCLK | Primary Clock |
| PDPR | Pseudo Dual Port RAM |
| PFU | Programmable Functional Unit |
| PIC | Programmable I/O Cells |
| PLL | Phase Locked Loops |
| POR | Power On Reset |
| SCI | SERDES Client Interface |
| SEU | Single Event Upset |
| SLVS | Scalable Low-Voltage Signaling |
| SPI | Serial Peripheral Interface |
| SPR | Single Port RAM |
| SRAM | Static Random-Access Memory |
| TAP | Test Access Port |
| TDM | Time Division Multiplexing |

1. General Description

The ECP5/ECP5-5G family of FPGA devices is optimized to deliver high performance features such as an enhanced DSP architecture, high speed SERDES and high speed source synchronous interfaces in an economical FPGA fabric. This combination is achieved through advances in device architecture and the use of 40 nm technology making the devices suitable for high-volume, high-speed, low-cost applications.

The ECP5/ECP5-5G device family covers look-up-table (LUT) capacity to 84K logic elements and supports up to 365 user I/Os. The ECP5/ECP5-5G device family also offers up to 156 18 x 18 multipliers and a wide range of parallel I/O standards.

The ECP5/ECP5-5G FPGA fabric is optimized high performance with low power and low cost in mind. The ECP5/ ECP5-5G devices utilize reconfigurable SRAM logic technology and provide popular building blocks such as LUT-based logic, distributed and embedded memory, Phase Locked Loops (PLLs), Delay Locked Loops (DLLs), pre-engineered source synchronous I/O support, enhanced sysDSP slices and advanced configuration support, including encryption and dual-boot capabilities.

The pre-engineered source synchronous logic implemented in the ECP5/ECP5-5G device family supports a broad range of interface standards, including DDR2/3, LPDDR2/3, XGMII and 7:1 LVDS.

The ECP5/ECP5-5G device family also features high speed SERDES with dedicated Physical Coding Sublayer (PCS) functions. High jitter tolerance and low transmit jitter allow the SERDES plus PCS blocks to be configured to support an array of popular data protocols including PCI Express, Ethernet (XAUI, GbE, and SGMII) and CPRI. Transmit De-emphasis with pre- and post-cursors, and Receive Equalization settings make the SERDES suitable for transmission and reception over various forms of media.

The ECP5/ECP5-5G devices also provide flexible, reliable and secure configuration options, such as dual-boot capability, bit-stream encryption, and TransFR field upgrade features.

ECP5-5G family devices have made some enhancement in the SERDES compared to ECP5UM devices. These enhancements increase the performance of the SERDES to up to 5 Gb/s data rate.

The ECP5-5G family devices are pin-to-pin compatible with the ECP5UM devices. These allows a migration path for users to port designs from ECP5UM to ECP5-5G devices to get higher performance.

The Lattice Diamond™ design software allows large complex designs to be efficiently implemented using the ECP5/ECP5-5G FPGA family. Synthesis library support for ECP5/ECP5-5G devices is available for popular logic synthesis tools. The Diamond tools use the synthesis tool output along with the constraints from its floor planning tools to place and route the design in the ECP5/ECP5-5G device. The tools extract the timing from the routing and back-annotate it into the design for timing verification.

Lattice provides many pre-engineered IP (Intellectual Property) modules for the ECP5/ECP5-5G family. By using these configurable soft core IPs as standardized blocks, designers are free to concentrate on the unique aspects of their design, increasing their productivity.

1.1. Features

- Higher Logic Density for Increased System Integration
 - 12K to 84K LUTs
 - 197 to 365 user programmable I/Os
- Embedded SERDES
 - 270 Mb/s, up to 3.2 Gb/s, SERDES interface (ECP5)
 - 270 Mb/s, up to 5.0 Gb/s, SERDES interface (ECP5-5G)
 - Supports eDP in RDR (1.62 Gb/s) and HDR (2.7 Gb/s)
 - Up to four channels per device: PCI Express, Ethernet (1GbE, SGMII, XAUI), and CPRI
- sysDSP™
 - Fully cascadable slice architecture
 - 12 to 160 slices for high performance multiply and accumulate
 - Powerful 54-bit ALU operations
 - Time Division Multiplexing MAC Sharing
 - Rounding and truncation
 - Each slice supports
 - Half 36 x 36, two 18 x 18 or four 9 x 9 multipliers
 - Advanced 18 x 36 MAC and 18 x 18 Multiply-Multiply-Accumulate (MMAC) operations
- Flexible Memory Resources
 - Up to 3.744 Mb sysMEM™ Embedded Block RAM (EBR)
 - 194K to 669K bits distributed RAM
- sysCLOCK Analog PLLs and DLLs

- Four DLLs and four PLLs in LFE5-45 and LFE5-85; two DLLs and two PLLs in LFE5-25 and LFE5-12
- Pre-Engineered Source Synchronous I/O
 - DDR registers in I/O cells
 - Dedicated read/write levelling functionality
 - Dedicated gearing logic
 - Source synchronous standards support
 - ADC/DAC, 7:1 LVDS, XGMII
 - High Speed ADC/DAC devices
 - Dedicated DDR2/DDR3 and LPDDR2/LPDDR3 memory support with DQS logic, up to 800 Mb/s data-rate
- Programmable sysI/O™ Buffer Supports Wide Range of Interfaces
 - On-chip termination
 - LVTTTL and LVCMOS 33/25/18/15/12
 - SSTL 18/15 I, II
 - HSUL12
 - LVDS, Bus-LVDS, LVPECL, RSDS, MLVDS
- subLVDS and SLVS, MIPI D-PHY input interfaces
- Flexible Device Configuration
 - Shared bank for configuration I/Os
 - SPI boot flash interface
 - Dual-boot images supported
 - Slave SPI
 - TransFR™ I/O for simple field updates
- Single Event Upset (SEU) Mitigation Support
 - Soft Error Detect – Embedded hard macro
 - Soft Error Correction – Without stopping user operation
 - Soft Error Injection – Emulate SEU event to debug system error handling
- System Level Support
 - IEEE 1149.1 and IEEE 1532 compliant
 - Reveal Logic Analyzer
 - On-chip oscillator for initialization and general use
 - 1.1 V core power supply

Table 1.1. ECP5 and ECP5-5G Family Selection Guide

| Device | LFE5UM-25 LFE5UM5G-25 | LFE5UM-45 LFE5UM5G-45 | LFE5UM-85 LFE5UM5G-85 | LFE5U-12 | LFE5U-25 | LFE5U-45 | LFE5U-85 |
|--|--------------------------|--------------------------|--------------------------|----------|----------|----------|----------|
| LUTs (K) | 24 | 44 | 84 | 12 | 24 | 44 | 84 |
| sysMEM Blocks (18 Kb) | 56 | 108 | 208 | 32 | 56 | 108 | 208 |
| Embedded Memory (Kb) | 1,008 | 1944 | 3744 | 576 | 1,008 | 1944 | 3744 |
| Distributed RAM Bits (Kb) | 194 | 351 | 669 | 97 | 194 | 351 | 669 |
| 18 X 18 Multipliers | 28 | 72 | 156 | 28 | 28 | 72 | 156 |
| SERDES (Dual/Channels) | 1/2 | 2/4 | 2/4 | 0 | 0 | 0 | 0 |
| PLLs/DLLs | 2/2 | 4/4 | 4/4 | 2/2 | 2/2 | 4/4 | 4/4 |
| Packages and SERDES Channels / I/O Combinations | | | | | | | |
| 285 csfBGA (10 x 10 mm ² , 0.5 mm) | 2/118 | 2/118 | 2/118 | 0/118 | 0/118 | 0/118 | 0/118 |
| 381 caBGA (17 x 17 mm ²) | 2/197 | 4/203 | 4/205 | 0/197 | 0/197 | 0/203 | 0/205 |
| 554 caBGA (23 x 23 mm ²) | — | 4/245 | 4/259 | — | — | 0/245 | 0/259 |
| 756 caBGA (27 x 27 mm ²) | — | — | 4/365 | — | — | — | 0/365 |

2. Architecture

2.1. Overview

Each ECP5/ECP5-5G device contains an array of logic blocks surrounded by Programmable I/O Cells (PIC). Interspersed between the rows of logic blocks are rows of sysMEM™ Embedded Block RAM (EBR) and rows of sysDSP™ Digital Signal Processing slices, as shown in [Figure 2.1](#) on the next page. The LFE5-85 devices have three rows of DSP slices, the LFE5-45 devices have two rows and both LFE5-25 & LFE5-12 devices have one. In addition, the LFE5UM/LFE5UM5G devices contain SERDES Duals on the bottom of the device.

The Programmable Functional Unit (PFU) contains the building blocks for logic, arithmetic, RAM and ROM functions. The PFU block is optimized for flexibility, allowing complex designs to be implemented quickly and efficiently. Logic Blocks are arranged in a two-dimensional array.

The ECP5/ECP5-5G devices contain one or more rows of sysMEM EBR blocks. sysMEM EBRs are large, dedicated 18 Kb fast memory blocks. Each sysMEM block can be configured in a variety of depths and widths as RAM or ROM. In addition, ECP5/ECP5-5G devices contain up to three rows of DSP slices. Each DSP slice has multipliers and adder/accumulators, which are the building blocks for complex signal processing capabilities.

The ECP5/ECP5-5G devices feature up to four embedded 3.2 Gb/s SERDES (Serializer / Deserializer) channels. Each SERDES channel contains independent 8b/10b encoding / decoding, polarity adjust and elastic buffer logic. Each group of two SERDES channels, along with its Physical Coding Sublayer (PCS) block, creates a dual DCU (Dual Channel Unit). The functionality of the SERDES/PCS duals can be controlled by SRAM cell settings during device configuration or by registers that are addressable during device operation. The registers in every dual can be programmed via the SERDES Client Interface (SCI). These DCUs (up to two) are located at the bottom of the devices.


Each PIC block encompasses two PIOs (PIO pairs) with their respective sysI/O buffers. The sysI/O buffers of the ECP5/ECP5-5G devices are arranged in seven banks (eight banks for LFE5-85 devices in caBGA756 and caBGA554 packages), allowing the implementation of a wide variety of I/O standards. One of these banks (Bank 8) is shared with the programming interfaces. 50% of the PIO pairs on the left and right edges of the device can be configured as LVDS transmit pairs, and all pairs on left and right can be configured as LVDS receive pairs. The PIC logic in the left and right banks also includes pre-engineered support to aid in the implementation of high speed source synchronous standards such as XGMII, 7:1 LVDS, along with memory interfaces including DDR3 and LPDDR3.

The ECP5/ECP5-5G registers in PFU and sysI/O can be configured to be SET or RESET. After power up and the device is configured, it enters into user mode with these registers SET/RESET according to the configuration setting, allowing the device entering to a known state for predictable system function.

Other blocks provided include PLLs, DLLs and configuration functions. The ECP5/ECP5-5G architecture provides up to four Delay Locked Loops (DLLs) and up to four Phase Locked Loops (PLLs). The PLL and DLL blocks are located at the corners of each device.

The configuration block that supports features such as configuration bit-stream decryption, transparent updates and dual-boot support is located at the bottom of each device, to the left of the SERDES blocks. Every device in the ECP5/ECP5-5G family supports a sysCONFIG™ ports located in that same corner, powered by Vccio8, allowing for serial or parallel device configuration.

In addition, every device in the family has a JTAG port. This family also provides an on-chip oscillator and soft error detect capability. The ECP5/ECP5-5G devices use 1.1 V as their core voltage.

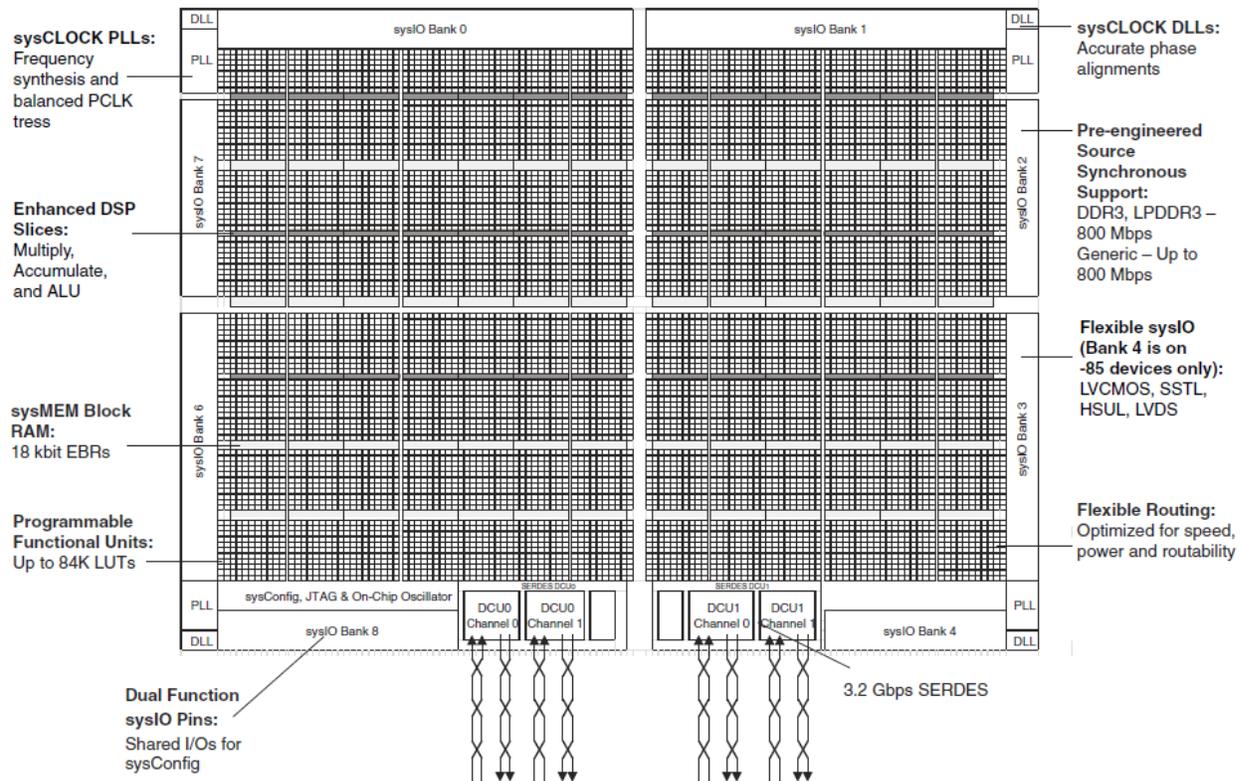

Note: There is no Bank 4 in -25 and -45 devices.
There are no PLL and DLL on the top corners in -25 devices.

Figure 2.1. Simplified Block Diagram, LFE5UM/LFE5UM5G-85 Device (Top Level)

2.2. PFU Blocks

The core of the ECP5/ECP5-5G device consists of PFU blocks. Each PFU block consists of four interconnected slices numbered 0-3 as shown in Figure 2.2. Each slice contains two LUTs. All the interconnections to and from PFU blocks are from routing. There are 50 inputs and 23 outputs associated with each PFU block.

The PFU block can be used in Distributed RAM or ROM function, or used to perform Logic, Arithmetic, or ROM functions. Table 2.1 shows the functions each slice can perform in either mode.

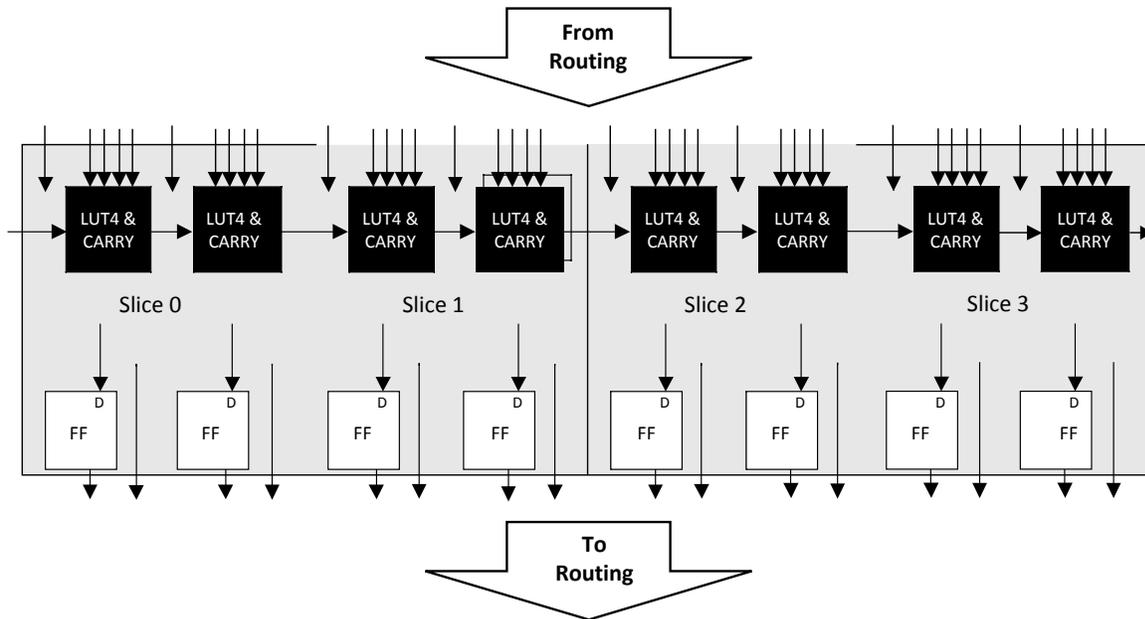


Figure 2.2. PFU Diagram

2.2.1. Slice


Each slice contains two LUT4s feeding two registers. In Distributed SRAM mode, Slice 0 through Slice 2 are configured as distributed memory, and Slice 3 is used as Logic or ROM. Table 2.1 shows the capability of the slices along with the operation modes they enable. In addition, each PFU contains logic that allows the LUTs to be combined to perform functions such as LUT5, LUT6, LUT7 and LUT8. There is control logic to perform set/reset functions (programmable as synchronous/ asynchronous), clock select, chip-select and wider RAM/ROM functions.

Table 2.1. Resources and Modes Available per Slice

| Slice | PFU (Used in Distributed SRAM) | | PFU (Not used as Distributed SRAM) | |
|---------|--------------------------------|--------------------|------------------------------------|--------------------|
| | Resources | Modes | Resources | Modes |
| Slice 0 | 2 LUT4s and 2 Registers | RAM | 2 LUT4s and 2 Registers | Logic, Ripple, ROM |
| Slice 1 | 2 LUT4s and 2 Registers | RAM | 2 LUT4s and 2 Registers | Logic, Ripple, ROM |
| Slice 2 | 2 LUT4s and 2 Registers | RAM | 2 LUT4s and 2 Registers | Logic, Ripple, ROM |
| Slice 3 | 2 LUT4s and 2 Registers | Logic, Ripple, ROM | 2 LUT4s and 2 Registers | Logic, Ripple, ROM |

Figure 2.3 shows an overview of the internal logic of the slice. The registers in the slice can be configured for positive/negative and edge triggered or level sensitive clocks.

Each slice has 14 input signals: 13 signals from routing and one from the carry-chain (from the adjacent slice or PFU). There are five outputs: four to routing and one to carry-chain (to the adjacent PFU). There are two inter slice/ PFU output signals that are used to support wider LUT functions, such as LUT6, LUT7 and LUT8. Table 2.2 and Figure 2.3 list the signals associated with all the slices. Figure 2.4 on page 16 shows the connectivity of the inter-slice/PFU signals that support LUT5, LUT6, LUT7 and LUT8.

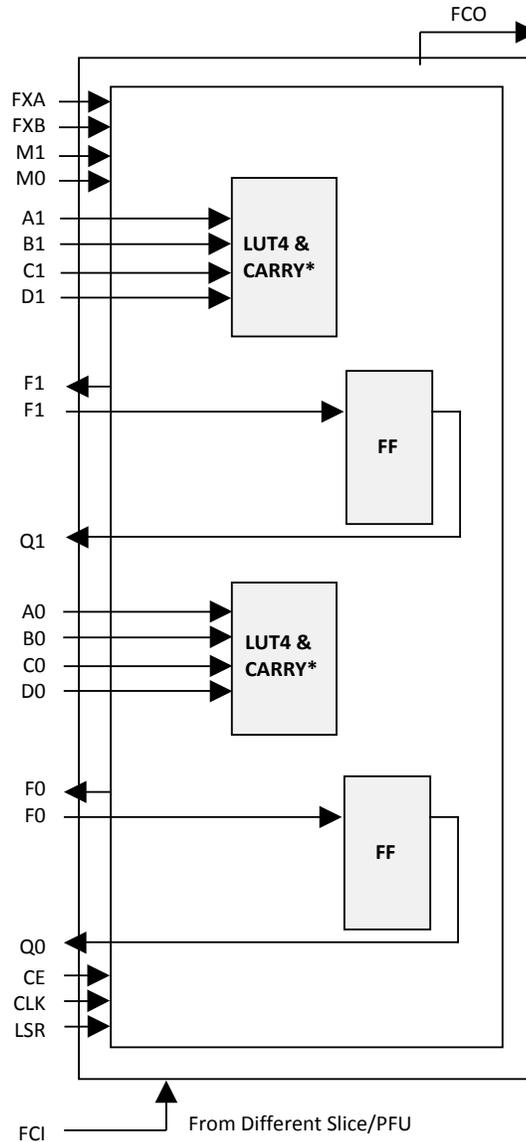

Notes: For Slices 0 and 1, memory control signals are generated from Slice 2 as follows:
WCK is CLK
WRE is from LSR
DI[3:2] for Slice 1 and DI[1:0] for Slice 0 data from Slice 2
WAD [A:D] is a 4-bit address from slice 2 LUT input

Figure 2.3. Slice Diagram

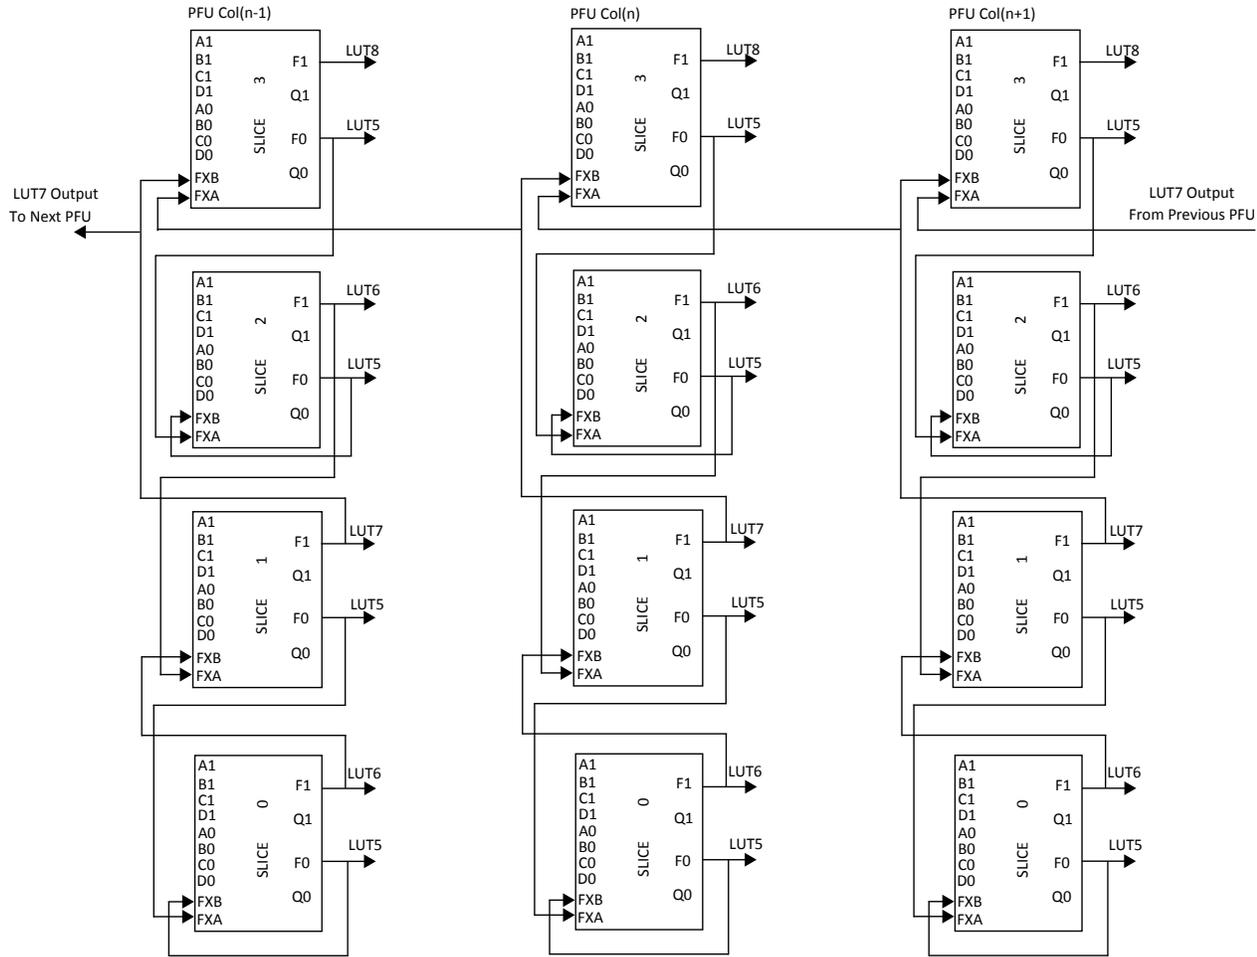


Figure 2.4. Connectivity Supporting LUT5, LUT6, LUT7, and LUT8

Table 2.2. Slice Signal Descriptions

| Function | Type | Signal Names | Description |
|----------|--------------------|----------------|--|
| Input | Data signal | A0, B0, C0, D0 | Inputs to LUT4 |
| Input | Data signal | A1, B1, C1, D1 | Inputs to LUT4 |
| Input | Multi-purpose | M0 | Multipurpose Input |
| Input | Multi-purpose | M1 | Multipurpose Input |
| Input | Control signal | CE | Clock Enable |
| Input | Control signal | LSR | Local Set/Reset |
| Input | Control signal | CLK | System Clock |
| Input | Inter-PFU signal | FCI | Fast Carry-in ¹ |
| Input | Inter-slice signal | FXA | Intermediate signal to generate LUT6, LUT7 and LUT8 ² |
| Input | Inter-slice signal | FXB | Intermediate signal to generate LUT6, LUT7 and LUT8 ² |
| Output | Data signals | F0, F1 | LUT4 output register bypass signals |
| Output | Data signals | Q0, Q1 | Register outputs |
| Output | Inter-PFU signal | FCO | Fast carry chain output ¹ |

Notes:

1. See Figure 2.3 on the previous page for connection details.
2. Requires two adjacent PFUs.

2.2.2. Modes of Operation

Slices 0-2 have up to four potential modes of operation: Logic, Ripple, RAM and ROM. Slice 3 is not needed for RAM mode, it can be used in Logic, Ripple, or ROM modes.

Logic Mode

In this mode, the LUTs in each slice are configured as 4-input combinatorial lookup tables. A LUT4 can have 16 possible input combinations. Any four input logic functions can be generated by programming this lookup table. Since there are two LUT4s per slice, a LUT5 can be constructed within one slice. Larger look-up tables such as LUT6, LUT7 and LUT8 can be constructed by concatenating other slices. Note that LUT8 requires more than four slices.

Ripple Mode

Ripple mode supports the efficient implementation of small arithmetic functions. In ripple mode, the following functions can be implemented by each slice:

- Addition 2-bit
- Subtraction 2-bit
- Add/Subtract 2-bit using dynamic control
- Up counter 2-bit
- Down counter 2-bit
- Up/Down counter with asynchronous clear
- Up/Down counter with preload (sync)
- Ripple mode multiplier building block
- Multiplier support
- Comparator functions of A and B inputs
 - A greater-than-or-equal-to B
 - A not-equal-to B
 - A less-than-or-equal-to B

Ripple Mode includes an optional configuration that performs arithmetic using fast carry chain methods. In this configuration (also referred to as CCU2 mode) two additional signals, Carry Generate and Carry Propagate, are generated on a per slice basis to allow fast arithmetic functions to be constructed by concatenating Slices.

RAM Mode

In this mode, a 16x4-bit distributed single port RAM (SPR) can be constructed in one PFU using each LUT block in Slice 0 and Slice 1 as a 16 x 2-bit memory in each slice. Slice 2 is used to provide memory address and control signals. A 16 x 2-bit pseudo dual port RAM (PDPR) memory is created in one PFU by using one Slice as the read-write port and the other companion slice as the read-only port. The slice with the read-write port updates the SRAM data contents in both slices at the same write cycle.

ECP5/ECP5-5G devices support distributed memory initialization.

The Lattice design tools support the creation of a variety of different size memories. Where appropriate, the software will construct these using distributed memory primitives that represent the capabilities of the PFU. [Table 2.3](#) lists the number of slices required to implement different distributed RAM primitives. For more information about using RAM in ECP5/ECP5-5G devices, refer to TN1264, [ECP5 and ECP5-5G Memory Usage Guide](#).

Table 2.3. Number of Slices Required to Implement Distributed RAM

| | SPR 16 X 4 | PDPR 16 X 4 |
|------------------|------------|-------------|
| Number of slices | 3 | 6 |

Note: SPR = Single Port RAM, PDPR = Pseudo Dual Port RAM

ROM Mode

ROM mode uses the LUT logic; hence, Slices 0 through 3 can be used in ROM mode. Preloading is accomplished through the programming interface during PFU configuration.

For more information, refer to TN1264, [ECP5 and ECP5-5G Memory Usage Guide](#).

2.3. Routing

There are many resources provided in the ECP5/ECP5-5G devices to route signals individually or as busses with related control signals. The routing resources consist of switching circuitry, buffers and metal interconnect (routing) segments. The ECP5/ECP5-5G family has an enhanced routing architecture that produces a compact design. The Diamond design software tool suites take the output of the synthesis tool and places and routes the design.

2.4. Clocking Structure

ECP5/ECP5-5G clocking structure consists of clock synthesis blocks, sysCLOCK PLL; balanced clock trees, PCLK and ECLK trees; and efficient clock logic modules, CLOCK DIVIDER and Dynamic Clock Select (DCS), Dynamic Clock Control (DCC), and DLL. Each of these functions is described as follow.

2.5. sysCLOCK PLL

The sysCLOCK PLLs provide the ability to synthesize clock frequencies. The devices in the ECP5/ECP5-5G family support two to four full-featured General Purpose PLLs. The sysCLOCK PLLs provide the ability to synthesize clock frequencies.

The architecture of the PLL is shown in [Figure 2.5](#). A description of the PLL functionality follows.

CLKI is the reference frequency input to the PLL and its source can come from two different external CLK inputs or from internal routing. A non-glitchless 2-to-1 input multiplexer is provided to dynamically select between two different external reference clock sources. The CLKI input feeds into the input Clock Divider block.

CLKFB is the feedback signal to the PLL which can come from internal feedback path, routing or an external I/O pin. The feedback divider is used to multiply the reference frequency and thus synthesize a higher frequency clock output.

The PLL has four clock outputs CLKOP, CLKOS, CLKOS2 and CLKOS3. Each output has its own output divider, thus allowing the PLL to generate different frequencies for each output. The output dividers can have a value from 1 to 128. The CLKOP, CLKOS, CLKOS2, and CLKOS3 outputs can all be used to drive the primary clock network. Only CLKOP and CLKOS outputs can go to the edge clock network.

The setup and hold times of the device can be improved by programming a phase shift into the CLKOS, CLKOS2, and CLKOS3 output clocks which will advance or delay the output clock with reference to the CLKOP output clock. This phase shift can be either programmed during configuration or can be adjusted dynamically using the PHASESEL, PHASEDIR, PHASESTEP, and PHASELOADREG ports.

The LOCK signal is asserted when the PLL determines it has achieved lock and de-asserted if a loss of lock is detected.

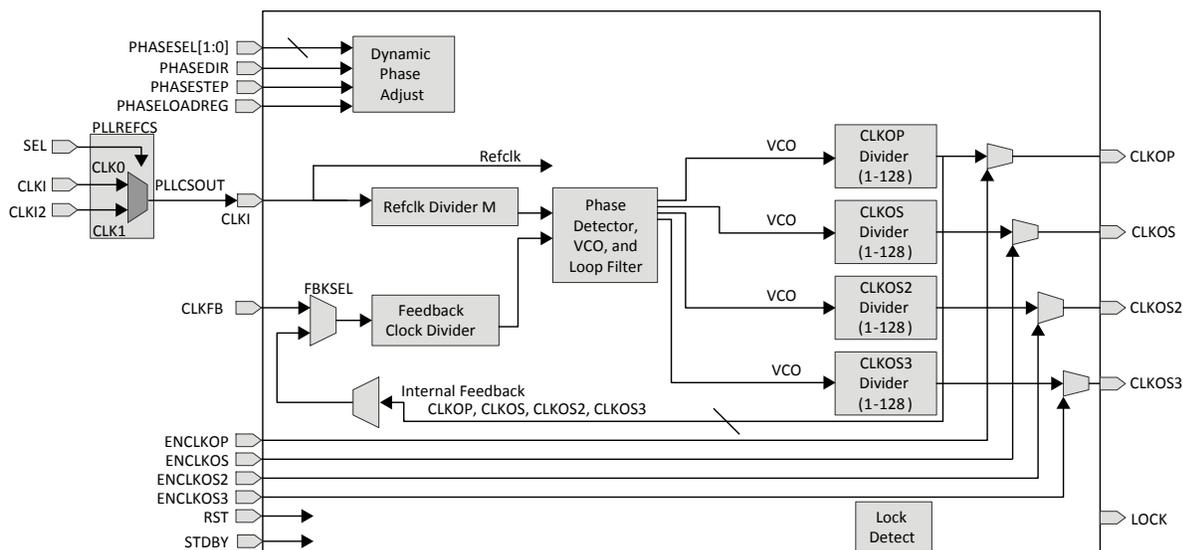


Figure 2.5. General Purpose PLL Diagram

Table 2.4 provides a description of the signals in the PLL blocks.

Table 2.4. PLL Blocks Signal Descriptions

| Signal | Type | Description |
|---------------|--------|---|
| CLKI | Input | Clock Input to PLL from external pin or routing |
| CLKI2 | Input | Muxed clock input to PLL |
| SEL | Input | Input Clock select, selecting from CLKI and CLKI2 inputs |
| CLKFB | Input | PLL Feedback Clock |
| PHASESEL[1:0] | Input | Select which output to be adjusted on Phase by PHASEDIR, PHASESTEP, PHASELODREG |
| PHASEDIR | Input | Dynamic Phase adjustment direction. |
| PHASESTEP | Input | Dynamic Phase adjustment step. |
| PHASELOADREG | Input | Load dynamic phase adjustment values into PLL. |
| CLKOP | Output | Primary PLL output clock (with phase shift adjustment) |
| CLKOS | Output | Secondary PLL output clock (with phase shift adjust) |
| CLKOS2 | Output | Secondary PLL output clock2 (with phase shift adjust) |
| CLKOS3 | Output | Secondary PLL output clock3 (with phase shift adjust) |
| LOCK | Output | PLL LOCK to CLKI, Asynchronous signal. Active high indicates PLL lock |
| STDBY | Input | Standby signal to power down the PLL |
| RST | Input | Resets the PLL |
| ENCLKOP | Input | Enable PLL output CLKOP |
| ENCLKOS | Input | Enable PLL output CLKOS |
| ENCLKOS2 | Input | Enable PLL output CLKOS2 |
| ENCLKOS3 | Input | Enable PLL output CLKOS3 |

For more details on the PLL you can refer to the TN1263, [ECP5 and ECP5-5G sysClock PLL/DLL Design and Usage Guide](#).

2.6. Clock Distribution Network

There are two main clock distribution networks for any member of the ECP5/ECP5-5G product family, namely Primary Clock (PCLK) and Edge Clock (ECLK). These clock networks have the clock sources come from many different sources, such as Clock Pins, PLL outputs, DLLDEL outputs, Clock divider outputs, SERDES/PCS clocks and some on chip generated clock signal. There are clock dividers (CLKDIV) blocks to provide the slower clock from these clock sources. ECP5/ECP5-5G also supports glitchless dynamic enable function (DCC) for the PCLK Clock to save dynamic power. There are also some logics to allow dynamic glitchless selection between two clocks for the PCLK network (DCS).

Overview of Clocking Network is shown in [Figure 2.6](#) on the next page, for LFE5UM/LFE5UM5G-85 device.

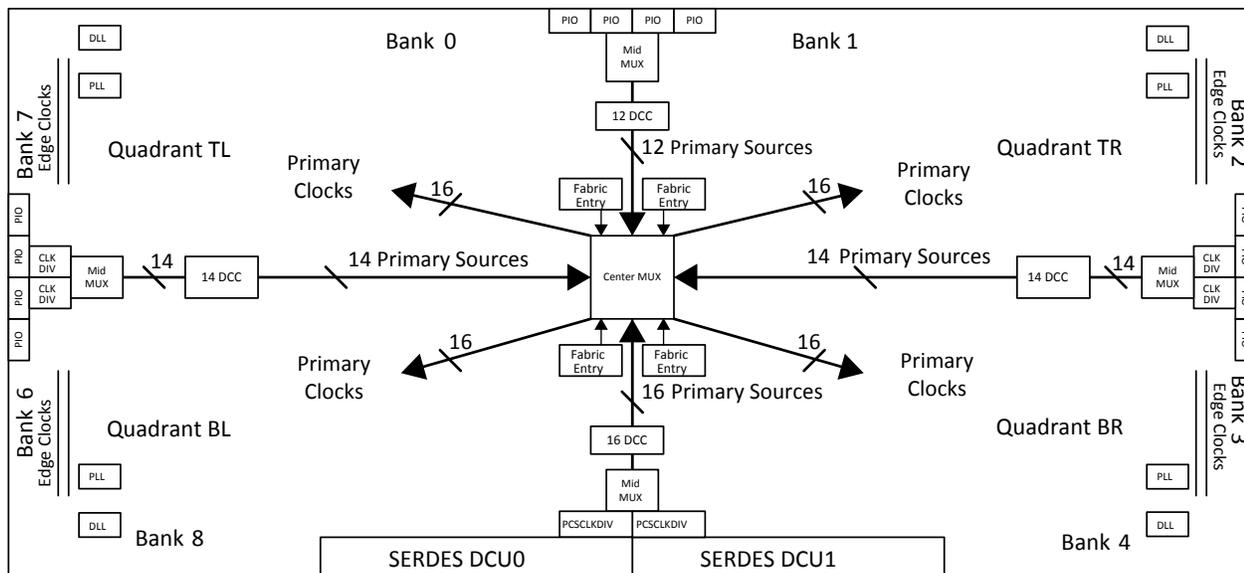


Figure 2.6. LFE5UM/LFE5UM5G-85 Clocking

2.7. Primary Clocks

The ECP5/ECP5-5G device family provides low-skew, high fanout clock distribution to all synchronous elements in the FPGA fabric through the Primary Clock Network.

The primary clock network is divided into four clocking quadrants: Top Left (TL), Bottom Left (BL), Top Right (TR), and Bottom Right (BR). Each of these quadrants has 16 clocks that can be distributed to the fabric in the quadrant.

The Lattice Diamond software can automatically route each clock to one of the four quadrants up to a maximum of 16 clocks per quadrant. The user can change how the clocks are routed by specifying a preference in the Lattice Diamond software to locate the clock to specific. The ECP5/ECP5-5G device provides the user with a maximum of 64 unique clock input sources that can be routed to the primary Clock network.

Primary clock sources are:

- Dedicated clock input pins
- PLL outputs
- CLKDIV outputs
- Internal FPGA fabric entries (with minimum general routing)
- SERDES/PCS/PCSDIV clocks
- OSC clock

These sources are routed to one of four clock switches called a Mid Mux. The outputs of the Mid MUX are routed to the center of the FPGA where another clock switch, called the Center MUX, is used to route the primary clock sources to primary clock distribution to the ECP5/ECP5-5G fabric. These routing muxes are shown in Figure 2.6. Since there is a maximum of 60 unique clock input sources to the clocking quadrants, there are potentially 64 unique clock domains that can be used in the ECP5/ECP5-5G Device. For more information about the primary clock tree and connections, refer to TN1263, [ECP5 and ECP5-5G sysClock PLL/DLL Design and Usage Guide](#).

2.8. Dynamic Clock Control

The Dynamic Clock Control (DCC), Quadrant Clock enable/disable feature allows internal logic control of the quadrant primary clock network. When a clock network is disabled, the clock signal is static and not toggle. All the logic fed by that clock will not toggle, reducing the overall power consumption of the device. The disable function will not create glitch and increase the clock latency to the primary clock network.

This DCC controls the clock sources from the Primary CLOCK MIDMUX before they are fed to the Primary Center MUXs that drive the quadrant clock network. For more information about the DCC, refer to TN1263, [ECP5 and ECP5-5G sysClock PLL/DLL Design and Usage Guide](#).

2.9. Dynamic Clock Select

The Dynamic Clock Select (DCS) is a smart multiplexer function available in the primary clock routing. It switches between two independent input clock sources. Depending on the operation modes, it switches between two (2) independent input clock sources either with or without any glitches. This is achieved regardless of when the select signal is toggled. Both input clocks must be running to achieve functioning glitch-less DCS output clock, but it is not required running clocks when used as non-glitch-less normal clock multiplexer.

There are two DCS blocks per device that are fed to all quadrants. The inputs to the DCS block come from all the output of MIDMUXs and Clock from CIB located at the center of the PLC array core. The output of the DCS is connected to one of the inputs of Primary Clock Center MUX.

[Figure 2.7](#) shows the timing waveforms of the default DCS operating mode. The DCS block can be programmed to other modes. For more information about the DCS, refer to TN1263, [ECP5 and ECP5-5G sysClock PLL/DLL Design and Usage Guide](#).

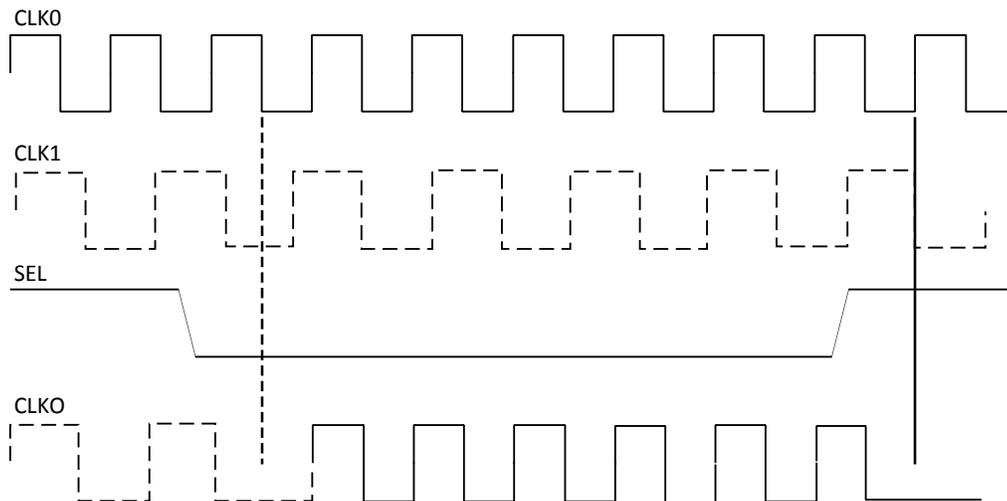


Figure 2.7. DCS Waveforms

2.10. Edge Clock

ECP5/ECP5-5G devices have a number of high-speed edge clocks that are intended for use with the PIOs in the implementation of high-speed interfaces. There are two ECLK networks per bank IO on the Left and Right sides of the devices.

Each Edge Clock can be sourced from the following:

- Dedicated Clock input pins (PCLK)
- DLLDEL output (Clock delayed by 90o)
- PLL outputs (CLKOP and CLKOS)
- ECLKBRIDGE
- Internal Nodes

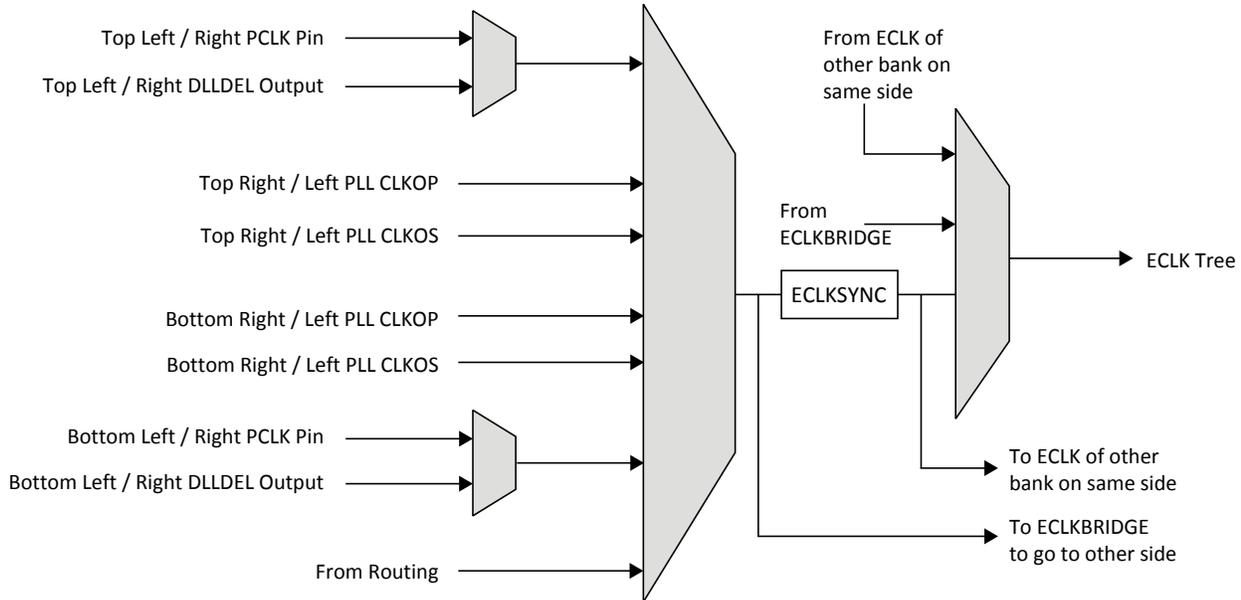


Figure 2.8. Edge Clock Sources per Bank

The edge clocks have low injection delay and low skew. They are used for DDR Memory or Generic DDR interfaces. For detailed information on Edge Clock connections, refer to TN1263, [ECP5 and ECP5-5G sysClock PLL/DLL Design and Usage Guide](#).

2.11. Clock Dividers

ECP5/ECP5-5G devices have two clock dividers, one on the left side and one on the right side of the device. These are intended to generate a slower-speed system clock from a high-speed edge clock. The block operates in a $\div 2$, $\div 3.5$ mode and maintains a known phase relationship between the divided down clock and the high-speed clock based on the release of its reset signal.

The clock dividers can be fed from selected PLL outputs, external primary clock pins multiplexed with the DDRDEL Slave Delay or from routing. The clock divider outputs serve as primary clock sources and feed into the clock distribution network. The Reset (RST) control signal resets input and asynchronously forces all outputs to low. The SLIP signal slips the outputs one cycle relative to the input clock. For further information on clock dividers, refer to TN1263, [ECP5 and ECP5-5G sysClock PLL/DLL Design and Usage Guide](#). Figure 2.9 shows the clock divider connections.

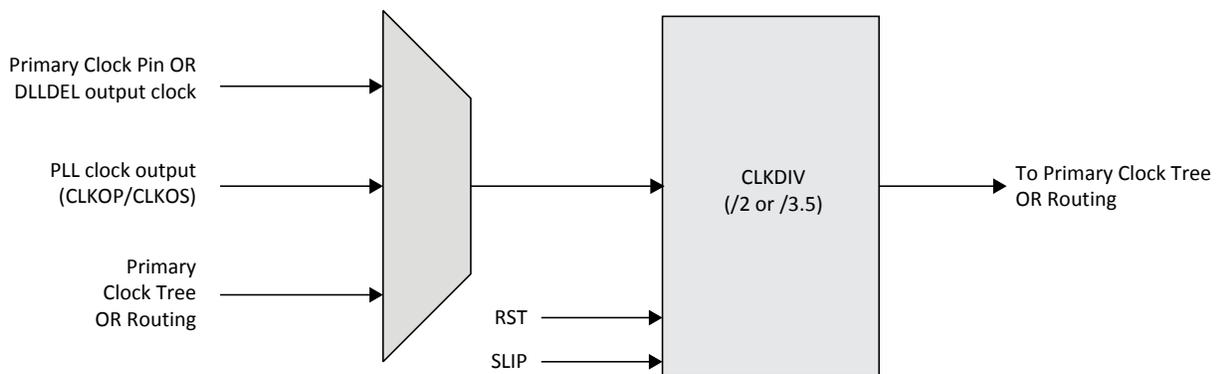


Figure 2.9. ECP5/ECP5-5G Clock Divider Sources

2.12. DDRDLL

Every DDRDLL (master DLL block) can generate phase shift code representing the amount of delay in a delay block that corresponding to 90 degree phase of the reference clock input. The reference clock can be either from PLL, or input pin. This code is used in the DQSBUF block that controls a set of DQS pin groups to interface with DDR memory (slave DLL). There are two DDRDLLs that supply two sets of codes (for two different reference clock frequencies) to each side of the I/Os (at each of the corners). The DQSBUF uses this code to controls the DQS input of the DDR memory to 90 degree shift to clock DQs at the center of the data eye for DDR memory interface.

The code is also sent to another slave DLL, DLLDEL, that takes a clock input, and generates a 90 degree shift clock output to drive the clocking structure. This is useful to interface edge-aligned Generic DDR, where 90 degree clocking needs to be created. [Figure 2.10](#) shows DDRDLL functional diagram.

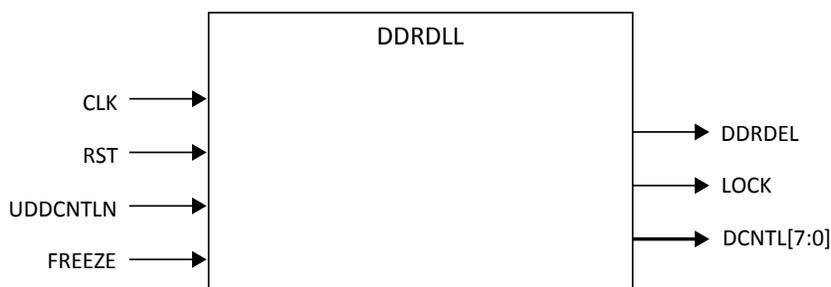


Figure 2.10. DDRDLL Functional Diagram

Table 2.5. DDRDLL Ports List

| Port Name | Type | Description |
|-------------|--------|---|
| CLK | Input | Reference clock input to the DDRDLL. Should run at the same frequency as the clock to the delayed. |
| RST | Input | Reset Input to the DDRDLL |
| UDDCNTLN | Input | Update Control to update the delay code. When low the delay code out the DDRDLL is updated. Should not be active during a read or a write cycle |
| FREEZE | Input | FREEZE goes high and, without a glitch, turns off the DLL internal clock and the ring oscillator output clock. When FREEZE goes low, it turns them back on. |
| DDRDEL | Output | The delay codes from the DDRDLL to be used in DQSBUF or DLLDEL |
| LOCK | Output | Lock output to indicate the DDRDLL has valid delay output |
| DCNTL [7:0] | Output | The delay codes from the DDRDLL available for the user IP. |

There are four identical DDRDLLs, one in each of the four corners in LFE5-85 and LFE5-45 devices, and two DDRDLLs in both LFE5-25 & LFE5-12 devices in the upper two corners. Each DDRDLL can generate delay code based on the reference frequency. The slave DLL (DQSBUF and DLLDEL) use the code to delay the signal, to create the phase shifted signal used for either DDR memory, or creating 90 degree shift clock. [Figure 2.11](#) on the next page shows the DDRDLL and the slave DLLs on the top level view.

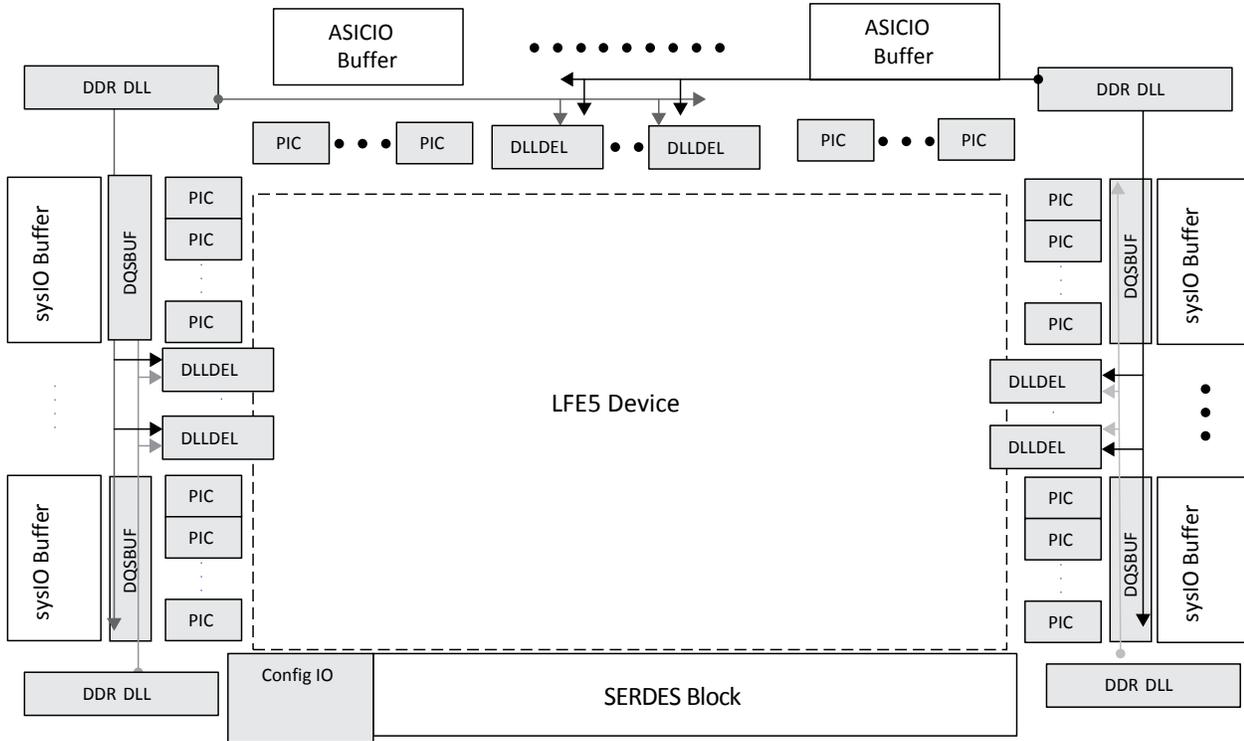


Figure 2.11. ECP5/ECP5-5G DLL Top Level View (For LFE-45 and LFE-85)

2.13. sysMEM Memory

ECP5/ECP5-5G devices contain a number of sysMEM Embedded Block RAM (EBR). The EBR consists of an 18 Kb RAM with memory core, dedicated input registers and output registers with separate clock and clock enable. Each EBR includes functionality to support true dual-port, pseudo dual-port, single-port RAM, ROM and FIFO buffers (via external PFUs).

2.13.1. sysMEM Memory Block

The sysMEM block can implement single port, dual port or pseudo dual port memories. Each block can be used in a variety of depths and widths as listed in [Table 2.6](#) on the next page. FIFOs can be implemented in sysMEM EBR blocks by implementing support logic with PFUs. The EBR block facilitates parity checking by supporting an optional parity bit for each data byte. EBR blocks provide byte-enable support for configurations with 18-bit and 36-bit data widths. For more information, refer to TN1264, [ECP5 and ECP5-5G Memory Usage Guide](#).

Table 2.6. sysMEM Block Configurations

| Memory Mode | Configurations |
|------------------|----------------|
| Single Port | 16,384 x 1 |
| | 8,192 x 2 |
| | 4,096 x 4 |
| | 2,048 x 9 |
| | 1,024 x 18 |
| | 512 x 36 |
| True Dual Port | 16,384 x 1 |
| | 8,192 x 2 |
| | 4,096 x 4 |
| | 2,048 x 9 |
| | 1,024 x 18 |
| | 512 x 36 |
| Pseudo Dual Port | 16,384 x 1 |
| | 8,192 x 2 |
| | 4,096 x 4 |
| | 2,048 x 9 |
| | 1,024 x 18 |
| | 512 x 36 |

2.13.2. Bus Size Matching

All of the multi-port memory modes support different widths on each of the ports. The RAM bits are mapped LSB word 0 to MSB word 0, LSB word 1 to MSB word 1, and so on. Although the word size and number of words for each port varies, this mapping scheme applies to each port.

2.13.3. RAM Initialization and ROM Operation

If desired, the contents of the RAM can be pre-loaded during device configuration. By preloading the RAM block during the chip configuration cycle and disabling the write controls, the sysMEM block can also be utilized as a ROM.

2.13.4. Memory Cascading

Larger and deeper blocks of RAM can be created using EBR sysMEM Blocks. Typically, the Lattice design tools cascade memory transparently, based on specific design inputs.

2.13.5. Single, Dual and Pseudo-Dual Port Modes

In all the sysMEM RAM modes the input data and address for the ports are registered at the input of the memory array. The output data of the memory is optionally registered at the output.

EBR memory supports the following forms of write behavior for single port or dual port operation:

- **Normal** – Data on the output appears only during a read cycle. During a write cycle, the data (at the current address) does not appear on the output. This mode is supported for all data widths.
- **Write Through** – A copy of the input data appears at the output of the same port during a write cycle. This mode is supported for all data widths.
- **Read-Before-Write** – When new data is written, the old content of the address appears at the output. This mode is supported for x9, x18, and x36 data widths.

2.13.6. Memory Core Reset

The memory array in the EBR utilizes latches at the A and B output ports. These latches can be reset asynchronously or synchronously. RSTA and RSTB are local signals, which reset the output latches associated with Port A and Port B, respectively. The Global Reset (GSRN) signal can reset both ports. The output data latches and associated resets for both ports are as shown in [Figure 2.12](#).

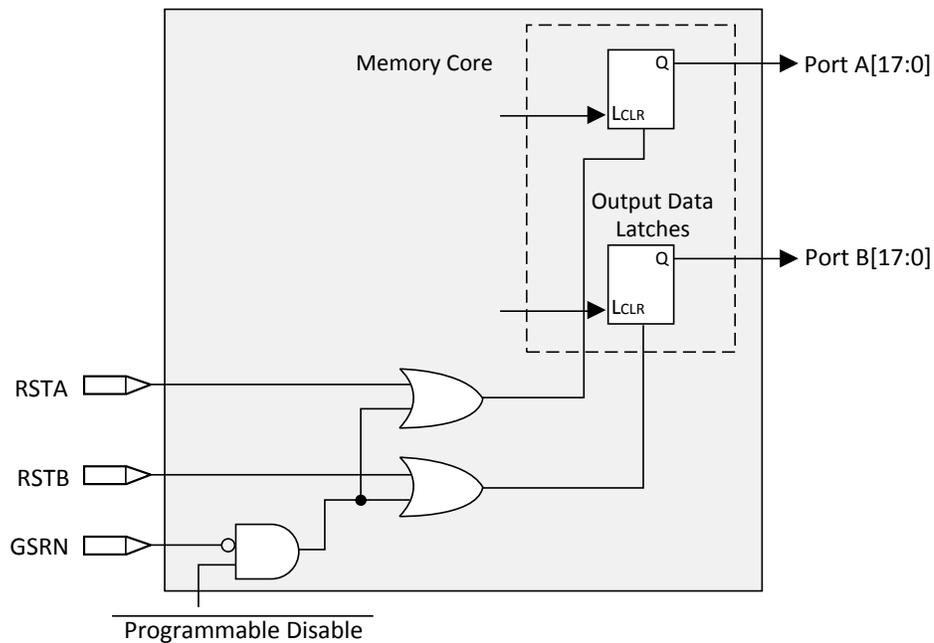


Figure 2.12. Memory Core Reset

For further information on the sysMEM EBR block, see the list of technical documentation in [Supplemental Information](#) section on page 105.

2.14. sysDSP™ Slice

The ECP5/ECP5-5G family provides an enhanced sysDSP architecture, making it ideally suited for low-cost, high-performance Digital Signal Processing (DSP) applications. Typical functions used in these applications are Finite Impulse Response (FIR) filters, Fast Fourier Transforms (FFT) functions, Correlators, Reed-Solomon/Turbo/Convolution encoders and decoders. These complex signal processing functions use similar building blocks such as multiply-adders and multiply-accumulators.

2.14.1. sysDSP Slice Approach Compared to General DSP

Conventional general-purpose DSP chips typically contain one to four (Multiply and Accumulate) MAC units with fixed data-width multipliers; this leads to limited parallelism and limited throughput. Their throughput is increased by higher clock speeds. In the ECP5/ECP5-5G device family, there are many DSP slices that can be used to support different data widths. This allows designers to use highly parallel implementations of DSP functions. Designers can optimize DSP performance vs. area by choosing appropriate levels of parallelism. [Figure 2.13](#) on the next page compares the fully serial implementation to the mixed parallel and serial implementation.

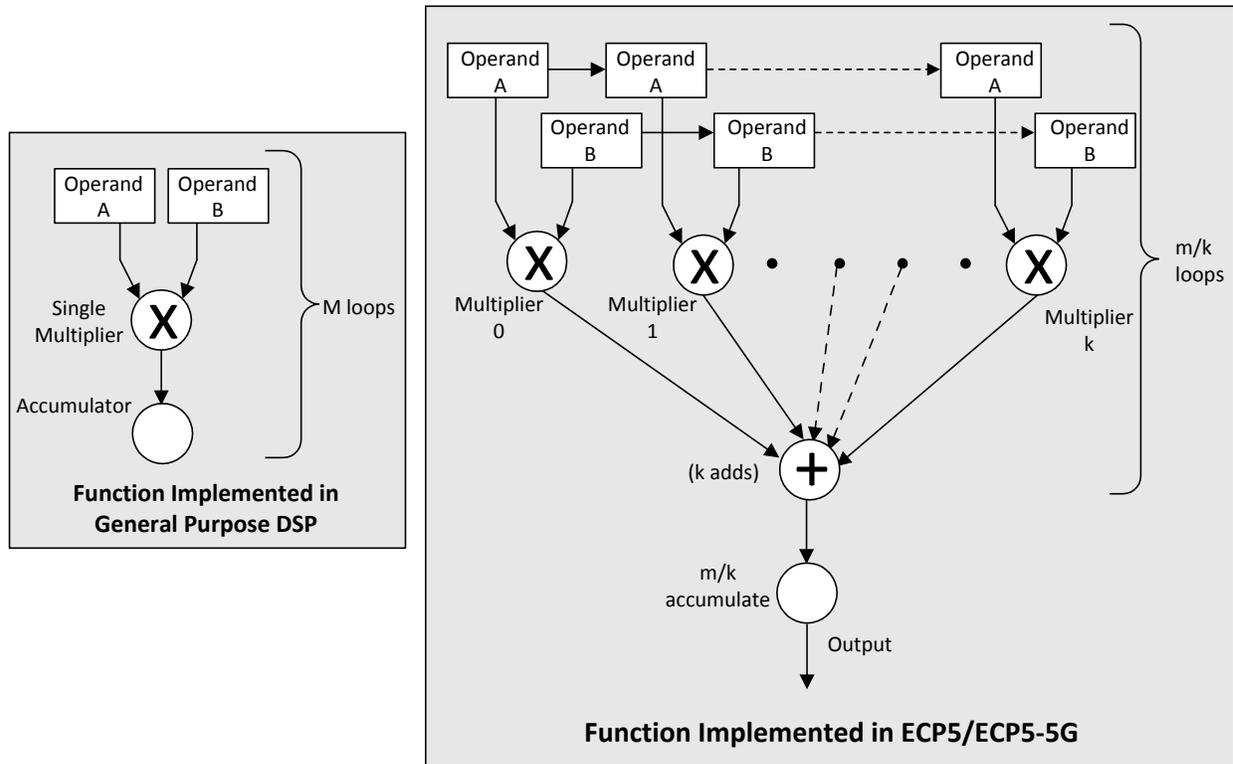


Figure 2.13. Comparison of General DSP and ECP5/ECP5-5G Approaches

2.15. ECP5/ECP5-5G sysDSP Slice Architecture Features

The ECP5/ECP5-5G sysDSP Slice has been significantly enhanced to provide functions needed for advanced processing applications. These enhancements provide improved flexibility and resource utilization.

The ECP5/ECP5-5G sysDSP Slice supports many functions that include the following:

- Fully double data rate support – Higher operation frequency (throughput of up to 370 Mb/s) is achieved by double input and output interfaces that enable twice the fabric operation throughput for most of the operation modes.
- Symmetry support. The primary target application is wireless. 1D Symmetry is useful for many applications that use FIR filters when their coefficients have symmetry or asymmetry characteristics. The main motivation for using 1D symmetry is cost/size optimization. The expected size reduction is up to 2x.
 - Odd mode – Filter with Odd number of taps
 - Even mode – Filter with Even number of taps
 - Two dimensional (2D) symmetry mode – supports 2D filters for mainly video applications
- Dual-multiplier architecture. Lower accumulator overhead to half and the latency to half compared to single multiplier architecture
- Fully cascadable DSP across slices. Support for symmetric, asymmetric and non-symmetric filters.
- Multiply (one 18x36, two 18x18 or four 9x9 Multiplies per Slice)
- Multiply (36x36 by cascading across two sysDSP slices)
- Multiply Accumulate (supports one 18x36 multiplier result accumulation or two 18x18 multiplier result accumulation)
- Two Multiplies feeding one Accumulate per cycle for increased processing with lower latency (two 18x18 Multiplies feed into an accumulator that can accumulate up to 52 bits)
- Pipeline registers
- 1D Symmetry support. The coefficients of FIR filters have symmetry or negative symmetry characteristics.
 - Odd mode – Filter with Odd number of taps
 - Even mode – Filter with Even number of taps

- 2D Symmetry support. The coefficients of 2D FIR filters have symmetry or negative symmetry characteristics.
 - 3*3 and 3*5 – Internal DSP Slice support
 - 5*5 and larger size 2D blocks – Semi internal DSP Slice support
- Flexible saturation and rounding options to satisfy a diverse set of applications situations
- Flexible cascading across DSP slices
 - Minimizes fabric use for common DSP and ALU functions
 - Enables implementation of FIR Filter or similar structures using dedicated sysDSP slice resources only
 - Provides matching pipeline registers
 - Can be configured to continue cascading from one row of sysDSP slices to another for longer cascade chains
- Flexible and Powerful Arithmetic Logic Unit (ALU) Supports:
 - Dynamically selectable ALU OPCODE
 - Ternary arithmetic (addition/subtraction of three inputs)
 - Bit-wise two-input logic operations (AND, OR, NAND, NOR, XOR and XNOR)
 - Eight flexible and programmable ALU flags that can be used for multiple pattern detection scenarios, such as, overflow, underflow and convergent rounding, etc.
 - Flexible cascading across slices to get larger functions
- RTL Synthesis friendly synchronous reset on all registers, while still supporting asynchronous reset for legacy users
- Dynamic MUX selection to allow Time Division Multiplexing (TDM) of resources for applications that require processor-like flexibility that enables different functions for each clock cycle

For most cases, as shown in [Figure 2.14](#) on the next page, the ECP5/ECP5-5G sysDSP slice is backwards-compatible with the LatticeECP2™ and LatticeECP3™ sysDSP block, such that, legacy applications can be targeted to the ECP5/ ECP5-5G sysDSP slice. [Figure 2.14](#) shows the diagram of sysDSP, and [Figure 2.15](#) shows the detailed diagram.

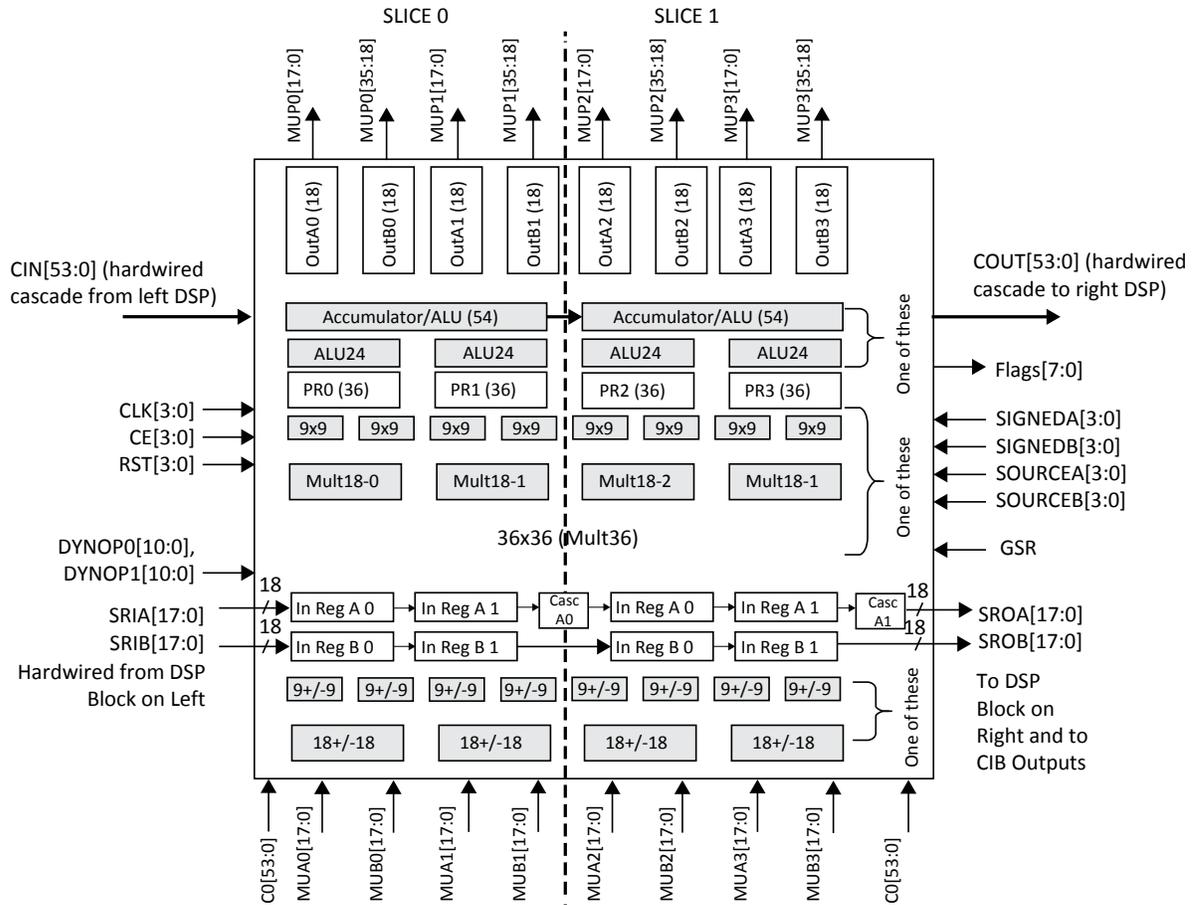


Figure 2.14. Simplified sysDSP Slice Block Diagram

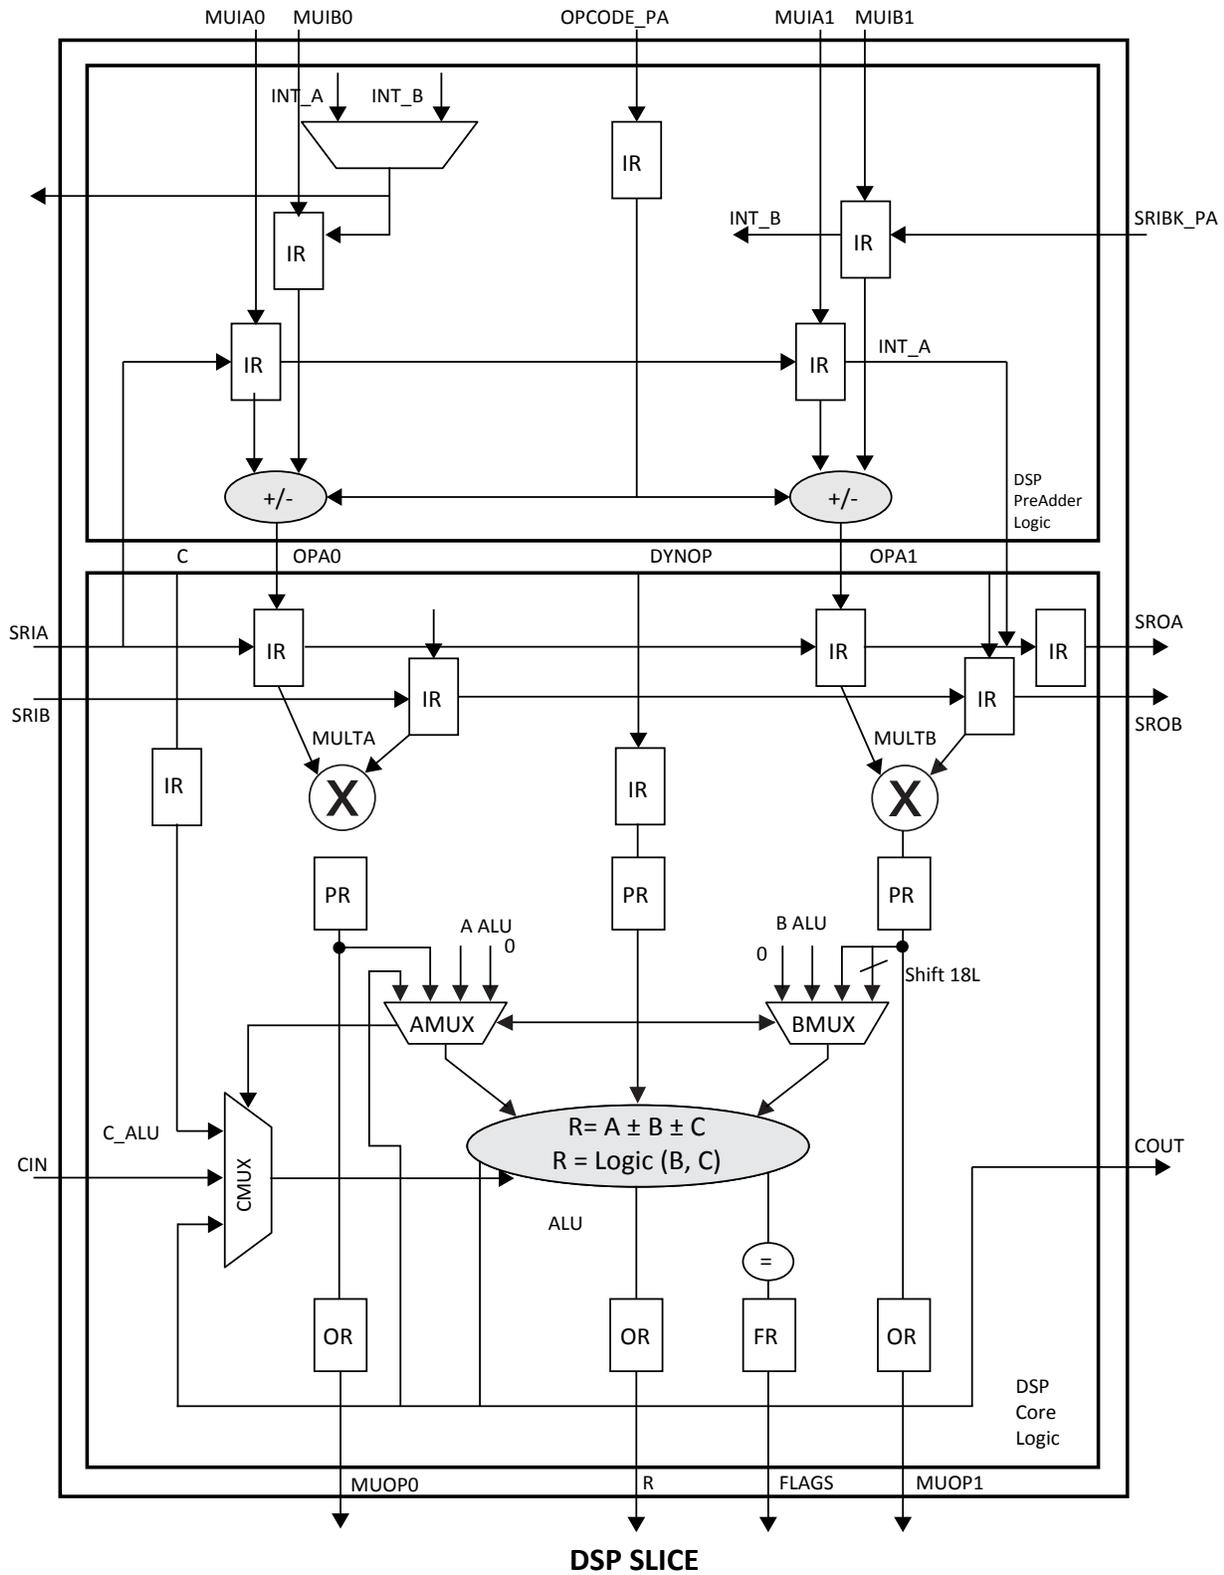


Figure 2.15. Detailed sysDSP Slice Diagram

In Figure 2.15, note that A_ALU, B_ALU and C_ALU are internal signals generated by combining bits from AA, AB, BA, BB and C inputs. For further information, refer to TN1267, [ECP5 and ECP5-5G sysDSP Usage Guide](#).

The ECP5/ECP5-5G sysDSP block supports the following basic elements.

- MULT (Multiply)
- MAC (Multiply, Accumulate)
- MULTADDSUB (Multiply, Addition/Subtraction)
- MULTADDSUBSUM (Multiply, Addition/Subtraction, Summation)

Table 2.7 shows the capabilities of each of the ECP5/ECP5-5G slices versus the above functions.

Table 2.7. Maximum Number of Elements in a Slice

| Width of Multiply | x9 | x18 | x36 |
|-------------------|----|-----|-----|
| MULT | 4 | 2 | 1/2 |
| MAC | 1 | 1 | — |
| MULTADDSUB | 2 | 1 | — |
| MULTADDSUBSUM | 1* | 1/2 | — |

*Note: One slice can implement 1/2 9x9 m9x9addsubsum and two m9x9addsubsum with two slices.

Some options are available in the four elements. The input register in all the elements can be directly loaded or can be loaded as a shift register from previous operand registers. By selecting “dynamic operation” the following operations are possible:

- In the Add/Sub option the Accumulator can be switched between addition and subtraction on every cycle.
- The loading of operands can switch between parallel and serial operations.

For further information, refer to TN1267, [ECP5 and ECP5-5G sysDSP Usage Guide](#).

2.16. Programmable I/O Cells

The programmable logic associated with an I/O is called a PIO. The individual PIO are connected to their respective sysIO buffers and pads. On the ECP5/ECP5-5G devices, the Programmable I/O cells (PIC) are assembled into groups of four PIO cells called a Programmable I/O Cell or PIC. The PICs are placed on all four sides of the device.

On all the ECP5/ECP5-5G devices, two adjacent PIOs can be combined to provide a complementary output driver pair. All PIO pairs can implement differential receivers. Half of the PIO pairs on the left and right edges of these devices can be configured as true LVDS transmit pairs.

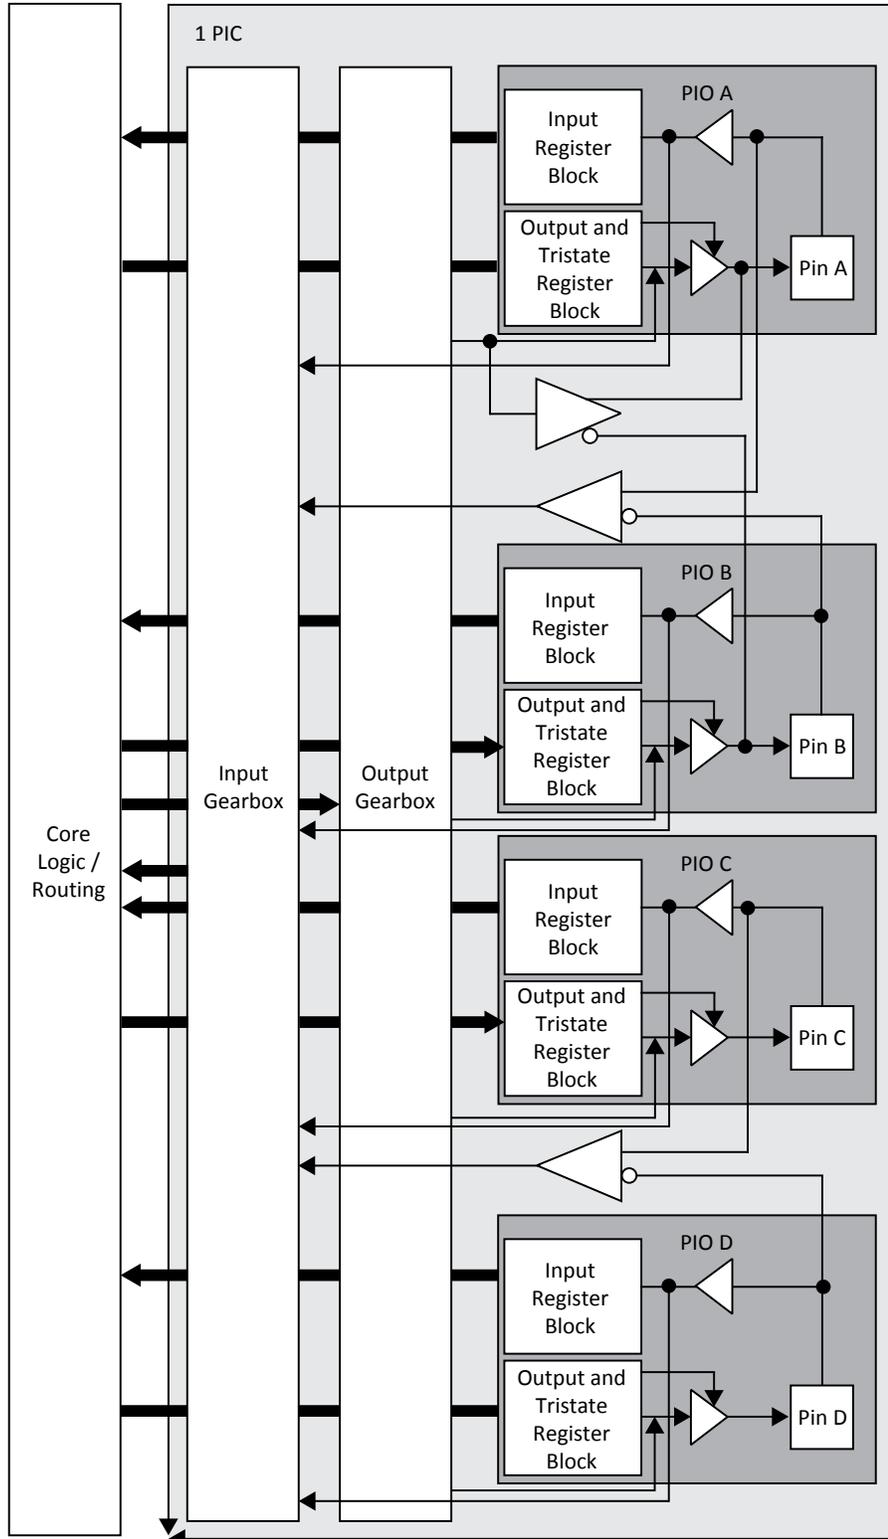


Figure 2.16. Group of Four Programmable I/O Cells on Left/Right Sides

2.17. PIO

The PIO contains three blocks: an input register block, output register block and tristate register block. These blocks contain registers for operating in a variety of modes along with the necessary clock and selection logic.

2.17.1. Input Register Block

The input register blocks for the PIOs on all edges contain delay elements and registers that can be used to condition high-speed interface signals before they are passed to the device core. In addition the input register blocks for the PIOs on the left and right edges include built-in FIFO logic to interface to DDR and LPDDR memory.

The Input register block on the right and left sides includes gearing logic and registers to implement IDDRX1, IDDRX2 functions. With two PICs sharing the DDR register path, it can also implement IDDRX71 function used for 7:1 LVDS interfaces. It uses three sets of registers – shift, update, and transfer to implement gearing and the clock domain transfer. The first stage registers samples the high-speed input data by the high-speed edge clock on its rising and falling edges. The second stage registers perform data alignment based on the control signals. The third stage pipeline registers pass the data to the device core synchronized to the low-speed system clock. The Top side of the device will support IDDRX1 gearing function. For more information on gearing function, refer to TN1265, [ECP5 and ECP5-5G High-Speed I/O Interface](#).

Figure 2.17 shows the input register block for the PIOs on the top edge.


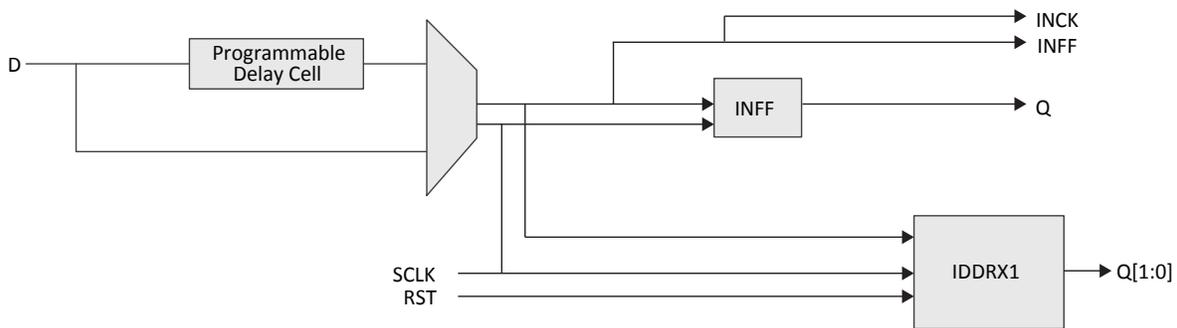


Figure 2.17. Input Register Block for PIO on Top Side of the Device

Figure 2.18 shows the input register block for the PIOs located on the left and right edges.

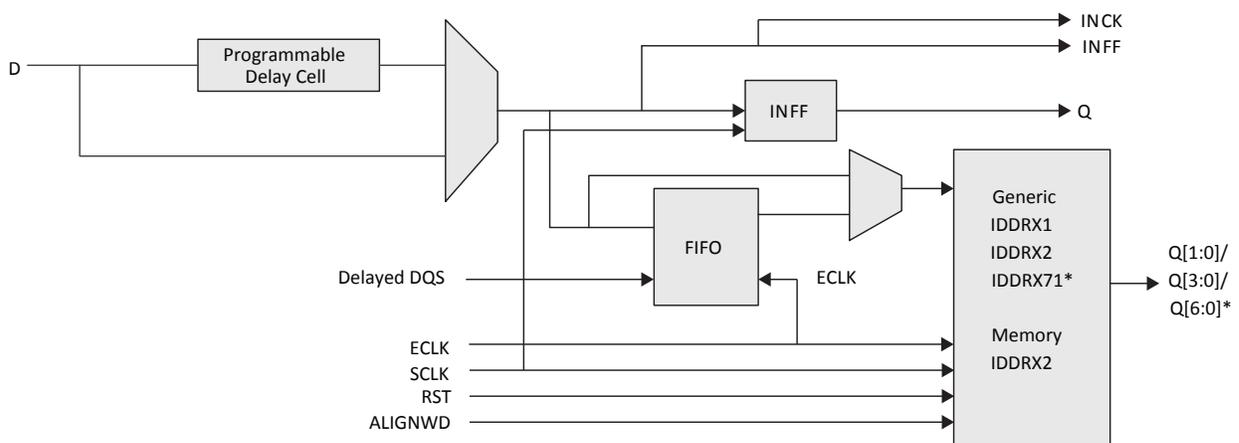

*For 7:1 LVDS interface only. It is required to use PIO pair pins (PIOA/B or PIOC/D).

Figure 2.18. Input Register Block for PIO on Left and Right Side of the Device

2.17.1.1. Input FIFO

The ECP5/ECP5-5G PIO has dedicated input FIFO per single-ended pin for input data register for DDR Memory interfaces. The FIFO resides before the gearing logic. It transfers data from DQS domain to continuous ECLK domain. On the Write side of the FIFO, it is clocked by DQS clock which is the delayed version of the DQS Strobe signal from DDR memory. On the Read side of FIFO, it is clocked by ECLK. ECLK may be any high speed clock with identical frequency as DQS (the frequency of the memory chip). Each DQS group has one FIFO control block. It distributes FIFO read/write pointer to every PIC in same DQS group. DQS Grouping and DQS Control Block is described in [DDR Memory Support](#) section on page 36.

Table 2.8. Input Block Port Description

| Name | Type | Description |
|----------------------|--------|--|
| D | Input | High Speed Data Input |
| Q[1:0]/Q[3:0]/Q[6:0] | Output | Low Speed Data to the device core |
| RST | Input | Reset to the Output Block |
| SCLK | Input | Slow Speed System Clock |
| ECLK | Input | High Speed Edge Clock |
| DQS | Input | Clock from DQS control Block used to clock DDR memory data |
| ALIGNWD | Input | Data Alignment signal from device core. |

2.17.2. Output Register Block

The output register block registers signals from the core of the device before they are passed to the sysIO buffers. ECP5/ECP5-5G output data path has output programmable flip flops and output gearing logic. On the left and right sides the output register block can support 1x, 2x and 7:1 gearing enabling high speed DDR interfaces and DDR memory interfaces. On the top side, the banks will support 1x gearing. ECP5/ECP5-5G output data path diagram is shown in [Figure 2.19](#). The programmable delay cells are also available in the output data path. For detailed description of the output register block modes and usage, you can refer to TN1265, [ECP5 and ECP5-5G High-Speed I/O Interface](#).


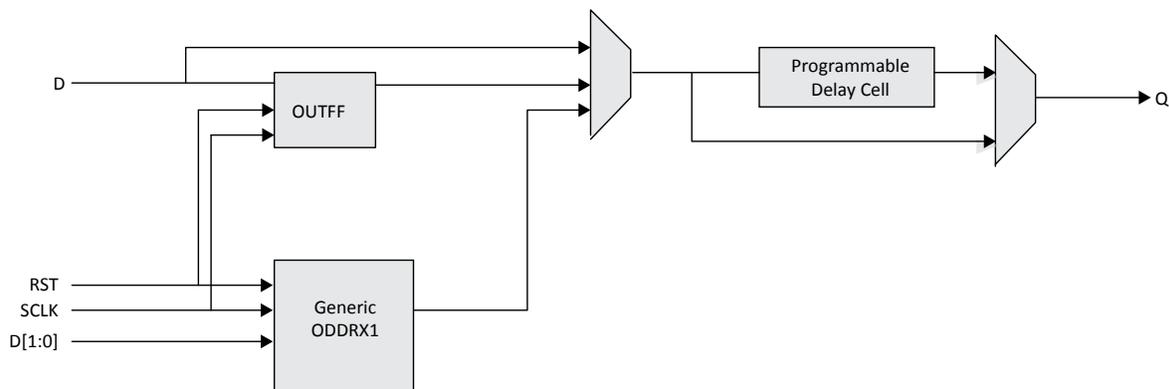


Figure 2.19. Output Register Block on Top Side

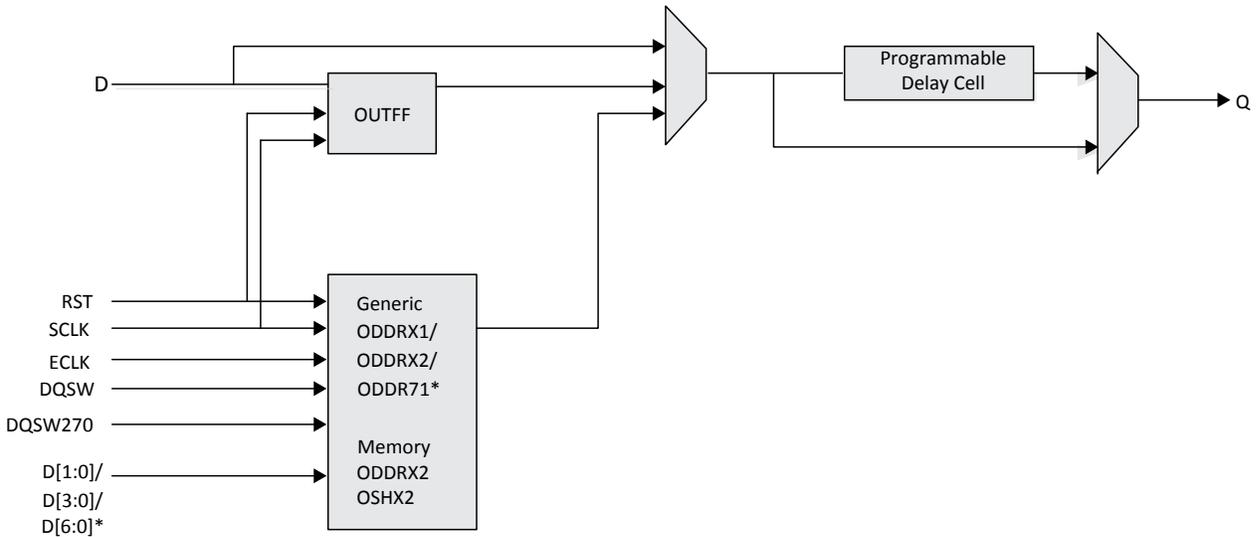

*For 7:1 LVDS interface only. It is required to use PIO pair pins PIOA/B.

Figure 2.20. Output Register Block on Left and Right Sides

Table 2.9. Output Block Port Description

| Name | Type | Description |
|-----------------------|--------|---|
| Q | Output | High Speed Data Output |
| D | Input | Data from core to output SDR register |
| D[1:0]/D[3:0]/ D[6:0] | Input | Low Speed Data from device core to output DDR register |
| RST | Input | Reset to the Output Block |
| SCLK | Input | Slow Speed System Clock |
| ECLK | Input | High Speed Edge Clock |
| DQSW | Input | Clock from DQS control Block used to generate DDR memory DQS output |
| DQSW270 | Input | Clock from DQS control Block used to generate DDR memory DQ output |

2.18. Tristate Register Block

The tristate register block registers tristate control signals from the core of the device before they are passed to the sysIO buffers. The block contains a register for SDR operation. In SDR, TD input feeds one of the flip-flops that then feeds the output. In DDR operation used mainly for DDR memory interface can be implemented on the left and right sides of the device. Here two inputs feed the tristate registers clocked by both ECLK and SCLK.

Figure 2.21 and Figure 2.22 show the Tristate Register Block functions on the device. For detailed description of the tristate register block modes and usage, you can refer to TN1265, [ECP5 and ECP5-5G High-Speed I/O Interface](#).

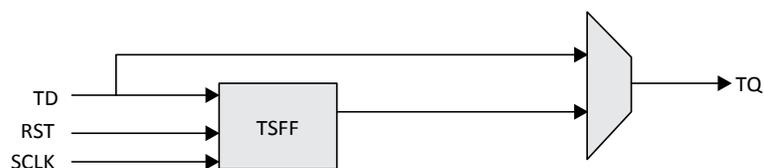


Figure 2.21. Tristate Register Block on Top Side

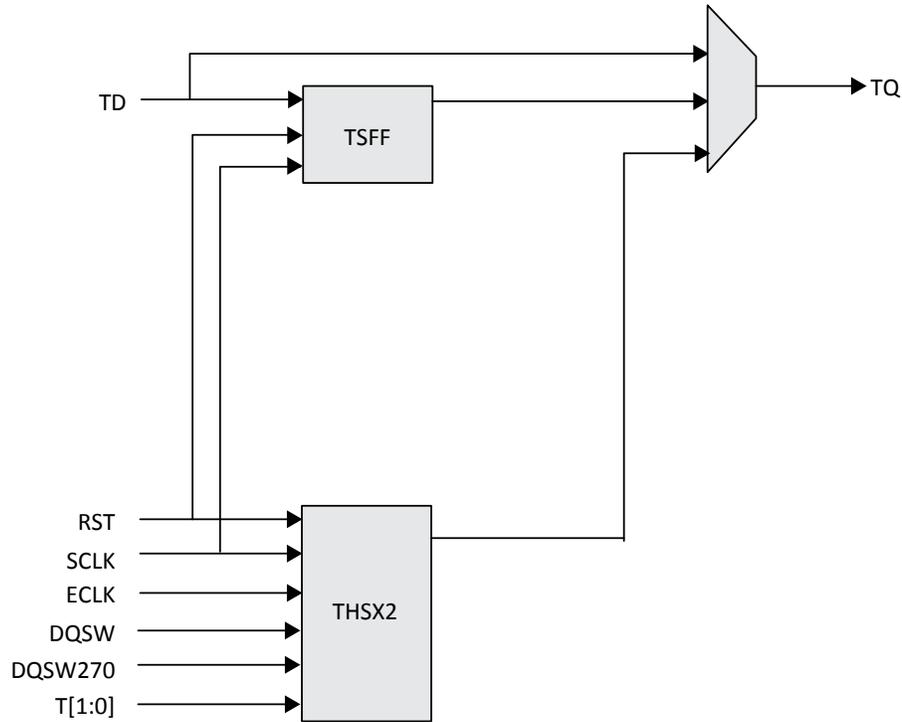


Figure 2.22. Tristate Register Block on Left and Right Sides

Table 2.10. Tristate Block Port Description

| Name | Type | Description |
|---------|--------|---|
| TD | Input | Tristate Input to Tristate SDR Register |
| RST | Input | Reset to the Tristate Block |
| TD[1:0] | Input | Tristate input to TSHX2 function |
| SCLK | Input | Slow Speed System Clock |
| ECLK | Input | High Speed Edge Clock |
| DQSW | Input | Clock from DQS control Block used to generate DDR memory DQS output |
| DQSW270 | Input | Clock from DQS control Block used to generate DDR memory DQ output |
| TQ | Output | Output of the Tristate block |

2.19. DDR Memory Support

2.19.1. DQS Grouping for DDR Memory

Certain PICs have additional circuitry to allow the implementation of high-speed source synchronous and DDR2, DDR3, LPDDR2 or LPDDR3 memory interfaces. The support varies by the edge of the device as detailed below.

The left and right sides of the PIC have fully functional elements supporting DDR2, DDR3, LPDDR2 or LPDDR3 memory interfaces. Every 16 PIOs on the left and right sides are grouped into one DQS group, as shown in [Figure 2.23](#) on the next page. Within each DQS group, there are two pre-placed pins for DQS and DQS# signals. The rest of the pins in the DQS group can be used as DQ signals and DM signal. The number of pins in each DQS group bonded out is package dependent. DQS groups with less than 11 pins bonded out can only be used for LPDDR2/3 Command/ Address busses. In DQS groups with more than 11 pins bonded out, up to two pre-defined pins are assigned to be used as "virtual" VCCIO, by driving these pins to HIGH, with the user connecting these pins to VCCIO power supply. These connections create "soft" connections to VCCIO thru these output pins, and make better connections on VCCIO to help to reduce SSO noise. For details, refer to TN1265, [ECP5 and ECP5-5G High-Speed I/O Interface](#).

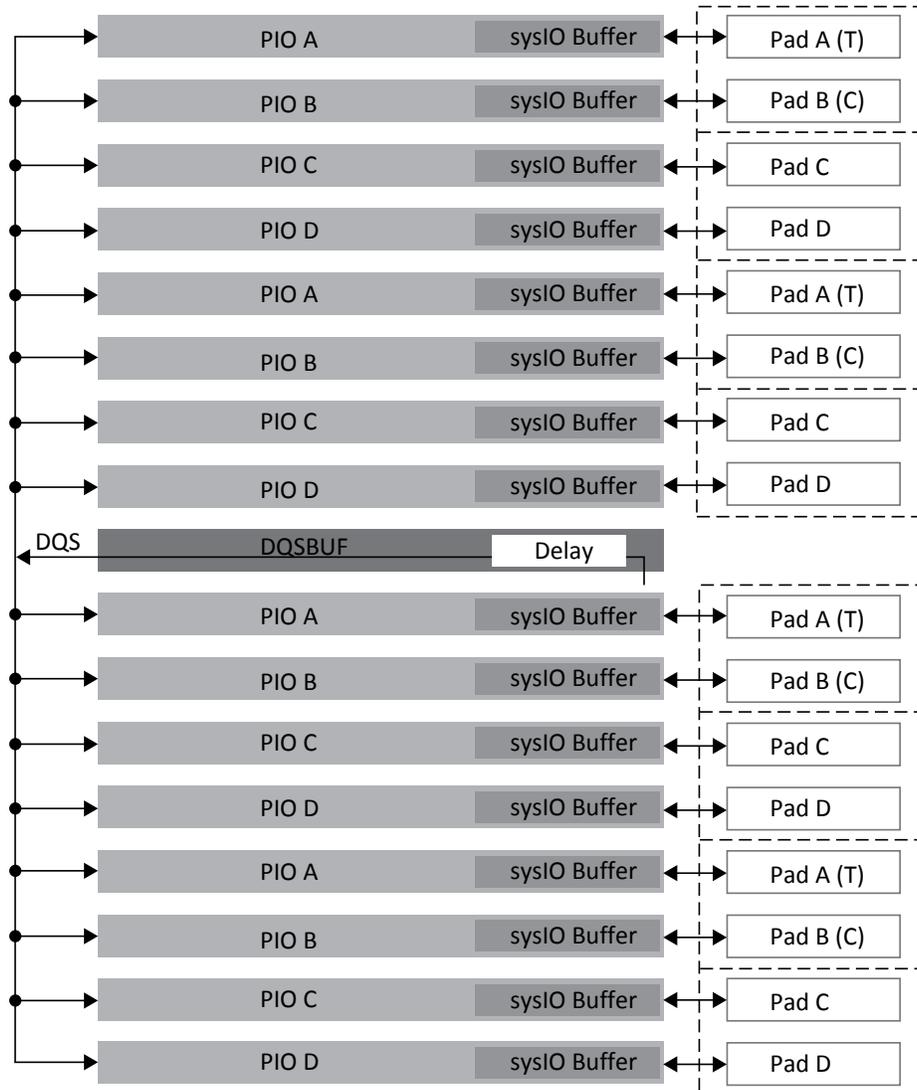


Figure 2.23. DQS Grouping on the Left and Right Edges

2.19.2. DLL Calibrated DQS Delay and Control Block (DQSBUF)

To support DDR memory interfaces (DDR2/3, LPDDR2/3), the DQS strobe signal from the memory must be used to capture the data (DQ) in the PIC registers during memory reads. This signal is output from the DDR memory device aligned to data transitions and must be time shifted before it can be used to capture data in the PIC. This time shifted is achieved by using DQSDEL programmable delay line in the DQS Delay Block (DQS read circuit). The DQSDEL is implemented as a slave delay line and works in conjunction with a master DDRDLL.

This block also includes slave delay line to generate delayed clocks used in the write side to generate DQ and DQS with correct phases within one DQS group. There is a third delay line inside this block used to provide write leveling feature for DDR write if needed.

Each of the read and write side delays can be dynamically shifted using margin control signals that can be controlled by the core logic.

FIFO Control Block include here generates the Read and Write Pointers for the FIFO block inside the Input Register Block. These pointers are generated to control the DQS to ECLK domain crossing using the FIFO module.

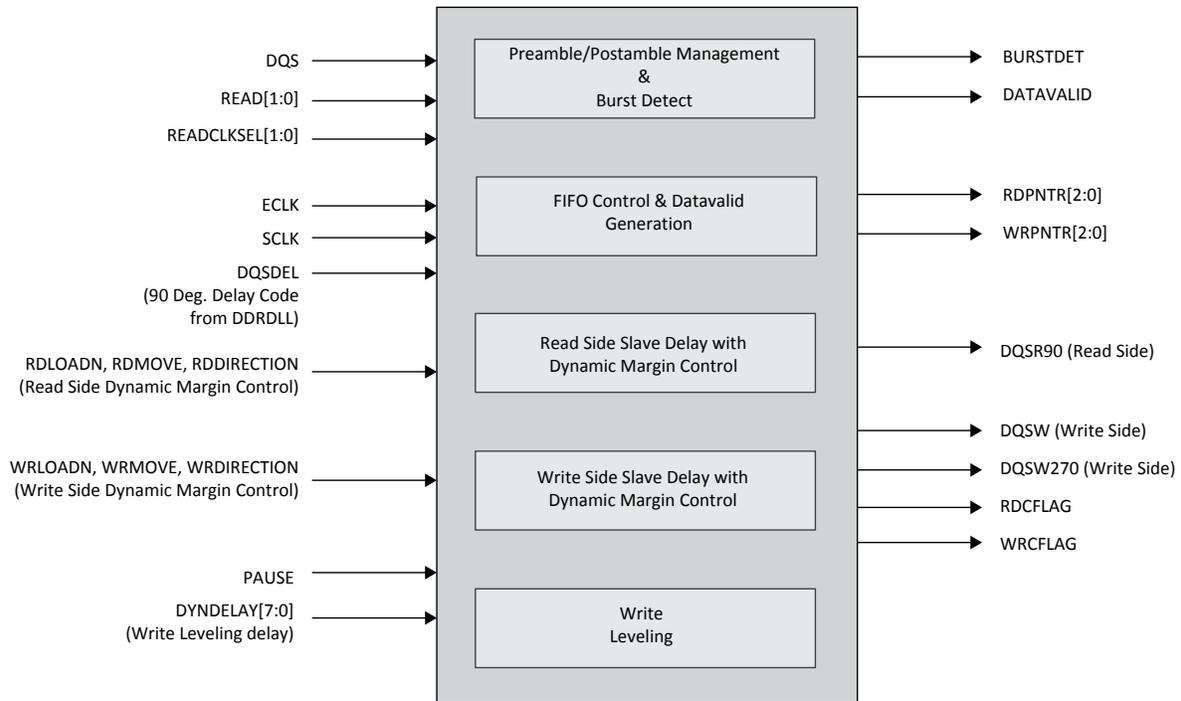


Figure 2.24. DQS Control and Delay Block (DQSBUF)

Table 2.11. DQSBUF Port list description

| Name | Type | Description |
|------------------------------|--------|--|
| DQS | Input | DDR memory DQS strobe |
| READ[1:0] | Input | Read Input from DDR Controller |
| READCLKSEL[1:0] | Input | Read pulse selection |
| SCLK | Input | Slow System Clock |
| ECLK | Input | High Speed Edge Clock (same frequency as DDR memory) |
| DQSDEL | Input | 90 Deg Delay Code from DDRDLL |
| RDLOADN, RDMOVE, RDDIRECTION | Input | Dynamic Margin Control ports for Read delay |
| WRLOADN, WRMOVE, WRDIRECTION | Input | Dynamic Margin Control ports for Write delay |
| PAUSE | Input | Used by DDR Controller to Pause write side signals during DDRDLL Code update or Write Leveling |
| DYNDELAY[7:0] | Input | Dynamic Write Leveling Delay Control |
| DQSR90 | Output | 90 delay DQS used for Read |
| DQSW270 | Output | 90 delay clock used for DQ Write |
| DQSW | Output | Clock used for DQS Write |
| RDPNTR[2:0] | Output | Read Pointer for IFIFO module |
| WRPNTR[2:0] | Output | Write Pointer for IFIFO module |
| DATAVALID | Output | Signal indicating start of valid data |
| BURSTDET | Output | Burst Detect indicator |
| RDFLAG | Output | Read Dynamic Margin Control output to indicate max value |
| WRFLAG | Output | Write Dynamic Margin Control output to indicate max value |

2.20. sysI/O Buffer

Each I/O is associated with a flexible buffer referred to as a sysI/O buffer. These buffers are arranged around the periphery of the device in groups referred to as banks. The sysI/O buffers allow users to implement the wide variety of standards that are found in today’s systems including LVDS, HSUL, BLVDS, SSTL Class I and II, LVCMOS, LVTTTL, LVPECL, and MIPI.


2.20.1. sysI/O Buffer Banks

ECP5/ECP5-5G devices have seven sysI/O buffer banks, two banks per side at Top, Left and Right, plus one at the bottom left side. The bottom left side bank (Bank 8) is a shared I/O bank. The I/Os in that bank contains both dedicated and shared I/O for sysConfig function. When a shared pin is not used for configuration, It is available as a user I/O. For LFE5-85 devices, there is an additional I/O bank (Bank 4) that is not available in other device in the family.

In ECP5/ECP5-5G devices, the Left and Right sides are tailored to support high performance interfaces, such as DDR2, DDR3, LPDDR2, LPDDR3 and other high speed source synchronous standards. The banks on the Left and Right sides of the devices feature LVDS input and output buffers, data-width gearing, and DQSBUF block to support DDR2/3 and LPDDR2/3 interfaces. The I/Os on the top and bottom banks do not have LVDS input and output buffer, and gearing logic, but can use LVCMOS to emulate most of differential output signaling.

Each sysIO bank has its own I/O supply voltage (V_{CCIO}). In addition, the banks on the Left and Right sides of the device, have voltage reference input (shared I/O pin), V_{REF1} per bank, which allow it to be completely independent of each other. The V_{REF} voltage is used to set the threshold for the referenced input buffers, such as SSTL. Figure 2.25 shows the seven banks and their associated supplies.

In ECP5/ECP5-5G devices, single-ended output buffers and ratioed input buffers (LVTTTL, and LVCMOS) are powered using V_{CCIO} . LVTTTL, LVCMOS33, LVCMOS25 and LVCMOS12 can also be set as fixed threshold inputs independent of V_{CCIO} .

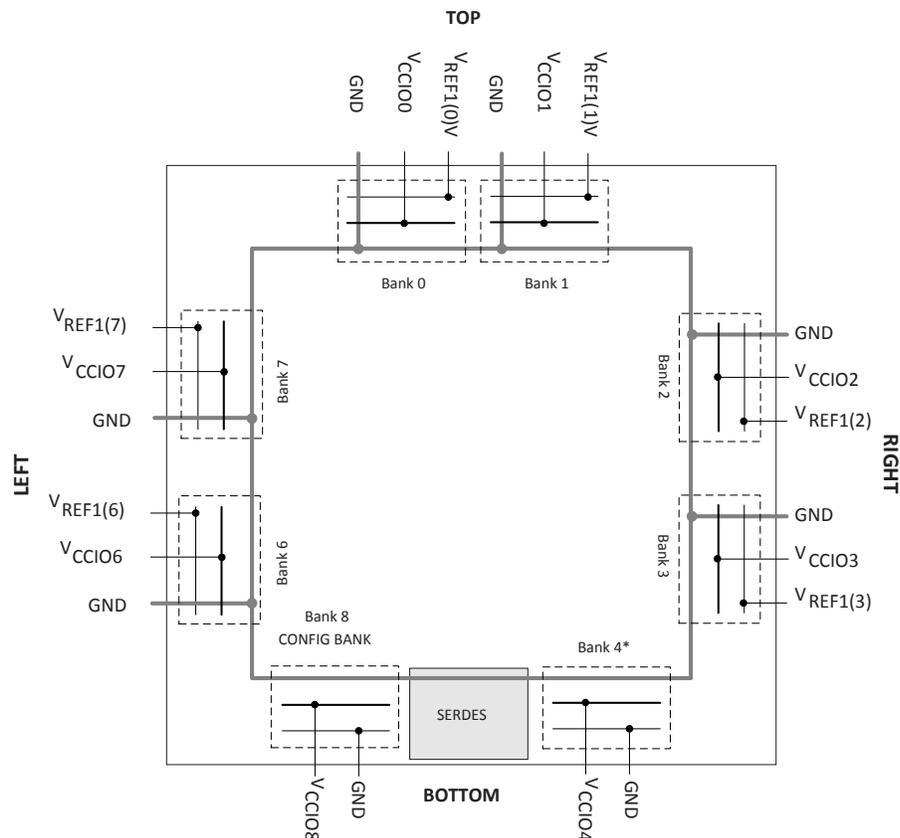

*Note: Only 85K device has this bank.

Figure 2.25. ECP5/ECP5-5G Device Family Banks

ECP5/ECP5-5G devices contain two types of sysI/O buffer pairs:

- Top (Bank 0 and Bank 1) and Bottom (Bank 8 and Bank 4) sysIO Buffer Pairs (Single-Ended Only)

The sysI/O buffers in the Banks at top and bottom of the device consist of ratioed single-ended output drivers and single-ended input buffers. The I/Os in these banks are not usually used as a pair, except when used as emulated differential output pair. They are used as individual I/Os and be configured as different I/O modes, as long as they are compatible with the V_{CCIO} voltage in the bank. When used as emulated differential outputs, the pair can be used together.

The top and bottom side IOs also support hot socketing. They support IO standards from 3.3 V to 1.2 V. They are ideal for general purpose I/Os, or as ADDR/CMD bus for DDR2/DDR3 applications, or for used as emulated differential signaling.

Bank 4 I/O only exists in the LFE5-85 device.

Bank 8 is a bottom bank that shares with sysConfig I/Os. During configuration, these I/Os are used for programming the device. Once the configuration is completed, these I/Os can be released and user can use these I/Os for functional signals in his design.

The top and bottom side pads can be identified by the Lattice Diamond tool.

- Left and Right (Banks 2, 3, 6 and 7) sysI/O Buffer Pairs (50% Differential and 100% Single-Ended Outputs)

The sysI/O buffer pairs in the left and right banks of the device consist of two single-ended output drivers, two single-ended input buffers (both ratioed and referenced) and half of the sysI/O buffer pairs (PIOA/B pairs) also has a high-speed differential output driver. One of the referenced input buffers can also be configured as a differential input. In these banks the two pads in the pair are described as “true” and “comp”, where the true pad is associated with the positive side of the differential I/O, and the comp (complementary) pad is associated with the negative side of the differential I/O.

In addition, programmable on-chip input termination (parallel or differential, static or dynamic) is supported on these sides, which is required for DDR3 interface. However, there is no support for hot-socketing for the I/O pins located on the left and right side of the device as the PCI clamp is always enabled on these pins.

LVDS differential output drivers are available on 50% of the buffer pairs on the left and right banks.

2.20.2. Typical sysI/O I/O Behavior during Power-up

The internal Power-On-Reset (POR) signal is deactivated when V_{CC} , V_{CCIO8} and V_{CCAUX} have reached satisfactory levels. After the POR signal is deactivated, the FPGA core logic becomes active. It is the user’s responsibility to ensure that all other V_{CCIO} banks are active with valid input logic levels to properly control the output logic states of all the I/O banks that are critical to the application. For more information about controlling the output logic state with valid input logic levels during power-up in ECP5/ECP5-5G devices, see the list of technical documentation in [Supplemental Information](#) section on page 105.

The V_{CC} and V_{CCAUX} supply the power to the FPGA core fabric, whereas the V_{CCIO} supplies power to the I/O buffers. In order to simplify system design while providing consistent and predictable I/O behavior, it is recommended that the I/O buffers be powered-up prior to the FPGA core fabric. V_{CCIO} supplies should be powered-up before or together with the V_{CC} and V_{CCAUX} supplies.

2.20.3. Supported sysI/O Standards

The ECP5/ECP5-5G sysI/O buffer supports both single-ended and differential standards. Single-ended standards can be further subdivided into LVCMOS, LVTTTL and other standards. The buffers support the LVTTTL, LVCMOS 1.2V, 1.5V, 1.8 V, 2.5 V and 3.3 V standards. In the LVCMOS and LVTTTL modes, the buffer has individual configuration options for drive strength, slew rates, bus maintenance (weak pull-up, weak pull-down, or a bus-keeper latch) and open drain. Other single-ended standards supported include SSTL and HSUL. Differential standards supported include LVDS, differential SSTL and differential HSUL. For further information on utilizing the sysI/O buffer to support a variety of standards, refer to TN1262, [ECP5 and ECP5-5G sysIO Usage Guide](#).

2.20.4. On-Chip Programmable Termination

The ECP5/ECP5-5G devices support a variety of programmable on-chip terminations options, including:

- Dynamically switchable Single-Ended Termination with programmable resistor values of 50 Ω, 75 Ω, or 150 Ω.
- Common mode termination of 100 Ω for differential inputs

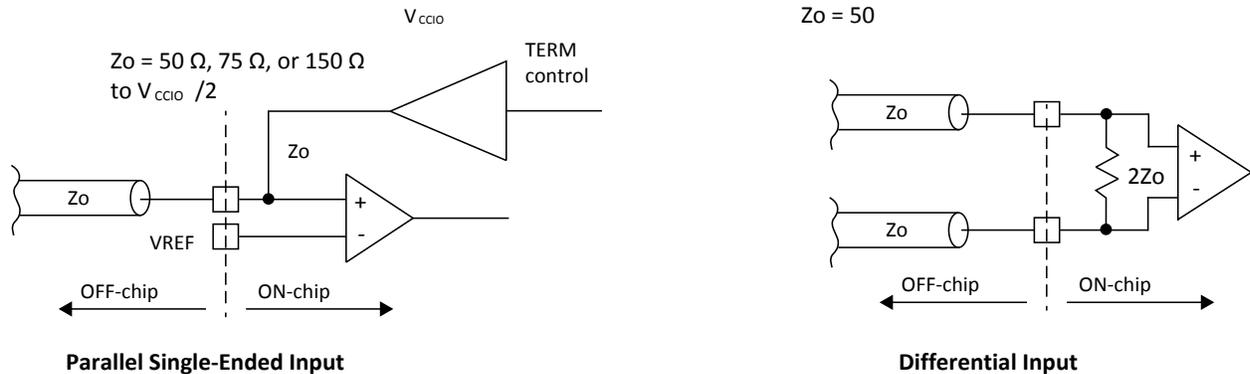


Figure 2.26. On-Chip Termination

See [Table 2.12](#) for termination options for input modes.

Table 2.12. On-Chip Termination Options for Input Modes

| IO_TYPE | Terminate to $V_{CCIO}/2^*$ | Differential Termination Resistor* |
|-----------------|-----------------------------|------------------------------------|
| LVDS25 | — | 100 |
| BLVDS25 | — | 100 |
| MLVDS | — | 100 |
| LVPECL33 | — | 100 |
| subLVDS | — | 100 |
| SLVS | — | 100 |
| HSUL12 | 50, 75, 150 | — |
| HSUL12D | — | 100 |
| SSTL135_I / II | 50, 75, 150 | — |
| SSTL135D_I / II | — | 100 |
| SSTL15_I / II | 50, 75, 150 | — |
| SSTL15D_I / II | — | 100 |
| SSTL18_I / II | 50, 75, 150 | — |
| SSTL18D_I / II | — | 100 |

***Note:**

TERMINATE to $V_{CCIO}/2$ (Single-Ended) and DIFFERENTIAL TERMINATION RESISTOR when turned on can only have one setting per bank. Only left and right banks have this feature.

Use of TERMINATE to $V_{CCIO}/2$ and DIFFERENTIAL TERMINATION RESISTOR are mutually exclusive in an I/O bank. On-chip termination tolerance $\pm 20\%$.

Refer to TN1262, [ECP5 and ECP5-5G sysIO Usage Guide](#) for on-chip termination usage and value ranges.

2.20.5. Hot Socketing

ECP5/ECP5-5G devices have been carefully designed to ensure predictable behavior during power-up and power-down. During power-up and power-down sequences, the I/Os remain in tristate until the power supply voltage is high enough to ensure reliable operation. In addition, leakage into I/O pins is controlled within specified limits. See the [Hot Socketing Specifications](#) section on page 49.

2.21. SERDES and Physical Coding Sublayer

LFE5UM/LFE5UM5G devices feature up to 4 channels of embedded SERDES/PCS arranged in dual-channel blocks at the bottom of the devices. Each channel supports up to 3.2 Gb/s (ECP5), or up to 5 Gb/s (ECP5-5G) data rate. [Figure 2.27](#) shows the position of the dual blocks for the LFE5-85. [Table 2.13](#) shows the location of available SERDES Duals for all devices. The LFE5UM/LFE5UM5G SERDES/PCS supports a range of popular serial protocols, including:

- PCI Express Gen1 and Gen2 (2.5 Gb/s) on ECP5UM; Gen 1, Gen2 (2.5 Gb/s and 5 Gb/s) on ECP5-5G
- Ethernet (XAUI, GbE – 1000 Base CS/SX/LX and SGMII)
- SMPTE SDI (3G-SDI, HD-SDI, SD-SDI)
- • CPRI (E.6.LV: 614.4 Mb/s, E.12.LV: 1228.8 Mb/s, E.24.LV: 2457.6 Mb/s, E.30.LV: 3072 Mb/s), also E.48.LV2:4915 Mb/s in ECP5-5G
- JESD204A/B – ADC and DAC converter interface: 312.5 Mb/s to 3.125 Gb/s (ECP5) / 5 Gb/s (ECP5-5G)

Each dual contains two dedicated SERDES for high speed, full duplex serial data transfer. Each dual also has a PCS block that interfaces to the SERDES channels and contains protocol specific digital logic to support the standards listed above. The PCS block also contains interface logic to the FPGA fabric. All PCS logic for dedicated protocol support can also be bypassed to allow raw 8-bit or 10-bit interfaces to the FPGA fabric.

Even though the SERDES/PCS blocks are arranged in duals, multiple baud rates can be supported within a dual with the use of dedicated, per channel /1, /2 and /11 rate dividers. Additionally, two duals can be arranged together to form x4 channel link.

ECP5UM devices and ECP5-5G devices are pin-to-pin compatible. But, the ECP5UM devices require 1.1 V on VCCA, VCCHRX and VCCHTX supplies. ECP5-5G devices require 1.2 V on these supplies. When designing either family device with migration in mind, these supplies need to be connected such that it is possible to adjust the voltage level on these supplies.

When a SERDES Dual in a 2-Dual device is not used, the power VCCA power supply for that Dual should be connected. It is advised to connect the VCCA of unused channel to core if the user knows he will not use the Dual at all, or it should be connected to a different regulated supply, if that Dual may be used in the future.

For an unused channel in a Dual, it is advised to connect the VCCHTX to VCCA, and user can leave VCCHRX unconnected.

For information on how to use the SERDES/PCS blocks to support specific protocols, as well on how to combine multiple protocols and baud rates within a device, refer to TN1261, [ECP5 and ECP5-5G SERDES/PCS Usage Guide](#).

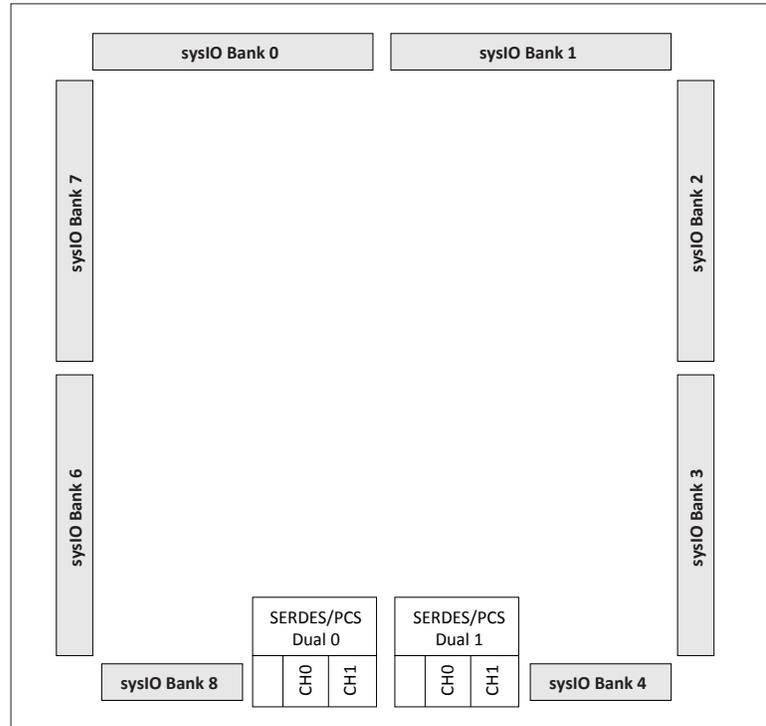


Figure 2.27. SERDES/PCS Duals (LFE5UM/LFE5UM5G-85)

Table 2.13. LFE5UM/LFE5UM5G SERDES Standard Support

| Standard | Data Rate (Mb/s) | Number of General/Link Width | Encoding Style |
|----------------------------------|------------------|------------------------------|----------------|
| PCI Express 1.1 and 2.0 | 2500 | x1, x2, x4 | 8b10b |
| | 5000 | x1, x2 | 8b10b |
| Gigabit Ethernet | 1250 | x1 | 8b10b |
| SGMII | 1250 | x1 | 8b10b |
| XAUI | 3125 | x4 | 8b10b |
| CPRI-1 | 614.4 | x1 | 8b10b |
| CPRI-2 | 1228.8 | | |
| CPRI-3 | 2457.6 | | |
| CPRI-4 | 3072.0 | | |
| CPRI-5 ² | 4915.2 | | |
| SD-SDI (259M, 344M) ¹ | 270 | x1 | NRZI/Scrambled |
| HD-SDI (292M) | 1483.5 | x1 | NRZI/Scrambled |
| | 1485 | | |
| 3G-SDI (424M) | 2967 | x1 | NRZI/Scrambled |
| | 2970 | | |
| | 5000 | | |
| JESD204A/B | 3125 | x1 | 8b/10b |

Notes:

1. For slower rates, the SERDES are bypassed and CML signals are directly connected to the FPGA routing.
2. For ECP5-5G family devices only.

Table 2.14. Available SERDES Duals per LFE5UM/LFE5UM5G Devices

| Package | LFE5UM/LFE5UM5G-25 | LFE5UM/LFE5UM5G-45 | LFE5UM/LFE5UM5G-85 |
|------------|--------------------|--------------------|--------------------|
| 285 csfBGA | 1 | 1 | 1 |
| 381 caBGA | 1 | 2 | 2 |
| 554 caBGA | — | 2 | 2 |
| 756 caBGA | — | — | 2 |

2.21.1. SERDES Block

A SERDES receiver channel may receive the serial differential data stream, equalize the signal, perform Clock and Data Recovery (CDR) and de-serialize the data stream before passing the 8- or 10-bit data to the PCS logic. The SERDES transmitter channel may receive the parallel 8- or 10-bit data, serialize the data and transmit the serial bit stream through the differential drivers. [Figure 2.28](#) shows a single-channel SERDES/PCS block. Each SERDES channel provides a recovered clock and a SERDES transmit clock to the PCS block and to the FPGA core logic.

Each transmit channel, receiver channel, and SERDES PLL shares the same power supply (VCCA). The output and input buffers of each channel have their own independent power supplies (VCCHTX and VCCHRX).

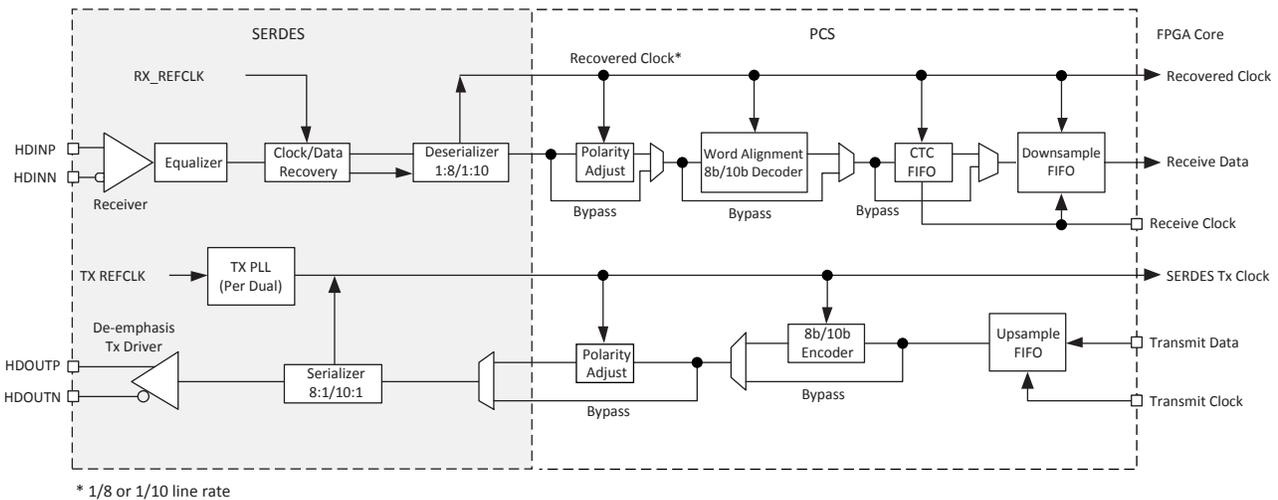


Figure 2.28. Simplified Channel Block Diagram for SERDES/PCS Block

2.21.2. PCS

As shown in [Figure 2.28](#), the PCS receives the parallel digital data from the deserializer and selects the polarity, performs word alignment, decodes (8b/10b), provides Clock Tolerance Compensation and transfers the clock domain from the recovered clock to the FPGA clock via the Down Sample FIFO.

For the transmit channel, the PCS block receives the parallel data from the FPGA core, encodes it with 8b/10b, selects the polarity and passes the 8/10 bit data to the transmit SERDES channel.

The PCS also provides bypass modes that allow a direct 8-bit or 10-bit interface from the SERDES to the FPGA logic. The PCS interface to the FPGA can also be programmed to run at 1/2 speed for a 16-bit or 20-bit interface to the FPGA logic.

Some of the enhancements in LFE5UM/LFE5UM5G SERDES/PCS include:

- Higher clock/channel granularity: Dual channel architecture provides more clock resource per channel.
- Enhanced Tx de-emphasis: Programmable pre- and post-cursors improves Tx output signaling
- Bit-slip function in PCS: Improves logic needed to perform Word Alignment function

Refer to TN1261, [ECP5 and ECP5-5G SERDES/PCS Usage Guide](#) for more information.

2.21.3. SERDES Client Interface Bus

The SERDES Client Interface (SCI) is an IP interface that allows the user to change the configuration thru this interface. This is useful when the user needs to fine-tune some settings, such as input and output buffer that need to be optimized based on the channel characteristics. It is a simple register configuration interface that allows SERDES/PCS configuration without power cycling the device.

The Diamond design tools support all modes of the PCS. Most modes are dedicated to applications associated with a specific industry standard data protocol. Other more general purpose modes allow users to define their own operation. With these tools, the user can define the mode for each dual in a design.

Popular standards such as 10 Gb Ethernet, x4 PCI Express and 4x Serial RapidIO can be implemented using IP (available through Lattice), with two duals (Four SERDES channels and PCS) and some additional logic from the core.

The LFE5UM/LFE5UM5G devices support a wide range of protocols. Within the same dual, the LFE5UM/ LFE5UM5G devices support mixed protocols with semi-independent clocking as long as the required clock frequencies are integer x1, x2, or x11 multiples of each other. [Table 2.15](#) lists the allowable combination of primary and secondary protocol combinations.

2.22. Flexible Dual SERDES Architecture

The LFE5UM/LFE5UM5G SERDES architecture is a dual channel-based architecture. For most SERDES settings and standards, the whole dual (consisting of two SERDES channels) is treated as a unit. This helps in silicon area savings, better utilization, higher granularity on clock/SERDES channel and overall lower cost.

However, for some specific standards, the LFE5UM/LFE5UM5G dual-channel architecture provides flexibility; more than one standard can be supported within the same dual.

[Table 2.15](#) lists the standards that can be mixed and matched within the same dual. In general, the SERDES standards whose nominal data rates are either the same or a defined subset of each other, can be supported within the same dual. The two Protocol columns of the table define the different combinations of protocols that can be implemented together within a Dual.

Table 2.15. LFE5UM/LFE5UM5G Mixed Protocol Support

| Protocol | | Protocol |
|-----------------|------|-------------------|
| PCI Express 1.1 | with | SGMII |
| PCI Express 1.1 | with | Gigabit Ethernet |
| CPRI-3 | with | CPRI-2 and CPRI-1 |
| 3G-SDI | with | HD-SDI and SD-SDI |

There are some restrictions to be aware of when using spread spectrum clocking. When a dual shares a PCI Express x1 channel with a non-PCI Express channel, ensure that the reference clock for the dual is compatible with all protocols within the dual. For example, a PCI Express spread spectrum reference clock is not compatible with most Gigabit Ethernet applications because of tight CTC ppm requirements.

While the LFE5UM/LFE5UM5G architecture will allow the mixing of a PCI Express channel and a Gigabit Ethernet, or SGMII channel within the same dual, using a PCI Express spread spectrum clocking as the transmit reference clock will cause a violation of the Gigabit Ethernet, and SGMII transmit jitter specifications.

For further information on SERDES, refer to TN1261, [ECP5 and ECP5-5G SERDES/PCS Usage Guide](#).

2.23. IEEE 1149.1-Compliant Boundary Scan Testability

All ECP5/ECP5-5G devices have boundary scan cells that are accessed through an IEEE 1149.1 compliant Test Access Port (TAP). This allows functional testing of the circuit board on which the device is mounted through a serial scan path that can access all critical logic nodes. Internal registers are linked internally, allowing test data to be shifted in and loaded directly onto test nodes, or test data to be captured and shifted out for verification. The test access port consists of dedicated I/Os: TDI, TDO, TCK and TMS. The test access port uses VCCIO8 for power supply.

For more information, refer to TN1260, [ECP5 and ECP5-5G sysCONFIG Usage Guide](#).

2.24. Device Configuration

All ECP5/ECP5-5G devices contain two ports that can be used for device configuration. The Test Access Port (TAP), which supports bit-wide configuration, and the sysCONFIG port, support dual-byte, byte and serial configuration. The TAP supports both the IEEE Standard 1149.1 Boundary Scan specification and the IEEE Standard 1532 In-System Configuration specification. There are 11 dedicated pins for TAP and sysConfig supports (TDI, TDO, TCK, TMS, CFG[2:0], PROGRAMN, DONE, INITN and CCLK). The remaining sysCONFIG pins are used as dual function pins. Refer to TN1260, [ECP5 and ECP5-5G sysCONFIG Usage Guide](#) for more information about using the dual-use pins as general purpose I/Os.

There are various ways to configure a ECP5/ECP5-5G device:

- JTAG
- Standard Serial Peripheral Interface (SPI) – Interface to boot PROM Support x1, x2, x4 wide SPI memory interfaces.
- System microprocessor to drive a x8 CPU port SPCM mode
- System microprocessor to drive a serial slave SPI port (SSPI mode)
- Slave Serial model (SCM)

On power-up, the FPGA SRAM is ready to be configured using the selected sysCONFIG port. Once a configuration port is selected, it will remain active throughout that configuration cycle. The IEEE 1149.1 port can be activated any time after power-up by sending the appropriate command through the TAP port.

ECP5/ECP5-5G devices also support the Slave SPI Interface. In this mode, the FPGA behaves like a SPI Flash device (slave mode) with the SPI port of the FPGA to perform read-write operations.

2.24.1. Enhanced Configuration Options

ECP5/ECP5-5G devices have enhanced configuration features such as: decryption support, decompression support, TransFR™ I/O and dual-boot and multi-boot image support.

TransFR (Transparent Field Reconfiguration)

TransFR I/O (TFR) is a unique Lattice technology that allows users to update their logic in the field without interrupting system operation using a single ispVM command. TransFR I/O allows I/O states to be frozen during device configuration. This allows the device to be field updated with a minimum of system disruption and downtime. Refer to TN1087, [Minimizing System Interruption During Configuration Using TransFR Technology](#) for details.

Dual-Boot and Multi-Boot Image Support

Dual-boot and multi-boot images are supported for applications requiring reliable remote updates of configuration data for the system FPGA. After the system is running with a basic configuration, a new boot image can be downloaded remotely and stored in a separate location in the configuration storage device. Any time after the update the ECP5/ECP5-5G devices can be re-booted from this new configuration file. If there is a problem, such as corrupt data during download or incorrect version number with this new boot image, the ECP5/ECP5-5G device can revert back to the original backup golden configuration and try again. This all can be done without power cycling the system. For more information, refer to TN1260, [ECP5 and ECP5-5G sysCONFIG Usage Guide](#).

2.24.2. Single Event Upset (SEU) Support

ECP5/ECP5-5G devices support SEU mitigation with three supporting functions:

- SED – Soft Error Detect
- SEC – Soft Error Correction
- SEI – Soft Error Injection

ECP5/ECP5-5G devices have dedicated logic to perform Cycle Redundancy Code (CRC) checks. During configuration, the configuration data bitstream can be checked with the CRC logic block. In addition, the ECP5/ECP5-5G device can also be programmed to utilize a Soft Error Detect (SED) mode that checks for soft errors in configuration SRAM. The SED operation can be run in the background during user mode. If a soft error occurs, during user mode (normal operation) the device can be programmed to generate an error signal.

When an error is detected, and the user's error handling software determines the error did not create any risk to the system operation, the SEC tool allows the device to be re-configured in the background to correct the affected bit. This operation allows the user functions to continue to operate without stopping the system function.

Additional SEI tool is also available in the Diamond Software, by creating a frame of data to be programmed into the device in the background with one bit changed, without stopping the user functions on the device. This emulates an SEU situation, allowing the user to test and monitor its error handling software.

For further information on SED support, refer to TN1184, [LatticeECP3, ECP5 and ECP5-5G Soft Error Detection \(SED\)/Correction \(SEC\) Usage Guide](#).

2.24.3. On-Chip Oscillator

Every ECP5/ECP5-5G device has an internal CMOS oscillator which is used to derive a Master Clock (MCLK) for configuration. The oscillator and the MCLK run continuously and are available to user logic after configuration is completed. The software default value of the MCLK is nominally 2.4 MHz. [Table 2.16](#) lists all the available MCLK frequencies. When a different Master Clock is selected during the design process, the following sequence takes place:

1. Device powers up with a nominal Master Clock frequency of 2.4 MHz.
2. During configuration, users select a different master clock frequency.
3. The Master Clock frequency changes to the selected frequency once the clock configuration bits are received.
4. If the user does not select a master clock frequency, then the configuration bitstream defaults to the MCLK frequency of 2.4 MHz.

This internal oscillator is available to the user by routing it as an input clock to the clock tree. For further information on the use of this oscillator for configuration or user mode, refer to TN1260, [ECP5 and ECP5-5G sysCONFIG Usage Guide](#).

Table 2.16. Selectable Master Clock (MCLK) Frequencies During Configuration (Nominal)

| MCLK Frequency (MHz) |
|----------------------|
| 2.4 |
| 4.8 |
| 9.7 |
| 19.4 |
| 38.8 |
| 62 |

2.25. Density Shifting

The ECP5/ECP5-5G family is designed to ensure that different density devices in the same family and in the same package have the same pinout. Furthermore, the architecture ensures a high success rate when performing design migration from lower density devices to higher density devices. In many cases, it is also possible to shift a lower utilization design targeted for a high-density device to a lower density device. However, the exact details of the final resource utilization will impact the likelihood of success in each case. An example is that some user I/Os may become No Connects in smaller devices in the same package. Refer to the ECP5/ECP5-5G Pin Migration Tables and Diamond software for specific restrictions and limitations.

3. DC and Switching Characteristics

3.1. Absolute Maximum Ratings

Table 3.1. Absolute Maximum Ratings

| Symbol | Parameter | Min | Max | Unit |
|--|--|------|------|------|
| V _{CC} | Supply Voltage | -0.5 | 1.21 | V |
| V _{CCA} | Supply Voltage | -0.5 | 1.32 | V |
| V _{CCAUX} , V _{CCAUXA} | Supply Voltage | -0.5 | 2.75 | V |
| V _{CCIO} | Supply Voltage | -0.5 | 3.63 | V |
| — | Input or I/O Transient Voltage Applied | -0.5 | 3.63 | V |
| V _{CCHR_X} , V _{CCHTX} | SERDES RX/TX Buffer Supply Voltages | -0.5 | 1.32 | V |
| — | Voltage Applied on SERDES Pins | -0.5 | 1.80 | V |
| T _A | Storage Temperature (Ambient) | -65 | 150 | °C |
| T _J | Junction Temperature | — | +125 | °C |

Notes:

1. Stress above those listed under the “Absolute Maximum Ratings” may cause permanent damage to the device. Functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.
2. Compliance with the Lattice [Thermal Management](#) document is required.
3. All voltages referenced to GND.

3.2. Recommended Operating Conditions

Table 3.2. Recommended Operating Conditions

| Symbol | Parameter | | Min | Max | Unit |
|---|--|---------|-------|-------|------|
| V _{CC} ² | Core Supply Voltage | | 1.045 | 1.155 | V |
| V _{CCAUX} ^{2,4} | Auxiliary Supply Voltage | | 2.375 | 2.625 | V |
| V _{CCIO} ^{2,3} | I/O Driver Supply Voltage | | 1.14 | 3.465 | V |
| V _{REF} ¹ | Input Reference Voltage | | 0.5 | 1.0 | V |
| t _{JCOM} | Junction Temperature, Commercial Operation | | 0 | 85 | °C |
| t _{JIND} | Junction Temperature, Industrial Operation | | -40 | 100 | °C |
| SERDES External Power Supply⁵ | | | | | |
| V _{CCA} | SERDES Analog Power Supply | ECP5UM | 1.045 | 1.155 | V |
| | | ECP5-5G | 1.14 | 1.26 | V |
| V _{CCAUXA} | SERDES Auxiliary Supply Voltage | — | 2.374 | 2.625 | V |
| V _{CCHR_X} ⁶ | SERDES Input Buffer Power Supply | ECP5UM | 0.30 | 1.155 | V |
| | | ECP5-5G | 0.30 | 1.26 | V |
| V _{CCHTX} | SERDES Output Buffer Power Supply | ECP5UM | 1.045 | 1.155 | V |
| | | ECP5-5G | 1.14 | 1.26 | V |

Notes:

1. For correct operation, all supplies except V_{REF} must be held in their valid operation range. This is true independent of feature usage.
2. All supplies with same voltage, except SERDES Power Supplies, should be connected together.
3. See recommended voltages by I/O standard in [Table 3.4](#) on the next page.
4. V_{CCAUX} ramp rate must not exceed 30 mV/μs during power-up when transitioning between 0 V and 3 V.
5. Refer to TN1261, [ECP5 and ECP5-5G SERDES/PCS Usage Guide](#) for information on board considerations for SERDES power supplies.
6. V_{CCHR_X} is used for Rx termination. It can be biased to V_{cm} if external AC coupling is used. This voltage needs to meet all the HDin input voltage level requirements specified in the Rx section of this Data Sheet.

3.3. Power Supply Ramp Rates

Table 3.3. Power Supply Ramp Rates

| Symbol | Parameter | Min | Typ | Max | Unit |
|------------|--|------|-----|-----|------|
| t_{RAMP} | Power Supply ramp rates for all supplies | 0.01 | — | 10 | V/ms |

Note: Assumes monotonic ramp rates.

3.4. Power-On-Reset Voltage Levels

Table 3.4. Power-On-Reset Voltage Levels

| Symbol | Parameter | | Min | Typ | Max | Unit | |
|-------------|-------------|--|-------------|------|-----|------|---|
| V_{PORUP} | All Devices | Power-On-Reset ramp-up trip point (Monitoring V_{CC} , V_{CCAUX} , and V_{CCIO8}) | V_{CC} | 0.90 | — | 1.00 | V |
| | | | V_{CCAUX} | 2.00 | — | 2.20 | V |
| | | | V_{CCIO8} | 0.95 | — | 1.06 | V |
| V_{PORDN} | All Devices | Power-On-Reset ramp-down trip point (Monitoring V_{CC} and V_{CCAUX}) | V_{CC} | 0.77 | — | 0.87 | V |
| | | | V_{CCAUX} | 1.80 | — | 2.00 | V |

Notes:

- These POR trip points are only provided for guidance. Device operation is only characterized for power supply voltages specified under recommended operating conditions.
- Only V_{CCIO8} has a Power-On-Reset ramp up trip point. All other VCCIOs do not have Power-On-Reset ramp up detection.
- V_{CCIO8} does not have a Power-On-Reset ramp down detection. V_{CCIO8} must remain within the Recommended Operating Conditions to ensure proper operation.

3.5. Power up Sequence

Power-On-Reset (POR) puts the ECP5/ECP5-5G device in a reset state. POR is released when V_{CC} , V_{CCAUX} , and V_{CCIO8} are ramped above the V_{PORUP} voltage, as specified above.

V_{CCIO8} controls the voltage on the configuration I/O pins. If the ECP5/ECP5-5G device is using Master SPI mode to download configuration data from external SPI Flash, it is required to ramp V_{CCIO8} above V_{IH} of the external SPI Flash, before at least one of the other two supplies (V_{CC} and/or V_{CCAUX}) is ramped to V_{PORUP} voltage level. If the system cannot meet this power up sequence requirement, and requires the V_{CCIO8} to be ramped last, then the system must keep either PROGRAMN or INITN pin LOW during power up, until V_{CCIO8} reaches V_{IH} of the external SPI Flash. This ensures the signals driven out on the configuration pins to the external SPI Flash meet the V_{IH} voltage requirement of the SPI Flash.

For LFE5UM/LFE5UM5G devices, it is required to power up V_{CCA} , before V_{CCAUXA} is powered up.

3.6. Hot Socketing Specifications

Table 3.5. Hot Socketing Specifications

| Symbol | Parameter | Condition | Min | Typ | Max | Unit |
|--------|--|--|-----|-----|-----|------|
| IDK_HS | Input or I/O Leakage Current for Top and Bottom Banks Only | $0 \leq V_{IN} \leq V_{IH}$ (Max) | — | — | ±1 | mA |
| IDK | Input or I/O Leakage Current for Left and Right Banks Only | $0 \leq V_{IN} < V_{CCIO}$ | — | — | ±1 | mA |
| | | $V_{CCIO} \leq V_{IN} \leq V_{CCIO} + 0.5$ V | — | 18 | — | mA |

Notes:

1. V_{CC} , V_{CCAUX} and V_{CCIO} should rise/fall monotonically.
2. I_{DK} is additive to I_{PU} , I_{PW} or I_{BH} .
3. LVCMOS and LVTTTL only.
4. Hot socket specification defines when the hot socketed device's junction temperature is at 85 °C or below. When the hot socketed device's junction temperature is above 85 °C, the IDK current can exceed ±1 mA.

3.7. Hot Socketing Requirements

Table 3.6. Hot Socketing Requirements

| Description | Min | Typ | Max | Unit |
|---|-----|-----|-----|------|
| Input current per SERDES I/O pin when device is powered down and inputs driven. | — | — | 8 | mA |
| Input current per HDIN pin when device power supply is off, inputs driven ^{1, 2} | — | — | 15 | mA |
| Current per HDIN pin when device power ramps up, input driven ³ | — | — | 50 | mA |
| Current per HDOOUT pin when device power supply is off, outputs pulled up ⁴ | — | — | 30 | mA |

Notes:

1. Device is powered down with all supplies grounded, both HDINP and HDINN inputs driven by a CML driver with maximum allowed output V_{CCHTX} , 8b/10b data, no external AC coupling.
2. Each P and N input must have less than the specified maximum input current during hot plug. For a device with 2 DCU, the total input current would be 15 mA * 4 channels * 2 input pins per channel = 120 mA.
3. Device power supplies are ramping up (V_{CCA} and V_{CCAUX}), both HDINP and HDINN inputs are driven by a CML driver with maximum allowed output V_{CCHTX} , 8b/10b data, internal AC coupling.
4. Device is powered down with all supplies grounded. Both HDOOUTP and HDOUN outputs are pulled up to V_{CCHTX} by the far end receiver termination of 50 Ω single ended.

3.8. ESD Performance

Refer to the [ECP5 and ECP5-5G Product Family Qualification Summary](#) for complete qualification data, including ESD performance.

3.9. DC Electrical Characteristics

Over Recommended Operating Conditions

Table 3.7. DC Electrical Characteristics

| Symbol | Parameter | Condition | Min | Typ | Max | Unit |
|-------------------------|--|---|-----|-----|------|---------|
| $I_{IL}, I_{IH}^{1, 4}$ | Input or I/O Low Leakage | $0 \leq V_{IN} \leq V_{CCIO}$ | — | — | 10 | μA |
| $I_{IH}^{1, 3}$ | Input or I/O High Leakage | $V_{CCIO} < V_{IN} \leq V_{IH(MAX)}$ | — | — | 100 | μA |
| I_{PU} | I/O Active Pull-up Current | $0 \leq V_{IN} \leq 0.7 V_{CCIO}$ | -30 | — | -150 | μA |
| I_{PD} | I/O Active Pull-down Current | $V_{IL(MAX)} \leq V_{IN} \leq V_{CCIO}$ | 30 | — | 150 | μA |
| C1 | I/O Capacitance ² | $V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V,$ $V_{CC} = 1.2 V, V_{IO} = 0 \text{ to } V_{IH(MAX)}$ | — | 5 | 8 | pf |
| C2 | Dedicated Input Capacitance ² | $V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V,$ $V_{CC} = 1.2 V, V_{IO} = 0 \text{ to } V_{IH(MAX)}$ | — | 5 | 7 | pf |
| V_{HYST} | Hysteresis for Single-Ended Inputs | $V_{CCIO} = 3.3 V$ | — | 300 | — | mV |
| | | $V_{CCIO} = 2.5 V$ | — | 250 | — | mV |

Notes:

1. Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output driver tristated. It is not measured with the output driver active. Bus maintenance circuits are disabled.
2. T_A 25 °C, f = 1.0 MHz.
3. Applicable to general purpose I/Os in top and bottom banks.
4. When used as V_{REF} , maximum leakage = 25 μA .

3.10. ECP5/ECP5-5G Supply Current (Standby)

Over recommended operating conditions.

Table 3.8. ECP5/ECP5-5G Supply Current (Standby)

| Symbol | Parameter | Device | Typical | Unit |
|-------------|--|---|---------|------|
| I_{CC} | Core Power Supply Current | LFE5U-12F/ LFE5U-25F/ LFE5UM-25F | 77 | mA |
| | | LFE5UM5G-25F | 77 | mA |
| | | LFE5U-45F/ LFE5UM-45F | 116 | mA |
| | | LFE5UM5G-45F | 116 | mA |
| | | LFE5U-85F/ LFE5UM-85F | 212 | mA |
| | | LFE5UM5G-85F | 212 | mA |
| I_{CCAUX} | Auxiliary Power Supply Current | LFE5U-12F/ LFE5U-25F/ LFE5UM-25F/ LFE5UM5G-25F | 16 | mA |
| | | LFE5U-45F/ LFE5UM-45F/ LFE5UM5G-45F | 17 | mA |
| | | LFE5U-85F/ LFE5UM-85F/ LFE5UM5G-85F | 26 | mA |
| I_{CCIO} | Bank Power Supply Current (Per Bank) | LFE5U-12F/ LFE5U-25F/ LFE5UM-25F/ LFE5UM5G-25F | 0.5 | mA |
| | | LFE5U-45F/ LFE5UM-45F/ LFE5UM5G-45F | 0.5 | mA |
| | | LFE5U-85F/ LFE5UM-85F/ LFE5UM5G-85F | 0.5 | mA |
| I_{CCA} | SERDES Power Supply Current (Per Dual) | LFE5UM-25F | 11 | mA |
| | | LFE5UM5G-25F | 11 | mA |
| | | LFE5UM-45F | 9.5 | mA |
| | | LFE5UM5G-45F | 9.5 | mA |
| | | LFE5UM-85F | 9.5 | mA |
| | | LFE5UM5G-85F | 9.5 | mA |

Notes:

- For further information on supply current, see the list of technical documentation in [Supplemental Information](#) section on page 105.
- Assumes all outputs are tristated, all inputs are configured as LVCMOS and held at the V_{CCIO} or GND.
- Frequency 0 Hz.
- Pattern represents a “blank” configuration data file.
- $T_j = 85^\circ\text{C}$, power supplies at nominal voltage.
- To determine the ECP5/ECP5-5G peak start-up current, use the Power Calculator tool in the Lattice Diamond Design Software.

3.11. SERDES Power Supply Requirements

Over recommended operating conditions.

Table 3.9. ECP5UM

| Symbol | Description | Typ | Max | Unit |
|---|---|-----|-----|------|
| Standby (Power Down) | | | | |
| I_{CCA-SB} | V_{CCA} Power Supply Current (Per Channel) | 4 | 9.5 | mA |
| $I_{CCHRX-SB}^4$ | V_{CCHRX} , Input Buffer Current (Per Channel) | — | 0.1 | mA |
| $I_{CCHTX-SB}$ | V_{CCHTX} , Output Buffer Current (Per Channel) | — | 0.9 | mA |
| Operating (Data Rate = 3.125 Gb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 43 | 54 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} , Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} , Output Buffer Current (Per Channel) | 10 | 13 | mA |
| Operating (Data Rate = 2.5 Gb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 40 | 50 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} , Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} , Output Buffer Current (Per Channel) | 10 | 13 | mA |
| Operating (Data Rate = 1.25 Gb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 34 | 43 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} , Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} , Output Buffer Current (Per Channel) | 10 | 13 | mA |
| Operating (Data Rate = 270 Mb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 28 | 38 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} , Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} , Output Buffer Current (Per Channel) | 8 | 10 | mA |

Table 3.10. ECP5-5G

| Symbol | Description | Typ | Max | Unit |
|--|---|-----|-----|------|
| Standby (Power Down) | | | | |
| I_{CCA-SB} | V_{CCA} Power Supply Current (Per Channel) | 4 | 9.5 | mA |
| $I_{CCHRX-SB}^4$ | V_{CCHRX} Input Buffer Current (Per Channel) | — | 0.1 | mA |
| $I_{CCHTX-SB}$ | V_{CCHTX} Output Buffer Current (Per Channel) | — | 0.9 | mA |
| Operating (Data Rate = 5 Gb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 58 | 67 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} Output Buffer Current (Per Channel) | 10 | 13 | mA |
| Operating (Data Rate = 3.2 Gb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 48 | 57 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} Output Buffer Current (Per Channel) | 10 | 13 | mA |
| Operating (Data Rate = 2.5 Gb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 44 | 53 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} Output Buffer Current (Per Channel) | 10 | 13 | mA |
| Operating (Data Rate = 1.25 Gb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 36 | 46 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} Output Buffer Current (Per Channel) | 10 | 13 | mA |
| Operating (Data Rate = 270 Mb/s) | | | | |
| I_{CCA-OP} | V_{CCA} Power Supply Current (Per Channel) | 30 | 40 | mA |
| $I_{CCHRX-OP}^5$ | V_{CCHRX} Input Buffer Current (Per Channel) | 0.4 | 0.5 | mA |
| $I_{CCHTX-OP}$ | V_{CCHTX} Output Buffer Current (Per Channel) | 8 | 10 | mA |

Notes:

1. Rx Equalization enabled, Tx De-emphasis (pre-cursor and post-cursor) disabled
2. Per Channel current is calculated with both channels on in a Dual, and divide current by two. If only one channel is on current will be higher.
3. To calculate with Tx De-emphasis enabled, use the Diamond Power Calculator tool.
4. For $I_{CCHRX-SB}$, during Standby, input termination on Rx are disabled.
5. For $I_{CCHRX-OP}$, during operational, the max specified when external AC coupling is used. If externally DC coupled, the power is based on current pulled down by external driver when the input is driven to LOW.

3.12. sysI/O Recommended Operating Conditions

Table 3.11. sysI/O Recommended Operating Conditions

| Standard | V _{CCIO} | | | V _{REF} (V) | | |
|--|-------------------|------|-------|----------------------|-------|-------|
| | Min | Typ | Max | Min | Typ | Max |
| LVC MOS33 ¹ | 3.135 | 3.3 | 3.465 | — | — | — |
| LVC MOS33D ³ Output | 3.135 | 3.3 | 3.465 | — | — | — |
| LVC MOS25 ¹ | 2.375 | 2.5 | 2.625 | — | — | — |
| LVC MOS18 | 1.71 | 1.8 | 1.89 | — | — | — |
| LVC MOS15 | 1.425 | 1.5 | 1.575 | — | — | — |
| LVC MOS12 ¹ | 1.14 | 1.2 | 1.26 | — | — | — |
| LVTTL33 ¹ | 3.135 | 3.3 | 3.465 | — | — | — |
| SSTL15_I, II ² | 1.43 | 1.5 | 1.57 | 0.68 | 0.75 | 0.9 |
| SSTL18_I, II ² | 1.71 | 1.8 | 1.89 | 0.833 | 0.9 | 0.969 |
| SSTL135_I, II ² | 1.28 | 1.35 | 1.42 | 0.6 | 0.675 | 0.75 |
| HSUL12 ² | 1.14 | 1.2 | 1.26 | 0.588 | 0.6 | 0.612 |
| MIPI D-PHY LP Input ³ | 1.425 | 1.5 | 1.575 | — | — | — |
| LVDS25 ^{1,3} Output | 2.375 | 2.5 | 2.625 | — | — | — |
| subLVDS ³ (Input only) | — | — | — | — | — | — |
| SLVS ³ (Input only) | — | — | — | — | — | — |
| LVDS25E ³ Output | 2.375 | 2.5 | 2.625 | — | — | — |
| MLVDS ³ Output | 2.375 | 2.5 | 2.625 | — | — | — |
| LVPECL33 ^{1,3} Output | 3.135 | 3.3 | 3.465 | — | — | — |
| BLVDS25 ^{1,3} Output | 2.375 | 2.5 | 2.625 | — | — | — |
| HSULD12D ^{2,3} | 1.14 | 1.2 | 1.26 | — | — | — |
| SSTL135D_I, II ^{2,3} | 1.28 | 1.35 | 1.42 | — | — | — |
| SSTL15D_I, II ^{2,3} | 1.43 | 1.5 | 1.57 | — | — | — |
| SSTL18D_I ^{1,2,3} , II ^{1,2,3} | 1.71 | 1.8 | 1.89 | — | — | — |

Notes:

1. For input voltage compatibility, refer to TN1262, [ECP5 and ECP5-5G sysIO Usage Guide](#).
2. V_{REF} is required when using Differential SSTL and HSUL to interface to DDR/LPDDR memories.
3. These differential inputs use LVDS input comparator, which uses VCCAUX power
4. All differential inputs and LVDS25 output are supported in the Left and Right banks only. Refer to TN1262, [ECP5 and ECP5-5G sysIO Usage Guide](#) for details.

3.13. sysI/O Single-Ended DC Electrical Characteristics

| Input/Output Standard | V_{IL} | | V_{IH} | | V_{OL} Max (V) | V_{OH} Min (V) | I_{OL}^1 (mA) | I_{OH}^1 (mA) |
|---------------------------|----------|-------------------|-------------------|---------|------------------|-------------------|-----------------|------------------|
| | Min (V) | Max (V) | Min (V) | Max (V) | | | | |
| LVC MOS33 | -0.3 | 0.8 | 2.0 | 3.465 | 0.4 | $V_{CCIO} - 0.4$ | 16, 12, 8, 4 | -16, -12, -8, -4 |
| LVC MOS25 | -0.3 | 0.7 | 1.7 | 3.465 | 0.4 | $V_{CCIO} - 0.4$ | 12, 8, 4 | -12, -8, -4 |
| LVC MOS18 | -0.3 | $0.35 V_{CCIO}$ | $0.65 V_{CCIO}$ | 3.465 | 0.4 | $V_{CCIO} - 0.4$ | 12, 8, 4 | -12, -8, -4 |
| LVC MOS15 | -0.3 | $0.35 V_{CCIO}$ | $0.65 V_{CCIO}$ | 3.465 | 0.4 | $V_{CCIO} - 0.4$ | 8, 4 | -8, -4 |
| LVC MOS12 | -0.3 | $0.35 V_{CCIO}$ | $0.65 V_{CCIO}$ | 3.465 | 0.4 | $V_{CCIO} - 0.4$ | 8, 4 | -8, -4 |
| LV TTL33 | -0.3 | 0.8 | 2.0 | 3.465 | 0.4 | $V_{CCIO} - 0.4$ | 16, 12, 8, 4 | -16, -12, -8, -4 |
| SSTL18_I (DDR2 Memory) | -0.3 | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | 3.465 | 0.4 | $V_{CCIO} - 0.4$ | 6.7 | -6.7 |
| SSTL18_II | -0.3 | $V_{REF} - 0.125$ | $V_{REF} + 0.125$ | 3.465 | 0.28 | $V_{CCIO} - 0.28$ | 13.4 | -13.4 |
| SSTL15_I (DDR3 Memory) | -0.3 | $V_{REF} - 0.1$ | $V_{REF} + 0.1$ | 3.465 | 0.31 | $V_{CCIO} - 0.31$ | 7.5 | -7.5 |
| SSTL15_II (DDR3 Memory) | -0.3 | $V_{REF} - 0.1$ | $V_{REF} + 0.1$ | 3.465 | 0.31 | $V_{CCIO} - 0.31$ | 8.8 | -8.8 |
| SSTL135_I (DDR3L Memory) | -0.3 | $V_{REF} - 0.09$ | $V_{REF} + 0.09$ | 3.465 | 0.27 | $V_{CCIO} - 0.27$ | 7 | -7 |
| SSTL135_II (DDR3L Memory) | -0.3 | $V_{REF} - 0.09$ | $V_{REF} + 0.09$ | 3.465 | 0.27 | $V_{CCIO} - 0.27$ | 8 | -8 |
| MIPI D-PHY (LP) | -0.3 | 0.55 | 0.88 | 3.465 | — | — | — | — |
| HSUL12 (LPDDR2/3 Memory) | -0.3 | $V_{REF} - 0.1$ | $V_{REF} + 0.1$ | 3.465 | 0.3 | $V_{CCIO} - 0.3$ | 4 | -4 |

Notes:

- For electromigration, the average DC current drawn by the I/O pads within a bank of I/Os shall not exceed 10 mA per I/O (All I/Os used in the same V_{CCIO}).
- Not all IO types are supported in all banks. Refer to TN1262, [ECP5 and ECP5-5G sysIO Usage Guide](#) for details.

3.14. sysI/O Differential Electrical Characteristics

3.14.1. LVDS

Over recommended operating conditions.

Table 3.12. LVDS

| Parameter | Description | Test Conditions | Min | Typ | Max | Unit |
|--------------------|--|---|-----------|------|----------|---------|
| V_{INP}, V_{INM} | Input Voltage | — | 0 | — | 2.4 | V |
| V_{CM} | Input Common Mode Voltage | Half the sum of the two Inputs | 0.05 | — | 2.35 | V |
| V_{THD} | Differential Input Threshold | Difference between the two Inputs | ± 100 | — | — | mV |
| I_{IN} | Input Current | Power On or Power Off | — | — | ± 10 | μA |
| V_{OH} | Output High Voltage for V_{OP} or V_{OM} | $R_T = 100 \Omega$ | — | 1.38 | 1.60 | V |
| V_{OL} | Output Low Voltage for V_{OP} or V_{OM} | $R_T = 100 \Omega$ | 0.9 V | 1.03 | — | V |
| V_{OD} | Output Voltage Differential | $(V_{OP} - V_{OM}), R_T = 100 \Omega$ | 250 | 350 | 450 | mV |
| ΔV_{OD} | Change in V_{OD} Between High and Low | — | — | — | 50 | mV |
| V_{OS} | Output Voltage Offset | $(V_{OP} + V_{OM})/2, R_T = 100 \Omega$ | 1.125 | 1.20 | 1.375 | V |
| ΔV_{OS} | Change in V_{OS} Between H and L | — | — | — | 50 | mV |
| I_{SAB} | Output Short Circuit Current | $V_{OD} = 0 V$ Driver outputs shorted to each other | — | — | 12 | mA |

Note: On the left and right sides of the device, this specification is valid only for $V_{CCIO} = 2.5 V$ or $3.3 V$.

3.14.2. SSTLD

All differential SSTL outputs are implemented as a pair of complementary single-ended outputs. All allowable single-ended output classes (class I and class II) are supported in this mode.

3.14.3. LVCMOS33D

All I/O banks support emulated differential I/O using the LVCMOS33D I/O type. This option, along with the external resistor network, provides the system designer the flexibility to place differential outputs on an I/O bank with 3.3 V V_{CCIO} . The default drive current for LVCMOS33D output is 12 mA with the option to change the device strength to 4 mA, 8 mA, 12 mA or 16 mA. Follow the LVCMOS33 specifications for the DC characteristics of the LVCMOS33D.

3.14.4. LVDS25E

The top and bottom sides of ECP5/ECP5-5G devices support LVDS outputs via emulated complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The scheme shown in Figure 3.1 is one possible solution for point-to-point signals.

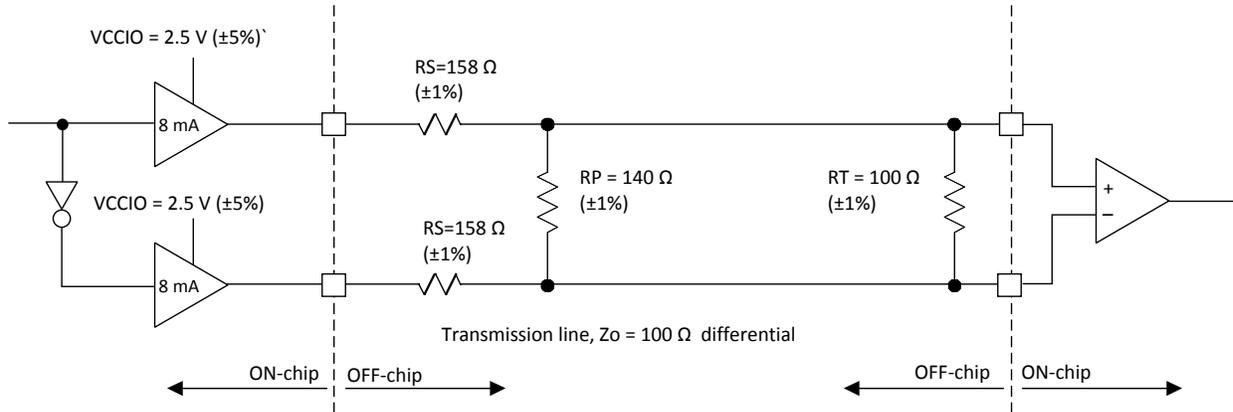


Figure 3.1. LVDS25E Output Termination Example

Table 3.13. LVDS25E DC Conditions

| Parameter | Description | Typical | Unit |
|-------------------|--------------------------------|---------|------|
| V _{CCIO} | Output Driver Supply (±5%) | 2.50 | V |
| Z _{OUT} | Driver Impedance | 20 | Ω |
| R _S | Driver Series Resistor (±1%) | 158 | Ω |
| R _P | Driver Parallel Resistor (±1%) | 140 | Ω |
| R _T | Receiver Termination (±1%) | 100 | Ω |
| V _{OH} | Output High Voltage | 1.43 | V |
| V _{OL} | Output Low Voltage | 1.07 | V |
| V _{OD} | Output Differential Voltage | 0.35 | V |
| V _{CM} | Output Common Mode Voltage | 1.25 | V |
| Z _{BACK} | Back Impedance | 100.5 | Ω |
| I _{DC} | DC Output Current | 6.03 | mA |

3.14.5. BLVDS25

The ECP5/ECP5-5G devices support the BLVDS standard. This standard is emulated using complementary LVCMOS outputs in conjunction with a parallel external resistor across the driver outputs. BLVDS is intended for use when multi-drop and bi-directional multi-point differential signaling is required. The scheme shown in Figure 3.2 is one possible solution for bi-directional multi-point differential signals.

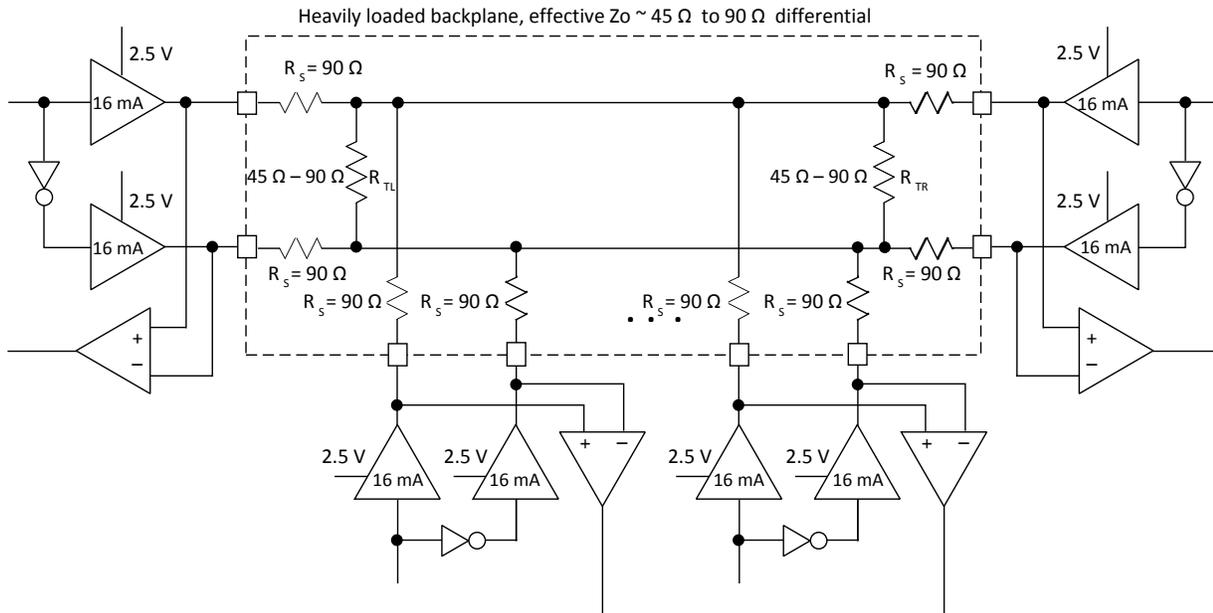


Figure 3.2. BLVDS25 Multi-point Output Example

Over recommended operating conditions.

Table 3.14. BLVDS25 DC Conditions

| Parameter | Description | Typical | | Unit |
|-------------------|--------------------------------|-----------|-----------|------|
| | | Zo = 45 Ω | Zo = 90 Ω | |
| V _{CCIO} | Output Driver Supply (±5%) | 2.50 | 2.50 | V |
| Z _{OUT} | Driver Impedance | 10.00 | 10.00 | Ω |
| R _S | Driver Series Resistor (±1%) | 90.00 | 90.00 | Ω |
| R _{TL} | Driver Parallel Resistor (±1%) | 45.00 | 90.00 | Ω |
| R _{TR} | Receiver Termination (±1%) | 45.00 | 90.00 | Ω |
| V _{OH} | Output High Voltage | 1.38 | 1.48 | V |
| V _{OL} | Output Low Voltage | 1.12 | 1.02 | V |
| V _{OD} | Output Differential Voltage | 0.25 | 0.46 | V |
| V _{CM} | Output Common Mode Voltage | 1.25 | 1.25 | V |
| I _{DC} | DC Output Current | 11.24 | 10.20 | mA |

Note: For input buffer, see LVDS Table 3.12 on page 56.

3.14.6. LVPECL33

The ECP5/ECP5-5G devices support the differential LVPECL standard. This standard is emulated using complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The LVPECL input standard is supported by the LVDS differential input buffer. The scheme shown in Figure 3.3 is one possible solution for point-to-point signals.

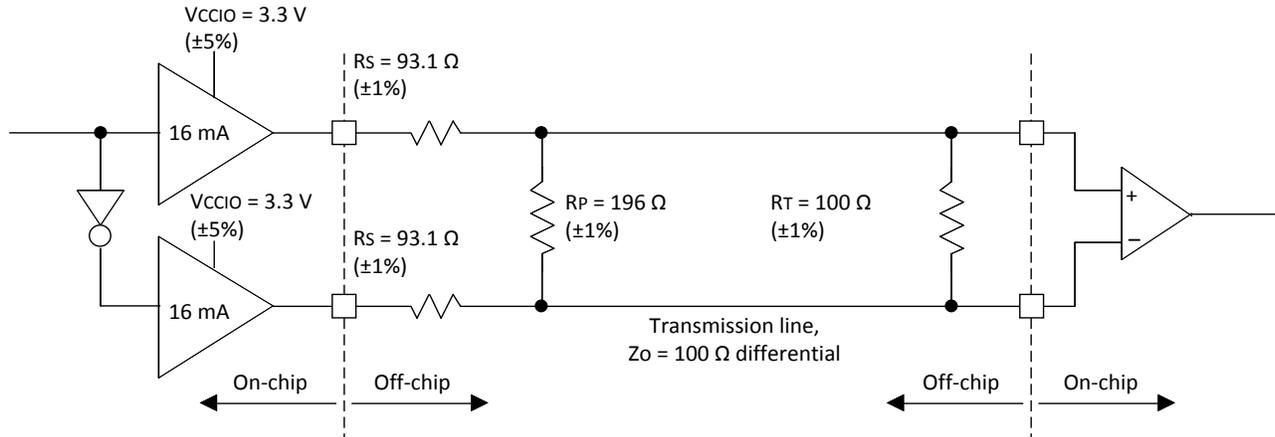


Figure 3.3. Differential LVPECL33

Over recommended operating conditions.

Table 3.15. LVPECL33 DC Conditions

| Parameter | Description | Typical | Unit |
|------------|--|---------|----------|
| V_{CCIO} | Output Driver Supply ($\pm 5\%$) | 3.30 | V |
| Z_{OUT} | Driver Impedance | 10 | Ω |
| R_S | Driver Series Resistor ($\pm 1\%$) | 93 | Ω |
| R_P | Driver Parallel Resistor ($\pm 1\%$) | 196 | Ω |
| R_T | Receiver Termination ($\pm 1\%$) | 100 | Ω |
| V_{OH} | Output High Voltage | 2.05 | V |
| V_{OL} | Output Low Voltage | 1.25 | V |
| V_{OD} | Output Differential Voltage | 0.80 | V |
| V_{CM} | Output Common Mode Voltage | 1.65 | V |
| Z_{BACK} | Back Impedance | 100.5 | Ω |
| I_{DC} | DC Output Current | 12.11 | mA |

Note: For input buffer, see LVDS Table 3.12 on page 56.

3.14.7. MLVDS25

The ECP5/ECP5-5G devices support the differential MLVDS standard. This standard is emulated using complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The MLVDS input standard is supported by the LVDS differential input buffer. The scheme shown in Figure 3.4 is one possible solution for MLVDS standard implementation. Resistor values in the figure are industry standard values for 1% resistors.

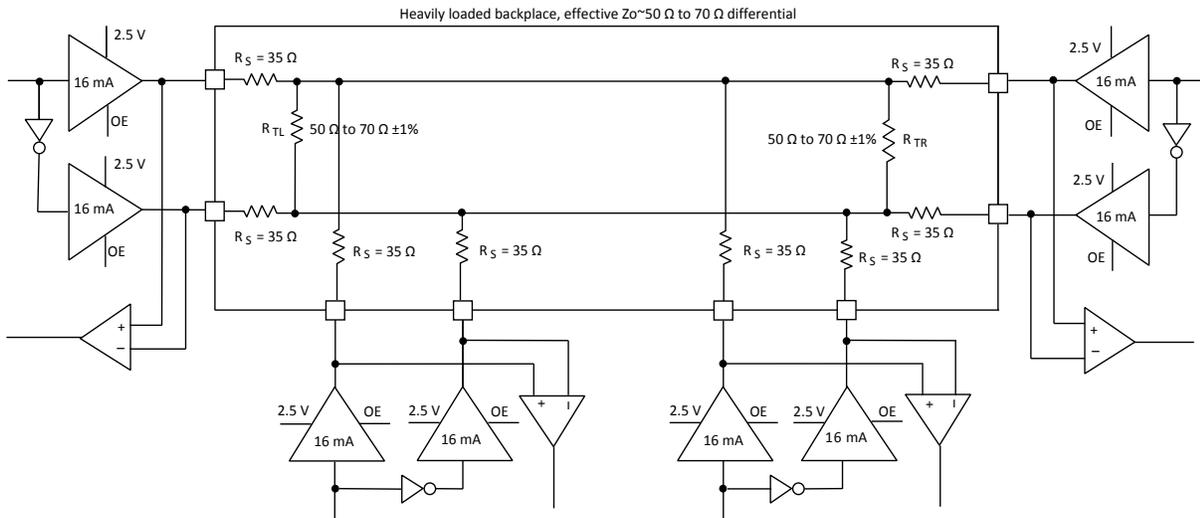


Figure 3.4. MLVDS25 (Multipoint Low Voltage Differential Signaling)

Table 3.16. MLVDS25 DC Conditions

| Parameter | Description | Typical | | Unit |
|-------------------|--------------------------------|---------|---------|------|
| | | Zo=50 Ω | Zo=70 Ω | |
| V _{CCIO} | Output Driver Supply (±5%) | 2.50 | 2.50 | V |
| Z _{OUT} | Driver Impedance | 10.00 | 10.00 | Ω |
| R _S | Driver Series Resistor (±1%) | 35.00 | 35.00 | Ω |
| R _{TL} | Driver Parallel Resistor (±1%) | 50.00 | 70.00 | Ω |
| R _{TR} | Receiver Termination (±1%) | 50.00 | 70.00 | Ω |
| V _{OH} | Output High Voltage | 1.52 | 1.60 | V |
| V _{OL} | Output Low Voltage | 0.98 | 0.90 | V |
| V _{OD} | Output Differential Voltage | 0.54 | 0.70 | V |
| V _{CM} | Output Common Mode Voltage | 1.25 | 1.25 | V |
| I _{DC} | DC Output Current | 21.74 | 20.00 | mA |

Note: For input buffer, see LVDS Table 3.12 on page 56.

3.14.8. SLVS

Scalable Low-Voltage Signaling (SLVS) is based on a point-to-point signaling method defined in the JEDEC JESD8-13 (SLVS-400) standard. This standard evolved from the traditional LVDS standard and relies on the advantage of its use of smaller voltage swings and a lower common-mode voltage. The 200 mV (400 mV p-p) SLVS swing contributes to a reduction in power.

The ECP5/ECP5-5G devices can receive differential input up to 800 Mb/s with its LVDS input buffer. This LVDS input buffer is used to meet the SLVS input standard specified by the JEDEC standard. The SLVS output parameters are compared to ECP5/ECP5-5G LVDS input parameters, as listed in [Table 3.17](#).

Table 3.17. Input to SLVS

| Parameter | ECP5/ECP5-5G LVDS Input | SLVS Output | Unit |
|----------------------------|-------------------------|-------------|------|
| Vcm (min) | 50 | 150 | mV |
| Vcm (max) | 2350 | 250 | mV |
| Differential Voltage (min) | 100 | 140 | mV |
| Differential Voltage (max) | — | 270 | mV |

ECP5/ECP5-5G does not support SLVS output. However, SLVS output can be created using ECP5/ECP5-5G LVDS outputs by level shift to meet the low Vcm/Vod levels required by SLVS. [Figure 3.5](#) shows how the LVDS output can be shifted external to meet SLVS levels.

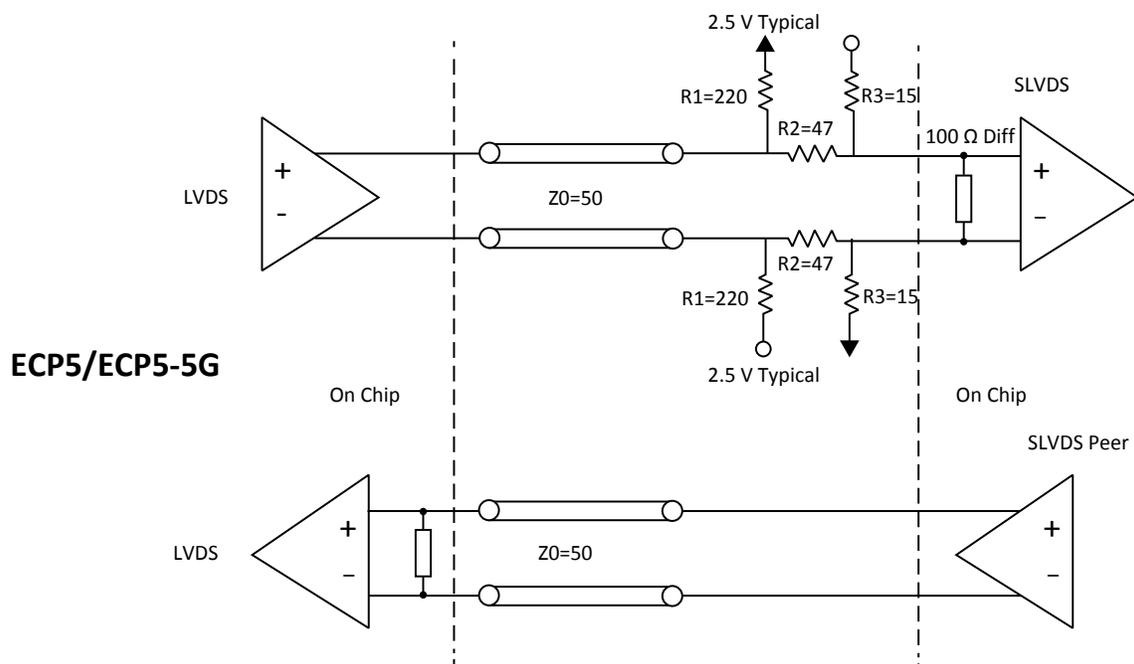


Figure 3.5. SLVS Interface

3.15. Typical Building Block Function Performance

Table 3.18. Pin-to-Pin Performance

| Function | -8 Timing | Unit |
|------------------------|-----------|------|
| Basic Functions | | |
| 16-Bit Decoder | 5.06 | ns |
| 32-Bit Decoder | 6.08 | ns |
| 64-Bit Decoder | 5.06 | ns |
| 4:1 Mux | 4.45 | ns |
| 8:1 Mux | 4.63 | ns |
| 16:1 Mux | 4.81 | ns |
| 32:1 Mux | 4.85 | ns |

Notes:

1. I/Os are configured with LVCMOS25 with VCCIO=2.5, 12 mA drive.
2. These functions were generated using Lattice Diamond design software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.
3. Commercial timing numbers are shown. Industrial numbers are typically slower and can be extracted from Lattice Diamond design software tool.

Table 3.19. Register-to-Register Performance

| Function | -8 Timing | Unit |
|---|-----------|------|
| Basic Functions | | |
| 16-Bit Decoder | 441 | MHz |
| 32-Bit Decoder | 441 | MHz |
| 64-Bit Decoder | 332 | MHz |
| 4:1 Mux | 441 | MHz |
| 8:1 Mux | 441 | MHz |
| 16:1 Mux | 441 | MHz |
| 32:1 Mux | 441 | MHz |
| 8-Bit Adder | 441 | MHz |
| 16-Bit Adder | 441 | MHz |
| 64-Bit Adder | 441 | MHz |
| 16-Bit Counter | 384 | MHz |
| 32-Bit Counter | 317 | MHz |
| 64-Bit Counter | 263 | MHz |
| 64-Bit Accumulator | 288 | MHz |
| Embedded Memory Functions | | |
| 1024x18 True-Dual Port RAM (Write Through or Normal), with EBR Output Registers | 272 | MHz |
| 1024x18 True-Dual Port RAM (Read-Before-Write), with EBR Output Registers | 214 | MHz |
| Distributed Memory Functions | | |
| 16 x 2 Pseudo-Dual Port or 16 x 4 Single Port RAM (One PFU) | 441 | MHz |
| 16 x 4 Pseudo-Dual Port (Two PFUs) | 441 | MHz |
| DSP Functions (DDR/SDR) | | |
| 9 x 9 Multiplier (All Registers) | 370/185 | MHz |
| 18 x 18 Multiplier (All Registers) | 370/185 | MHz |
| 36 x 36 Multiplier (All Registers) | 370/185 | MHz |
| 18 x 18 Multiply-Add/Sub (All Registers) | 370/185 | MHz |
| 18 x 18 Multiply/Accumulate (Input and Output Registers) | 370/185 | MHz |

Notes:

1. These functions were generated using Lattice Diamond design software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.
2. Commercial timing numbers are shown. Industrial numbers are typically slower and can be extracted from Lattice Diamond design software tool.

3.16. Derating Timing Tables

Logic timing provided in the following sections of this data sheet and the Diamond design tools are worst case numbers in the operating range. Actual delays at nominal temperature and voltage for best case process, can be much better than the values given in the tables. The Diamond design tool can provide logic timing numbers at a particular temperature and voltage.

3.17. ECP5/ECP5-5G Maximum I/O Buffer Speed

Over recommended operating conditions.

Table 3.20. ECP5/ECP5-5G Maximum I/O Buffer Speed

| Buffer | Description | Max | Unit |
|---------------------------------|--|-----|------|
| Maximum Input Frequency | | | |
| LVDS25 | LVDS, $V_{CCIO} = 2.5\text{ V}$ | 400 | MHz |
| MLVDS25 | MLVDS, Emulated, $V_{CCIO} = 2.5\text{ V}$ | 400 | MHz |
| BLVDS25 | BLVDS, Emulated, $V_{CCIO} = 2.5\text{ V}$ | 400 | MHz |
| MIPI D-PHY (HS Mode) | MIPI Video | 400 | MHz |
| SLVS | SLVS similar to MIPI | 400 | MHz |
| Mini LVDS | Mini LVDS | 400 | MHz |
| LVPECL33 | LVPECL, Emulated, $V_{CCIO} = 3.3\text{ V}$ | 400 | MHz |
| SSTL18 (all supported classes) | SSTL_18 class I, II, $V_{CCIO} = 1.8\text{ V}$ | 400 | MHz |
| SSTL15 (all supported classes) | SSTL_15 class I, II, $V_{CCIO} = 1.5\text{ V}$ | 400 | MHz |
| SSTL135 (all supported classes) | SSTL_135 class I, II, $V_{CCIO} = 1.35\text{ V}$ | 400 | MHz |
| HSUL12 (all supported classes) | HSUL_12 class I, II, $V_{CCIO} = 1.2\text{ V}$ | 400 | MHz |
| LVTTTL33 | LVTTTL, $V_{CCIO} = 3.3\text{ V}$ | 200 | MHz |
| LVC MOS33 | LVC MOS, $V_{CCIO} = 3.3\text{ V}$ | 200 | MHz |
| LVC MOS25 | LVC MOS, $V_{CCIO} = 2.5\text{ V}$ | 200 | MHz |
| LVC MOS18 | LVC MOS, $V_{CCIO} = 1.8\text{ V}$ | 200 | MHz |
| LVC MOS15 | LVC MOS 1.5, $V_{CCIO} = 1.5\text{ V}$ | 200 | MHz |
| LVC MOS12 | LVC MOS 1.2, $V_{CCIO} = 1.2\text{ V}$ | 200 | MHz |
| Maximum Output Frequency | | | |
| LVDS25E | LVDS, Emulated, $V_{CCIO} = 2.5\text{ V}$ | 300 | MHz |
| LVDS25 | LVDS, $V_{CCIO} = 2.5\text{ V}$ | 400 | MHz |
| MLVDS25 | MLVDS, Emulated, $V_{CCIO} = 2.5\text{ V}$ | 300 | MHz |
| BLVDS25 | BLVDS, Emulated, $V_{CCIO} = 2.5\text{ V}$ | 300 | MHz |
| LVPECL33 | LVPECL, Emulated, $V_{CCIO} = 3.3\text{ V}$ | 300 | MHz |
| SSTL18 (all supported classes) | SSTL_18 class I, II, $V_{CCIO} = 1.8\text{ V}$ | 400 | MHz |
| SSTL15 (all supported classes) | SSTL_15 class I, II, $V_{CCIO} = 1.5\text{ V}$ | 400 | MHz |
| SSTL135 (all supported classes) | SSTL_135 class I, II, $V_{CCIO} = 1.35\text{ V}$ | 400 | MHz |
| HSUL12 (all supported classes) | HSUL12 class I, II, $V_{CCIO} = 1.2\text{ V}$ | 400 | MHz |
| LVTTTL33 | LVTTTL, $V_{CCIO} = 3.3\text{ V}$ | 150 | MHz |
| LVC MOS33 (For all drives) | LVC MOS, 3.3 V | 150 | MHz |
| LVC MOS25 (For all drives) | LVC MOS, 2.5 V | 150 | MHz |
| LVC MOS18 (For all drives) | LVC MOS, 1.8 V | 150 | MHz |
| LVC MOS15 (For all drives) | LVC MOS, 1.5 V | 150 | MHz |
| LVC MOS12 (For all drives) | LVC MOS, 1.2 V | 150 | MHz |

Notes:

1. These maximum speeds are characterized but not tested on every device.
2. Maximum I/O speed for differential output standards emulated with resistors depends on the layout.
3. LVC MOS timing is measured with the load specified in Switching Test Conditions, [Table 3.43](#) on page 91.
4. All speeds are measured at fast slew.
5. Actual system operation may vary depending on user logic implementation.
6. Maximum data rate equals 2 times the clock rate when utilizing DDR.

3.18. ECP5/ECP5-5G External Switching Characteristics

Over recommended commercial operating conditions.

Table 3.21. ECP5/ECP5-5G External Switching Characteristics

| Parameter | Description | Device | -8 | | -7 | | -6 | | Unit |
|---|--|-------------|-------|-----|-------|-----|------|-----|------|
| | | | Min | Max | Min | Max | Min | Max | |
| Clocks | | | | | | | | | |
| Primary Clock | | | | | | | | | |
| f_{MAX_PRI} | Frequency for Primary Clock Tree | — | — | 370 | — | 303 | — | 257 | MHz |
| t_{W_PRI} | Clock Pulse Width for Primary Clock | — | 0.8 | — | 0.9 | — | 1.0 | — | ns |
| t_{SKEW_PRI} | Primary Clock Skew Within a Device | — | — | 420 | — | 462 | — | 505 | ps |
| Edge Clock | | | | | | | | | |
| f_{MAX_EDGE} | Frequency for Edge Clock Tree | — | — | 400 | — | 350 | — | 312 | MHz |
| t_{W_EDGE} | Clock Pulse Width for Edge Clock | — | 1.175 | — | 1.344 | — | 1.50 | — | ns |
| t_{SKEW_EDGE} | Edge Clock Skew Within a Bank | — | — | 160 | — | 180 | — | 200 | ps |
| Generic SDR Input | | | | | | | | | |
| General I/O Pin Parameters Using Dedicated Primary Clock Input Without PLL | | | | | | | | | |
| t_{CO} | Clock to Output - PIO Output Register | All Devices | — | 5.4 | — | 6.1 | — | 6.8 | ns |
| t_{SU} | Clock to Data Setup - PIO Input Register | All Devices | 0 | — | 0 | — | 0 | — | ns |
| t_H | Clock to Data Hold - PIO Input Register | All Devices | 2.7 | — | 3 | — | 3.3 | — | ns |
| t_{SU_DEL} | Clock to Data Setup - PIO Input Register with Data Input Delay | All Devices | 1.2 | — | 1.33 | — | 1.46 | — | ns |
| t_{H_DEL} | Clock to Data Hold - PIO Input Register with Data Input Delay | All Devices | 0 | — | 0 | — | 0 | — | ns |
| f_{MAX_IO} | Clock Frequency of I/O and PFU Register | All Devices | — | 400 | — | 350 | — | 312 | MHz |
| General I/O Pin Parameters Using Dedicated Primary Clock Input with PLL | | | | | | | | | |
| t_{COPLL} | Clock to Output - PIO Output Register | All Devices | — | 3.5 | — | 3.8 | — | 4.1 | ns |
| t_{SUPLL} | Clock to Data Setup - PIO Input Register | All Devices | 0.7 | — | 0.78 | — | 0.85 | — | ns |
| t_{HPLL} | Clock to Data Hold - PIO Input Register | All Devices | 0.8 | — | 0.89 | — | 0.98 | — | ns |
| t_{SU_DEPLL} | Clock to Data Setup - PIO Input Register with Data Input Delay | All Devices | 1.6 | — | 1.78 | — | 1.95 | — | ns |

Table 3.21. ECP5/ECP5-5G External Switching Characteristics (Continued)

| Parameter | Description | Device | -8 | | -7 | | -6 | | Unit |
|---|---|-------------|-------|-----------|-------|-------|-------|------------|------------------|
| | | | Min | Max | Min | Max | Min | Max | |
| t _{H_DEPLL} | Clock to Data Hold - PIO Input Register with Data Input Delay | All Devices | 0 | — | 0 | — | 0 | — | Ns |
| Generic DDR Input | | | | | | | | | |
| Generic DDRX1 Inputs With Clock and Data Centered at Pin (GDDR1_RX.SCLK.Centered) Using PCLK Clock Input - Figure 3.6 | | | | | | | | | |
| t _{SU_GDDR1_centered} | Data Setup Before CLK Input | All Devices | 0.52 | — | 0.52 | — | 0.52 | — | ns |
| t _{HD_GDDR1_centered} | Data Hold After CLK Input | All Devices | 0.52 | — | 0.52 | — | 0.52 | — | ns |
| f _{DATA_GDDR1_centered} | GDDR1 Data Rate | All Devices | — | 500 | — | 500 | — | 500 | Mb/s |
| f _{MAX_GDDR1_centered} | GDDR1 CLK Frequency (SCLK) | All Devices | — | 250 | — | 250 | — | 250 | MHz |
| Generic DDRX1 Inputs With Clock and Data Aligned at Pin (GDDR1_RX.SCLK.Aligned) Using PCLK Clock Input - Figure 3.7 | | | | | | | | | |
| t _{SU_GDDR1_aligned} | Data Setup from CLK Input | All Devices | — | — 0.55 | — | -0.55 | — | -0.55 | ns + 1/2 UI |
| t _{HD_GDDR1_aligned} | Data Hold from CLK Input | All Devices | 0.55 | — | 0.55 | — | 0.55 | — | ns + 1/2 UI |
| f _{DATA_GDDR1_aligned} | GDDR1 Data Rate | All Devices | — | 500 | — | 500 | — | 500 | Mb/s |
| f _{MAX_GDDR1_aligned} | GDDR1 CLK Frequency (SCLK) | All Devices | — | 250 | — | 250 | — | 250 | MHz |
| Generic DDRX2 Inputs With Clock and Data Centered at Pin (GDDR2_RX.ECLK.Centered) Using PCLK Clock Input, Left and Right sides Only - Figure 3.6 | | | | | | | | | |
| t _{SU_GDDR2_centered} | Data Setup before CLK Input | All Devices | 0.321 | — | 0.403 | — | 0.471 | — | ns |
| t _{HD_GDDR2_centered} | Data Hold after CLK Input | All Devices | 0.321 | — | 0.403 | — | 0.471 | — | ns |
| f _{DATA_GDDR2_centered} | GDDR2 Data Rate | All Devices | — | 800 | — | 700 | — | 624 | Mb/s |
| f _{MAX_GDDR2_centered} | GDDR2 CLK Frequency (ECLK) | All Devices | — | 400 | — | 350 | — | 312 | MHz |
| Generic DDRX2 Inputs With Clock and Data Aligned at Pin (GDDR2_RX.ECLK.Aligned) Using PCLK Clock Input, Left and Right sides Only - Figure 3.7 | | | | | | | | | |
| t _{SU_GDDR2_aligned} | Data Setup from CLK Input | All Devices | — | -0.344 | — | -0.42 | — | - 0.495 | ns + 1/2 UI |
| t _{HD_GDDR2_aligned} | Data Hold from CLK Input | All Devices | 0.344 | — | 0.42 | — | 0.495 | — | ns + 1/2 UI |
| f _{DATA_GDDR2_aligned} | GDDR2 Data Rate | All Devices | — | 800 | — | 700 | — | 624 | Mb/s |
| f _{MAX_GDDR2_aligned} | GDDR2 CLK Frequency (ECLK) | All Devices | — | 400 | — | 350 | — | 312 | MHz |
| Video DDRX71 Inputs With Clock and Data Aligned at Pin (GDDR71_RX.ECLK) Using PLL Clock Input, Left and Right sides Only - Figure 3.11 | | | | | | | | | |
| t _{SU_LVDS71_i} | Data Setup from CLK Input (bit i) | All Devices | — | -0.271 | — | -0.39 | — | -0.41 | ns+(1/2+i) UI |
| t _{HD_LVDS71_i} | Data Hold from CLK Input (bit i) | All Devices | 0.271 | — | 0.39 | — | 0.41 | — | ns+(1/2+i) UI |
| f _{DATA_LVDS71} | DDR71 Data Rate | All Devices | — | 756 | — | 620 | — | 525 | Mb/s |
| f _{MAX_LVDS71} | DDR71 CLK Frequency (ECLK) | All Devices | — | 378 | — | 310 | — | 262.5 | MHz |

Table 3.21. ECP5/ECP5-5G External Switching Characteristics (Continued)

| Parameter | Description | Device | -8 | | -7 | | -6 | | Unit |
|--|---------------------------------------|-------------|--------|-------|-------|--------|--------|--------|-------------|
| | | | Min | Max | Min | Max | Min | Max | |
| Generic DDR Output | | | | | | | | | |
| Generic DDRX1 Outputs With Clock and Data Centered at Pin (GDDR1_TX.SCLK.Centered) Using PCLK Clock Input - Figure 3.8 | | | | | | | | | |
| t _{DVB_GDDR1_centered} | Data Output Valid before CLK Output | All Devices | -0.67 | — | -0.67 | — | -0.67 | — | ns + 1/2 UI |
| t _{DVA_GDDR1_centered} | Data Output Valid after CLK Output | All Devices | -0.67 | — | -0.67 | — | -0.67 | — | ns + 1/2 UI |
| f _{DATA_GDDR1_centered} | GDDR1 Data Rate | All Devices | — | 500 | — | 500 | — | 500 | Mb/s |
| f _{MAX_GDDR1_centered} | GDDR1 CLK Frequency (SCLK) | All Devices | — | 250 | — | 250 | — | 250 | MHz |
| Generic DDRX1 Outputs With Clock and Data Aligned at Pin (GDDR1_TX.SCLK.Aligned) Using PCLK Clock Input - Figure 3.9 | | | | | | | | | |
| t _{DIB_GDDR1_aligned} | Data Output Invalid before CLK Output | All Devices | -0.3 | — | -0.3 | — | -0.3 | — | ns |
| t _{DIA_GDDR1_aligned} | Data Output Invalid after CLK Output | All Devices | — | 0.3 | — | 0.3 | — | 0.3 | ns |
| f _{DATA_GDDR1_aligned} | GDDR1 Data Rate | All Devices | — | 500 | — | 500 | — | 500 | Mb/s |
| f _{MAX_GDDR1_aligned} | GDDR1 CLK Frequency (SCLK) | All Devices | — | 250 | — | 250 | — | 250 | MHz |
| Generic DDRX2 Outputs With Clock and Data Centered at Pin (GDDR2_TX.ECLK.Centered) Using PCLK Clock Input, Left and Right sides Only - Figure 3.8 | | | | | | | | | |
| t _{DVB_GDDR2_centered} | Data Output Valid Before CLK Output | All Devices | -0.442 | — | -0.56 | — | -0.676 | — | ns + 1/2 UI |
| t _{DVA_GDDR2_centered} | Data Output Valid After CLK Output | All Devices | — | 0.442 | — | 0.56 | — | 0.676 | ns + 1/2 UI |
| f _{DATA_GDDR2_centered} | GDDR2 Data Rate | All Devices | — | 800 | — | 700 | — | 624 | Mb/s |
| f _{MAX_GDDR2_centered} | GDDR2 CLK Frequency (ECLK) | All Devices | — | 400 | — | 350 | — | 312 | MHz |
| Generic DDRX2 Outputs With Clock and Data Aligned at Pin (GDDR2_TX.ECLK.Aligned) Using PCLK Clock Input, Left and Right sides Only - Figure 3.9 | | | | | | | | | |
| t _{DIB_GDDR2_aligned} | Data Output Invalid before CLK Output | All Devices | -0.16 | — | -0.18 | — | -0.2 | — | ns |
| t _{DIA_GDDR2_aligned} | Data Output Invalid after CLK Output | All Devices | — | 0.16 | — | 0.18 | — | 0.2 | ns |
| f _{DATA_GDDR2_aligned} | GDDR2 Data Rate | All Devices | — | 800 | — | 700 | — | 624 | Mb/s |
| f _{MAX_GDDR2_aligned} | GDDR2 CLK Frequency (ECLK) | All Devices | — | 400 | — | 350 | — | 312 | MHz |
| Video DDRX71 Outputs With Clock and Data Aligned at Pin (GDDR71_TX.ECLK) Using PLL Clock Input, Left and Right sides Only - Figure 3.12 | | | | | | | | | |
| t _{DIB_LVDS71_i} | Data Output Invalid before CLK Output | All Devices | -0.16 | — | -0.18 | — | -0.2 | — | ns + (i) UI |
| t _{DIA_LVDS71_i} | Data Output Invalid after CLK Output | All Devices | — | 0.16 | — | 0.18 | — | 0.2 | ns + (i) UI |
| f _{DATA_LVDS71} | DDR71 Data Rate | All Devices | — | 756 | — | 620 | — | 525 | Mb/s |
| f _{MAX_LVDS71} | DDR71 CLK Frequency (ECLK) | All Devices | — | 378 | — | 310 | — | 262.5 | MHz |
| Memory Interface | | | | | | | | | |
| DDR2/DDR3/DDR3L/LPDDR2/LPDDR3 READ (DQ Input Data are Aligned to DQS) | | | | | | | | | |
| t _{DVB DQ DDR2} t _{DVB DQ DDR3} t _{DVB DQ DDR3L} t _{DVB DQ LPDDR2} t _{DVB DQ LPDDR3} | Data Output Valid before DQS Input | All Devices | — | -0.26 | — | -0.317 | — | -0.374 | ns + 1/2 UI |
| t _{DVADQ DDR2} t _{DVADQ DDR3} t _{DVADQ DDR3L} t _{DVADQ LPDDR2} t _{DVADQ LPDDR3} | Data Output Valid after DQS Input | All Devices | 0.26 | — | 0.317 | — | 0.374 | — | ns + 1/2 UI |

Table 3.21. ECP5/ECP5-5G External Switching Characteristics (Continued)

| Parameter | Description | Device | -8 | | -7 | | -6 | | Unit |
|--|-------------------------------------|-------------|------|-------|------|-------|------|-------|------|
| | | | Min | Max | Min | Max | Min | Max | |
| f_{DATA_DDR2} f_{DATA_DDR3} f_{DATA_DDR3L} f_{DATA_LPDDR2} f_{DATA_LPDDR3} | DDR Memory Data Rate | All Devices | — | 800 | — | 700 | — | 624 | Mb/s |
| f_{MAX_DDR2} f_{MAX_DDR3} f_{MAX_DDR3L} f_{MAX_LPDDR2} f_{MAX_LPDDR3} | DDR Memory CLK Frequency (ECLK) | All Devices | — | 400 | — | 350 | — | 312 | MHz |
| DDR2/DDR3/DDR3L/LPDDR2/LPDDR3 WRITE (DQ Output Data are Centered to DQS) | | | | | | | | | |
| t_{DQVBS_DDR2} t_{DQVBS_DDR3} t_{DQVBS_DDR3L} t_{DQVBS_LPDDR2} t_{DQVBS_LPDDR3} | Data Output Valid before DQS Output | All Devices | — | -0.25 | — | -0.25 | — | -0.25 | UI |
| t_{DQVAS_DDR2} t_{DQVAS_DDR3} t_{DQVAS_DDR3L} t_{DQVAS_LPDDR2} t_{DQVAS_LPDDR3} | Data Output Valid after DQS Output | All Devices | 0.25 | — | 0.25 | — | 0.25 | — | UI |
| f_{DATA_DDR2} f_{DATA_DDR3} f_{DATA_DDR3L} f_{DATA_LPDDR2} f_{DATA_LPDDR3} | DDR Memory Data Rate | All Devices | — | 800 | — | 700 | — | 624 | Mb/s |
| f_{MAX_DDR2} f_{MAX_DDR3} f_{MAX_DDR3L} f_{MAX_LPDDR2} f_{MAX_LPDDR3} | DDR Memory CLK Frequency (ECLK) | All Devices | — | 400 | — | 350 | — | 312 | MHz |

Notes:

- Commercial timing numbers are shown. Industrial numbers are typically slower and can be extracted from the Diamond software.
- General I/O timing numbers are based on LVCMOS 2.5, 12 mA, Fast Slew Rate, 0pf load.
Generic DDR timing are numbers based on LVDS I/O.
DDR2 timing numbers are based on SSTL18.
DDR3 timing numbers are based on SSTL15.
LPDDR2 and LPDDR3 timing numbers are based on HSUL12.
- Uses LVDS I/O standard for measurements.
- Maximum clock frequencies are tested under best case conditions. System performance may vary upon the user environment.
- All numbers are generated with the Diamond software.

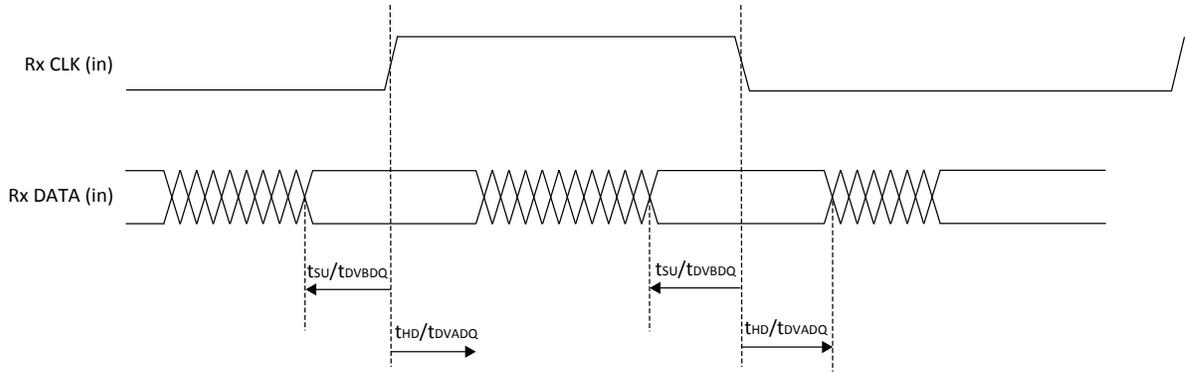


Figure 3.6. Receiver RX.CLK.Centered Waveforms

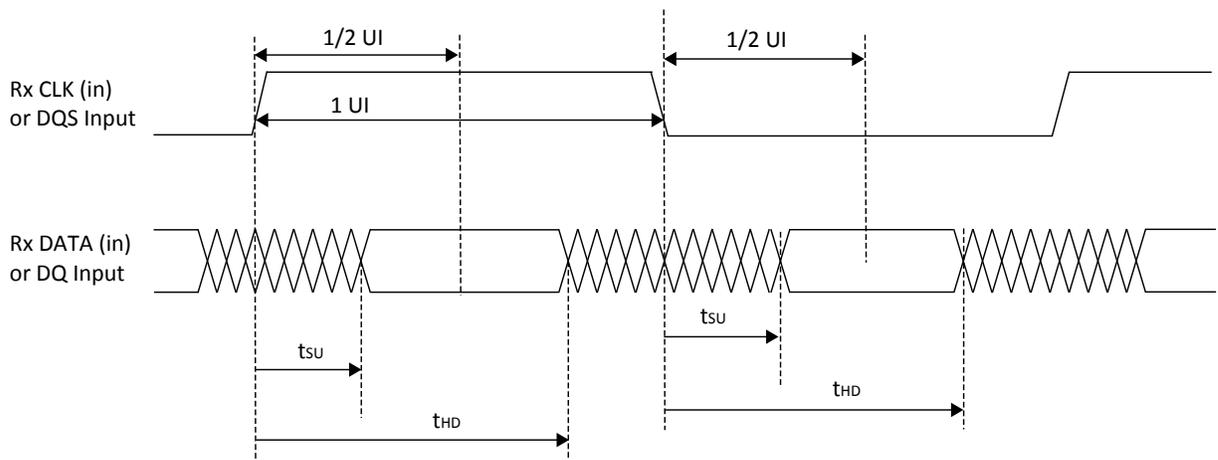


Figure 3.7. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms

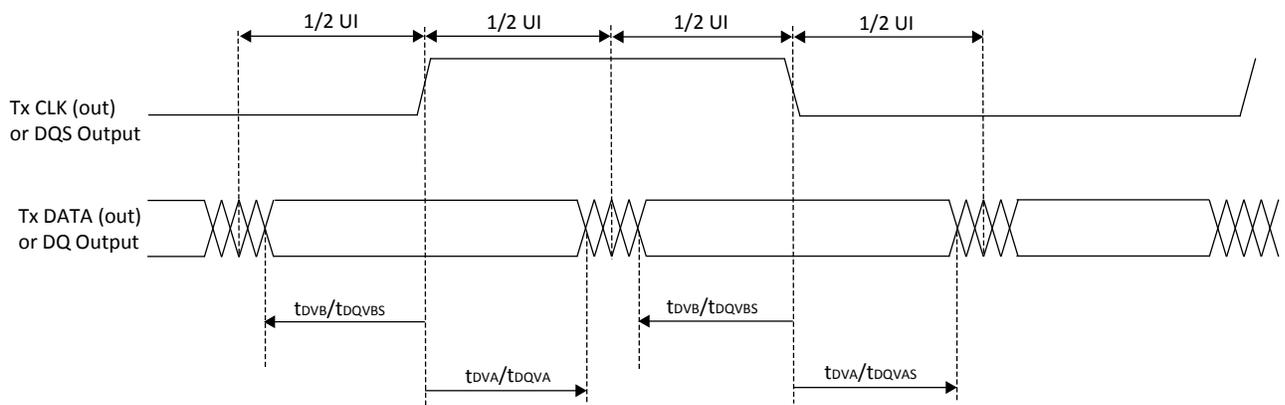


Figure 3.8. Transmit TX.CLK.Centered and DDR Memory Output Waveforms


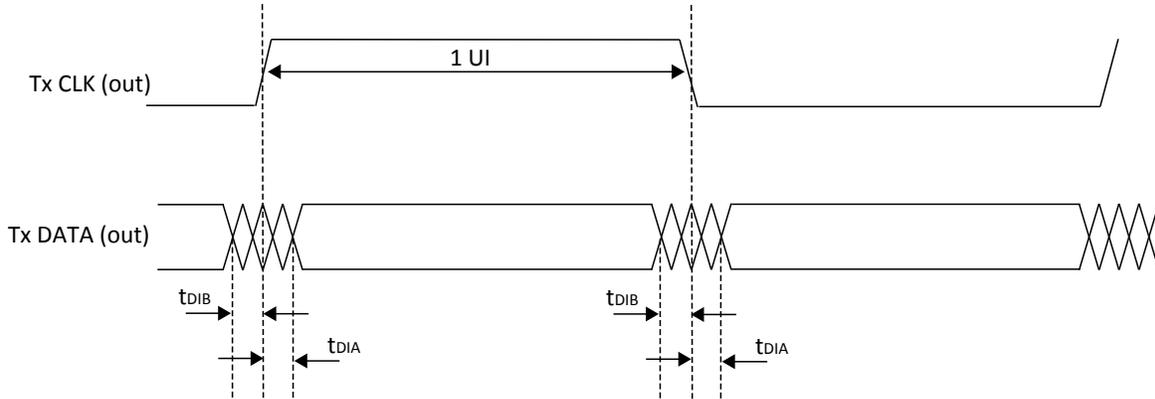


Figure 3.9. Transmit TX.CLK Aligned Waveforms

Receiver – Shown for one LVDS Channel

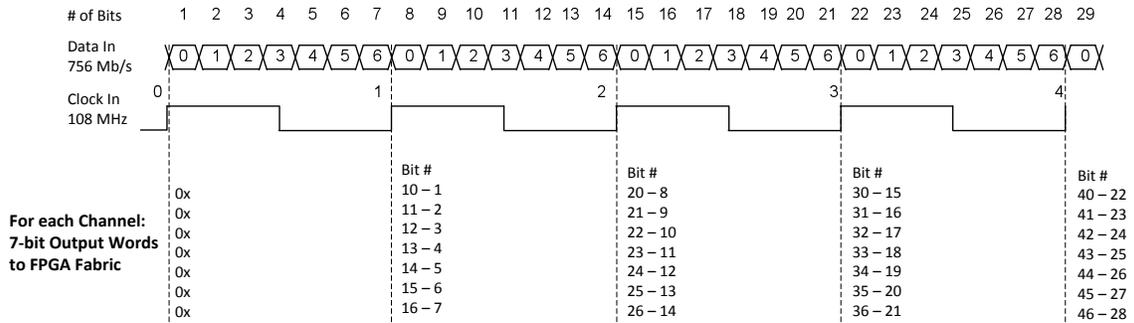

Transmitter – Shown for one LVDS Channel

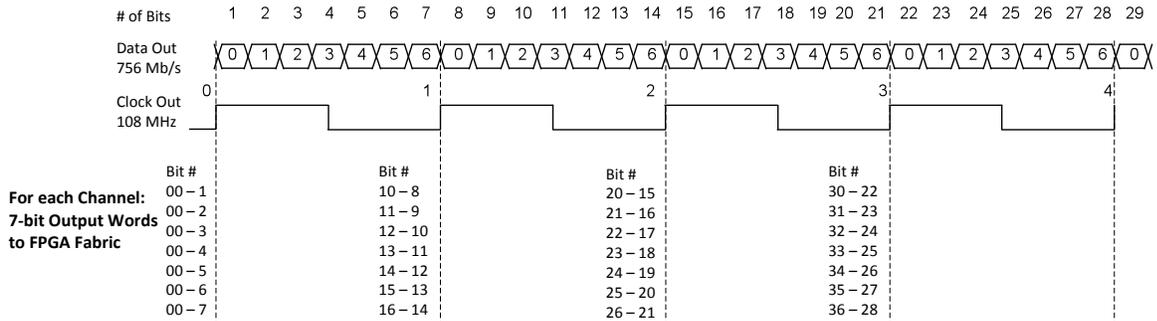


Figure 3.10. DDRX71 Video Timing Waveforms

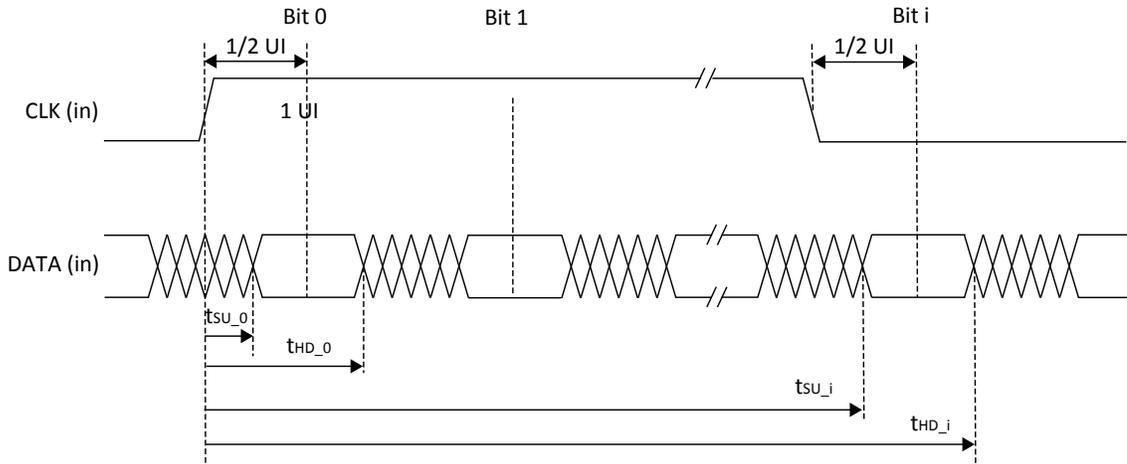


Figure 3.11. Receiver DDRX71_RX Waveforms

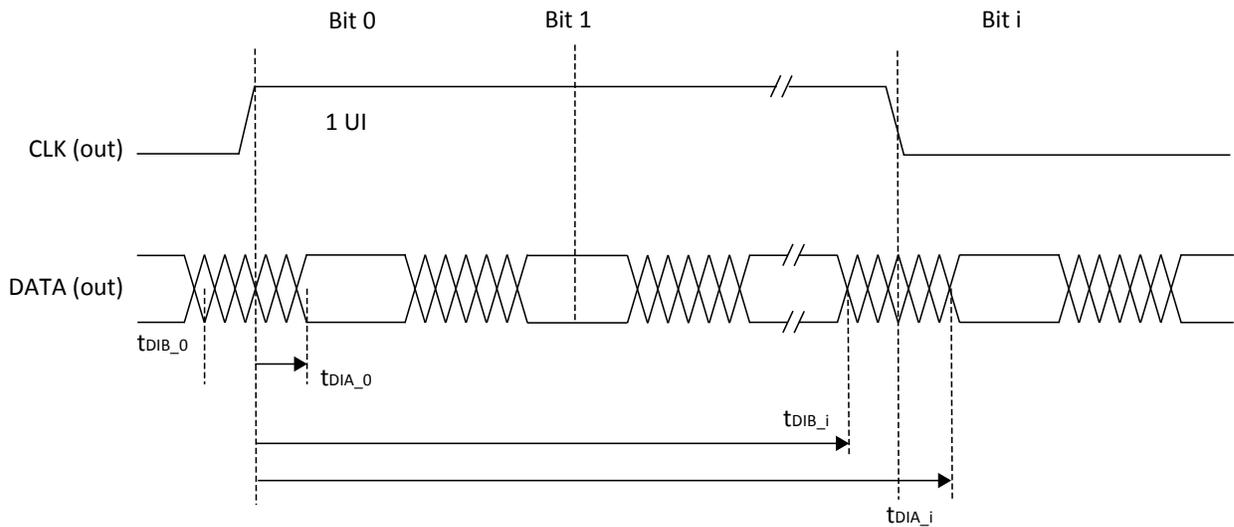


Figure 3.12. Transmitter DDRX71_TX Waveforms

3.19. sysCLOCK PLL Timing

Over recommended operating conditions.

Table 3.22. sysCLOCK PLL Timing

| Parameter | Descriptions | Conditions | Min | Max | Units |
|---------------------------|--|-------------------------|-------|-------|------------|
| f_{IN} | Input Clock Frequency (CLKI, CLKFB) | — | 8 | 400 | MHz |
| f_{OUT} | Output Clock Frequency (CLKOP, CLKOS) | — | 3.125 | 400 | MHz |
| f_{VCO} | PLL VCO Frequency | — | 400 | 800 | MHz |
| f_{PFD}^3 | Phase Detector Input Frequency | — | 10 | 400 | MHz |
| AC Characteristics | | | | | |
| t_{DT} | Output Clock Duty Cycle | — | 45 | 55 | % |
| t_{PH4} | Output Phase Accuracy | — | -5 | 5 | % |
| t_{OPJIT}^1 | Output Clock Period Jitter | $f_{OUT} \geq 100$ MHz | — | 100 | ps p-p |
| | | $f_{OUT} < 100$ MHz | — | 0.025 | UIPP |
| | Output Clock Cycle-to-Cycle Jitter | $f_{OUT} \geq 100$ MHz | — | 200 | ps p-p |
| | | $f_{OUT} < 100$ MHz | — | 0.050 | UIPP |
| | Output Clock Phase Jitter | $f_{PFD} > 100$ MHz | — | 200 | ps p-p |
| | | $f_{PFD} < 100$ MHz | — | 0.011 | UIPP |
| t_{SPO} | Static Phase Offset | Divider ratio = integer | — | 400 | ps p-p |
| t_W | Output Clock Pulse Width | At 90% or 10% | 0.9 | — | ns |
| t_{LOCK}^2 | PLL Lock-in Time | — | — | 15 | ms |
| t_{UNLOCK} | PLL Unlock Time | — | — | 50 | ns |
| t_{IPJIT} | Input Clock Period Jitter | $f_{PFD} \geq 20$ MHz | — | 1,000 | ps p-p |
| | | $f_{PFD} < 20$ MHz | — | 0.02 | UIPP |
| t_{HI} | Input Clock High Time | 90% to 90% | 0.5 | — | ns |
| t_{LO} | Input Clock Low Time | 10% to 10% | 0.5 | — | ns |
| t_{RST} | RST/ Pulse Width | — | 1 | — | ms |
| t_{RSTREC} | RST Recovery Time | — | 1 | — | ns |
| t_{LOAD_REG} | Min Pulse for CIB_LOAD_REG | — | 10 | — | ns |
| $t_{ROTATE-SETUP}$ | Min time for CIB dynamic phase controls to be stable fore CIB_ROTATE | — | 5 | — | ns |
| $t_{ROTATE-WD}$ | Min pulse width for CIB_ROTATE to maintain “0” or “1” | — | 4 | — | VCO cycles |

Notes:

1. Jitter sample is taken over 10,000 samples for Periodic jitter, and 2,000 samples for Cycle-to-Cycle jitter of the primary PLL output with clean reference clock with no additional I/O toggling.
2. Output clock is valid after t_{LOCK} for PLL reset and dynamic delay adjustment.
3. Period jitter and cycle-to-cycle jitter numbers are guaranteed for $f_{PFD} > 10$ MHz. For $f_{PFD} < 10$ MHz, the jitter numbers may not be met in certain conditions.

3.20. SERDES High-Speed Data Transmitter

Table 3.23. Serial Output Timing and Levels

| Symbol | Description | Min | Typ | Max | Unit |
|------------------|--|------|-----------------|-----|----------|
| $V_{TX-DIFF-PP}$ | Peak-Peak Differential voltage on selected amplitude ^{1, 2} | -25% | — | 25% | mV, p-p |
| $V_{TX-CM-DC}$ | Output common mode voltage | — | $V_{CCHTX} / 2$ | — | mV, p-p |
| T_{TX-R} | Rise time (20% to 80%) | 50 | — | — | ps |
| T_{TX-F} | Fall time (80% to 20%) | 50 | — | — | ps |
| $T_{TX-CM-AC-P}$ | RMS AC peak common-mode output voltage | — | — | 20 | mV |
| Z_{TX_SE} | Single ended output impedance for 50/75 Ω | -20% | 50/75 | 20% | Ω |
| | Single ended output impedance for 6K Ω | -25% | 6K | 25% | Ω |
| RL_{TX_DIFF} | Differential return loss (with package included) ³ | — | — | -10 | dB |
| RL_{TX_COM} | Common mode return loss (with package included) ³ | — | — | -6 | dB |

Notes:

1. Measured with 50 Ω Tx Driver impedance at $V_{CCHTX} \pm 5\%$.
2. Refer to TN1261, [ECP5 and ECP5-5G SERDES/PCS Usage Guide](#) for settings of Tx amplitude.
3. Return los = -10 dB (differential), -6 dB (common mode) for 100 MHz $\leq f \leq$ 1.6 GHz with 50 Ω output impedance configuration. This includes degradation due to package effects.

Table 3.24. Channel Output Jitter

| Description | Frequency | Min | Typ | Max | Unit |
|---------------|------------|-----|-----|------|---------|
| Deterministic | 5 Gb/s | — | — | | UI, p-p |
| Random | 5 Gb/s | — | — | | UI, p-p |
| Total | 5 Gb/s | — | — | | UI, p-p |
| Deterministic | 3.125 Gb/s | — | — | 0.17 | UI, p-p |
| Random | 3.125 Gb/s | — | — | 0.25 | UI, p-p |
| Total | 3.125 Gb/s | — | — | 0.35 | UI, p-p |
| Deterministic | 2.5 Gb/s | — | — | 0.17 | UI, p-p |
| Random | 2.5 Gb/s | — | — | 0.20 | UI, p-p |
| Total | 2.5 Gb/s | — | — | 0.35 | UI, p-p |
| Deterministic | 1.25 Gb/s | — | — | 0.10 | UI, p-p |
| Random | 1.25 Gb/s | — | — | 0.22 | UI, p-p |
| Total | 1.25 Gb/s | — | — | 0.24 | UI, p-p |

Notes:

1. Values are measured with PRBS 2⁷-1, all channels operating, FPGA logic active, I/Os around SERDES pins quiet, reference clock @ 10X mode.
2. For ECP5-5G family devices only.

3.21. SERDES/PCS Block Latency

Table 3.25 describes the latency of each functional block in the transmitter and receiver. Latency is given in parallel clock cycles. Figure 3.13 shows the location of each block.

Table 3.25. SERDES/PCS Latency Breakdown

| Item | Description | Min | Avg | Max | Fixed | Bypass | Unit ³ |
|--|---|-----|-----|-----|---------|--------|-------------------|
| Transmit Data Latency¹ | | | | | | | |
| T1 | FPGA Bridge - Gearing disabled with same clocks | 3 | — | 4 | — | 1 | byte clk |
| | FPGA Bridge - Gearing enabled | 5 | — | 7 | — | — | word clk |
| T2 | 8b10b Encoder | — | — | — | 2 | 1 | byte clk |
| T3 | SERDES Bridge transmit | — | — | — | 2 | 1 | byte clk |
| T4 | Serializer: 8-bit mode | — | — | — | 15 + Δ1 | — | UI + ps |
| | Serializer: 10-bit mode | — | — | — | 18 + Δ1 | — | UI + ps |
| T5 | Pre-emphasis ON | — | — | — | 1 + Δ2 | — | UI + ps |
| | Pre-emphasis OFF | — | — | — | 0 + Δ3 | — | UI + ps |
| Receive Data Latency² | | | | | | | |
| R1 | Equalization ON | — | — | — | Δ1 | — | UI + ps |
| | Equalization OFF | — | — | — | Δ2 | — | UI + ps |
| R2 | Deserializer: 8-bit mode | — | — | — | 10 + Δ3 | — | UI + ps |
| | Deserializer: 10-bit mode | — | — | — | 12 + Δ3 | — | UI + ps |
| R3 | SERDES Bridge receive | — | — | — | 2 | — | byte clk |
| R4 | Word alignment | 3.1 | — | 4 | — | 1 | byte clk |
| R5 | 8b10b decoder | — | — | — | 1 | 0 | byte clk |
| R6 | Clock Tolerance Compensation | 7 | 15 | 23 | — | 1 | byte clk |
| R7 | FPGA Bridge - Gearing disabled with same clocks | 4 | — | 5 | — | 1 | byte clk |
| | FPGA Bridge - Gearing enabled | 7 | — | 9 | — | — | word clk |

Notes:

1. Δ1 = -245 ps, Δ2 = +88 ps, Δ3 = +112 ps.
2. Δ1 = +118 ps, Δ2 = +132 ps, Δ3 = +700 ps.
3. byte clk = 8UIs (8-bit mode), or 10 UIs (10-bit mode); word clk = 16UIs (8-bit mode), or 20 UIs (10-bit mode).

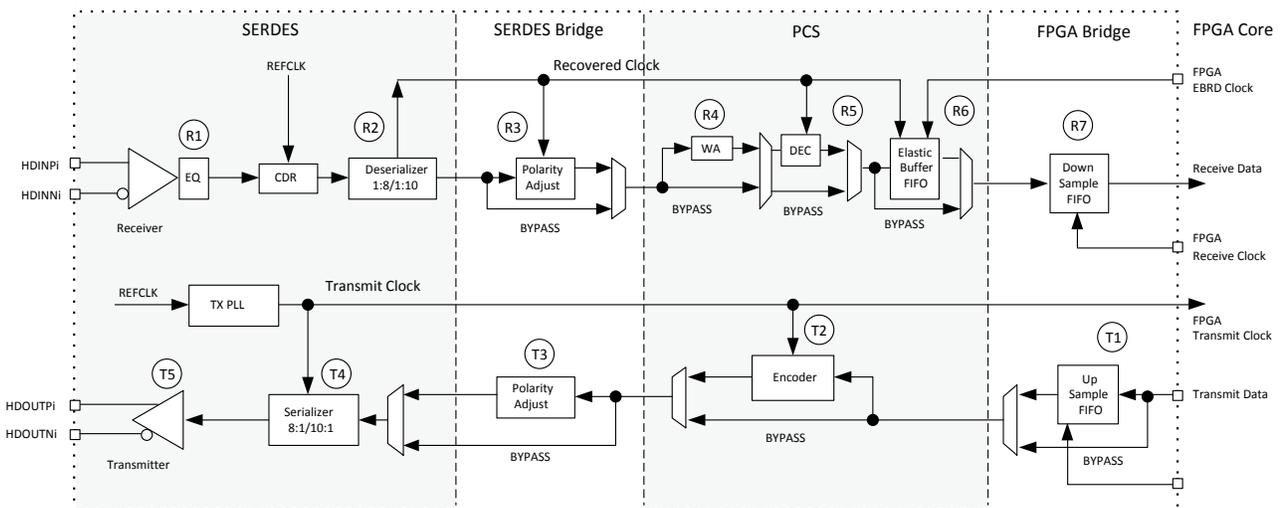


Figure 3.13. Transmitter and Receiver Latency Block Diagram

3.22. SERDES High-Speed Data Receiver

Table 3.26. Serial Input Data Specifications

| Symbol | Description | Min | Typ | Max | Unit |
|------------------|---|------|-----------|-------------------|----------|
| $V_{RX-DIFF-S}$ | Differential input sensitivity | 150 | — | 1760 | mV, p-p |
| V_{RX-IN} | Input levels | 0 | — | $V_{CCA} + 0.5^2$ | V |
| $V_{RX-CM-DCCM}$ | Input common mode range (internal DC coupled mode) | 0.6 | — | V_{CCA} | V |
| $V_{RX-CM-ACCM}$ | Input common mode range (internal AC coupled mode) ² | 0.1 | — | $V_{CCA} + 0.2$ | V |
| $T_{RX-RELOCK}$ | SCDR re-lock time ¹ | — | 1000 | — | Bits |
| $Z_{RX-TERM}$ | Input termination 50/75 Ω /High Z | -20% | 50/75/5 K | +20% | Ω |
| RL_{RX-RL} | Return loss (without package) | — | — | -10 | dB |

Notes:

1. This is the typical number of bit times to re-lock to a new phase or frequency within ± 300 ppm, assuming 8b10b encoded data.
2. Up to 1.655 for ECP5, and 1.76 for ECP5-5G.

3.23. Input Data Jitter Tolerance

A receiver's ability to tolerate incoming signal jitter is very dependent on jitter type. High speed serial interface standards have recognized the dependency on jitter type and have specifications to indicate tolerance levels for different jitter types as they relate to specific protocols. Sinusoidal jitter is considered to be a worst case jitter type.

Table 3.27. Receiver Total Jitter Tolerance Specification

| Description | Frequency | Condition | Min | Typ | Max | Unit |
|---------------|------------|-------------------------|-----|-----|------|---------|
| Deterministic | 5 Gb/s | 400 mV differential eye | — | — | | UI, p-p |
| Random | | 400 mV differential eye | — | — | | UI, p-p |
| Total | | 400 mV differential eye | — | — | | UI, p-p |
| Deterministic | 3.125 Gb/s | 400 mV differential eye | — | — | 0.37 | UI, p-p |
| Random | | 400 mV differential eye | — | — | 0.18 | UI, p-p |
| Total | | 400 mV differential eye | — | — | 0.65 | UI, p-p |
| Deterministic | 2.5 Gb/s | 400 mV differential eye | — | — | 0.37 | UI, p-p |
| Random | | 400 mV differential eye | — | — | 0.18 | UI, p-p |
| Total | | 400 mV differential eye | — | — | 0.65 | UI, p-p |
| Deterministic | 1.25 Gb/s | 400 mV differential eye | — | — | 0.37 | UI, p-p |
| Random | | 400 mV differential eye | — | — | 0.18 | UI, p-p |
| Total | | 400 mV differential eye | — | — | 0.65 | UI, p-p |

Notes:

1. Jitter tolerance measurements are done with protocol compliance tests: 3.125 Gb/s - XAUI Standard, 2.5 Gb/s - PCIe Standard, 1.25 Gb/s - SGMII Standard.
2. For ECP5-5G family devices only.

3.24. SERDES External Reference Clock

The external reference clock selection and its interface are a critical part of system applications for this product. [Table 3.28](#) specifies reference clock requirements, over the full range of operating conditions.

Table 3.28. External Reference Clock Specification (refclkp/refclkn)

| Symbol | Description | Min | Typ | Max | Unit |
|------------------------|--|-------|---------|--------------------|----------------------|
| F_{REF} | Frequency range | 50 | — | 320 | MHz |
| $F_{REF-PPM}$ | Frequency tolerance ¹ | -1000 | — | 1000 | ppm |
| $V_{REF-IN-SE}$ | Input swing, single-ended clock ^{2,4} | 200 | — | V_{CCAUXA} | mV, p-p |
| $V_{REF-IN-DIFF}$ | Input swing, differential clock | 200 | — | $2*V_{CCAUXA}$ | mV, p-p differential |
| V_{REF-IN} | Input levels | 0 | — | $V_{CCAUXA} + 0.4$ | V |
| D_{REF} | Duty cycle ³ | 40 | — | 60 | % |
| T_{REF-R} | Rise time (20% to 80%) | 200 | 500 | 1000 | ps |
| T_{REF-F} | Fall time (80% to 20%) | 200 | 500 | 1000 | ps |
| $Z_{REF-IN-TERM-DIFF}$ | Differential input termination | -30% | 100/HIZ | +30% | Ω |
| $C_{REF-IN-CAP}$ | Input capacitance | — | — | 7 | pF |

Notes:

- Depending on the application, the PLL_LOL_SET and CDR_LOL_SET control registers may be adjusted for other tolerance values as described in TN1261, [ECP5 and ECP5-5G SERDES/PCS Usage Guide](#).
- The signal swing for a single-ended input clock must be as large as the p-p differential swing of a differential input clock to get the same gain at the input receiver. With single-ended clock, a reference voltage needs to be externally connected to CLKREFN pin, and the input voltage needs to be swung around this reference voltage.
- Measured at 50% amplitude.
- Single-ended clocking is achieved by applying a reference voltage V_{REF} on REFCLKN input, with the clock applied to REFCLKP input pin. V_{REF} should be set to mid-point of the REFCLKP voltage swing.

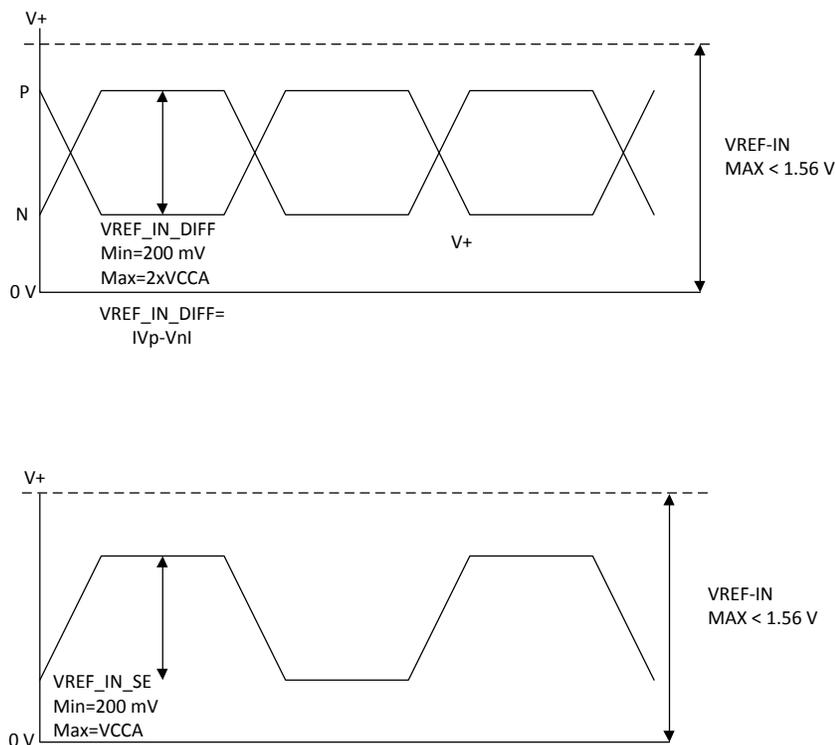


Figure 3.14. SERDES External Reference Clock Waveforms

3.25. PCI Express Electrical and Timing Characteristics

3.25.1. PCIe (2.5 Gb/s) AC and DC Characteristics

Over recommended operating conditions.

Table 3.29. PCIe (2.5 Gb/s)

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|--|--|--|-------------------|------|--------------------|------|
| Transmit¹ | | | | | | |
| UI | Unit interval | — | 399.88 | 400 | 400.12 | ps |
| V _{TX-DIFF_P-P} | Differential peak-to-peak output | — | 0.8 | 1.0 | 1.2 | V |
| V _{TX-DE-RATIO} | De-emphasis differential output voltage ratio | — | -3 | -3.5 | -4 | dB |
| V _{TX-CM-AC_P} | RMS AC peak common-mode output voltage | — | — | — | 20 | mV |
| V _{TX-RCV-DETECT} | Amount of voltage change allowed during receiver detection | — | — | — | 600 | mV |
| V _{TX-CM-DC} | Tx DC common mode voltage | — | 0 | — | V _{CCHTX} | V |
| I _{TX-SHORT} | Output short circuit current | V _{TX-D+=0.0 V} V _{TX-D-=0.0 V} | — | — | 90 | mA |
| Z _{TX-DIFF-DC} | Differential output impedance | — | 80 | 100 | 120 | Ω |
| RL _{TX-DIFF} | Differential return loss | — | 10 | — | — | dB |
| RL _{TX-CM} | Common mode return loss | — | 6.0 | — | — | dB |
| T _{TX-RISE} | Tx output rise time | 20% to 80% | 0.125 | — | — | UI |
| T _{TX-FALL} | Tx output fall time | 20% to 80% | 0.125 | — | — | UI |
| L _{TX-SKEW} | Lane-to-lane static output skew for all lanes in port/link | — | — | — | 1.3 | ns |
| T _{TX-EYE} | Transmitter eye width | — | 0.75 | — | — | UI |
| T _{TX-EYE-MEDIAN-TO-MAX-JITTER} | Maximum time between jitter median and maximum deviation from median | — | — | — | 0.125 | UI |
| Receive^{1,2} | | | | | | |
| UI | Unit Interval | — | 399.88 | 400 | 400.12 | ps |
| V _{RX-DIFF_P-P} | Differential peak-to-peak input voltage | — | 0.34 ³ | — | 1.2 | V |
| V _{RX-IDLE-DET-DIFF_P-P} | Idle detect threshold voltage | — | 65 | — | 340 ³ | mV |
| V _{RX-CM-AC_P} | RMS AC peak common-mode input voltage | — | — | — | 150 | mV |
| Z _{RX-DIFF-DC} | DC differential input impedance | — | 80 | 100 | 120 | Ω |
| Z _{RX-DC} | DC input impedance | — | 40 | 50 | 60 | Ω |
| Z _{RX-HIGH-IMP-DC} | Power-down DC input impedance | — | 200K | — | — | Ω |
| RL _{RX-DIFF} | Differential return loss | — | 10 | — | — | dB |
| RL _{RX-CM} | Common mode return loss | — | 6.0 | — | — | dB |

Notes:

1. Values are measured at 2.5 Gb/s.
2. Measured with external AC-coupling on the receiver.
3. Not in compliance with PCI Express 1.1 standard.

3.25.2. PCIe (5 Gb/s) – Preliminary AC and DC Characteristics

Over recommended operating conditions.

Table 3.30. PCIe (5 Gb/s)

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|-----------------------------------|---|---------------------------|--------|-----|--------|---------|
| Transmit¹ | | | | | | |
| UI | Unit Interval | — | 199.94 | 200 | 200.06 | ps |
| B _{WTX-PKG-PLL2} | Tx PLL bandwidth corresponding to PKGTX-PLL2 | — | 5 | — | 16 | MHz |
| P _{KGTX-PLL2} | Tx PLL Peaking | — | — | — | 1 | dB |
| V _{TX-DIFF-PP} | Differential p-p Tx voltage swing | — | 0.8 | — | 1.2 | V, p-p |
| V _{TX-DIFF-PP-LOW} | Low power differential p-p Tx voltage swing | — | 0.4 | — | 1.2 | V, p-p |
| V _{TX-DE-RATIO-3.5dB} | Tx de-emphasis level ratio at 3.5dB | — | 3 | — | 4 | dB |
| V _{TX-DE-RATIO-6dB} | Tx de-emphasis level ratio at 6dB | — | 5.5 | — | 6.5 | dB |
| T _{MIN-PULSE} | Instantaneous lone pulse width | — | — | — | — | UI |
| T _{TX-RISE-FALL} | Transmitter rise and fall time | — | — | — | — | UI |
| T _{TX-EYE} | Transmitter Eye, including all jitter sources | — | 0.75 | — | — | UI |
| T _{TX-DJ} | Tx deterministic jitter > 1.5 MHz | — | — | — | 0.15 | UI |
| T _{TX-RJ} | Tx RMS jitter < 1.5 MHz | — | — | — | 3 | ps, RMS |
| T _{RF-MISMATCH} | Tx rise/fall time mismatch | — | — | — | — | UI |
| R _{LTX-DIFF} | Tx Differential Return Loss, including package and silicon | 50 MHz < freq < 1.25 GHz | 10 | — | — | dB |
| | | 1.25 GHz < freq < 2.5 GHz | 8 | — | — | dB |
| R _{LTX-CM} | Tx Common Mode Return Loss, including package and silicon | 50 MHz < freq < 2.5 GHz | 6 | — | — | dB |
| Z _{TX-DIFF-DC} | DC differential Impedance | — | — | — | 120 | Ω |
| V _{TX-CM-AC-PP} | Tx AC peak common mode voltage, peak-peak | — | — | — | — | mV, p-p |
| I _{TX-SHORT} | Transmitter short-circuit current | — | — | — | 90 | mA |
| V _{TX-DC-CM} | Transmitter DC common-mode | — | 0 | — | 1.2 | V |
| V _{TX-IDLE-DIFF-DC} | Electrical Idle Output DC voltage | — | 0 | — | 5 | mV |
| V _{TX-IDLE-DIFF-AC-p} | Electrical Idle Differential Output peak voltage | — | — | — | — | mV |
| V _{TX-RCV-DETECT} | Voltage change allowed during Receiver Detect | — | — | — | 600 | mV |
| T _{TX-IDLE-MIN} | Min. time in Electrical Idle | — | 20 | — | — | ns |
| T _{TX-IDLE-SET-TO-IDLE} | Max. time from EI Order Set to valid Electrical Idle | — | — | — | 8 | ns |
| T _{TX-IDLE-TO-DIFF-DATA} | Max. time from Electrical Idle to valid differential output | — | — | — | 8 | ns |
| L _{TX-SKEW} | Lane-to-lane output skew | — | — | — | — | ps |

Table 3.30. PCIe (5 Gb/s) Continued

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|----------------------------------|---|--------------------------------|-------------------|-----|------------------|----------|
| Receive^{1, 2} | | | | | | |
| UI | Unit Interval | — | 199.94 | 200 | 200.06 | ps |
| V _{RX-DIFF-PP} | Differential Rx peak-peak voltage | — | 0.34 ³ | — | 1.2 | V, p-p |
| T _{RX-RJ-RMS} | Receiver random jitter tolerance (RMS) | 1.5 MHz – 100 MHz Random noise | — | — | 4.2 | ps, RMS |
| T _{RX-DJ} | Receiver deterministic jitter tolerance | — | — | — | 88 | ps |
| V _{RX-CM-AC} | Common mode noise from Rx | — | — | — | — | mV, p-p |
| R _{LRX-DIFF} | Receiver differential Return Loss, package plus silicon | 50 MHz < freq < 1.25 GHz | 10 | — | — | dB |
| | | 1.25 GHz < freq < 2.5 GHz | 8 | — | — | dB |
| R _{LRX-CM} | Receiver common mode Return Loss, package plus silicon | — | 6 | — | — | dB |
| Z _{RX-DC} | Receiver DC single ended impedance | — | 40 | — | 60 | Ω |
| Z _{RX-HIGH-IMP-DC} | Receiver DC single ended impedance when powered down | — | 200K | — | — | Ω |
| V _{RX-CM-AC-P} | Rx AC peak common mode voltage | — | — | — | — | mV, peak |
| V _{RX-IDLE-DET-DIFF-PP} | Electrical Idle Detect Threshold | — | 65 | — | 340 ³ | mv, pp |
| L _{RX-SKEW} | Receiver lane-lane skew | — | — | — | 8 | ns |

Notes:

1. Values are measured at 5 Gb/s.
2. Measured with external AC-coupling on the receiver.
3. Not in compliance with PCI Express standard.

3.26. CPRI LV2 E.48 Electrical and Timing Characteristics – Preliminary

Table 3.31. CPRI LV2 E.48 Electrical and Timing Characteristics

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|-----------------------------|--|--------------------------------|--------|--------|------------------------------|----------|
| Transmit | | | | | | |
| UI | Unit Interval | — | 203.43 | 203.45 | 203.47 | ps |
| T _{DCD} | Duty Cycle Distortion | — | — | — | 0.05 | UI |
| J _{UBHPJ} | Uncorrelated Bounded High Probability Jitter | — | — | — | 0.15 | UI |
| J _{TOTAL} | Total Jitter | — | — | — | 0.3 | UI |
| Z _{RX-DIFF-DC} | DC differential Impedance | — | 80 | — | 120 | Ω |
| T _{SKEW} | Skew between differential signals | — | — | — | 9 | ps |
| R _{LTX-DIFF} | Tx Differential Return Loss (S22), including package and silicon | 100 MHz < freq < 3.6864 GHz | — | — | –8 | dB |
| | | 3.6864 GHz < freq < 4.9152 GHz | — | — | –8 + 16.6 *log (freq/3.6864) | dB |
| R _{LTX-CM} | Tx Common Mode Return Loss, including package and silicon | 100 MHz < freq < 3.6864 GHz | 6 | — | — | dB |
| I _{TX-SHORT} | Transmitter short-circuit current | — | — | — | 100 | mA |
| T _{RISE_FALL-DIFF} | Differential Rise and Fall Time | — | — | — | — | ps |
| L _{TX-SKEW} | Lane-to-lane output skew | — | — | — | — | ps |
| Receive | | | | | | |
| UI | Unit Interval | — | 203.43 | 203.45 | 203.47 | ps |
| V _{RX-DIFF-PP} | Differential Rx peak-peak voltage | — | — | — | 1.2 | V, p-p |
| V _{RX-EYE_Y1_Y2} | Receiver eye opening mask, Y1 and Y2 | — | 62.5 | — | 375 | mV, diff |
| V _{RX-EYE_X1} | Receiver eye opening mask, X1 | — | — | — | 0.3 | UI |
| T _{RX-TJ} | Receiver total jitter tolerance (not including sinusoidal) | — | — | — | 0.6 | UI |
| R _{LRX-DIFF} | Receiver differential Return Loss, package plus silicon | 100 MHz < freq < 3.6864 GHz | — | — | –8 | dB |
| | | 3.6864 GHz < freq < 4.9152 GHz | — | — | –8 + 16.6 *log (freq/3.6864) | dB |
| R _{LRX-CM} | Receiver common mode Return Loss, package plus silicon | — | 6 | — | — | dB |
| Z _{RX-DIFF-DC} | Receiver DC differential impedance | — | 80 | 100 | 120 | Ω |

Note: Data is measured with PRBS7 data pattern, not with PRBS-31 pattern.

3.27. XAUI/CPRI LV E.30 Electrical and Timing Characteristics

3.27.1. AC and DC Characteristics

Over recommended operating conditions.

Table 3.32. Transmit

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|----------------------|----------------------------------|-----------------|-----|-----|------|----------|
| T_{RF} | Differential rise/fall time | 20% to 80% | — | 80 | — | ps |
| $Z_{TX_DIFF_DC}$ | Differential impedance | — | 80 | 100 | 120 | Ω |
| $J_{TX_DDJ}^{2,3}$ | Output data deterministic jitter | — | — | — | 0.17 | UI |
| $J_{TX_TJ}^{1,2,3}$ | Total output data jitter | — | — | — | 0.35 | UI |

Notes:

1. Total jitter includes both deterministic jitter and random jitter.
2. Jitter values are measured with each CML output AC coupled into a 50 Ω impedance (100 Ω differential impedance).
3. Jitter and skew are specified between differential crossings of the 50% threshold of the reference signal.

Over recommended operating conditions.

Table 3.33. Receive and Jitter Tolerance

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|----------------------|---|---------------------------|------|-----|------|----------|
| RL_{RX_DIFF} | Differential return loss | From 100 MHz to 3.125 GHz | 10 | — | — | dB |
| RL_{RX_CM} | Common mode return loss | From 100 MHz to 3.125 GHz | 6 | — | — | dB |
| Z_{RX_DIFF} | Differential termination resistance | — | 80 | 100 | 120 | Ω |
| $J_{RX_DJ}^{1,2,3}$ | Deterministic jitter tolerance (peak-to-peak) | — | — | — | 0.37 | UI |
| $J_{RX_RJ}^{1,2,3}$ | Random jitter tolerance (peak-to-peak) | — | — | — | 0.18 | UI |
| $J_{RX_SJ}^{1,2,3}$ | Sinusoidal jitter tolerance (peak-to-peak) | — | — | — | 0.10 | UI |
| $J_{RX_TJ}^{1,2,3}$ | Total jitter tolerance (peak-to-peak) | — | — | — | 0.65 | UI |
| T_{RX_EYE} | Receiver eye opening | — | 0.35 | — | — | UI |

Notes:

1. Total jitter includes deterministic jitter, random jitter and sinusoidal jitter.
2. Jitter values are measured with each high-speed input AC coupled into a 50 Ω impedance.
3. Jitter and skew are specified between differential crossings of the 50% threshold of the reference signal.

3.28. CPRI LV E.24 Electrical and Timing Characteristics

3.28.1. AC and DC Characteristics

Table 3.34. Transmit

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|----------------------|----------------------------------|-----------------|-----|-----|------|----------|
| T_{RF}^1 | Differential rise/fall time | 20% to 80% | — | 80 | — | ps |
| $Z_{TX_DIFF_DC}$ | Differential impedance | — | 80 | 100 | 120 | Ω |
| $J_{TX_DDJ}^{3,4}$ | Output data deterministic jitter | — | — | — | 0.17 | UI |
| $J_{TX_TJ}^{2,3,4}$ | Total output data jitter | — | — | — | 0.35 | UI |

Notes:

1. Rise and Fall times measured with board trace, connector and approximately 2.5 pf load.
2. Total jitter includes both deterministic jitter and random jitter. The random jitter is the total jitter minus the actual deterministic jitter.
3. Jitter values are measured with each CML output AC coupled into a 50 Ω impedance (100 Ω differential impedance).
4. Jitter and skew are specified between differential crossings of the 50% threshold of the reference signal.

Table 3.35. Receive and Jitter Tolerance

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|--|---|-------------------------|------|-----|------|------|
| RL _{RX_DIFF} | Differential return loss | From 100 MHz to 2.5 GHz | 10 | — | — | dB |
| RL _{RX_CM} | Common mode return loss | From 100 MHz to 2.5 GHz | 6 | — | — | dB |
| Z _{RX_DIFF} | Differential termination resistance | — | 80 | 100 | 120 | Ω |
| J _{RX_DJ} ^{2, 3, 4} | Deterministic jitter tolerance (peak-to-peak) | — | — | — | 0.37 | UI |
| J _{RX_RJ} ^{2, 3, 4} | Random jitter tolerance (peak-to-peak) | — | — | — | 0.18 | UI |
| J _{RX_SJ} ^{2, 3, 4} | Sinusoidal jitter tolerance (peak-to-peak) | — | — | — | 0.10 | UI |
| J _{RX_TJ} ^{1, 2, 3, 4} | Total jitter tolerance (peak-to-peak) | — | — | — | 0.65 | UI |
| T _{RX_EYE} | Receiver eye opening | — | 0.35 | — | — | UI |

Notes:

1. Total jitter includes deterministic jitter, random jitter and sinusoidal jitter.
2. Jitter values are measured with each high-speed input AC coupled into a 50 Ω impedance.
3. Jitter and skew are specified between differential crossings of the 50% threshold of the reference signal.
4. Jitter tolerance, Differential Input Sensitivity and Receiver Eye Opening parameters are characterized when Full Rx Equalization is enabled.

3.29. Gigabit Ethernet/SGMII/CPRI LV E.12 Electrical and Timing Characteristics

3.29.1. AC and DC Characteristics

Table 3.36. Transmit

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|---------------------------------------|----------------------------------|-----------------|-----|-----|------|------|
| T _{RF} | Differential rise/fall time | 20% to 80% | — | 80 | — | ps |
| Z _{TX_DIFF_DC} | Differential impedance | — | 80 | 100 | 120 | Ω |
| J _{TX_DDJ} ^{2, 3} | Output data deterministic jitter | — | — | — | 0.10 | UI |
| J _{TX_TJ} ^{1, 2, 3} | Total output data jitter | — | — | — | 0.24 | UI |

Notes:

1. Total jitter includes both deterministic jitter and random jitter. The random jitter is the total jitter minus the actual deterministic jitter.
2. Jitter values are measured with each CML output AC coupled into a 50 Ω impedance (100 Ω differential impedance).
3. Jitter and skew are specified between differential crossings of the 50% threshold of the reference signal.

Table 3.37. Receive and Jitter Tolerance

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|--|---|--------------------------|------|-----|------|------|
| RL _{RX_DIFF} | Differential return loss | From 100 MHz to 1.25 GHz | 10 | — | — | dB |
| RL _{RX_CM} | Common mode return loss | From 100 MHz to 1.25 GHz | 6 | — | — | dB |
| Z _{RX_DIFF} | Differential termination resistance | — | 80 | 100 | 120 | Ω |
| J _{RX_DJ} ^{1, 2, 3, 4} | Deterministic jitter tolerance (peak-to-peak) | — | — | — | 0.34 | UI |
| J _{RX_RJ} ^{1, 2, 3, 4} | Random jitter tolerance (peak-to-peak) | — | — | — | 0.26 | UI |
| J _{RX_SJ} ^{1, 2, 3, 4} | Sinusoidal jitter tolerance (peak-to-peak) | — | — | — | 0.11 | UI |
| J _{RX_TJ} ^{1, 2, 3, 4} | Total jitter tolerance (peak-to-peak) | — | — | — | 0.71 | UI |
| T _{RX_EYE} | Receiver eye opening | — | 0.29 | — | — | UI |

Notes:

1. Total jitter includes deterministic jitter, random jitter and sinusoidal jitter.
2. Jitter values are measured with each high-speed input AC coupled into a 50 Ω impedance.
3. Jitter and skew are specified between differential crossings of the 50% threshold of the reference signal.
4. Jitter tolerance, Differential Input Sensitivity and Receiver Eye Opening parameters are characterized when Full Rx Equalization is enabled.

3.30. SMPTE SD/HD-SDI/3G-SDI (Serial Digital Interface) Electrical and Timing Characteristics

3.30.1. AC and DC Characteristics

Table 3.38. Transmit

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|--|---------------------------------|-----------------------|-----|-----|------|------|
| BR _{SDO} | Serial data rate | — | 270 | — | 2975 | Mb/s |
| T _{JALIGNMENT} ² | Serial output jitter, alignment | 270 Mb/s ⁶ | — | — | 0.2 | UI |
| T _{JALIGNMENT} ² | Serial output jitter, alignment | 1485 Mb/s | — | — | 0.2 | UI |
| T _{JALIGNMENT} ^{1,2} | Serial output jitter, alignment | 2970 Mb/s | — | — | 0.3 | UI |
| T _{JTIMING} | Serial output jitter, timing | 270 Mb/s ⁶ | — | — | 0.2 | UI |
| T _{JTIMING} | Serial output jitter, timing | 1485 Mb/s | — | — | 1 | UI |
| T _{JTIMING} | Serial output jitter, timing | 2970 Mb/s | — | — | 2 | UI |

Notes:

1. Timing jitter is measured in accordance with SMPTE serial data transmission standards.
2. Jitter is defined in accordance with SMPTE RP1 184-1996 as: jitter at an equipment output in the absence of input jitter.
3. All Tx jitter are measured at the output of an industry standard cable driver, with the Lattice SERDES device configured to 50 Ω output impedance connecting to the external cable driver with differential signaling.
4. The cable driver drives: RL=75 Ω, AC-coupled at 270, 1485, or 2970 Mb/s.
5. All LFE5UM/LFE5UM5G devices are compliant with all SMPTE compliance tests, except 3G-SDI Level-A pathological compliance pattern test.
6. 270 Mb/s is supported with Rate Divider only.

Table 3.39. Receive

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|-------------------|------------------------|-----------------|-----|-----|------|------|
| BR _{SDI} | Serial input data rate | — | 270 | — | 2970 | Mb/s |

Table 3.40. Reference Clock

| Symbol | Description | Test Conditions | Min | Typ | Max | Unit |
|-------------------|------------------------------|-----------------|-----|-----|-------|------|
| F _{VCLK} | Video output clock frequency | — | 54 | — | 148.5 | MHz |
| DC _v | Duty cycle, video clock | — | 45 | 50 | 55 | % |

Note: SD-SDI (270 Mb/s) is supported with Rate Divider only. For Single Rate: Reference Clock = 54 MHz and Rate Divider = /2. For Tri-Rate: Reference Clock = 148.5 MHz and Rate Divider = /11.

3.31. ECP5/ECP5-5G sysCONFIG Port Timing Specifications


Over recommended operating conditions.

Table 3.41. ECP5/ECP5-5G sysCONFIG Port Timing Specifications

| Symbol | Parameter | | Min | Max | Unit |
|--|--|--------------------------|-----|-----|------|
| POR, Configuration Initialization, and Wakeup | | | | | |
| t_{ICFG} | Time from the Application of V_{CC} , V_{CCAUX} or V_{CCIO8} (whichever is the last) to the rising edge of INITN | — | — | 33 | ms |
| t_{VMC} | Time from t_{ICFG} to the valid Master CCLK | — | — | 5 | us |
| t_{CZ} | CCLK from Active to High-Z | — | — | 300 | ns |
| Master CCLK | | | | | |
| | Frequency | All selected frequencies | -20 | 20 | % |
| | Duty Cycle | All selected frequencies | 40 | 60 | % |
| All Configuration Modes | | | | | |
| t_{PRGM} | PROGRAMN LOW pulse accepted | — | 110 | — | ns |
| t_{PRGMRJ} | PROGRAMN LOW pulse rejected | — | — | 50 | ns |
| t_{INITL} | INITN LOW time | — | — | 55 | ns |
| t_{DPPINT} | PROGRAMN LOW to INITN LOW | — | — | 70 | ns |
| $t_{DPPDONE}$ | PROGRAMN LOW to DONE LOW | — | — | 80 | ns |
| t_{IODISS} | PROGRAMN LOW to I/O Disabled | — | — | 150 | ns |
| Slave SPI | | | | | |
| f_{CCLK} | CCLK input clock frequency | — | — | 60 | MHz |
| t_{CCLKH} | CCLK input clock pulsewidth HIGH | — | 6 | — | ns |
| t_{CCLKL} | CCLK input clock pulsewidth LOW | — | 6 | — | ns |
| t_{STSU} | CCLK setup time | — | 1 | — | ns |
| t_{STH} | CCLK hold time | — | 1 | — | ns |
| t_{STCO} | CCLK falling edge to valid output | — | — | 10 | ns |
| t_{STOZ} | CCLK falling edge to valid disable | — | — | 10 | ns |
| t_{STOV} | CCLK falling edge to valid enable | — | — | 10 | ns |
| t_{SCS} | Chip Select HIGH time | — | 25 | — | ns |
| t_{SCSS} | Chip Select setup tim | — | 3 | — | ns |
| t_{SCSH} | Chip Select hold time | — | 3 | — | ns |
| Master SPI | | | | | |
| f_{CCLK} | Max selected CCLK output frequency | — | — | 62 | MHz |
| t_{CCLKH} | CCLK output clock pulse width HIGH | — | 3.5 | — | ns |
| t_{CCLKL} | CCLK output clock pulse width LOW | — | 3.5 | — | ns |
| t_{STSU} | CCLK setup time | — | 5 | — | ns |
| t_{STH} | CCLK hold time | — | 1 | — | ns |
| t_{CSSPI} | INITN HIGH to Chip Select LOW | — | 100 | 200 | ns |
| t_{CFGX} | INITN HIGH to first CCLK edge | — | — | 150 | ns |
| Slave Serial | | | | | |
| f_{CCLK} | CCLK input clock frequency | — | — | 66 | MHz |
| t_{SSCH} | CCLK input clock pulse width HIGH | — | 5 | — | ns |
| t_{SSCL} | CCLK input clock pulse width LOW | — | 5 | — | ns |
| t_{SUSCDI} | CCLK setup time | — | 0.5 | — | ns |
| $t_{HS CDI}$ | CCLK hold time | — | 1.5 | — | ns |


Table 3.41. ECP5/ECP5-5G sysCONFIG Port Timing Specifications (Continued)

| Symbol | Parameter | | Min | Max | Unit |
|-----------------------|----------------------------------|---|-----|-----|------|
| Slave Parallel | | | | | |
| f_{CCLK} | CCLK input clock frequency | — | — | 50 | MHz |
| t_{BSCH} | CCLK input clock pulsewidth HIGH | — | 6 | — | ns |
| t_{BSCL} | CCLK input clock pulsewidth LOW | — | 6 | — | ns |
| t_{CORD} | CCLK to DOUT for Read Data | — | — | 12 | ns |
| t_{SUCBDI} | Data Setup Time to CCLK | — | 1.5 | — | ns |
| t_{HCBDI} | Data Hold Time to CCLK | — | 1.5 | — | ns |
| t_{SUCS} | CSN, CSN1 Setup Time to CCLK | — | 2.5 | — | ns |
| t_{HCS} | CSN, CSN1 Hold Time to CCLK | — | 1.5 | — | ns |
| t_{SUWD} | WRITEN Setup Time to CCLK | — | 45 | — | ns |
| t_{HCWD} | WRITEN Hold Time to CCLK | — | 2 | — | ns |
| t_{DCB} | CCLK to BUSY Delay Time | — | — | 12 | ns |

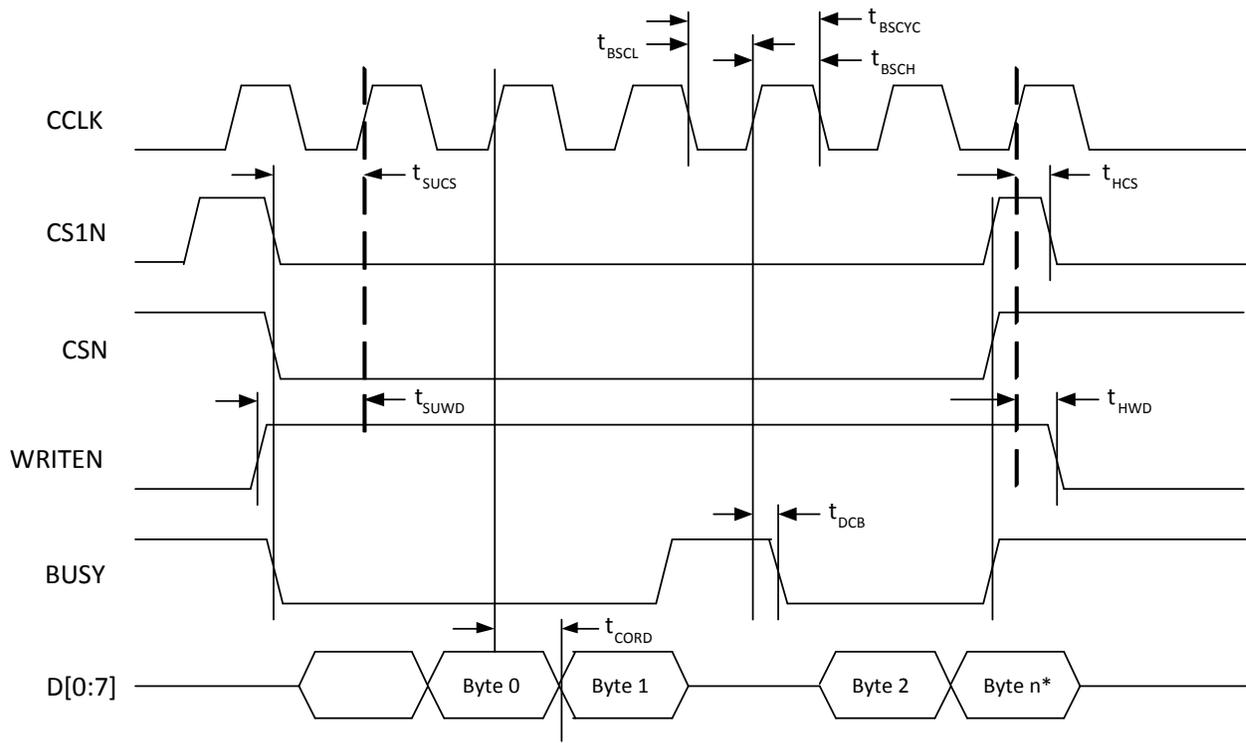

*n = last byte of read cycle.

Figure 3.15. sysCONFIG Parallel Port Read Cycle

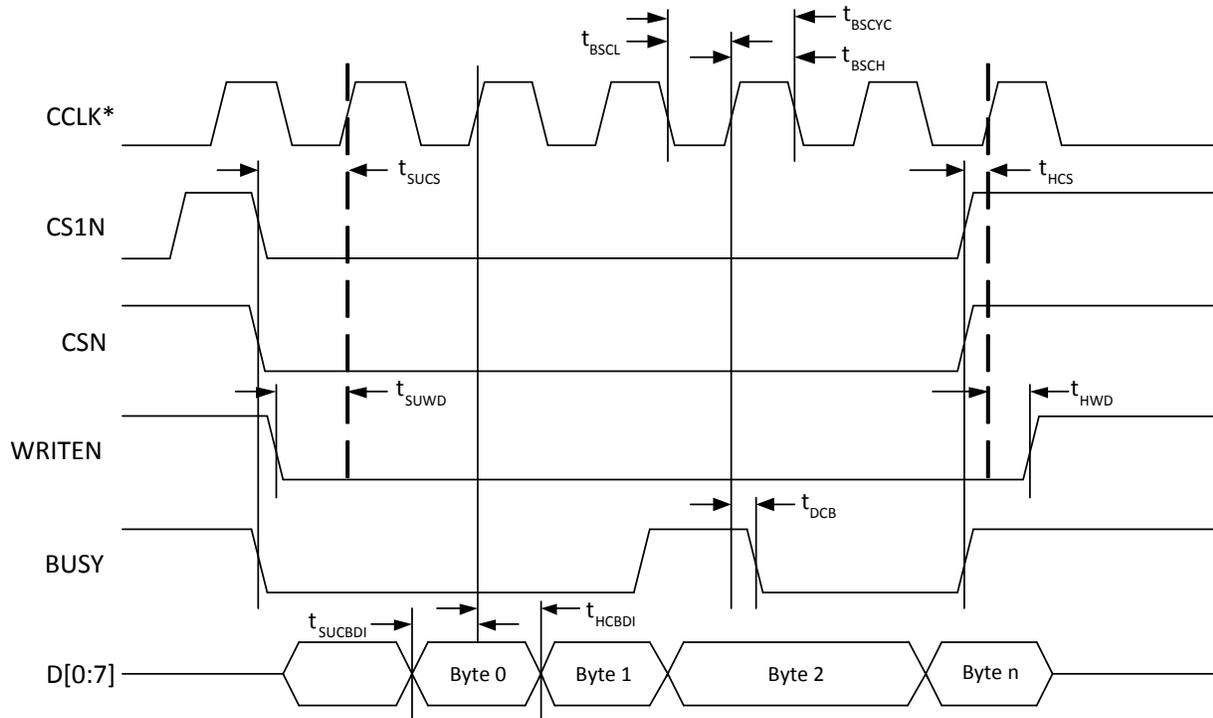

*In Master Parallel Mode the FPGA provides CCLK (MCLK). In Slave Parallel Mode the external device provides CCLK.

Figure 3.16. sysCONFIG Parallel Port Write Cycle


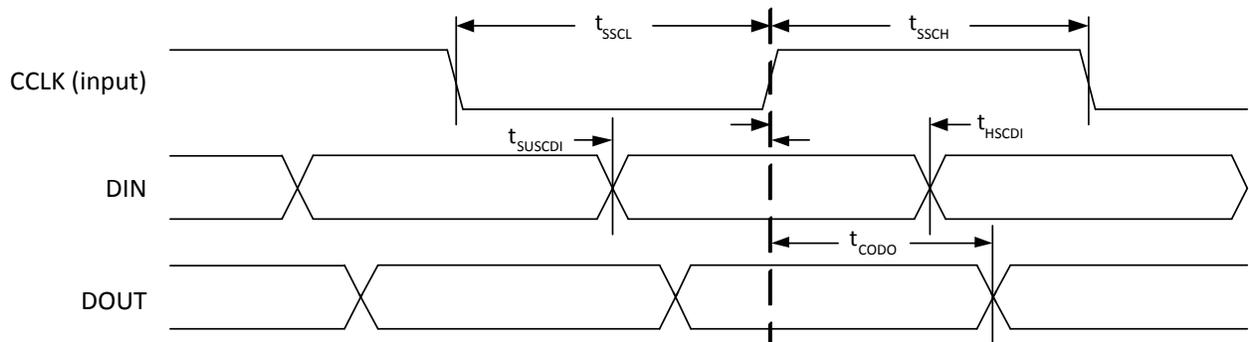


Figure 3.17. sysCONFIG Slave Serial Port Timing

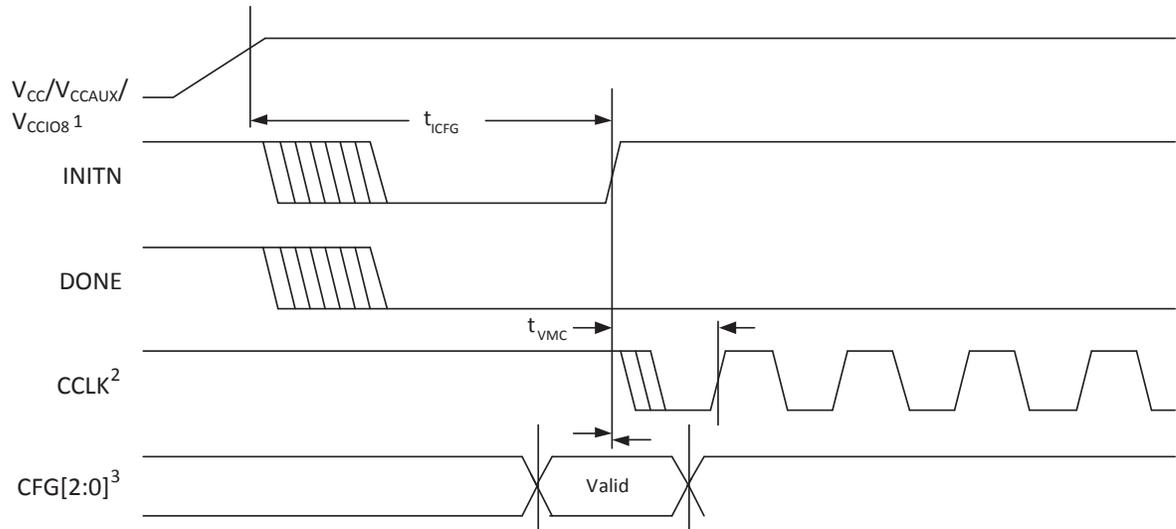

1. Time taken from V_{CC}, V_{CCAUX} or V_{CCIO8}, whichever is the last to cross the POR trip point.
2. Device is in a Master Mode (SPI, SPI_m).
3. The CFG pins are normally static (hardwired).

Figure 3.18. Power-On-Reset (POR) Timing


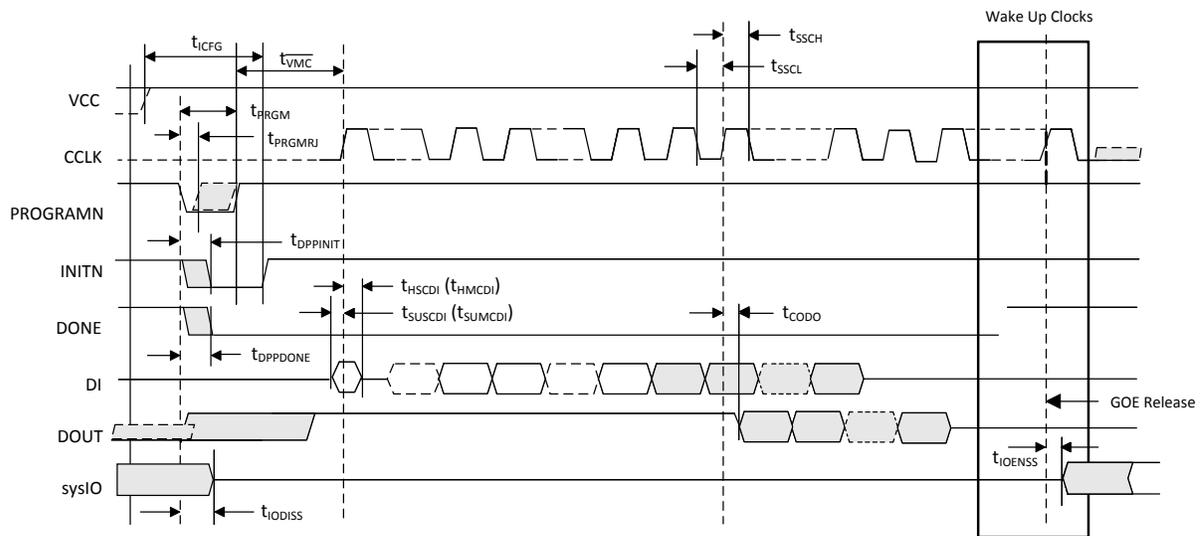


Figure 3.19. sysCONFIG Port Timing

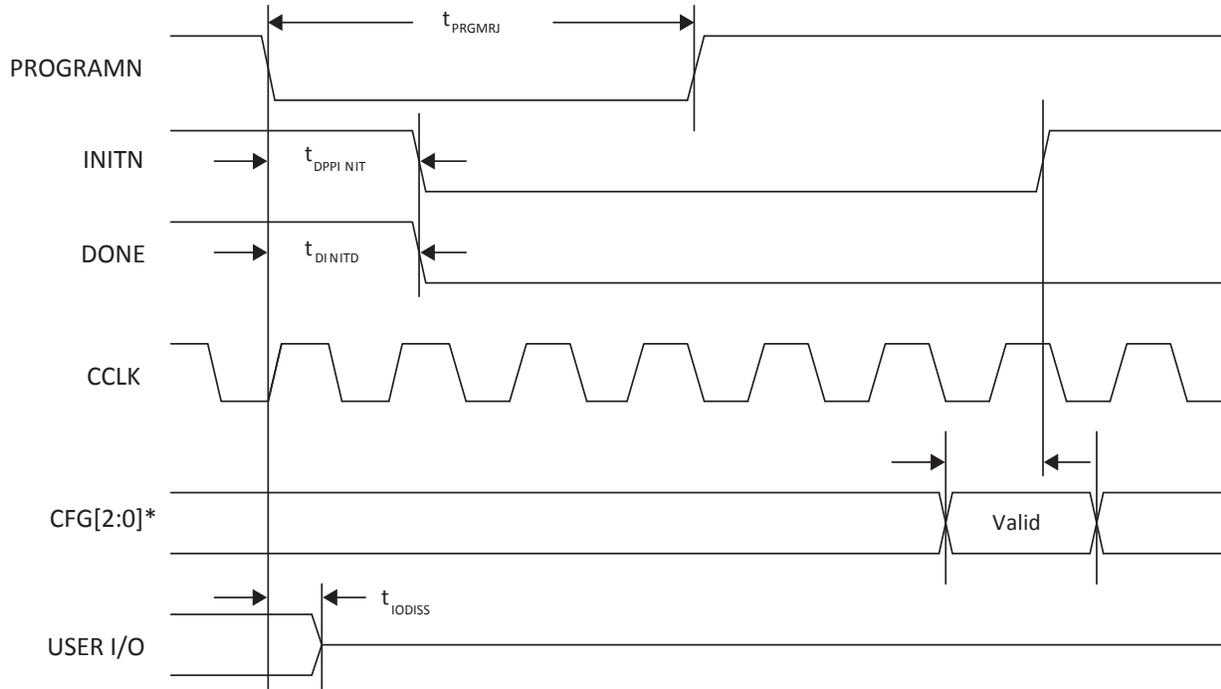

*The CFG pins are normally static (hardwired).

Figure 3.20. Configuration from PROGRAMN Timing

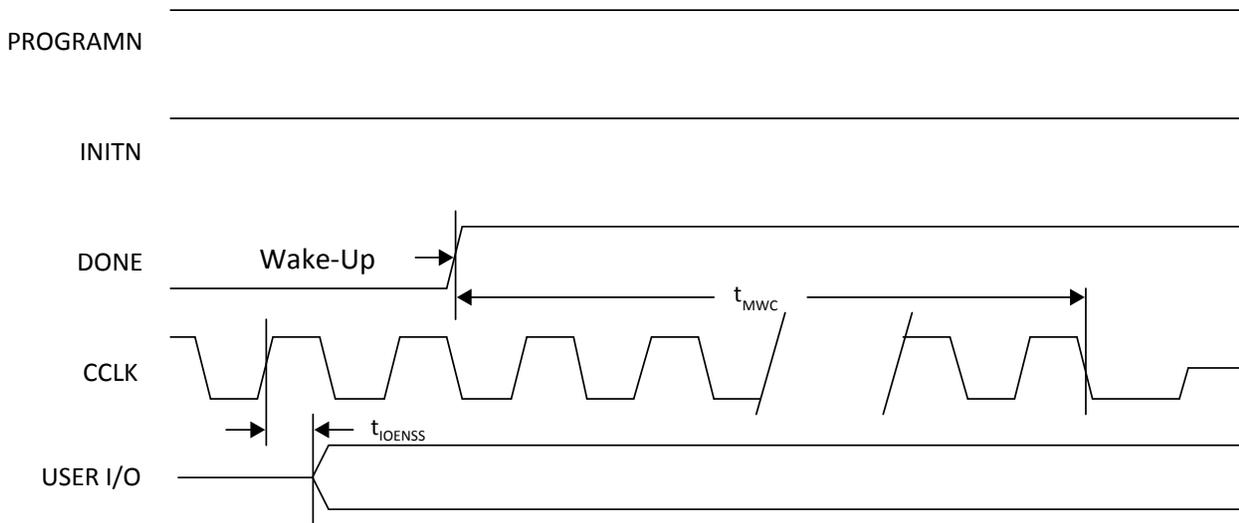


Figure 3.21. Wake-Up Timing

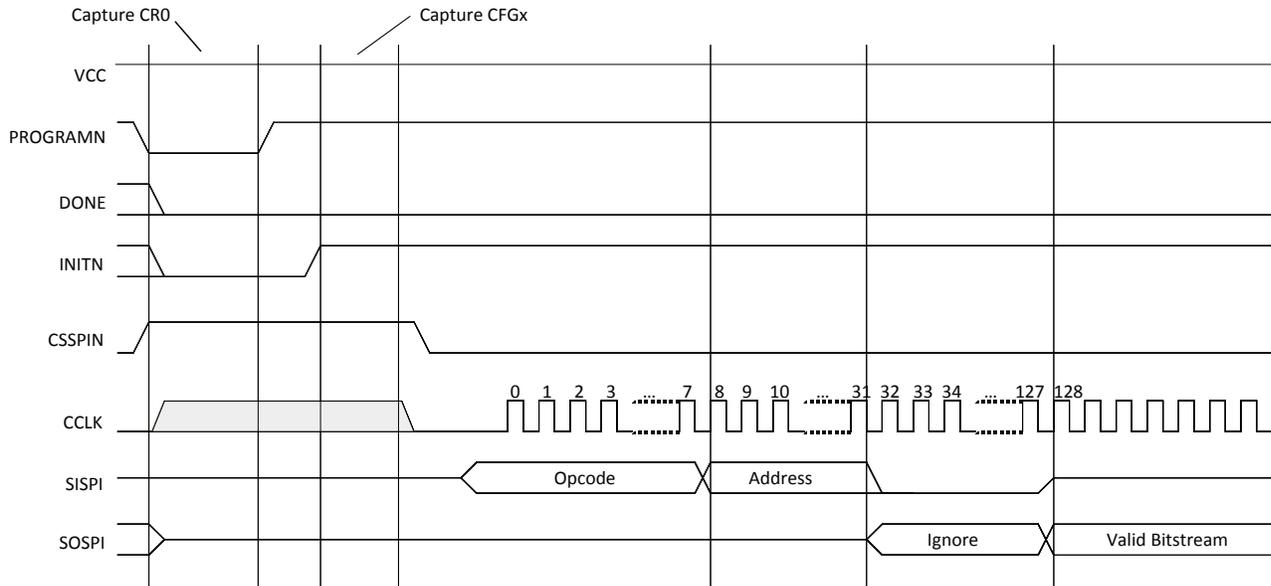


Figure 3.22. Master SPI Configuration Waveforms

3.32. JTAG Port Timing Specifications

Over recommended operating conditions.

Table 3.42. JTAG Port Timing Specifications

| Symbol | Parameter | Min | Max | Units |
|---------------|--|-----|-----|-------|
| f_{MAX} | TCK clock frequency | — | 25 | MHz |
| t_{BTCPH} | TCK [BSCAN] clock pulse width high | 20 | — | ns |
| t_{BTCPL} | TCK [BSCAN] clock pulse width low | 20 | — | ns |
| t_{BTS} | TCK [BSCAN] setup time | 10 | — | ns |
| t_{BTH} | TCK [BSCAN] hold time | 8 | — | ns |
| t_{BTRF} | TCK [BSCAN] rise/fall time | 50 | — | mV/ns |
| t_{BTCO} | TAP controller falling edge of clock to valid output | — | 10 | ns |
| $t_{BTCODIS}$ | TAP controller falling edge of clock to valid disable | — | 10 | ns |
| t_{BTCOEN} | TAP controller falling edge of clock to valid enable | — | 10 | ns |
| t_{BTCRS} | BSCAN test capture register setup time | 8 | — | ns |
| t_{BTCRH} | BSCAN test capture register hold time | 25 | — | ns |
| t_{BUTCO} | BSCAN test update register, falling edge of clock to valid output | — | 25 | ns |
| $t_{BTUODIS}$ | BSCAN test update register, falling edge of clock to valid disable | — | 25 | ns |
| $t_{BTUPOEN}$ | BSCAN test update register, falling edge of clock to valid enable | — | 25 | ns |


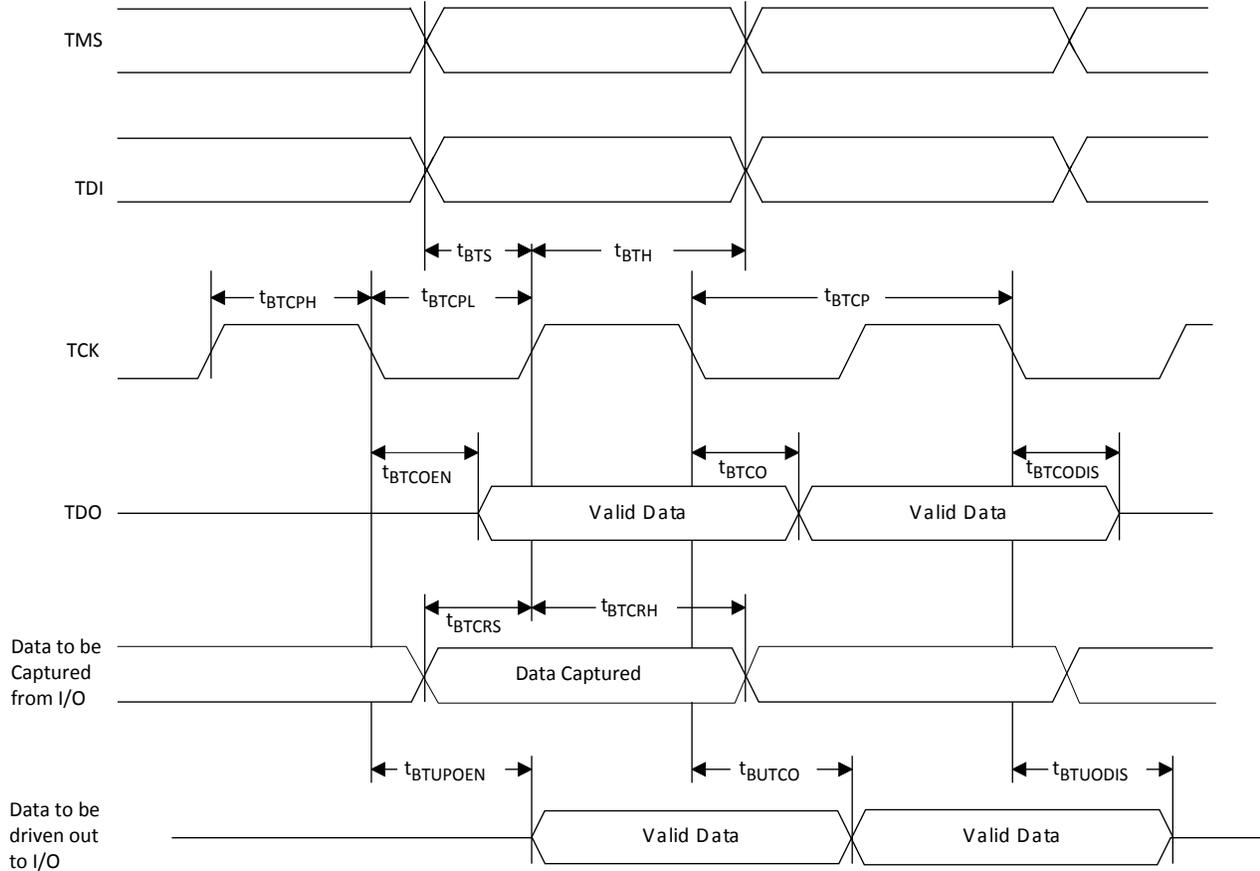


Figure 3.23. JTAG Port Timing Waveforms

3.33. Switching Test Conditions

Figure 3.24 shows the output test load that is used for AC testing. The specific values for resistance, capacitance, voltage, and other test conditions are listed in Table 3.43.

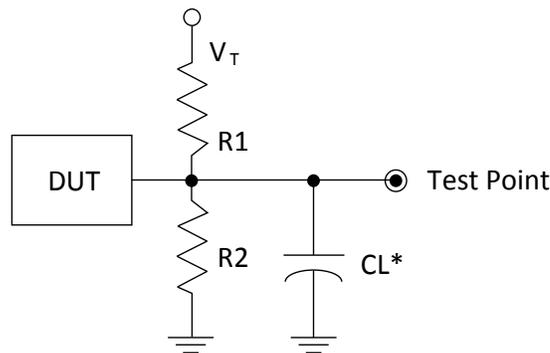

*CL Includes Test Fixture and Probe Capacitance

Figure 3.24. Output Test Load, LVTTTL and LVCMOS Standards

Table 3.43. Test Fixture Required Components, Non-Terminated Interfaces

| Test Condition | R ₁ | R ₂ | C _L | Timing Ref. | V _T |
|---|----------------|----------------|----------------|-----------------------------------|-------------------|
| LVTTTL and other LVCMOS settings (L ≥ H, H ≥ L) | ∞ | ∞ | 0 pF | LVCMOS 3.3 = 1.5 V | — |
| | | | | LVCMOS 2.5 = V _{CCIO} /2 | — |
| | | | | LVCMOS 1.8 = V _{CCIO} /2 | — |
| | | | | LVCMOS 1.5 = V _{CCIO} /2 | — |
| | | | | LVCMOS 1.2 = V _{CCIO} /2 | — |
| LVCMOS 2.5 I/O (Z ≥ H) | ∞ | 1 MΩ | 0 pF | V _{CCIO} /2 | — |
| LVCMOS 2.5 I/O (Z ≥ L) | 1 MΩ | ∞ | 0 pF | V _{CCIO} /2 | V _{CCIO} |
| LVCMOS 2.5 I/O (H ≥ Z) | ∞ | 100 | 0 pF | V _{OH} - 0.10 | — |
| LVCMOS 2.5 I/O (L ≥ Z) | 100 | ∞ | 0 pF | V _{OL} + 0.10 | V _{CCIO} |

Note: Output test conditions for all other interfaces are determined by the respective standards.

4. Pinout Information

4.1. Signal Descriptions

| Signal Name | I/O | Description |
|-------------------------------------|-----|--|
| General Purpose | | |
| P[L/R][Group Number]_[A/B/C/D] | I/O | <p>[L/R] indicates the L (Left), or R (Right) edge of the device. [Group Number] indicates the PIO [A/B/C/D] group.</p> <p>[A/B/C/D] indicates the PIO within the PIC to which the pad is connected.</p> <p>Some of these user-programmable pins are shared with special function pins. These pins, when not used as special purpose pins, can be programmed as I/Os for user logic. During configuration the user-programmable I/Os are tristated with an internal pull-down resistor enabled. If any pin is not used (or not bonded to a package pin), it is tristated and default to have pull-down enabled after configuration.</p> <p>PIO A and B are grouped as a pair, and PIO C and D are group as a pair. Each pair supports true LVDS differential input buffer. Only PIO A and B pair supports true LVDS differential output buffer.</p> <p>Each A/B and C/D pair supports programmable on/off differential input termination of 100 Ω.</p> |
| P[T/B][Group Number]_[A/B] | I/O | <p>[T/B] indicates the T (top) or B (bottom) edge of the device. [Group Number] indicates the PIO [A/B] group.</p> <p>[A/B] indicates the PIO within the PIC to which the pad is connected. Some of these user-programmable pins are shared with sysConfig pins. These pins, when not used as configuration pins, can be programmed as I/Os for user logic. During configuration, the pins not used in configuration are tristated with an internal pull-down resistor enabled. If any pin is not used (or not bonded to a package pin), it is tristated and default to have pull-down enabled after configuration.</p> <p>PIOs on top and bottom do not support differential input signaling or true LVDS output signaling, but it can support emulated differential output buffer.</p> <p>PIO A/B forms a pair of emulated differential output buffer.</p> |
| GSRN | I | Global RESET signal (active low). Any I/O pin can be GSRN. |
| NC | — | No connect. |
| RESERVED | — | This pin is reserved and should not be connected to anything on the board. |
| GND | — | Ground. Dedicated pins. |
| VCC | — | Power supply pins for core logic. Dedicated pins. VCC = 1.1 V |
| VCCAUX | — | Auxiliary power supply pin. This dedicated pin powers all the differential and referenced input buffers. VCCAUX = 2.5 V. |
| VCCIOx | — | Dedicated power supply pins for I/O bank x. VCCIO8 is used for configuration and JTAG. |
| VREF1_x | — | Reference supply pins for I/O bank x. Pre-determined shared pin in each bank are assigned as VREF1 input. When not used, they may be used as I/O pins. |
| PLL, DLL and Clock Functions | | |
| [LOC]_[GPLL[T, C]]_IN | I | General Purpose PLL (GPLL) input pads: [LOC] = ULC, LLC, URC and LRC, T = true and C = complement. These pins are shared I/O pins. When not configured as GPLL input pads, they can be used as general purpose I/O pins. |
| GR_PCLK[Bank][num] | I | General Routing Signals in Banks 0, 1, 2, 3, 4, 6 and 7. There are two in each bank ([num] = 0, 1). Refer to TN1263, ECP5 sysClock PLL/DLL Design and Usage Guide . These pins are shared I/O pins. When not configured as GR pins, they can be used as general purpose I/O pins. |
| PCLK[T/C][Bank]_[num] | I/O | General Purpose Primary CLK pads: [T/C] = True/Complement, [Bank] = (0, 1, 2, 3, 6 and 7). There are two in each bank ([num] = 0, 1). These are shared I/O pins. When not configured as PCLK pins, they can be used as general purpose I/O pins. |

| Signal Name | I/O | Description |
|---|-----|---|
| PLL, DLL and Clock Functions (Continued) | | |
| [L/R]DQS[group_num] | I/O | DQS input/output pads: T (top), R (right), group_num = ball number associated with DQS[T] pin. |
| [T/R]]DQ[group_num] | I/O | DQ input/output pads: T (top), R (right), group_num = ball number associated with DQS[T] pin. |
| Test and Programming (Dedicated Pins) | | |
| TMS | I | Test Mode Select input, used to control the 1149.1 state machine. Pull-up is enabled during configuration. This is a dedicated input pin. |
| TCK | I | Test Clock input pin, used to clock the 1149.1 state machine. No pull-up enabled. This is a dedicated input pin. |
| TDI | I | Test Data in pin. Used to load data into device using 1149.1 state machine. After power-up, this TAP port can be activated for configuration by sending appropriate command. (Note: once a configuration port is selected it is locked. Another configuration port cannot be selected until the power-up sequence). Pull-up is enabled during configuration. This is a dedicated input pin. |
| TDO | O | Output pin. Test Data Out pin used to shift data out of a device using 1149.1. This is a dedicated output pin. |
| Configuration Pads (Used during sysCONFIG) | | |
| CFG[2:0] | I | Mode pins used to specify configuration mode values latched on rising edge of INITN. During configuration, a pull-up is enabled. These are dedicated pins. |
| INITN | I/O | Open Drain pin. Indicates the FPGA is ready to be configured. During configuration, a pull-up is enabled. This is a dedicated pin. |
| PROGRAMN | I | Initiates configuration sequence when asserted low. This pin always has an active pull-up. This is a dedicated pin. |
| DONE | I/O | Open Drain pin. Indicates that the configuration sequence is complete, and the startup sequence is in progress. This is a dedicated pin. |
| CCLK | I/O | Input Configuration Clock for configuring an FPGA in Slave SPI, Serial, and CPU modes. Output Configuration Clock for configuring an FPGA in Master configuration modes (Master SPI, Master Serial). This is a dedicated pin. |
| HOLDN/DI/BUSY/CSSPIN/CEN | I/O | Parallel configuration mode busy indicator. SPI/SPI _m mode data output. This is a shared I/O pin. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| CSN/SN | I/O | Parallel configuration mode active-low chip select. Slave SPI chip select. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| CS1N | I | Parallel configuration mode active-low chip select. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| WRITEN | I | Write enable for parallel configuration modes. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| DOUT/CSON | O | Serial data output. Chip select output. SPI/SPI _m mode chip select. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| DO/MOSI/IOO | I/O | Parallel configuration I/O. Open drain during configuration. When in SPI modes, it is an output in Master mode, and input in Slave mode. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |

| Signal Name | I/O | Description |
|---|-----|---|
| Configuration Pads (Used during sysCONFIG) (Continued) | | |
| D1/MISO/IO1 | I/O | Parallel configuration I/O. Open drain during configuration. When in SPI modes, it is an input in Master mode, and output in Slave mode. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| D2/IO2 | I/O | Parallel configuration I/O. Open drain during configuration. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| D3/IO3 | I/O | Parallel configuration I/O. Open drain during configuration. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| D4/IO4 | I/O | Parallel configuration I/O. Open drain during configuration. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| D5/IO5 | I/O | Parallel configuration I/O. Open drain during configuration. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| D6/IO6 | I/O | Parallel configuration I/O. Open drain during configuration. When in SPI modes, it is an output in Master mode, and input in Slave mode. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| D7/IO7 | I/O | Parallel configuration I/O. Open drain during configuration. When in SPI modes, it is an output in Master mode, and input in Slave mode. This is a shared I/O pin. When not in configuration, it can be used as general purpose I/O pin. |
| SERDES Function | | |
| VCCA _x | — | SERDES, transmit, receive, PLL and reference clock buffer power supply for SERDES Dual x. All VCCA supply pins must always be powered to the recommended operating voltage range. If no SERDES channels are used, connect VCCA to VCC. VCCA _x = 1.1 V for ECP5, VCCA _x = 1.2 V for ECP5-5G. |
| VCCAUX _x | — | SERDES Aux Power Supply pin for SERDES Dual x. VCCAUX _x = 2.5 V. |
| HDRX[P/N]_D[dual_num]CH[chan_num] | I | High-speed SERDES inputs, P = Positive, N = Negative, dual_num = [0, 1], chan_num = [0, 1]. These are dedicated SERDES input pins. |
| HDTX[P/N]_D[dual_num]CH[chan_num] | O | High-speed SERDES outputs, P = Positive, N = Negative, dual_num = [0, 1], chan_num = [0, 1]. These are dedicated SERDES output pins. |
| REFCLK[P/N]_D[dual_num] | I | SERDES Reference Clock inputs, P = Positive, N = Negative, dual_num = [0, 1]. These are dedicated SERDES input pins. |
| VCCHRX_D[dual_num]CH[chan_num] | — | SERDES High-Speed Inputs Termination Voltage Supplies, dual_num = [0, 1], chan_num = [0, 1]. These pins should be powered to 1.1 V on ECP5, or 1.2 V on ECP5-5G. |
| VCCHTX_D[dual_num]CH[chan_num] | — | SERDES High-Speed Outputs Buffer Voltage Supplies, dual_num = [0, 1], chan_num = [0, 1]. These pins should be powered to 1.1 V on ECP5, or 1.2 V on ECP5-5G. |

Notes:

1. When placing switching I/Os around these critical pins that are designed to supply the device with the proper reference or supply voltage, care must be given.
2. These pins are dedicated inputs or can be used as general purpose I/O.
3. m defines the associated channel in the quad.

4.2. PICs and DDR Data (DQ) Pins Associated with the DDR Strobe (DQS) Pin

| PICs Associated with DQS Strobe | PIO within PIC | DDR Strobe (DQS) and Data (DQ) Pins |
|--|----------------|-------------------------------------|
| For Left and Right Edges of the Device Only | | |
| P[L/R] [n-6] | A | DQ |
| | B | DQ |
| | C | DQ |
| | D | DQ |
| P[L/R] [n-3] | A | DQ |
| | B | DQ |
| | C | DQ |
| | D | DQ |
| P[L/R] [n] | A | DQS (P) |
| | B | DQS (N) |
| | C | DQ |
| | D | DQ |
| P[L/R] [n+3] | A | DQ |
| | B | DQ |
| | C | DQ |
| | D | DQ |

Note: "n" is a row PIC number.

4.3. Pin Information Summary

4.3.1. LFE5UM/LFE5UM5G

| Pin Information Summary | | LFE5UM/ LFE5UM5G-25 | | LFE5UM/LFE5UM5G-45 | | | LFE5UM/LFE5UM5G-85 | | | |
|---|----------|------------------------|--------------|--------------------|--------------|--------------|--------------------|--------------|--------------|--------------|
| | | 285 csfBGA | 381 caBGA | 285 csfBGA | 381 caBGA | 554 caBGA | 285 csfBGA | 381 caBGA | 554 caBGA | 756 caBGA |
| General Purpose Inputs/Outputs per Bank | Bank 0 | 6 | 24 | 6 | 27 | 32 | 6 | 27 | 32 | 56 |
| | Bank 1 | 6 | 32 | 6 | 33 | 40 | 6 | 33 | 40 | 48 |
| | Bank 2 | 21 | 32 | 21 | 32 | 32 | 21 | 34 | 32 | 48 |
| | Bank 3 | 28 | 32 | 28 | 33 | 48 | 28 | 33 | 48 | 64 |
| | Bank 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 14 | 24 |
| | Bank 6 | 26 | 32 | 26 | 33 | 48 | 26 | 33 | 48 | 64 |
| | Bank 7 | 18 | 32 | 18 | 32 | 32 | 18 | 32 | 32 | 48 |
| | Bank 8 | 13 | 13 | 13 | 13 | 13 | 13 | 13 | 13 | 13 |
| Total Single-Ended User I/O | | 118 | 197 | 118 | 203 | 245 | 118 | 205 | 259 | 365 |
| VCC | | 13 | 20 | 13 | 20 | 24 | 13 | 20 | 24 | 36 |
| VCCAUX (Core) | | 3 | 4 | 3 | 4 | 9 | 3 | 4 | 9 | 8 |
| VCCIO | Bank 0 | 1 | 2 | 1 | 2 | 3 | 1 | 2 | 3 | 4 |
| | Bank 1 | 1 | 2 | 1 | 2 | 3 | 1 | 2 | 3 | 4 |
| | Bank 2 | 2 | 3 | 2 | 3 | 4 | 2 | 3 | 4 | 4 |
| | Bank 3 | 2 | 3 | 2 | 3 | 3 | 2 | 3 | 3 | 4 |
| | Bank 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 |
| | Bank 6 | 2 | 3 | 2 | 3 | 4 | 2 | 3 | 4 | 4 |
| | Bank 7 | 2 | 3 | 2 | 3 | 3 | 2 | 3 | 3 | 4 |
| | Bank 8 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| TAP | | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Miscellaneous Dedicated Pins | | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 |
| GND | | 83 | 59 | 83 | 59 | 113 | 83 | 59 | 113 | 166 |
| NC | | 1 | 8 | 1 | 2 | 33 | 1 | 0 | 17 | 29 |
| Reserved | | 0 | 2 | 0 | 2 | 4 | 0 | 2 | 4 | 4 |
| SERDES | | 14 | 28 | 14 | 28 | 28 | 14 | 28 | 28 | 28 |
| VCCA (SERDES) | VCCA0 | 2 | 2 | 2 | 2 | 6 | 2 | 2 | 6 | 8 |
| | VCCA1 | 0 | 2 | 0 | 2 | 6 | 0 | 2 | 6 | 9 |
| VCCAUX (SERDES) | VCCAUXA0 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| | VCCAUXA1 | 0 | 2 | 0 | 2 | 2 | 0 | 2 | 2 | 2 |
| GNDA (SERDES) | | 26 | 26 | 26 | 26 | 49 | 26 | 26 | 49 | 60 |
| Total Balls | | 285 | 381 | 285 | 381 | 554 | 285 | 381 | 554 | 756 |
| High Speed Differential Input / Output Pairs | Bank 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 2 | 10/8 | 16/8 | 10/8 | 16/8 | 16/8 | 10/8 | 17/9 | 16/8 | 24/12 |
| | Bank 3 | 14/7 | 16/8 | 14/7 | 16/8 | 24/12 | 14/7 | 16/8 | 24/12 | 32/16 |
| | Bank 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 6 | 13/6 | 16/8 | 13/6 | 16/8 | 24/12 | 13/6 | 16/8 | 24/12 | 32/16 |
| | Bank 7 | 8/6 | 16/8 | 8/6 | 16/8 | 16/8 | 8/6 | 16/8 | 16/8 | 24/12 |
| | Bank 8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

LFESUM/LFESUM5G (Continued)

| Pin Information Summary | | LFESUM/ LFESUM5G-25 | | LFESUM/LFESUM5G-45 | | | LFESUM/LFESUM5G-85 | | | |
|---|--------|------------------------|--------------|--------------------|--------------|--------------|--------------------|--------------|--------------|--------------|
| Pin Type | | 285 csfBGA | 381 caBGA | 285 csfBGA | 381 caBGA | 554 caBGA | 285 csfBGA | 381 caBGA | 554 caBGA | 756 caBGA |
| Total High Speed Differential I/O Pairs | | 45/27 | 64/32 | 45/27 | 64/3 | 80/40 | 45/27 | 65/3 | 80/40 | 112/5 |
| DQS Groups (> 11 pins in group) | Bank 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 2 | 1 | 2 | 1 | 2 | 2 | 1 | 2 | 2 | 3 |
| | Bank 3 | 2 | 2 | 2 | 2 | 3 | 2 | 2 | 3 | 4 |
| | Bank 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 6 | 2 | 2 | 2 | 2 | 3 | 2 | 2 | 3 | 4 |
| | Bank 7 | 1 | 2 | 1 | 2 | 2 | 1 | 2 | 2 | 3 |
| Total DQS Groups | | 6 | 8 | 6 | 8 | 10 | 6 | 8 | 10 | 14 |

4.3.2. LFE5U



| Pin Information Summary | | LFE5U-12 | | LFE5U-25 | | LFE5U-45 | | | LFE5U-85 | | | |
|---|--------|---------------|--------------|---------------|--------------|---------------|--------------|--------------|---------------|--------------|--------------|--------------|
| Pin Type | | 285 csfBGA | 381 caBGA | 285 csfBGA | 381 caBGA | 285 csfBGA | 381 caBGA | 554 caBGA | 285 csfBGA | 381 caBGA | 554 caBGA | 756 caBGA |
| General Purpose Inputs/Outputs per Bank | Bank 0 | 6 | 24 | 6 | 24 | 6 | 27 | 32 | 6 | 27 | 32 | 56 |
| | Bank 1 | 6 | 32 | 6 | 32 | 6 | 33 | 40 | 6 | 33 | 40 | 48 |
| | Bank 2 | 21 | 32 | 21 | 32 | 21 | 32 | 32 | 21 | 34 | 32 | 48 |
| | Bank 3 | 28 | 32 | 28 | 32 | 28 | 33 | 48 | 28 | 33 | 48 | 64 |
| | Bank 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 14 | 24 |
| | Bank 6 | 26 | 32 | 26 | 32 | 26 | 33 | 48 | 26 | 33 | 48 | 64 |
| | Bank 7 | 18 | 32 | 18 | 32 | 18 | 32 | 32 | 18 | 32 | 32 | 48 |
| | Bank 8 | 13 | 13 | 13 | 13 | 13 | 13 | 13 | 13 | 13 | 13 | 13 |
| Total Single-Ended User I/O | | 118 | 197 | 118 | 197 | 118 | 203 | 245 | 118 | 205 | 259 | 365 |
| VCC | | 13 | 20 | 13 | 20 | 13 | 20 | 24 | 13 | 20 | 24 | 36 |
| VCCAUX (Core) | | 3 | 4 | 3 | 4 | 3 | 4 | 9 | 3 | 4 | 9 | 8 |
| VCCIO | Bank 0 | 1 | 2 | 1 | 2 | 1 | 2 | 3 | 1 | 2 | 3 | 4 |
| | Bank 1 | 1 | 2 | 1 | 2 | 1 | 2 | 3 | 1 | 2 | 3 | 4 |
| | Bank 2 | 2 | 3 | 2 | 3 | 2 | 3 | 4 | 2 | 3 | 4 | 4 |
| | Bank 3 | 2 | 3 | 2 | 3 | 2 | 3 | 3 | 2 | 3 | 3 | 4 |
| | Bank 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 |
| | Bank 6 | 2 | 3 | 2 | 3 | 2 | 3 | 4 | 2 | 3 | 4 | 4 |
| | Bank 7 | 2 | 3 | 2 | 3 | 2 | 3 | 3 | 2 | 3 | 3 | 4 |
| Bank 8 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | |
| TAP | | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 |
| Miscellaneous Dedicated Pins | | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 | 7 |
| GND | | 123 | 99 | 123 | 99 | 123 | 99 | 198 | 123 | 99 | 198 | 267 |
| NC | | 1 | 26 | 1 | 26 | 1 | 26 | 33 | 1 | 26 | 33 | 29 |
| Reserved | | 4 | 6 | 4 | 6 | 4 | 6 | 12 | 4 | 6 | 12 | 12 |

LFE5U (Continued)

| Pin Information Summary | | LFE5U-12 | | LFE5U-25 | | LFE5U-45 | | | LFE5U-85 | | | |
|--|--------|---------------|--------------|---------------|--------------|---------------|--------------|--------------|---------------|--------------|--------------|--------------|
| Pin Type | | 285 csfBGA | 381 caBGA | 285 csfBGA | 381 caBGA | 285 csfBGA | 381 caBGA | 554 caBGA | 285 csfBGA | 381 caBGA | 554 caBGA | 756 caBGA |
| Total Balls | | 285 | 381 | 285 | 381 | 285 | 381 | 554 | 285 | 381 | 554 | 756 |
| High Speed Differential Input / Output Pairs | Bank 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 2 | 10/8 | 16/8 | 10/8 | 16/8 | 10/8 | 16/8 | 16/8 | 10/8 | 17/9 | 16/8 | 24/12 |
| | Bank 3 | 14/7 | 16/8 | 14/7 | 16/8 | 14/7 | 16/8 | 24/12 | 14/7 | 16/8 | 24/12 | 32/16 |
| | Bank 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 6 | 13/6 | 16/8 | 13/6 | 16/8 | 13/6 | 16/8 | 24/12 | 13/6 | 16/8 | 24/12 | 32/16 |
| | Bank 7 | 8/6 | 16/8 | 8/6 | 16/8 | 8/6 | 16/8 | 16/8 | 8/6 | 16/8 | 16/8 | 24/12 |
| | Bank 8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Total High Speed Differential I/O | | 45/27 | 64/32 | 45/27 | 64/32 | 45/27 | 64/32 | 80/40 | 45/27 | 65/33 | 80/40 | 112/5 |
| DQS Groups (> 11 pins in group) | Bank 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 2 | 1 | 2 | 1 | 2 | 1 | 2 | 2 | 1 | 2 | 2 | 3 |
| | Bank 3 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 2 | 2 | 3 | 4 |
| | Bank 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Bank 6 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 2 | 2 | 3 | 4 |
| | Bank 7 | 1 | 2 | 1 | 2 | 1 | 2 | 2 | 1 | 2 | 2 | 3 |
| | Bank 8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Total DQS Groups | | 6 | 8 | 6 | 8 | 6 | 8 | 10 | 6 | 8 | 10 | 14 |

5. Ordering Information

5.1. ECP5/ECP5-5G Part Number Description

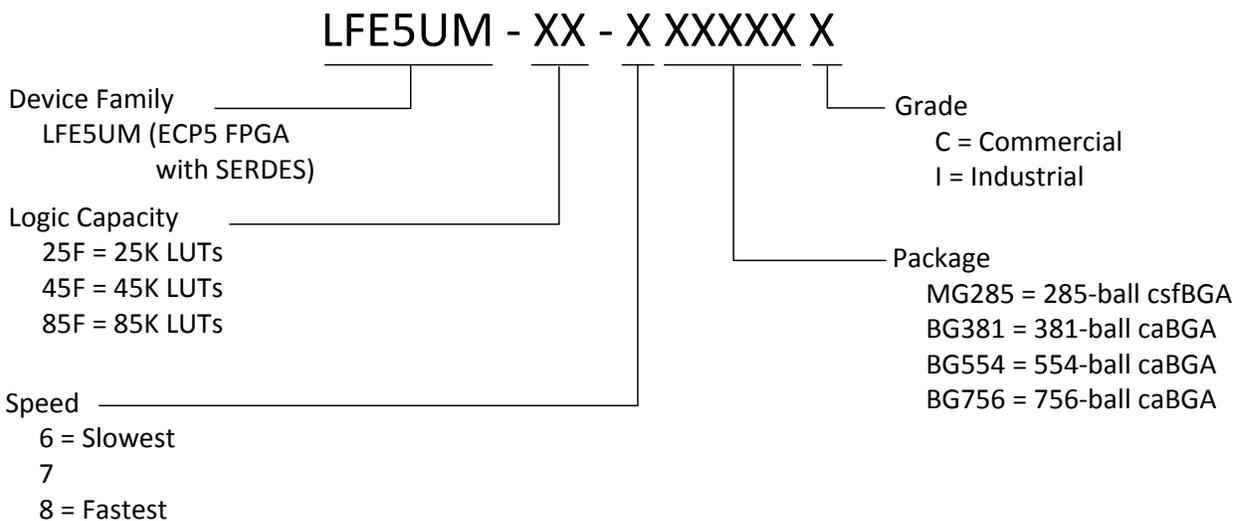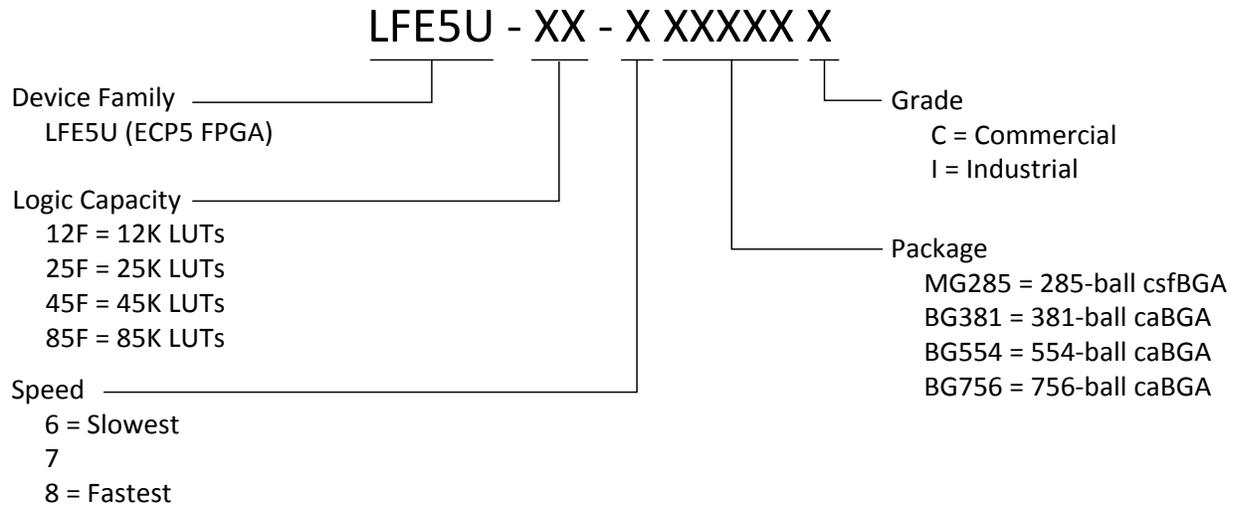

LFE5UM5G - XX - X XXXXX X

Device Family

LFE5UM5G (ECP5-5G FPGA
with SERDES)

Logic Capacity

25F = 25K LUTs
45F = 45K LUTs
85F = 85K LUTs

Speed

8 = Fastest

Grade

C = Commercial
I = Industrial

Package

MG285 = 285-ball csfBGA
BG381 = 381-ball caBGA
BG554 = 554-ball caBGA
BG756 = 756-ball caBGA

5.2. Ordering Part Numbers

5.2.1. Commercial

| Part number | Grade | Package | Pins | Temp. | LUTs (K) | SERDES |
|--------------------|-------|------------------|------|------------|----------|--------|
| LFE5U-12F-6MG285C | -6 | Lead free csfBGA | 285 | Commercial | 12 | No |
| LFE5U-12F-7MG285C | -7 | Lead free csfBGA | 285 | Commercial | 12 | No |
| LFE5U-12F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 12 | No |
| LFE5U-12F-6BG381C | -6 | Lead free caBGA | 381 | Commercial | 12 | No |
| LFE5U-12F-7BG381C | -7 | Lead free caBGA | 381 | Commercial | 12 | No |
| LFE5U-12F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 12 | No |
| LFE5U-25F-6MG285C | -6 | Lead free csfBGA | 285 | Commercial | 24 | No |
| LFE5U-25F-7MG285C | -7 | Lead free csfBGA | 285 | Commercial | 24 | No |
| LFE5U-25F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 24 | No |
| LFE5U-25F-6BG381C | -6 | Lead free caBGA | 381 | Commercial | 24 | No |
| LFE5U-25F-7BG381C | -7 | Lead free caBGA | 381 | Commercial | 24 | No |
| LFE5U-25F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 24 | No |
| LFE5U-45F-6MG285C | -6 | Lead free csfBGA | 285 | Commercial | 44 | No |
| LFE5U-45F-7MG285C | -7 | Lead free csfBGA | 285 | Commercial | 44 | No |
| LFE5U-45F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 44 | No |
| LFE5U-45F-6BG381C | -6 | Lead free caBGA | 381 | Commercial | 44 | No |
| LFE5U-45F-7BG381C | -7 | Lead free caBGA | 381 | Commercial | 44 | No |
| LFE5U-45F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 44 | No |
| LFE5U-45F-6BG554C | -6 | Lead free caBGA | 554 | Commercial | 44 | No |
| LFE5U-45F-7BG554C | -7 | Lead free caBGA | 554 | Commercial | 44 | No |
| LFE5U-45F-8BG554C | -8 | Lead free caBGA | 554 | Commercial | 44 | No |
| LFE5U-85F-6MG285C | -6 | Lead free csfBGA | 285 | Commercial | 84 | No |
| LFE5U-85F-7MG285C | -7 | Lead free csfBGA | 285 | Commercial | 84 | No |
| LFE5U-85F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 84 | No |
| LFE5U-85F-6BG381C | -6 | Lead free caBGA | 381 | Commercial | 84 | No |
| LFE5U-85F-7BG381C | -7 | Lead free caBGA | 381 | Commercial | 84 | No |
| LFE5U-85F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 84 | No |
| LFE5U-85F-6BG554C | -6 | Lead free caBGA | 554 | Commercial | 84 | No |
| LFE5U-85F-7BG554C | -7 | Lead free caBGA | 554 | Commercial | 84 | No |
| LFE5U-85F-8BG554C | -8 | Lead free caBGA | 554 | Commercial | 84 | No |
| LFE5U-85F-6BG756C | -6 | Lead free caBGA | 756 | Commercial | 84 | No |
| LFE5U-85F-7BG756C | -7 | Lead free caBGA | 756 | Commercial | 84 | No |
| LFE5U-85F-8BG756C | -8 | Lead free caBGA | 756 | Commercial | 84 | No |
| LFE5UM-25F-6MG285C | -6 | Lead free csfBGA | 285 | Commercial | 24 | Yes |
| LFE5UM-25F-7MG285C | -7 | Lead free csfBGA | 285 | Commercial | 24 | Yes |
| LFE5UM-25F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 24 | Yes |
| LFE5UM-25F-6BG381C | -6 | Lead free caBGA | 381 | Commercial | 24 | Yes |
| LFE5UM-25F-7BG381C | -7 | Lead free caBGA | 381 | Commercial | 24 | Yes |
| LFE5UM-25F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 24 | Yes |
| LFE5UM-45F-6MG285C | -6 | Lead free csfBGA | 285 | Commercial | 44 | Yes |
| LFE5UM-45F-7MG285C | -7 | Lead free csfBGA | 285 | Commercial | 44 | Yes |
| LFE5UM-45F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 44 | Yes |
| LFE5UM-45F-6BG381C | -6 | Lead free caBGA | 381 | Commercial | 44 | Yes |

| Part number | Grade | Package | Pins | Temp. | LUTs (K) | SERDES |
|----------------------|-------|------------------|------|------------|----------|--------|
| LFE5UM-45F-7BG381C | -7 | Lead free caBGA | 381 | Commercial | 44 | Yes |
| LFE5UM-45F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 44 | Yes |
| LFE5UM-45F-6BG554C | -6 | Lead free caBGA | 554 | Commercial | 44 | Yes |
| LFE5UM-45F-7BG554C | -7 | Lead free caBGA | 554 | Commercial | 44 | Yes |
| LFE5UM-45F-8BG554C | -8 | Lead free caBGA | 554 | Commercial | 44 | Yes |
| LFE5UM-85F-6MG285C | -6 | Lead free csfBGA | 285 | Commercial | 84 | Yes |
| LFE5UM-85F-7MG285C | -7 | Lead free csfBGA | 285 | Commercial | 84 | Yes |
| LFE5UM-85F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 84 | Yes |
| LFE5UM-85F-6BG381C | -6 | Lead free caBGA | 381 | Commercial | 84 | Yes |
| LFE5UM-85F-7BG381C | -7 | Lead free caBGA | 381 | Commercial | 84 | Yes |
| LFE5UM-85F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 84 | Yes |
| LFE5UM-85F-6BG554C | -6 | Lead free caBGA | 554 | Commercial | 84 | Yes |
| LFE5UM-85F-7BG554C | -7 | Lead free caBGA | 554 | Commercial | 84 | Yes |
| LFE5UM-85F-8BG554C | -8 | Lead free caBGA | 554 | Commercial | 84 | Yes |
| LFE5UM-85F-6BG756C | -6 | Lead free caBGA | 756 | Commercial | 84 | Yes |
| LFE5UM-85F-7BG756C | -7 | Lead free caBGA | 756 | Commercial | 84 | Yes |
| LFE5UM-85F-8BG756C | -8 | Lead free caBGA | 756 | Commercial | 84 | Yes |
| LFE5UM5G-25F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 24 | Yes |
| LFE5UM5G-25F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 24 | Yes |
| LFE5UM5G-45F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 44 | Yes |
| LFE5UM5G-45F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 44 | Yes |
| LFE5UM5G-45F-8BG554C | -8 | Lead free caBGA | 554 | Commercial | 44 | Yes |
| LFE5UM5G-85F-8MG285C | -8 | Lead free csfBGA | 285 | Commercial | 84 | Yes |
| LFE5UM5G-85F-8BG381C | -8 | Lead free caBGA | 381 | Commercial | 84 | Yes |
| LFE5UM5G-85F-8BG554C | -8 | Lead free caBGA | 554 | Commercial | 84 | Yes |
| LFE5UM5G-85F-8BG756C | -8 | Lead free caBGA | 756 | Commercial | 84 | Yes |

5.2.2. Industrial

| Part number | Grade | Package | Pins | Temp. | LUTs (K) | SERDES |
|-------------------|-------|------------------|------|------------|----------|--------|
| LFE5U-12F-6MG285I | -6 | Lead free csfBGA | 285 | Industrial | 12 | No |
| LFE5U-12F-7MG285I | -7 | Lead free csfBGA | 285 | Industrial | 12 | No |
| LFE5U-12F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 12 | No |
| LFE5U-12F-6BG381I | -6 | Lead free caBGA | 381 | Industrial | 12 | No |
| LFE5U-12F-7BG381I | -7 | Lead free caBGA | 381 | Industrial | 12 | No |
| LFE5U-12F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 12 | No |
| LFE5U-25F-6MG285I | -6 | Lead free csfBGA | 285 | Industrial | 24 | No |
| LFE5U-25F-7MG285I | -7 | Lead free csfBGA | 285 | Industrial | 24 | No |
| LFE5U-25F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 24 | No |
| LFE5U-25F-6BG381I | -6 | Lead free caBGA | 381 | Industrial | 24 | No |
| LFE5U-25F-7BG381I | -7 | Lead free caBGA | 381 | Industrial | 24 | No |
| LFE5U-25F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 24 | No |
| LFE5U-45F-6MG285I | -6 | Lead free csfBGA | 285 | Industrial | 44 | No |
| LFE5U-45F-7MG285I | -7 | Lead free csfBGA | 285 | Industrial | 44 | No |
| LFE5U-45F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 44 | No |
| LFE5U-45F-6BG381I | -6 | Lead free caBGA | 381 | Industrial | 44 | No |

| Part number | Grade | Package | Pins | Temp. | LUTs (K) | SERDES |
|--------------------|-------|------------------|------|------------|----------|--------|
| LFE5U-45F-7BG381I | -7 | Lead free caBGA | 381 | Industrial | 44 | No |
| LFE5U-45F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 44 | No |
| LFE5U-45F-6BG554I | -6 | Lead free caBGA | 554 | Industrial | 44 | No |
| LFE5U-45F-7BG554I | -7 | Lead free caBGA | 554 | Industrial | 44 | No |
| LFE5U-45F-8BG554I | -8 | Lead free caBGA | 554 | Industrial | 44 | No |
| LFE5U-85F-6MG285I | -6 | Lead free csfBGA | 285 | Industrial | 84 | No |
| LFE5U-85F-7MG285I | -7 | Lead free csfBGA | 285 | Industrial | 84 | No |
| LFE5U-85F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 84 | No |
| LFE5U-85F-6BG381I | -6 | Lead free caBGA | 381 | Industrial | 84 | No |
| LFE5U-85F-7BG381I | -7 | Lead free caBGA | 381 | Industrial | 84 | No |
| LFE5U-85F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 84 | No |
| LFE5U-85F-6BG554I | -6 | Lead free caBGA | 554 | Industrial | 84 | No |
| LFE5U-85F-7BG554I | -7 | Lead free caBGA | 554 | Industrial | 84 | No |
| LFE5U-85F-8BG554I | -8 | Lead free caBGA | 554 | Industrial | 84 | No |
| LFE5U-85F-6BG756I | -6 | Lead free caBGA | 756 | Industrial | 84 | No |
| LFE5U-85F-7BG756I | -7 | Lead free caBGA | 756 | Industrial | 84 | No |
| LFE5U-85F-8BG756I | -8 | Lead free caBGA | 756 | Industrial | 84 | No |
| LFE5UM-25F-6MG285I | -6 | Lead free csfBGA | 285 | Industrial | 24 | Yes |
| LFE5UM-25F-7MG285I | -7 | Lead free csfBGA | 285 | Industrial | 24 | Yes |
| LFE5UM-25F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 24 | Yes |
| LFE5UM-25F-6BG381I | -6 | Lead free caBGA | 381 | Industrial | 24 | Yes |
| LFE5UM-25F-7BG381I | -7 | Lead free caBGA | 381 | Industrial | 24 | Yes |
| LFE5UM-25F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 24 | Yes |
| LFE5UM-45F-6MG285I | -6 | Lead free csfBGA | 285 | Industrial | 44 | Yes |
| LFE5UM-45F-7MG285I | -7 | Lead free csfBGA | 285 | Industrial | 44 | Yes |
| LFE5UM-45F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 44 | Yes |
| LFE5UM-45F-6BG381I | -6 | Lead free caBGA | 381 | Industrial | 44 | Yes |
| LFE5UM-45F-7BG381I | -7 | Lead free caBGA | 381 | Industrial | 44 | Yes |
| LFE5UM-45F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 44 | Yes |
| LFE5UM-45F-6BG554I | -6 | Lead free caBGA | 554 | Industrial | 44 | Yes |
| LFE5UM-45F-7BG554I | -7 | Lead free caBGA | 554 | Industrial | 44 | Yes |
| LFE5UM-45F-8BG554I | -8 | Lead free caBGA | 554 | Industrial | 44 | Yes |
| LFE5UM-85F-6MG285I | -6 | Lead free csfBGA | 285 | Industrial | 84 | Yes |
| LFE5UM-85F-7MG285I | -7 | Lead free csfBGA | 285 | Industrial | 84 | Yes |
| LFE5UM-85F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 84 | Yes |
| LFE5UM-85F-6BG381I | -6 | Lead free caBGA | 381 | Industrial | 84 | Yes |
| LFE5UM-85F-7BG381I | -7 | Lead free caBGA | 381 | Industrial | 84 | Yes |
| LFE5UM-85F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 84 | Yes |
| LFE5UM-85F-6BG554I | -6 | Lead free caBGA | 554 | Industrial | 84 | Yes |
| LFE5UM-85F-7BG554I | -7 | Lead free caBGA | 554 | Industrial | 84 | Yes |
| LFE5UM-85F-8BG554I | -8 | Lead free caBGA | 554 | Industrial | 84 | Yes |
| LFE5UM-85F-6BG756I | -6 | Lead free caBGA | 756 | Industrial | 84 | Yes |
| LFE5UM-85F-7BG756I | -7 | Lead free caBGA | 756 | Industrial | 84 | Yes |
| LFE5UM-85F-8BG756I | -8 | Lead free caBGA | 756 | Industrial | 84 | Yes |

| Part number | Grade | Package | Pins | Temp. | LUTs (K) | SERDES |
|----------------------|-------|------------------|------|------------|----------|--------|
| LFE5UM5G-25F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 24 | Yes |
| LFE5UM5G-25F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 24 | Yes |
| LFE5UM5G-45F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 44 | Yes |
| LFE5UM5G-45F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 44 | Yes |
| LFE5UM5G-45F-8BG554I | -8 | Lead free caBGA | 554 | Industrial | 44 | Yes |
| LFE5UM5G-85F-8MG285I | -8 | Lead free csfBGA | 285 | Industrial | 84 | Yes |
| LFE5UM5G-85F-8BG381I | -8 | Lead free caBGA | 381 | Industrial | 84 | Yes |
| LFE5UM5G-85F-8BG554I | -8 | Lead free caBGA | 554 | Industrial | 84 | Yes |
| LFE5UM5G-85F-8BG756I | -8 | Lead free caBGA | 756 | Industrial | 84 | Yes |

Supplemental Information

For Further Information

A variety of technical notes for the ECP5/ECP5-5G family are available.

- TN1184, [LatticeECP3, ECP-5 and ECP5-5G Soft Error Detection \(SED\)/Correction \(SEC\) Usage Guide](#)
- TN1260, [ECP5 and ECP5-5G sysCONFIG Usage Guide](#)
- TN1261, [ECP5 and ECP5-5G SERDES/PCS Usage Guide](#)
- TN1262, [ECP5 and ECP5-5G sysIO Usage Guide](#)
- TN1263, [ECP5 and ECP5-5G sysClock PLL/DLL Design and Usage Guide](#)
- TN1264, [ECP5 and ECP5-5G Memory Usage Guide](#)
- TN1265, [ECP5 and ECP5-5G High-Speed I/O Interface](#)
- TN1266, [Power Consumption and Management for ECP5 and ECP5-5G Devices](#)
- TN1267, [ECP5 and ECP5-5G sysDSP Usage Guide](#)

For further information on interface standards refer to the following websites:

- JEDEC Standards (LVTTTL, LVCMOS, SSTL): www.jedec.org
- PCI: www.pcisig.com

Revision History

| Date | Version | Section | Change Summary |
|---------------|---------|----------------------------------|---|
| February 2016 | 1.6 | All | Changed document status from Preliminary to Final. |
| | | General Description | Updated Features section. Changed “24K to 84K LUTs” to “12K to 84K LUTs”. Added LFE5U-12 column to Table 1.1. ECP5 and ECP5-5G Family Selection Guide . |
| | | DC and Switching Characteristics | Updated Power up Sequence section. Identified typical I _{CC} current for specific devices in Table 3.8. ECP5/ECP5-5G Supply Current (Standby) . Updated values in Table 3.9. ECP5 . Updated values in Table 3.10. ECP5-5G . Added values to –8 Timing column of Table 3.18. Pin-to-Pin Performance . Added values to –8 Timing column of Table 3.19. Register-to-Register Performance . Changed LFE5-45 to All Devices in Table 3.21. ECP5/ECP5-5G External Switching Characteristics . Added table notes to Table 3.30. PCIe (5 Gb/s) . Added table note to Table 3.31. CPRI LV2 E.48 Electrical and Timing Characteristics . Added values to Max column of Table 3.38. Transmit . |
| | | Pinout Information | Added LFE5U-12 column to the table in LFE5U section. |
| | | Ordering Information | Updated LFE5U in ECP5/ECP5-5G Part Number Description section: added 12 F = 12K LUTs to Logic Capacity. Added LFE5U-12F information to Ordering Part Numbers section. |
| | | November 2015 | 1.5 |
| November 2015 | 1.4 | General Description | Updated Features section. Added support for eDP in RDR and HDR. |
| | | Architecture | Updated Overview section. Revised Figure 2.1. Simplified Block Diagram, LFE5UM/LFE5UM5G-85 Device (Top Level) . Modified Flexible sysIO description and Note. Updated SERDES and Physical Coding Sublayer section. <ul style="list-style-type: none"> Changed E.24.V in CPRI protocol to E.24.LV. Removed “1.1 V” from paragraph on unused Dual. |
| | | DC and Switching Characteristics | Updated Hot Socketing Requirements section. Revised V _{CCHTX} in table notes 1 and 3. Indicated V _{CCHTX} in table note 4. Updated SERDES High-Speed Data Transmitter section. Revised V _{CCHTX} in table note 1. |
| | | Ordering Information | Updated ECP5/ECP5-5G Part Number Description section. Changed “LFE5 FPGA” under Device Family to “ECP5 FPGA”. |
| | | August 2015 | 1.3 |
| | | Architecture | General update. |
| | | DC and Switching Characteristics | General update. |

(Continued)

| Date | Version | Section | Change Summary |
|--|---------|----------------------------------|---|
| August 2015 | 1.3 | Pinout Information | Updated Signal Descriptions section. Revised the descriptions of the following signals: <ul style="list-style-type: none"> P[L/R] [Group Number]_[A/B/C/D] P[T/B][Group Number]_[A/B] D4/IO4 (Previously named D4/MOSI2/IO4) D5/IO5 (Previously named D5/MISO/IO5) VCCHRX_D[dual_num]CH[chan_num] VCCTX_D[dual_num]CH[chan_num] |
| | | Supplemental Information | Added TN1184 reference. |
| August 2014 | 1.2 | All | Changed document status from Advance to Preliminary. |
| | | General Description | Updated Features section. <ul style="list-style-type: none"> Deleted Serial RapidIO protocol under Embedded SERDES. Corrected data rate under Pre-Engineered Source Synchronous I/O. |
| | | | Changed DD3. LPDDR3 to DDR2/3, LPDDR2/3. Mentioned transmit de-emphasis “pre- and post-cursors”. |
| | | Architecture | Updated Overview section. <ul style="list-style-type: none"> Revised description of PFU blocks. Specified SRAM cell settings in describing the control of SERDES/PCS duals. |
| | | | Updated SERDES and Physical Coding Sublayer section. <ul style="list-style-type: none"> Changed PCI Express 2.0 to PCI Express Gen1 and Gen2. Deleted Serial RapidIO protocol. Updated Table 2.13. LFE5UM/LFE5UM5G SERDES Standard Support. Updated Table 2.15. LFE5UM/LFE5UM5G Mixed Protocol Support. |
| | | | Updated On-Chip Oscillator section. <ul style="list-style-type: none"> Deleted “130 MHz ±15% CMOS” oscillator. Updated Table 2.16. Selectable Master Clock (MCLK) Frequencies During Configuration (Nominal) |
| | | DC and Switching Characteristics | Updated Absolute Maximum Ratings section. Added supply voltages V_{CCA} and V_{CCAUXA} . |
| | | | Updated sys/O Recommended Operating Conditions section. Revised HSULD12D VCCIO values and removed table note. |
| | | | Updated sys/O Single-Ended DC Electrical Characteristics section. Revised some values for SSTL15_I, SSTL15_II, SSTL135_I, SSTL15_II, and HSUL12. |
| | | | Updated ECP5/ECP5-5G External Switching Characteristics section. Changed parameters to $t_{SKEW_PR} V_{CCA}$ and t_{SKEW_EDGE} and added LFE5-85 as device. |
| Updated ECP5 Family Timing Adders section. Added SSTL135_II buffer type data. Removed LVCMOS33_20mA, LVCMOS25_20mA, LVCMOS25_16mA, LVCMOS25D_16mA, and LVCMOS18_16mA buffer types. Changed buffer type to LVCMOS12_4mA and LVCMOS12_8mA. | | | |
| Updated ECP5/ECP5-5G Maximum I/O Buffer Speed section. Revised Max values. | | | |
| Updated sysCLOCK PLL Timing section. Revised t_{DT} Min and Max values. Revised t_{OPJIT} Max value. Revised number of samples in table note 1. | | | |
| Updated SERDES High-Speed Data Transmitter section. Updated Table 3.23. Serial Output Timing and Levels and Table 3.24. Channel Output Jitter . | | | |

(Continued)

| Date | Version | Section | Change Summary |
|-------------|---------|----------------------------------|--|
| August 2014 | 1.2 | DC and Switching Characteristics | SERDES High-Speed Data Receiver section. Updated Table 3.26. Serial Input Data Specifications , Table 3.27. Receiver Total Jitter Tolerance Specification , and Table 3.28. External Reference Clock Specification (refclkp/refclkn) . |
| | | | Modified section heading to XXAU/CPRI LV E.30 Electrical and Timing Characteristics . Updated Table 3.32. Transmit and Table 3.33. Receive and Jitter Tolerance . |
| | | | Modified section heading to CPRI LV E.24 Electrical and Timing Characteristics . Updated Table 3.34. Transmit and Table 3.35. Receive and Jitter Tolerance . |
| | | | Modified section heading to Gigabit Ethernet/SGMII/CPRI LV E.12 Electrical and Timing Characteristics . Updated Table 3.36. Transmit and Table 3.37. Receive and Jitter Tolerance . |
| June 2014 | 1.1 | Ordering Information | Updated ECP5/ECP5-5G Part Number Description and Ordering Part Numbers sections. |
| March 2014 | 1.0 | All | Initial release. |



5555 NE, Moore Court
Hillsboro, OR 97124, USA
T 503.268.8000
www.latticesemi.com