

SHINDENGEN

Schottky Rectifiers (SBD)

Single

DE3S4M

40V 3A

FEATURES

SMT

T_j150P_{RRSM} avalanche guaranteed

High current capacity with Small Package

APPLICATION

Switching power supply

DC/DC converter


Home Appliances, Office Equipment

Telecommunication

OUTLINE DIMENSIONS

Case : E-pack

Unit : mm

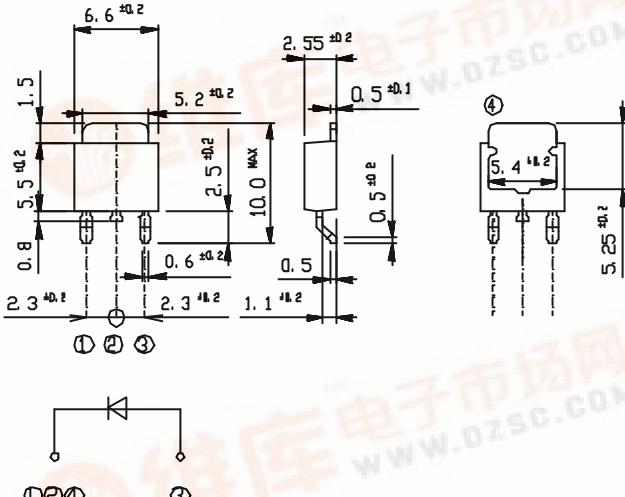

RATINGS


Absolute Maximum Ratings (If not specified T = 25 °C)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40 ~ 150	
Operating Junction Temperature	T _j		150	
Maximum Reverse Voltage	V _{RM}		40	V
Repetitive Peak Surge Reverse Voltage	V _{RRSM}	Pulse width 0.5ms, duty 1/40	45	V
Average Rectified Forward Current	I _o	50Hz sine wave, R-load Ta=40 On alumina substrate	2.6	A
		50Hz sine wave, R-load Tc=121	3	
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =125	70	A
Repetitive Peak Surge Reverse Power	P _{RRSM}	Pulse width 10 μs, T _j =25	330	W


Electrical Characteristics (If not specified T = 25 °C)



Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =3A, Pulse measurement	Max.0.55	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement	Max.2.5	mA
Junction Capacitance	C _j	f=1MHz, V _R =10V	Typ.150	pF
Thermal Resistance	j _c	junction to case	Max.12	/W
	j _a		Max.55	

DE3S4M Forward Voltage

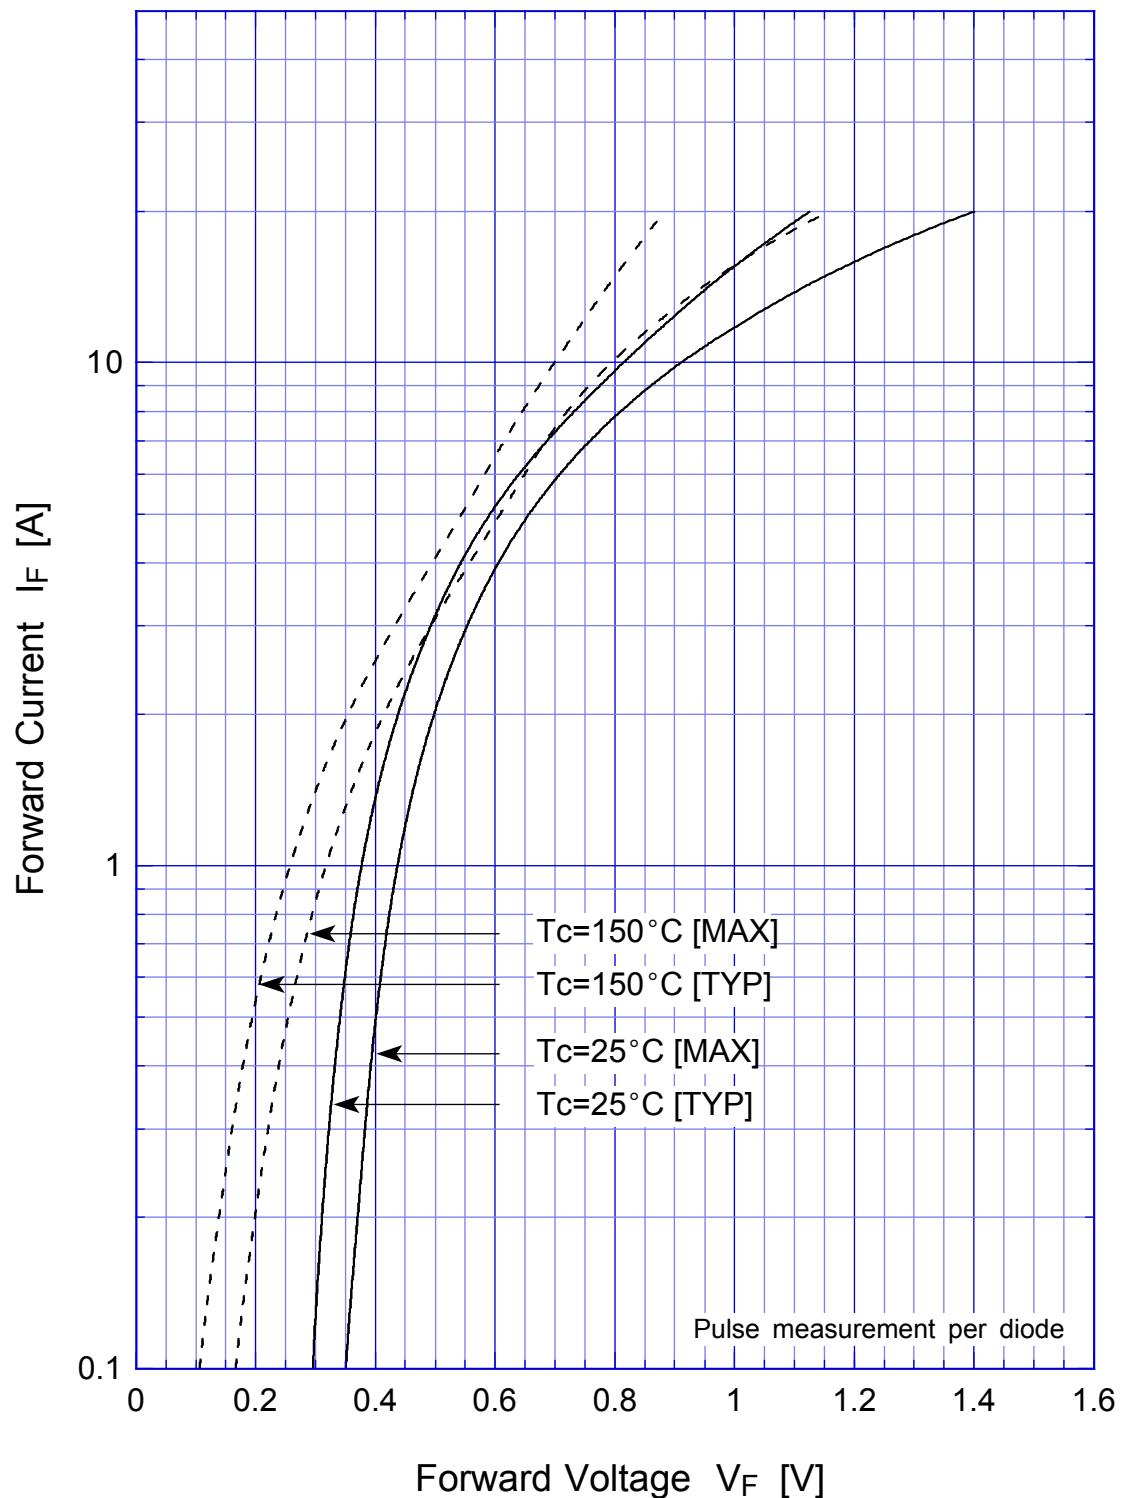


DE3S4M Reverse Current

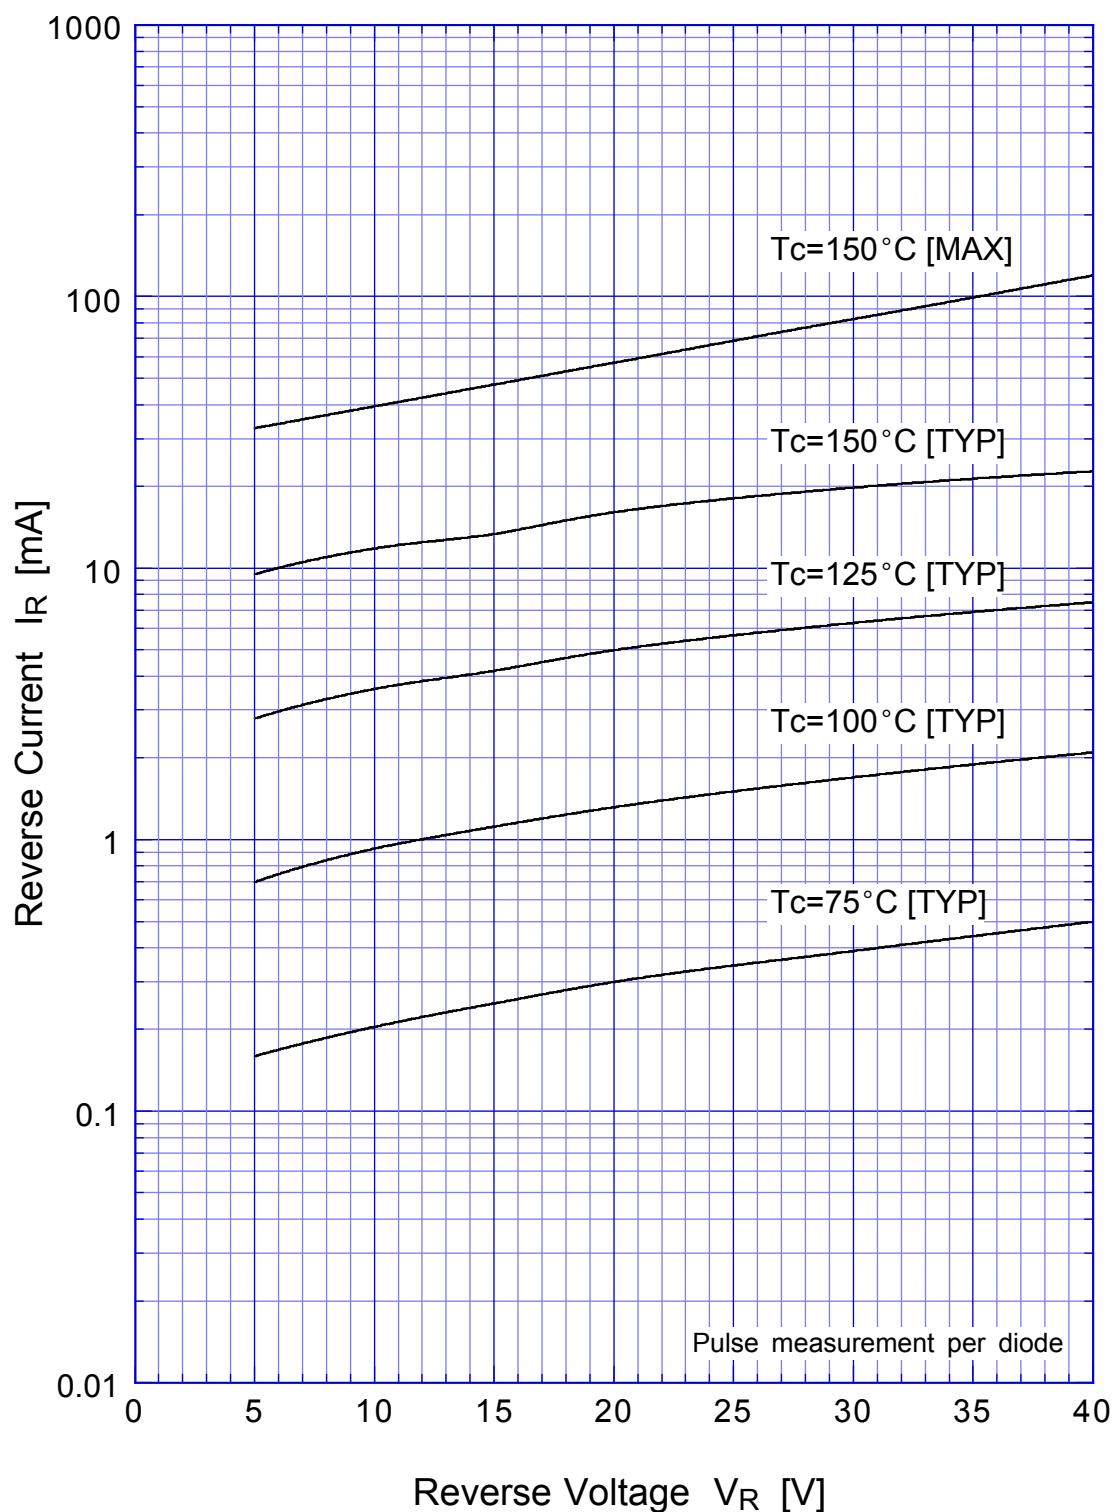


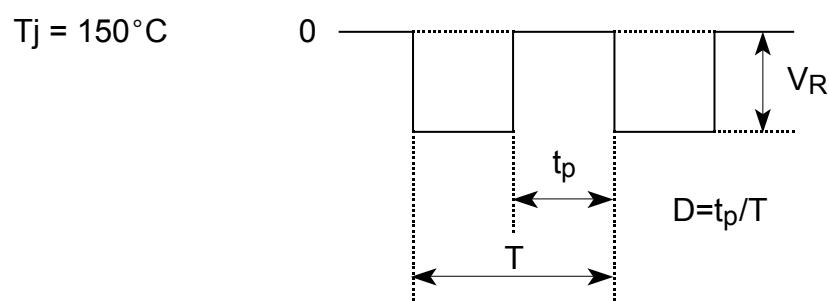
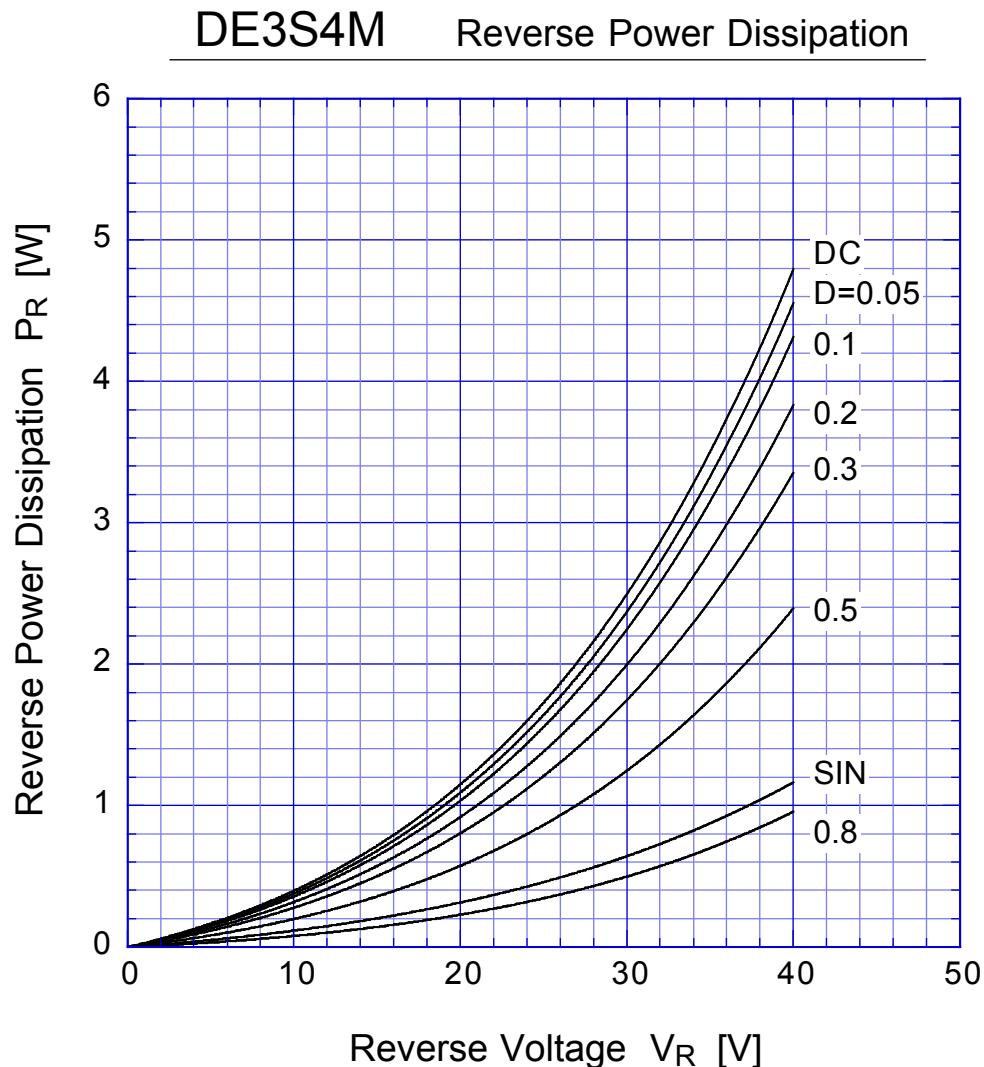




DE3S4M Forward Power Dissipation

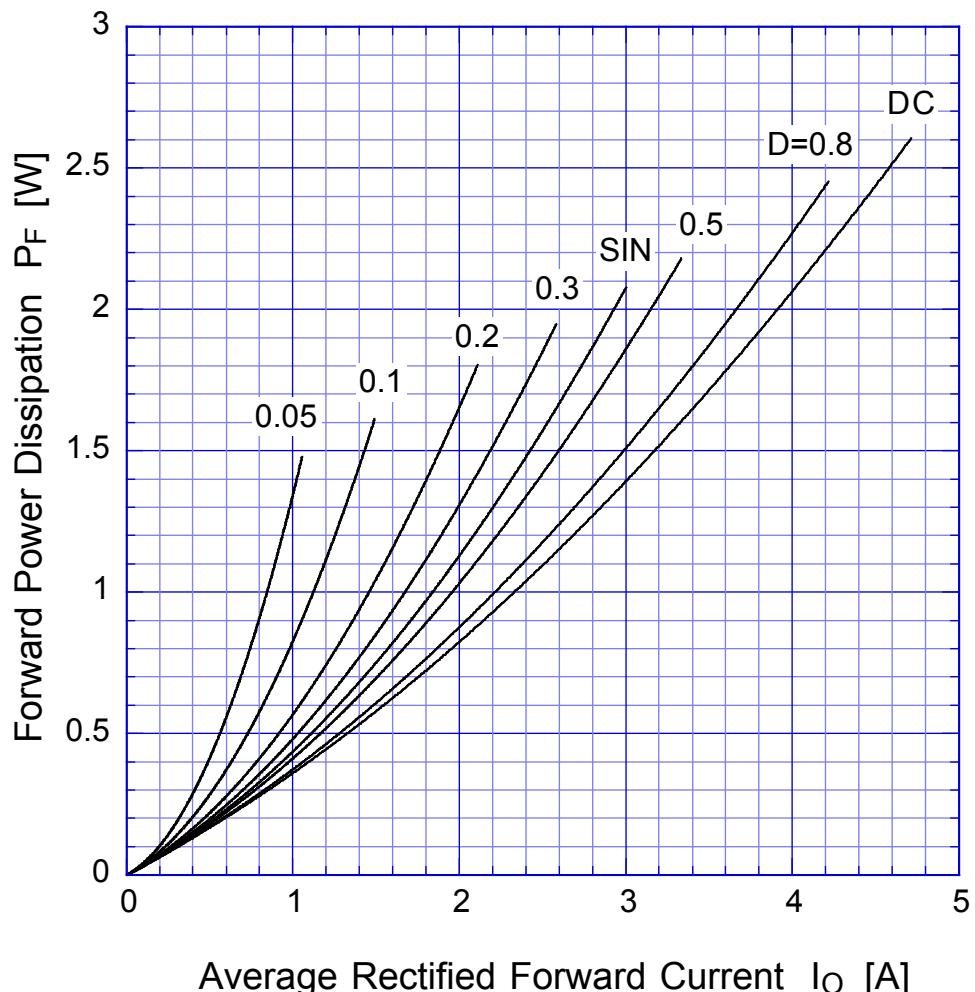

$T_j = 150^\circ\text{C}$

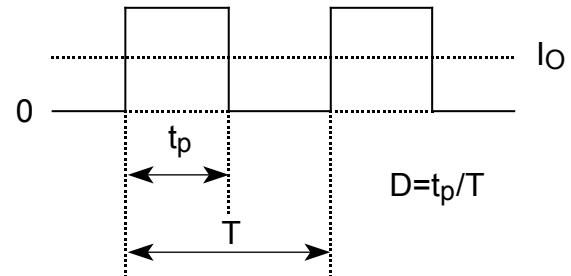


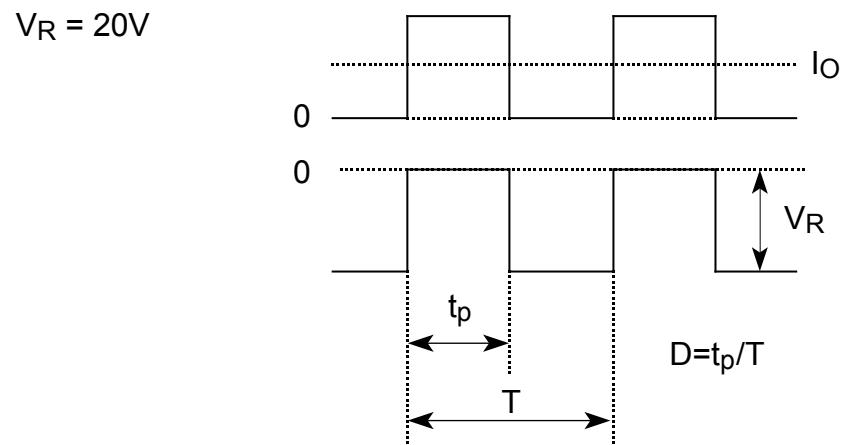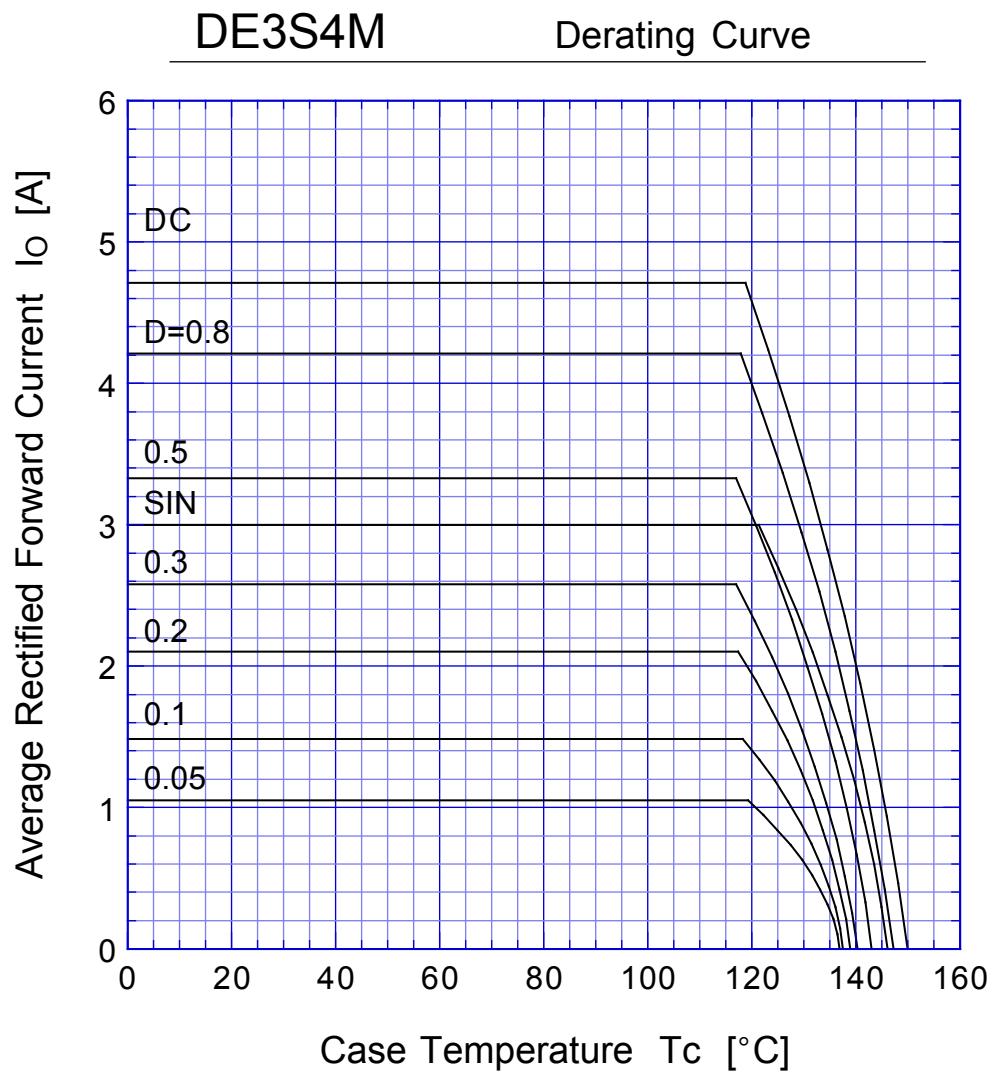

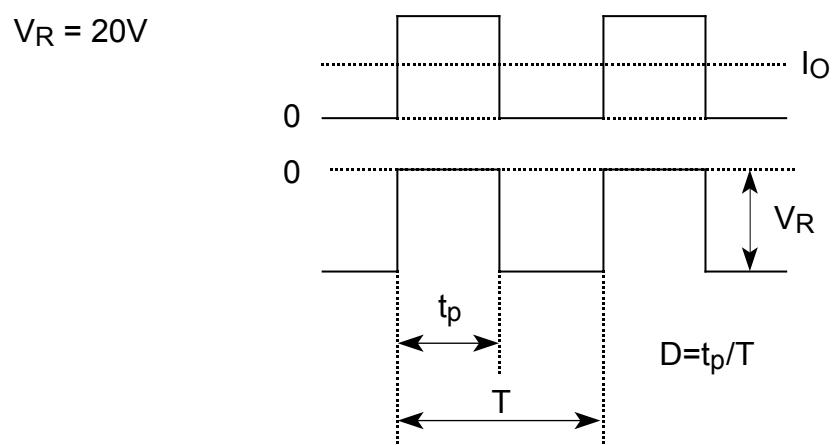
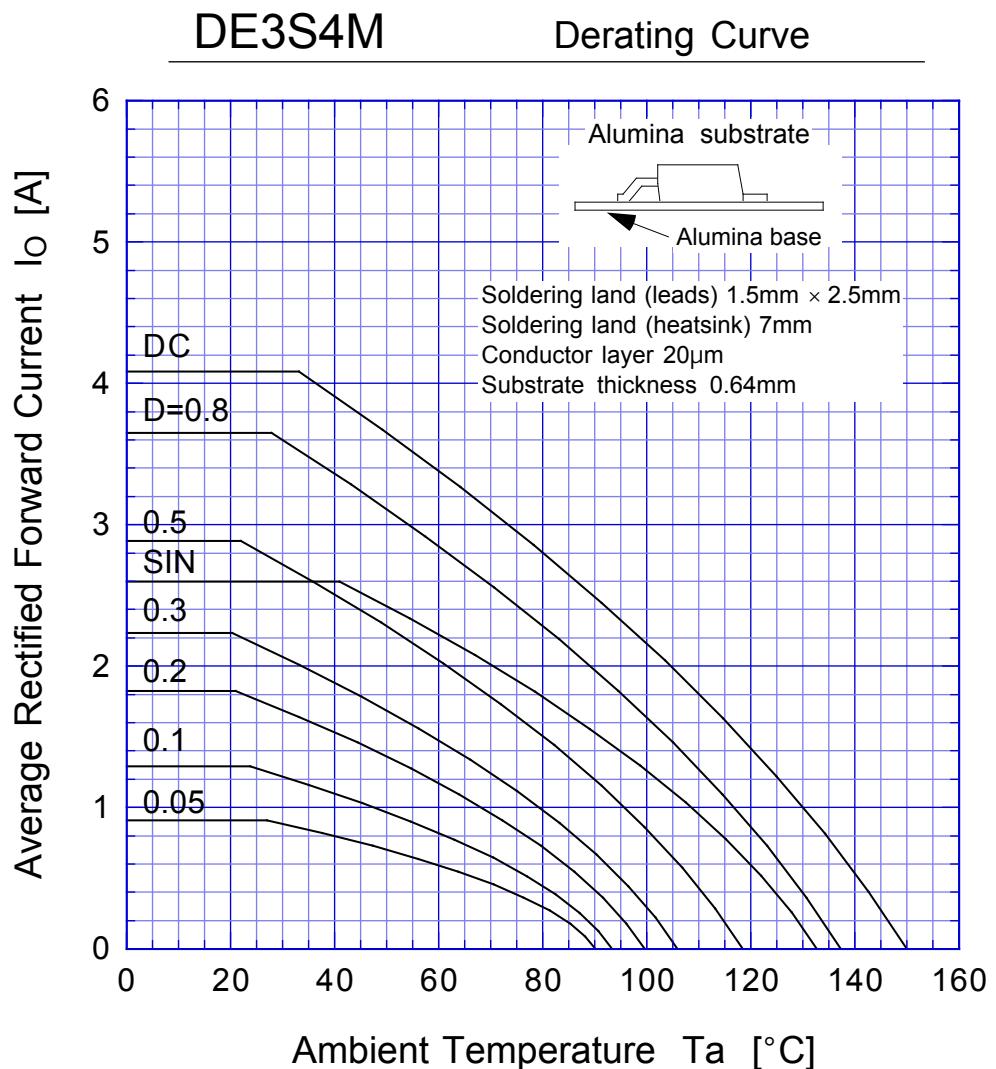


DE3S4M

Peak Surge Forward Capability

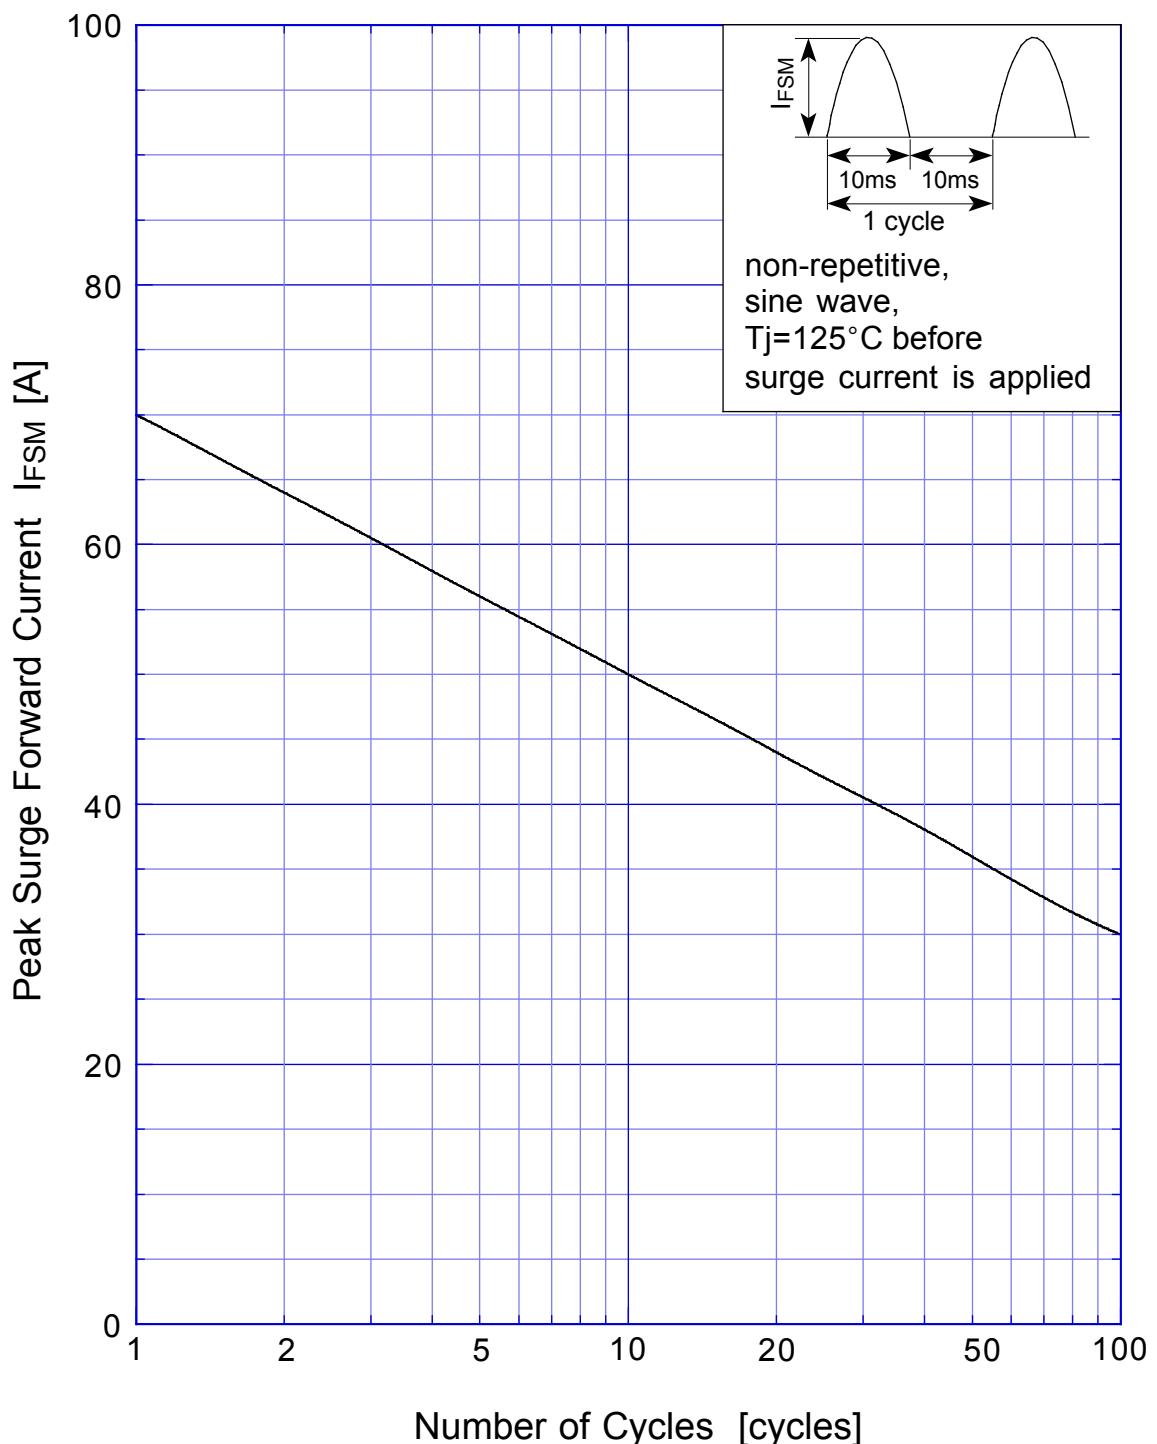

SBD Repetitive Surge Reverse Power Derating Curve

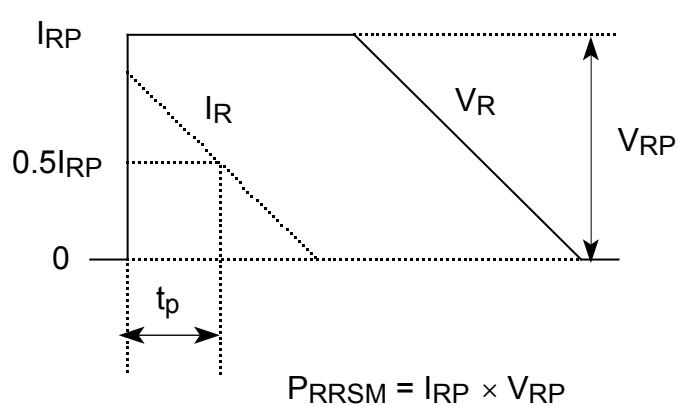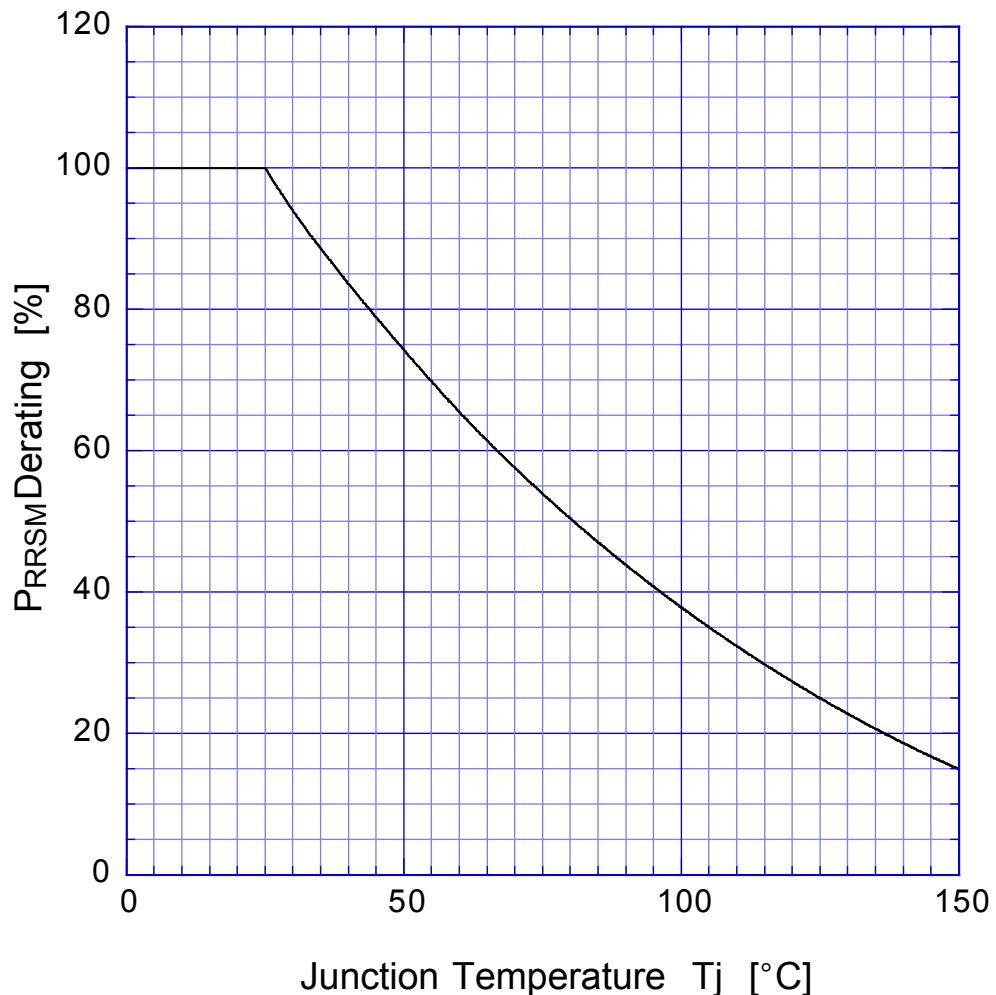

SBD Repetitive Surge Reverse Power Capability

