

# Surface Mount Ultrafast Power Rectifiers

... employing state-of-the-art epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for high voltage, high frequency rectification, or as free wheeling and protection diodes, in surface mount applications where compact size and weight are critical to the system.

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- Highly Stable Oxide Passivated Junction
- Low Forward Voltage Drop (0.71 to 1.05 Volts Max @ 3.0 A, T<sub>J</sub> = 150°C)

### Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 217 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 16 mm Tape and Reel, 2500 units per reel
- Polarity: Notch in Plastic Body Indicates Cathode Lead
- Marking: U3D, U3J

**MURS320T3  
 MURS360T3**

Motorola Preferred Devices

**ULTRAFAST RECTIFIERS  
 3.0 AMPERES  
 200–600 VOLTS**



CASE 403-03

### MAXIMUM RATINGS

Rating	Symbol	MURS		Unit
		320T3	360T3	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	200	600	Volts
Average Rectified Forward Current	I <sub>F(AV)</sub>	3.0 @ T <sub>L</sub> = 140°C 4.0 @ T <sub>L</sub> = 130°C	3.0 @ T <sub>L</sub> = 130°C 4.0 @ T <sub>L</sub> = 115°C	Amps
Non-Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I <sub>FSM</sub>	75		Amps
Operating Junction Temperature	T <sub>J</sub>	-65 to +175		°C

### THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Lead	R <sub>θJL</sub>	11	°C/W
--------------------------------------	------------------	----	------


### ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i <sub>F</sub> = 3.0 A, T <sub>J</sub> = 25°C) (i <sub>F</sub> = 4.0 A, T <sub>J</sub> = 25°C) (i <sub>F</sub> = 3.0 A, T <sub>J</sub> = 150°C)	V <sub>F</sub>	0.875 0.89 0.71	1.25 1.28 1.05	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T <sub>J</sub> = 25°C) (Rated dc Voltage, T <sub>J</sub> = 150°C)	i <sub>R</sub>	5.0 15	10 250	μA
Maximum Reverse Recovery Time (i <sub>F</sub> = 1.0 A, di/dt = 50 A/μs) (i <sub>F</sub> = 0.5 A, i <sub>R</sub> = 1.0 A, I <sub>REC</sub> to 0.25 A)	t <sub>rr</sub>	35 25	75 50	ns
Maximum Forward Recovery Time (i <sub>F</sub> = 1.0 A, di/dt = 100 A/μs, Recovery to 1.0 V)	t <sub>fr</sub>	25	50	ns


(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

# MURS320T3 MURS360T3

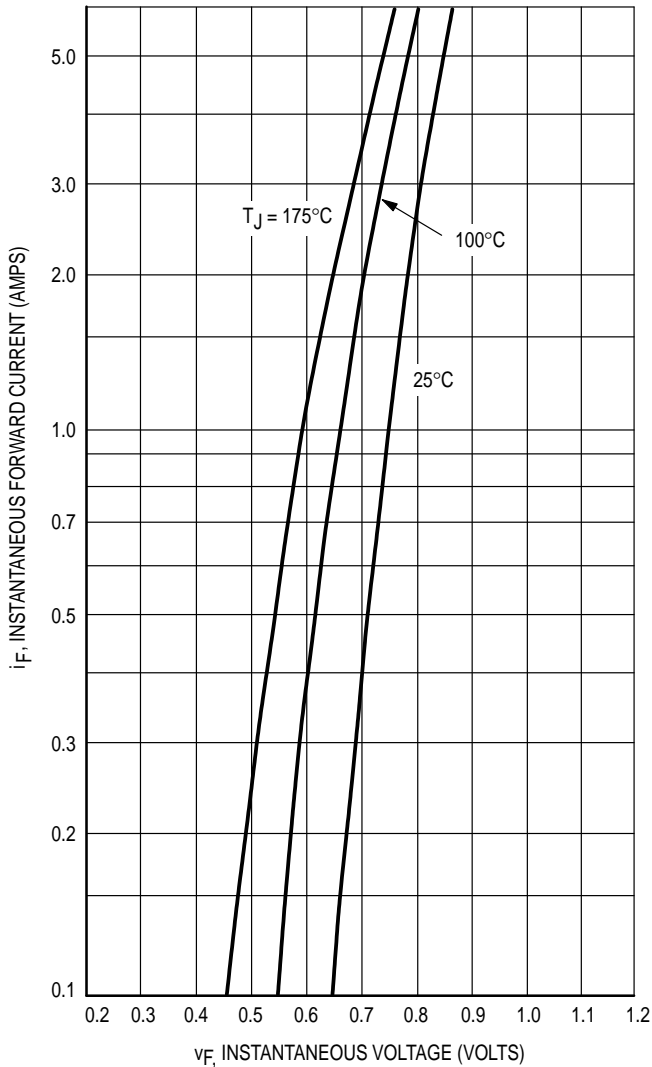


**Figure 1. Typical Forward Voltage**

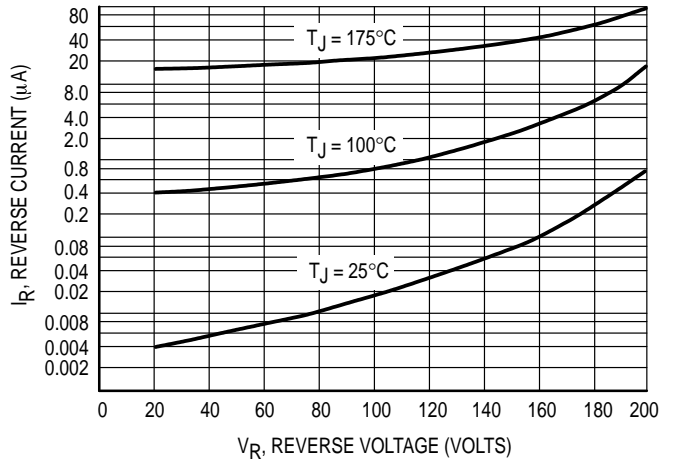


**Figure 2. Typical Reverse Current\***


\* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if  $V_R$  is sufficiently below rated  $V_R$ .

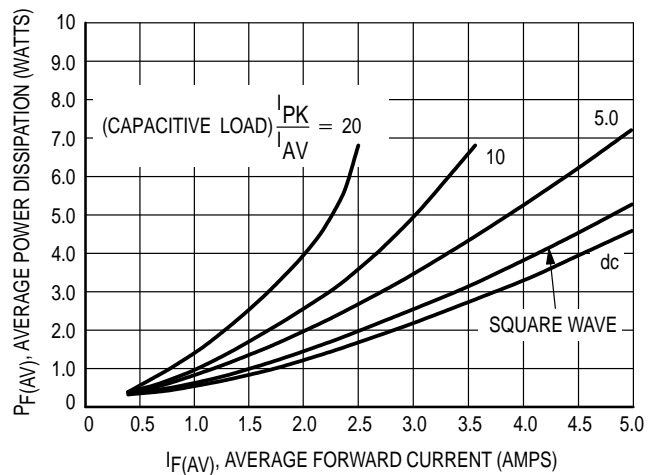

**Figure 3. Power Dissipation**

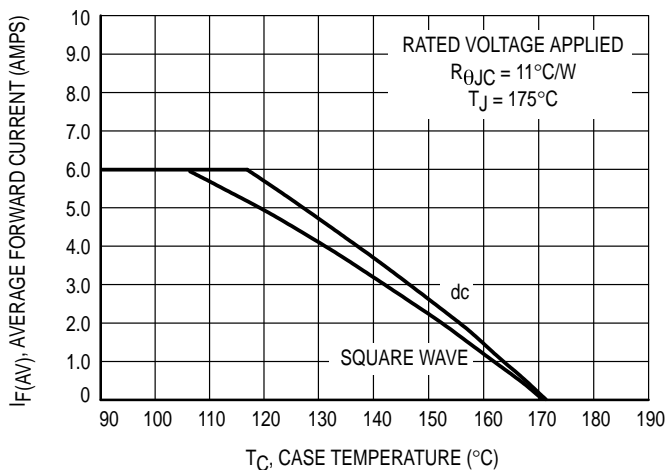


**Figure 4. Current Derating, Case**

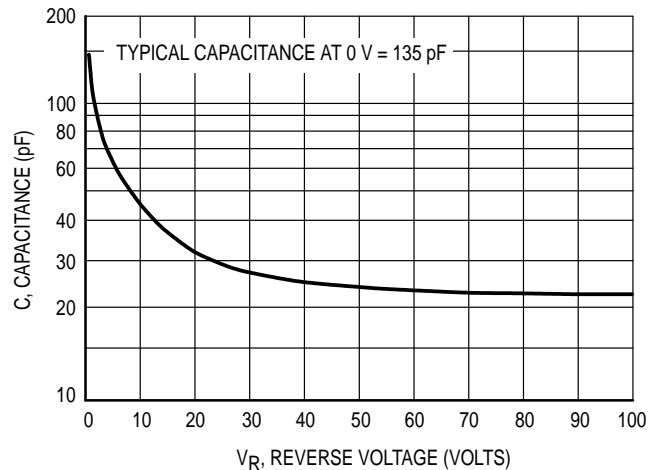


**Figure 5. Typical Capacitance**

**MURS320T3 MURS360T3**

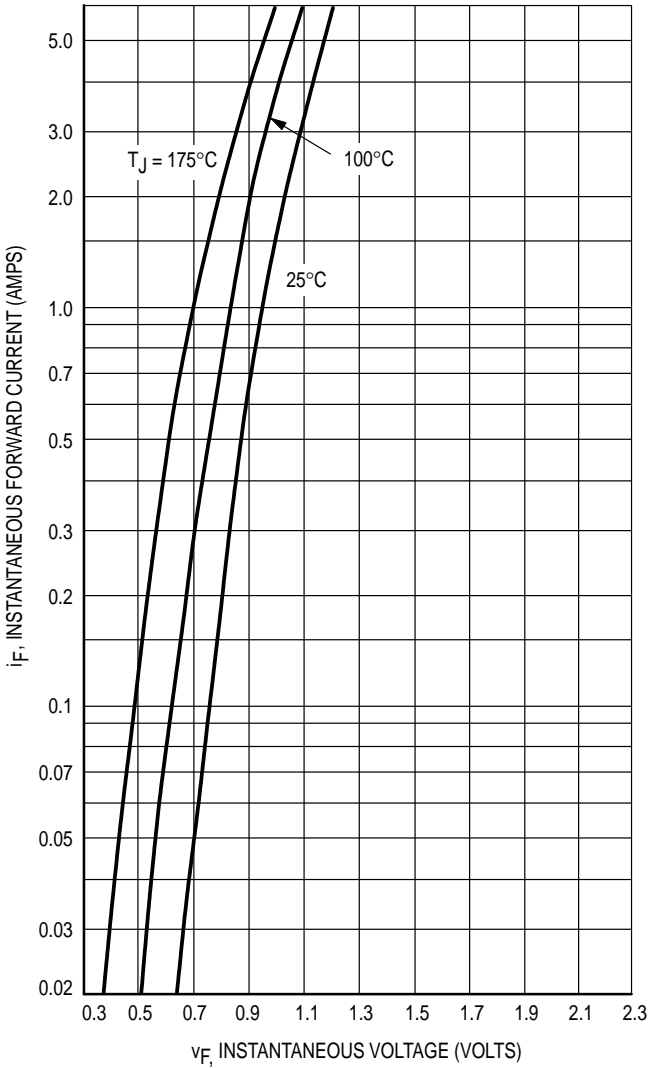


**Figure 6. Typical Forward Voltage**

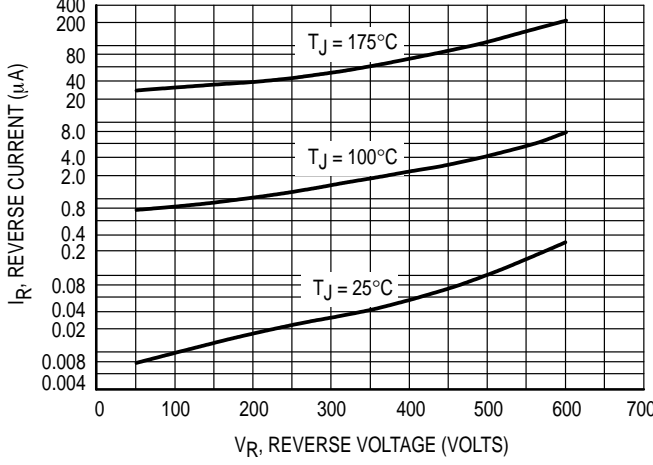


**Figure 7. Typical Reverse Current\***


\* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if  $V_R$  is sufficiently below rated  $V_R$ .

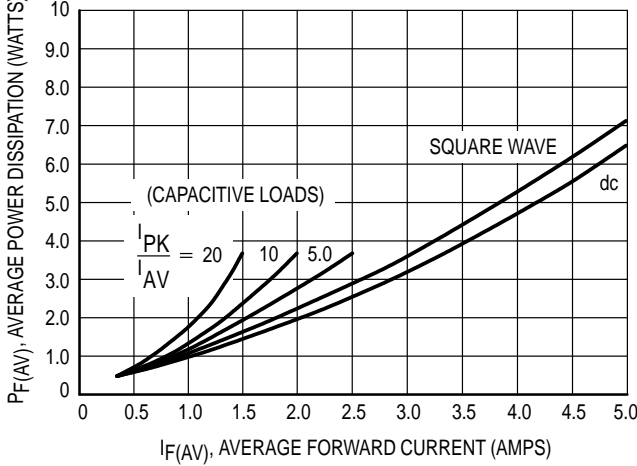

**Figure 8. Power Dissipation**

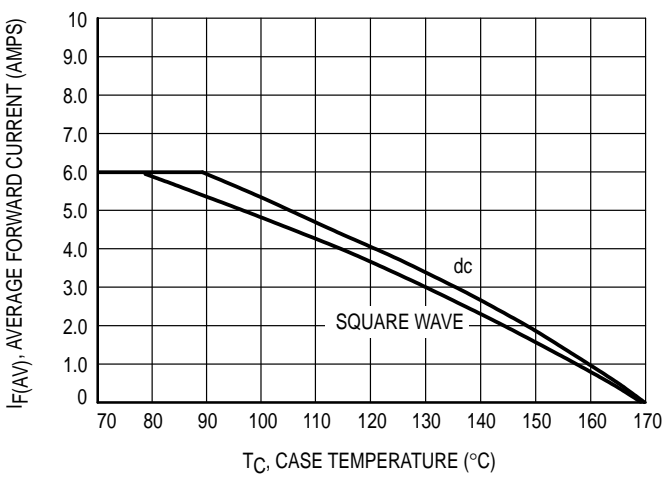


**Figure 9. Current Derating, Case**

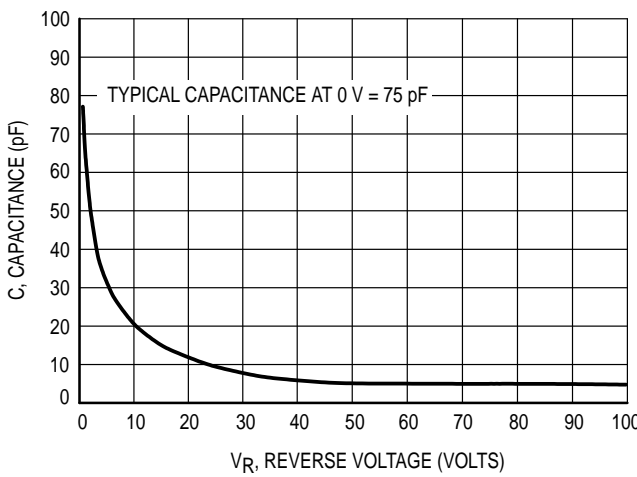

**Figure 10. Typical Capacitance**

**MURS320T3 MURS360T3**


**PACKAGE DIMENSIONS**

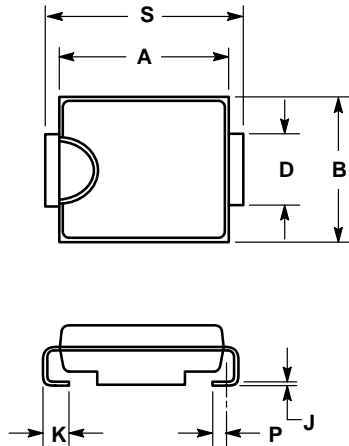

- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.  
 3. D DIMENSION SHALL BE MEASURED WITHIN DIMENSION P.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.260	0.280	6.60	7.11
B	0.220	0.240	5.59	6.10
C	0.075	0.095	1.90	2.41
D	0.115	0.121	2.92	3.07
H	0.0020	0.0060	0.051	0.152
J	0.006	0.012	0.15	0.30
K	0.030	0.050	0.76	1.27
P	0.020	REF	0.51	REF
S	0.305	0.320	7.75	8.13

**CASE 403-03  
 ISSUE B**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
 P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.: SPD, Strategic Planning Office, 4-32-1,  
 Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan. 81-3-5487-8488

**Customer Focus Center: 1-800-521-6274**

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
 Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
 – http://sps.motorola.com/mfax/

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**HOME PAGE:** http://motorola.com/sps/

