


- Member of the Pin-Compatible CommsDAC™ Product Family
- 100 MSPS Update Rate
- 12-Bit Resolution
- Spurious Free Dynamic Range (SFDR) to Nyquist at 20 MHz Output: 63 dBc
- 1 ns Setup/Hold Time
- Differential Scalable Current Outputs: 2 mA to 20 mA
- On-Chip 1.2 V Reference
- 3 V and 5 V CMOS-Compatible Digital Interface
- Straight Binary or Twos Complement Input
- Power Dissipation: 175 mW at 5 V, Sleep Mode: 25 mW at 5 V
- Package: 28-Pin SOIC and TSSOP

SOIC (DW) OR TSSOP (PW) PACKAGE
(TOP VIEW)

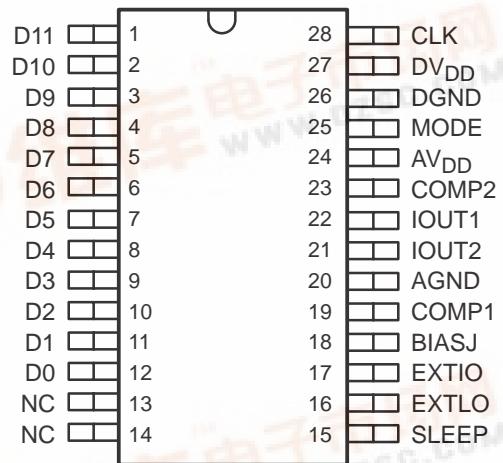

NC – No internal connection

description

The THS5661 is a 12-bit resolution digital-to-analog converter (DAC) specifically optimized for digital data transmission in wired and wireless communication systems. The 12-bit DAC is a member of the CommsDAC series of high-speed, low-power CMOS digital-to-analog converters. The CommsDAC family consists of pin compatible 14-, 12-, 10-, and 8-bit DACs. All devices offer identical interface options, small outline package, and pinout. The THS5661 offers superior ac and dc performance while supporting update rates up to 100 MSPS.

The THS5661 operates from an analog supply of 4.5 V to 5.5 V. Its inherent low power dissipation of 175 mW ensures that the device is well-suited for portable and low-power applications. Lowering the full-scale current output reduces the power dissipation without significantly degrading performance. The device features a SLEEP mode, which reduces the standby power to approximately 25 mW, thereby optimizing the power consumption for system needs.

The THS5661 is manufactured in Texas Instruments advanced high-speed mixed-signal CMOS process. A current-source-array architecture combined with simultaneous switching shows excellent dynamic performance. On-chip edge-triggered input latches and a 1.2 V temperature-compensated bandgap reference provide a complete monolithic DAC solution. The digital supply range of 3 V to 5.5 V supports 3 V and 5 V CMOS logic families. Minimum data input setup and hold times allow for easy interfacing with external logic. The THS5661 supports both a straight binary and twos complement input word format, enabling flexible interfacing with digital signal processors.

The THS5661 provides a nominal full-scale differential output current of 20 mA and >300 kΩ output impedance, supporting both single-ended and differential applications. The output current can be directly fed to the load (e.g., external resistor load or transformer), with no additional external output buffer required. An accurate on-chip reference and control amplifier allows the user to adjust this output current from 20 mA down to 2 mA, with no significant degradation of performance. This reduces power consumption and provides 20 dB gain range control capabilities. Alternatively, an external reference voltage and control amplifier may be applied in applications using a multiplying DAC. The output voltage compliance range is 1.25 V.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
 SLAS200A – MAY 1999 – REVISED JULY 1999


description (continued)

The THS5661 is available in both a 28-pin SOIC and TSSOP package. The device is characterized for operation over the industrial temperature range of -40°C to 85°C .

AVAILABLE OPTIONS

T_A	PACKAGE	
	28-TSSOP (PW)	28-SOIC (DW)
-40°C to 85°C	THS5661IPW	THS5661IDW

functional block diagram

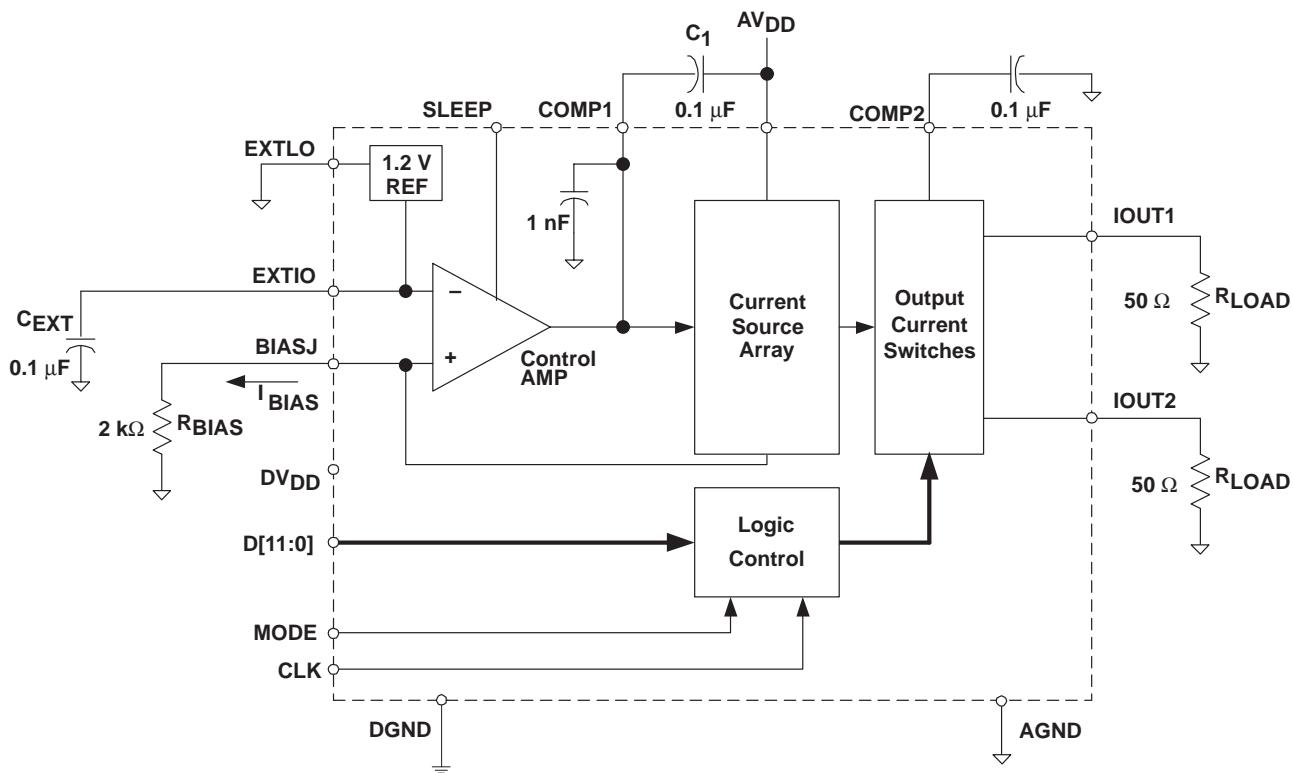

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
SLAS200A – MAY 1999 – REVISED JULY 1999

Terminal Functions

TERMINAL NAME		I/O	DESCRIPTION
NO.			
AGND	20	I	Analog ground return for the internal analog circuitry
AV _{DD}	24	I	Positive analog supply voltage (4.5 V to 5.5 V)
BIASJ	18	O	Full-scale output current bias
CLK	28	I	External clock input. Input data latched on rising edge of the clock.
COMP1	19	I	Compensation and decoupling node, requires a 0.1 μ F capacitor to AV _{DD} .
COMP2	23	I	Internal bias node, requires a 0.1 μ F decoupling capacitor to AGND.
D[11:0]	[1:12]	I	Data bits 0 through 11. D11 is most significant data bit (MSB), D0 is least significant data bit (LSB).
DGND	26	I	Digital ground return for the internal digital logic circuitry
DV _{DD}	27	I	Positive digital supply voltage (3 V to 5.5 V)
EXTIO	17	I/O	Used as external reference input when internal reference is disabled (i.e., EXTLO = AV _{DD}). Used as internal reference output when EXTLO = AGND, requires a 0.1 μ F decoupling capacitor to AGND when used as reference output.
EXTLO	16	O	Internal reference ground. Connect to AV _{DD} to disable the internal reference source.
IOUT1	22	O	DAC current output. Full scale when all input bits are set 1
IOUT2	21	O	Complementary DAC current output. Full scale when all input bits are 0
MODE	25	I	Mode select. Internal pulldown. Mode 0 is selected if this pin is left floating or connected to DGND. See timing diagram.
NC	[13:14]	N	No connection
SLEEP	15	I	Asynchronous hardware power down input. Active high. Internal pulldown. Requires 5 μ s to power down but 3 ms to power up.

absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

Supply voltage range, AV _{DD} (see Note 1)	-0.3 V to 6.5 V
DV _{DD} (see Note 2)	-0.3 V to 6.5 V
Voltage between AGND and DGND	-0.3 V to 0.5 V
Supply voltage range, AV _{DD} to DV _{DD}	-6.5 V to 6.5 V
CLK, SLEEP, MODE (see Note 2)	-0.3 V to DV _{DD} + 0.3 V
Digital input D11–D0 (see Note 2)	-0.3 V to DV _{DD} + 0.3 V
IOUT1, IOUT2 (see Note 1)	-1 V to AV _{DD} + 0.3 V
COMP1, COMP2 (see Note 1)	-0.3 V to AV _{DD} + 0.3 V
EXTIO, BIASJ (see Note 1)	-0.3 V to AV _{DD} + 0.3 V
EXTLO (see Note 1)	-0.3 V to 0.3 V
Peak input current (any input)	20 mA
Peak total input current (all inputs)	-30 mA
Operating free-air temperature range, T _A : THS5661I	-40°C to 85°C
Storage temperature range	-65°C to 150°C
Lead temperature 1.6 mm (1/16 inch) from the case for 10 seconds	260°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. Measured with respect to AGND.
2. Measured with respect to DGND.

THS561
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER

SLAS200A – MAY 1999 – REVISED JULY 1999

electrical characteristics over recommended operating free-air temperature range, $AV_{DD} = 5$ V, $DV_{DD} = 5$ V, $I_{OUT,FS} = 20$ mA (unless otherwise noted)

dc specifications

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Resolution		12			Bits	
DC accuracy†						
INL Integral nonlinearity	$TA = -40^{\circ}\text{C}$ to 85°C	-4	± 0.75	4	LSB	
DNL Differential nonlinearity		-2	± 0.5	2	LSB	
Monotonicity	At 11-bit level	Monotonic				
Analog output						
Offset error		0.02			%FSR	
Gain error	Without internal reference	2.3			%FSR	
	With internal reference	1.3				
Full scale output current‡		2	20		mA	
Output compliance range	$AV_{DD} = 5$ V, $I_{OUT,FS} = 20$ mA	-1	1.25		V	
Output resistance		300			k Ω	
Output capacitance		5			pF	
Reference output						
Reference voltage		1.18	1.22	1.32	V	
Reference output current§		100			nA	
Reference input						
V_{EXTIO} Input voltage range		0.1	1.25		V	
Input resistance		1			M Ω	
Small signal bandwidth¶	Without C_{COMP1}	1.3			MHz	
Input capacitance		100			pF	
Temperature coefficients						
Offset drift		0			ppm of FSR/°C	
Gain drift	Without internal reference	± 40				
	With internal reference	± 120				
Reference voltage drift		± 35				
Power supply						
AV_{DD} Analog supply voltage		4.5	5	5.5	V	
DV_{DD} Digital supply voltage		3	5	5.5	V	
I_{AVDD} Analog supply current		25			mA	
	Sleep mode supply current	3			mA	
I_{DVDD} Digital supply current#		5			mA	
	Power dissipation	175			mW	
AV_{DD} Power supply rejection ratio	$AV_{DD} = 5$ V, $DV_{DD} = 5$ V, $I_{OUT,FS} = 20$ mA	± 0.4			%FSR/V	
		± 0.025				
Operating range		-40	85		°C	

† Measured at $I_{OUT,1}$ in virtual ground configuration.

‡ Nominal full-scale current $I_{OUT,FS}$ equals 32X the I_{BIAS} current.

§ Use an external buffer amplifier with high impedance input to drive any external load.

¶ Reference bandwidth is a function of external cap at $COMP1$ pin and signal level.

Measured at $f_{CLK} = 50$ MSPS and $f_{OUT} = 1$ MHz.

|| Measured for $50 \Omega R_{LOAD}$ at $I_{OUT,1}$ and $I_{OUT,2}$, $f_{CLK} = 50$ MSPS and $f_{OUT} = 20$ MHz.

Specifications subject to change

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
 SLAS200A – MAY 1999 – REVISED JULY 1999

electrical characteristics over recommended operating free-air temperature range, $AV_{DD} = 5$ V, $DV_{DD} = 5$ V, $I_{OUT,FS} = 20$ mA, differential transformer coupled output, $50\ \Omega$ doubly terminated load (unless otherwise noted)

ac specifications

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Analog output						
f _{CLK}	Maximum output update rate	DV _{DD} = 4.5 V to 5.5 V	100			MSPS
		DV _{DD} = 3 V to 3.6 V	67			
t _s (DAC)	Output settling time to 0.1%†		35			ns
t _{pd}	Output propagation delay		1			ns
GE	Glitch energy‡	Worst case LSB transition (code 2047 – code 2048)	5			pV-s
t _r (I _{OUT})	Output rise time 10% to 90%†		1			ns
t _f (I _{OUT})	Output fall time 90% to 10%†		1			ns
Output noise	I _{OUT,FS} = 20 mA		15			pA/√Hz
	I _{OUT,FS} = 2 mA		10			
AC linearity						
THD	Total harmonic distortion	f _{CLK} = 25 MSPS, f _{OUT} = 1 MHz, T _A = 25°C	-75			dBc
		f _{CLK} = 50 MSPS, f _{OUT} = 1 MHz, T _A = -40°C to 85°C	-72	-66		
		f _{CLK} = 50 MSPS, f _{OUT} = 2 MHz, T _A = 25°C	-72			
		f _{CLK} = 100 MSPS, f _{OUT} = 2 MHz, T _A = 25°C	-72			
SFDR	Spurious free dynamic range to Nyquist	f _{CLK} = 25 MSPS, f _{OUT} = 1 MHz, T _A = 25°C	81			dBc
		f _{CLK} = 50 MSPS, f _{OUT} = 1 MHz, T _A = -40°C to 85°C	68			
		f _{CLK} = 50 MSPS, f _{OUT} = 1 MHz, T _A = 25°C	81			
		f _{CLK} = 50 MSPS, f _{OUT} = 2.51 MHz, T _A = 25°C	74			
		f _{CLK} = 50 MSPS, f _{OUT} = 5.02 MHz, T _A = 25°C	68			
		f _{CLK} = 50 MSPS, f _{OUT} = 20.2 MHz, T _A = 25°C	63			
		f _{CLK} = 100 MSPS, f _{OUT} = 5.04 MHz, T _A = 25°C	67			
		f _{CLK} = 100 MSPS, f _{OUT} = 20.2 MHz, T _A = 25°C	54			
	Spurious free dynamic range within a window	f _{CLK} = 100 MSPS, f _{OUT} = 40.4 MHz, T _A = 25°C	56			dBc
		f _{CLK} = 50 MSPS, f _{OUT} = 1 MHz, T _A = 25°C, 1 MHz span	86			
		f _{CLK} = 50 MSPS, f _{OUT} = 5.02 MHz, 2 MHz span	84			
		f _{CLK} = 100 MSPS, f _{OUT} = 5.04 MHz, 4 MHz span	87			

† Measured single ended into $50\ \Omega$ load at I_{OUT}1.

‡ Single-ended output I_{OUT1}, $50\ \Omega$ doubly terminated load.

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
SLAS200A – MAY 1999 – REVISED JULY 1999

electrical characteristics over recommended operating free-air temperature range, $AV_{DD} = 5$ V, $DV_{DD} = 5$ V, $I_{OUT_{FS}} = 20$ mA (unless otherwise noted)

digital specifications

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Interface						
V _{IH}	High-level input voltage	DV _{DD} = 5 V	3.5	5		V
		DV _{DD} = 3.3 V	2.1	3.3		
V _{IL}	Low-level input voltage	DV _{DD} = 5 V		0	1.3	V
		DV _{DD} = 3.3 V		0	0.9	
I _{IH}	High-level input current	DV _{DD} = 3 V to 5.5 V		-10	10	µA
I _{IL}	Low-level input current	DV _{DD} = 3 V to 5.5 V		-10	10	µA
	Input capacitance		1		5	pF
Timing						
t _{su} (D)	Input setup time		1			ns
t _h (D)	Input hold time		1			ns
t _w (LPH)	Input latch pulse high time		4			ns
t _d (D)	Digital delay time				1	clk

Specifications subject to change

TYPICAL CHARACTERISTICS†

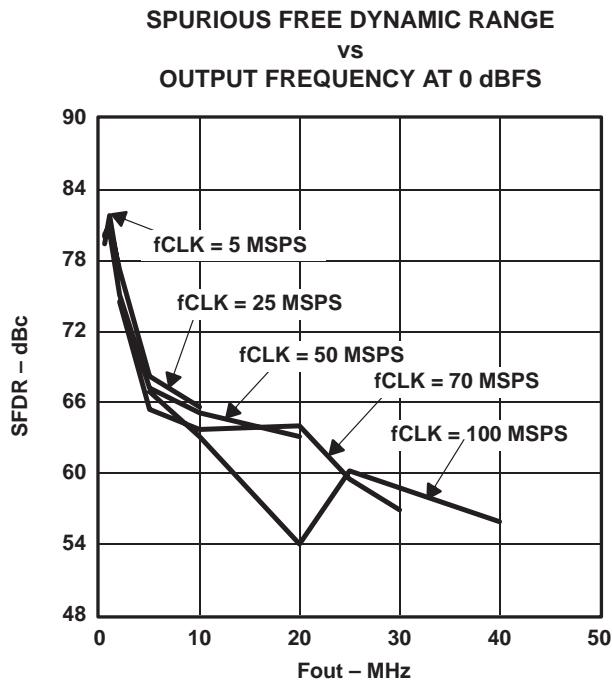


Figure 1

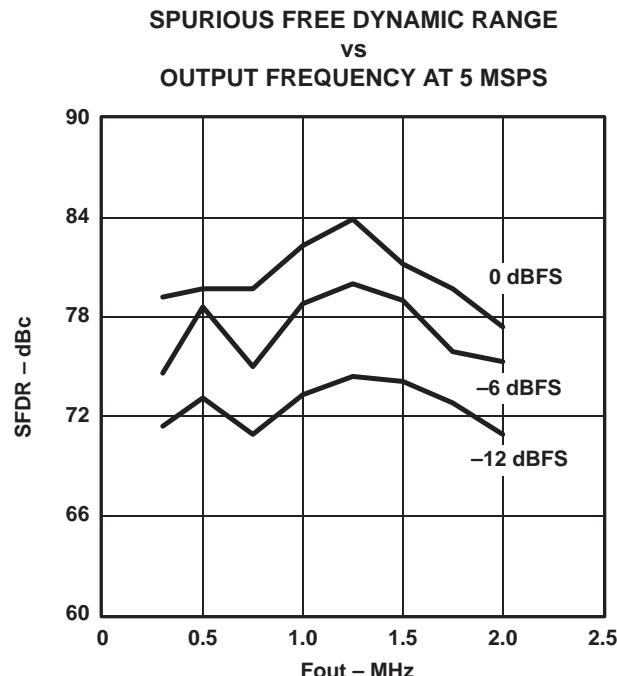


Figure 2

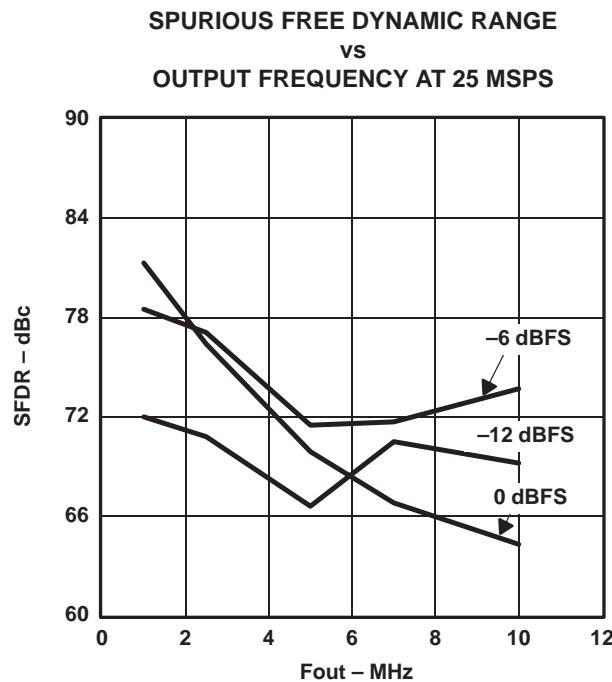


Figure 3

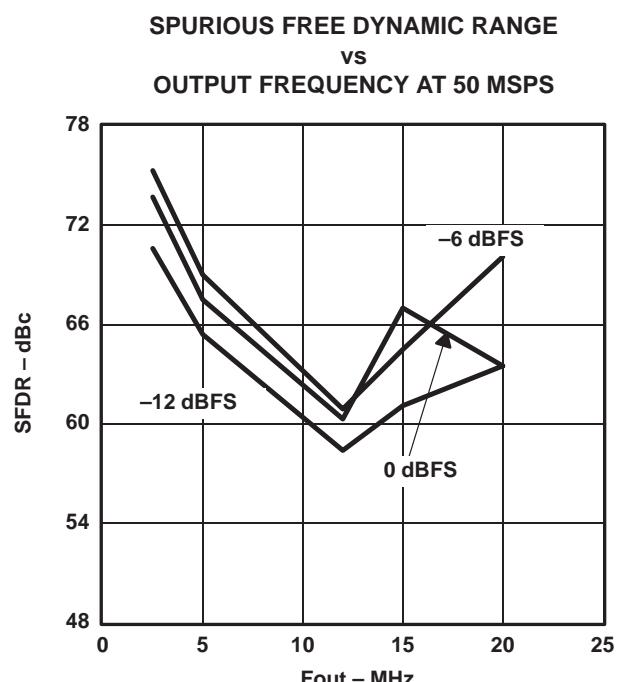


Figure 4

† $V_{DD} = DV_{DD} = 5$ V, $I_{OUTFS} = 20$ mA, differential transformer coupled output, $50\ \Omega$ doubly terminated load, $T_A = 25^\circ\text{C}$ (unless otherwise noted.)

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
 SLAS200A – MAY 1999 – REVISED JULY 1999

TYPICAL CHARACTERISTICS[†]

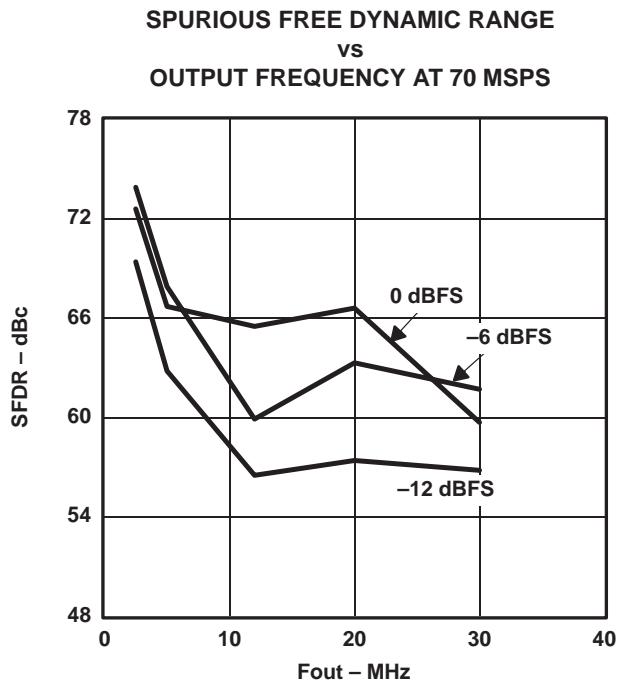


Figure 5

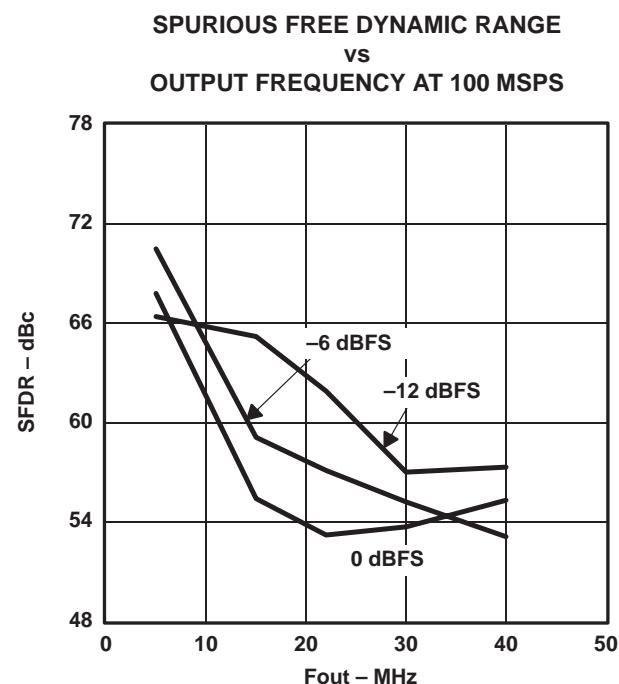


Figure 6

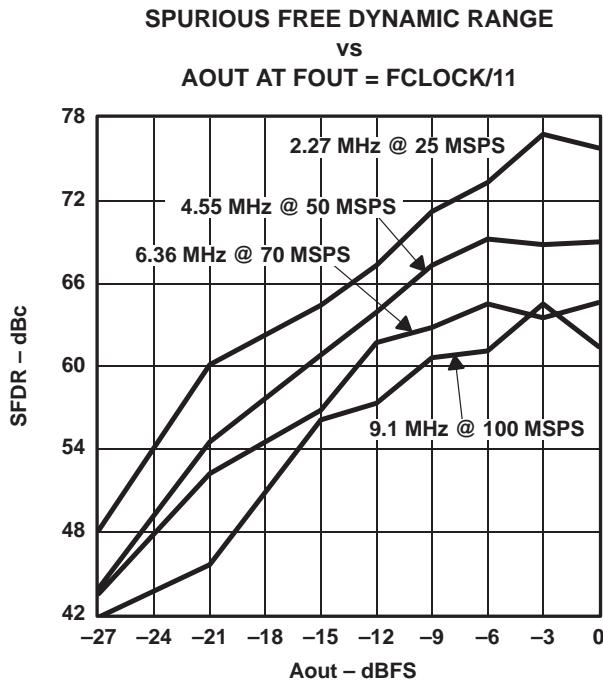


Figure 7

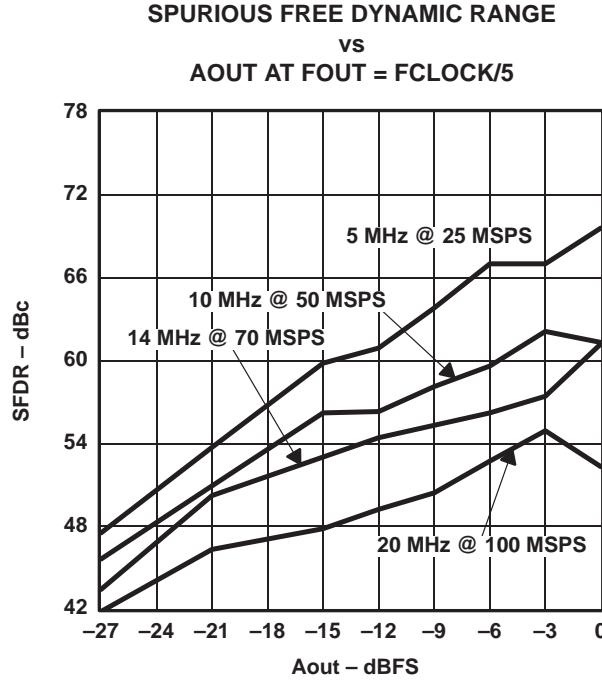


Figure 8

[†] AV_{DD} = DV_{DD} = 5 V, I_{OOUTFS} = 20 mA, differential transformer coupled output, 50 Ω doubly terminated load, T_A = 25°C (unless otherwise noted.)

TYPICAL CHARACTERISTICS†

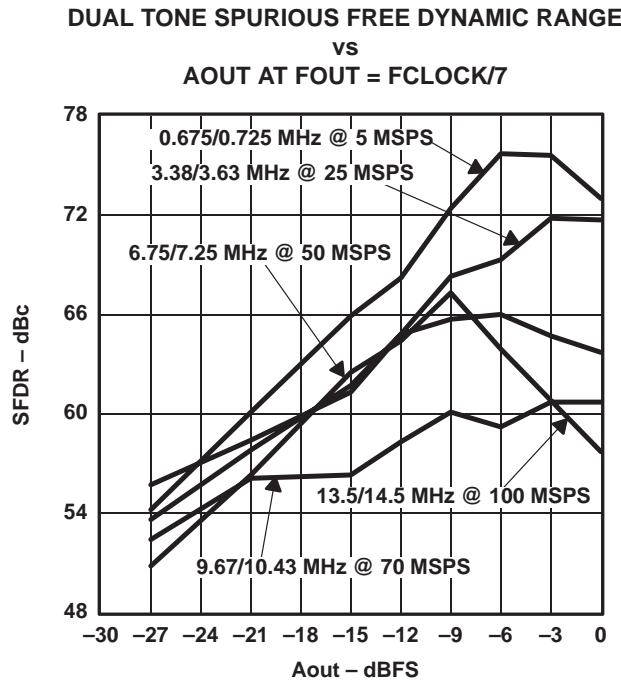


Figure 9

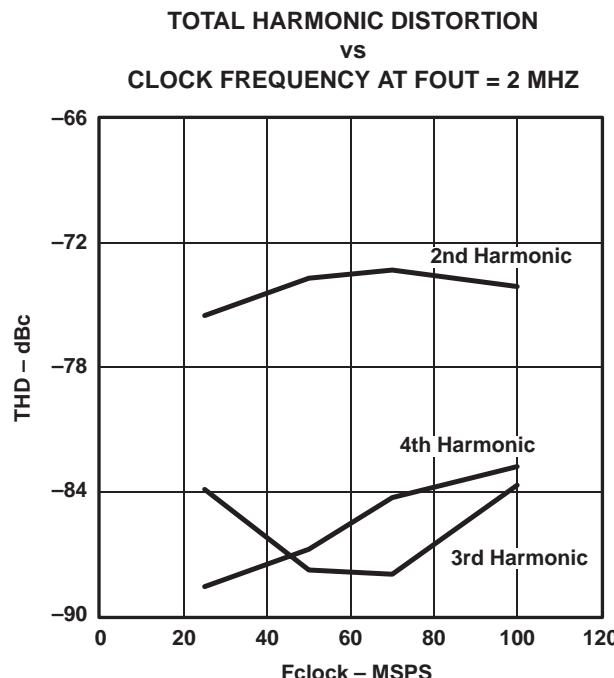


Figure 10

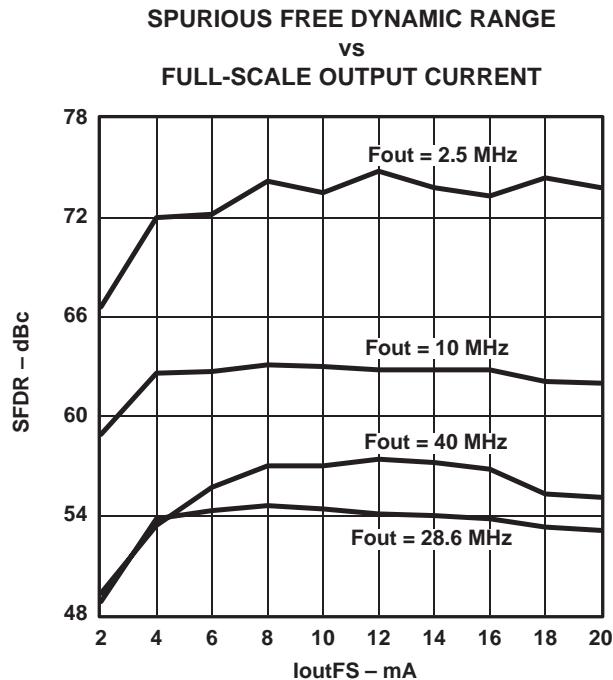


Figure 11

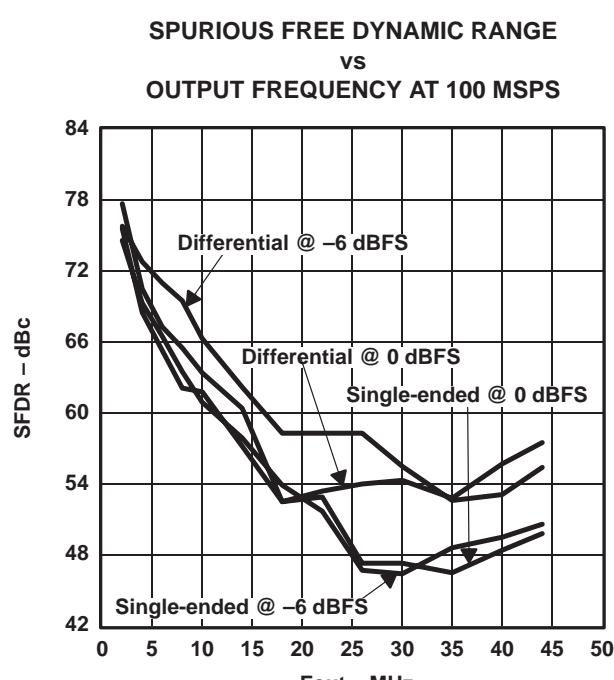


Figure 12

† AV_{DD} = DV_{DD} = 5 V, I_{OUTFS} = 20 mA, differential transformer coupled output, 50 Ω doubly terminated load, TA = 25°C (unless otherwise noted.)

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
SLAS200A – MAY 1999 – REVISED JULY 1999

TYPICAL CHARACTERISTICS[†]

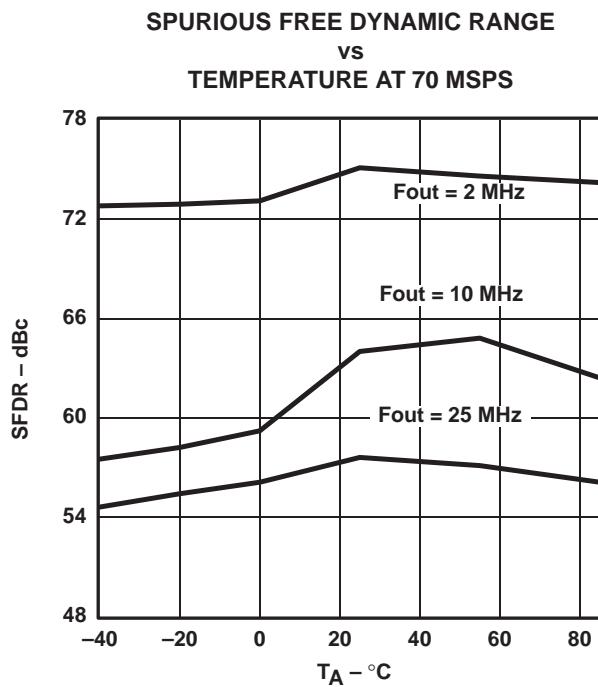


Figure 13

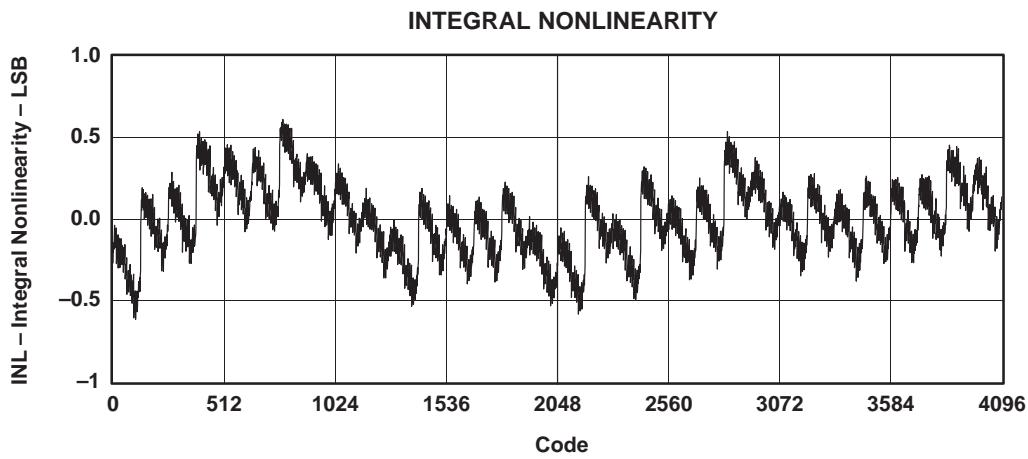


Figure 14

[†] AV_{DD} = DV_{DD} = 5 V, I_{OUTFS} = 20 mA, differential transformer coupled output, 50 Ω doubly terminated load, T_A = 25°C (unless otherwise noted.)

TYPICAL CHARACTERISTICS†

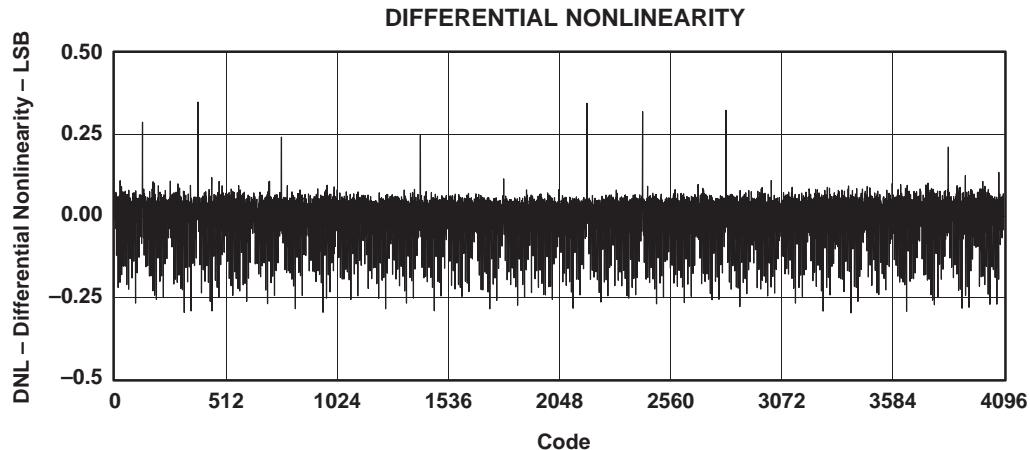


Figure 15

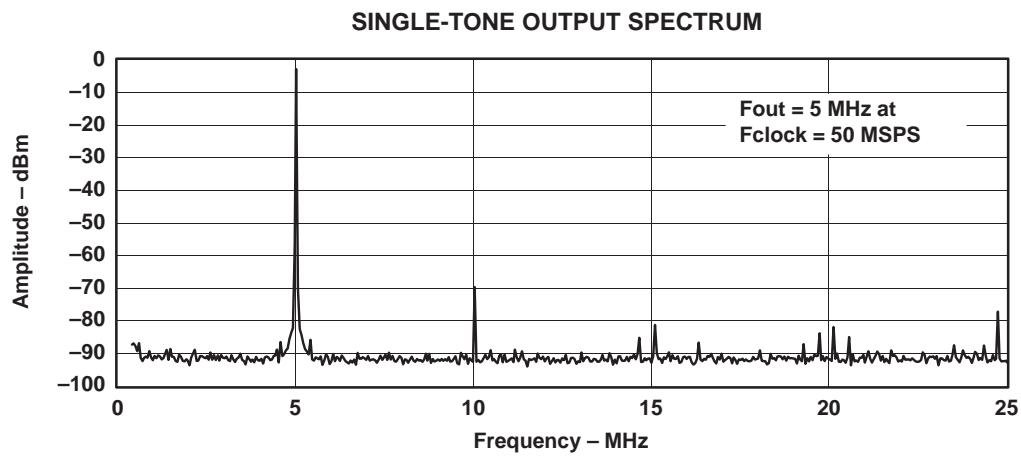


Figure 16

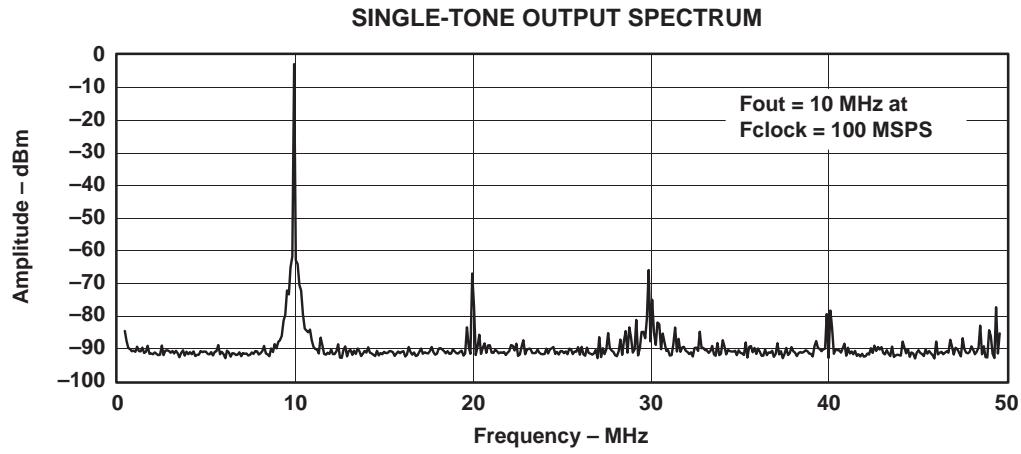


Figure 17

† AV_{DD} = DV_{DD} = 5 V, I_{OUTFS} = 20 mA, differential transformer coupled output, 50 Ω doubly terminated load, T_A = 25°C (unless otherwise noted.)

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
SLAS200A – MAY 1999 – REVISED JULY 1999

TYPICAL CHARACTERISTICS†

DUAL-TONE OUTPUT SPECTRUM

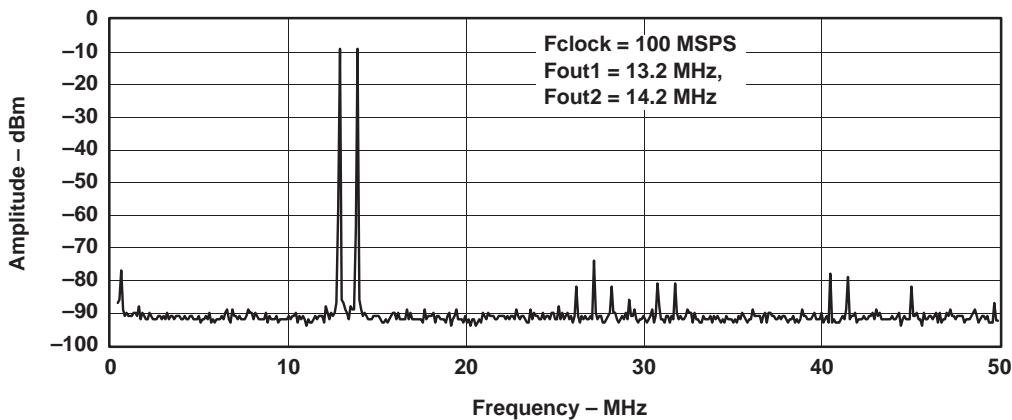


Figure 18

FOUR-TONE OUTPUT SPECTRUM

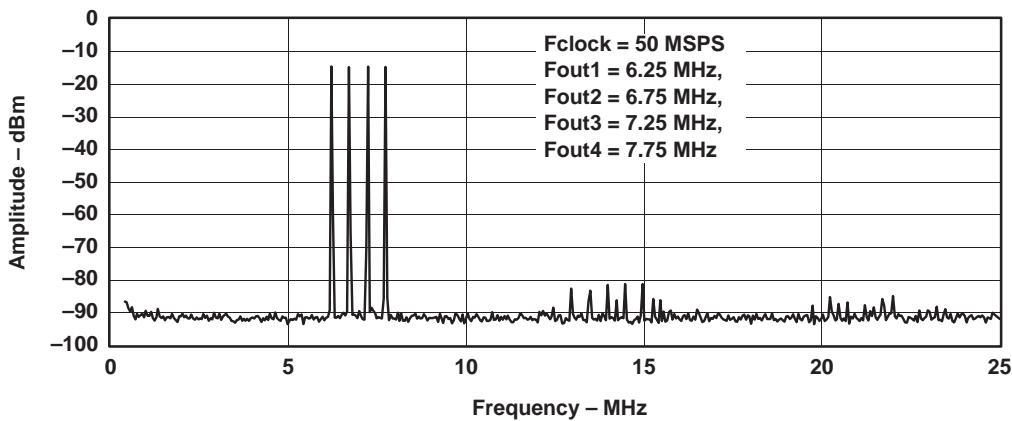


Figure 19

† AV_{DD} = DV_{DD} = 5 V, I_{OUTFS} = 20 mA, differential transformer coupled output, 50 Ω doubly terminated load, T_A = 25°C (unless otherwise noted.)

TYPICAL CHARACTERISTICS†

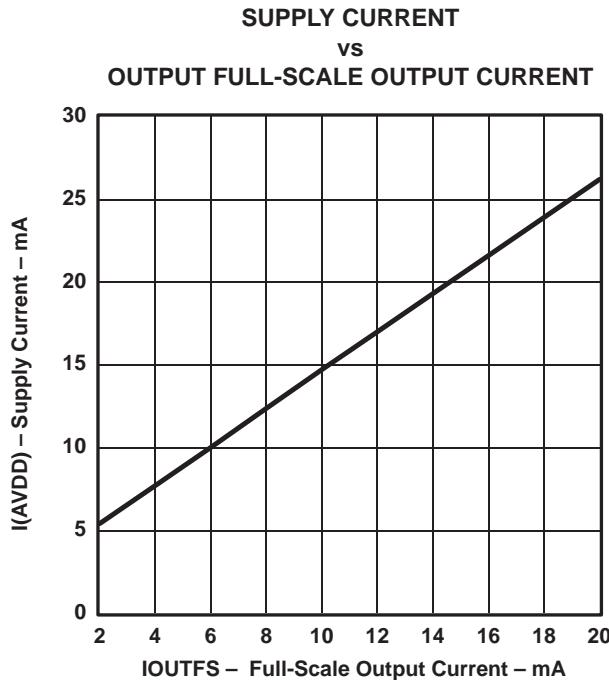


Figure 20

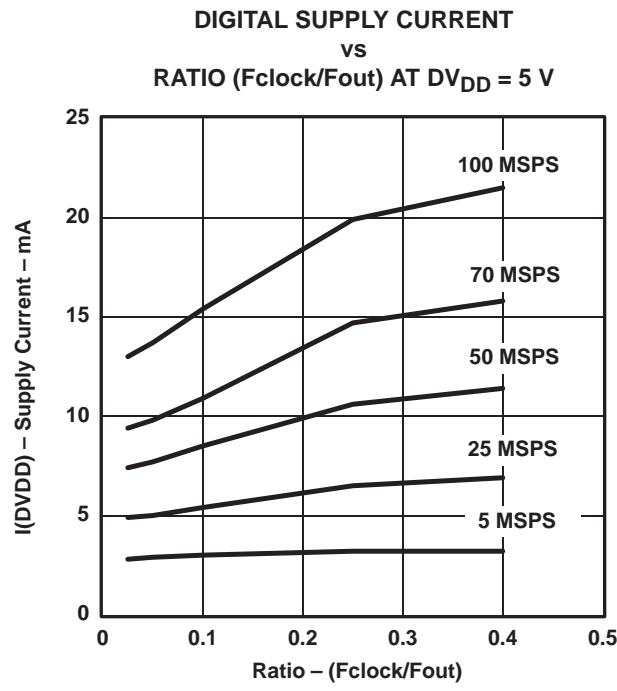


Figure 21

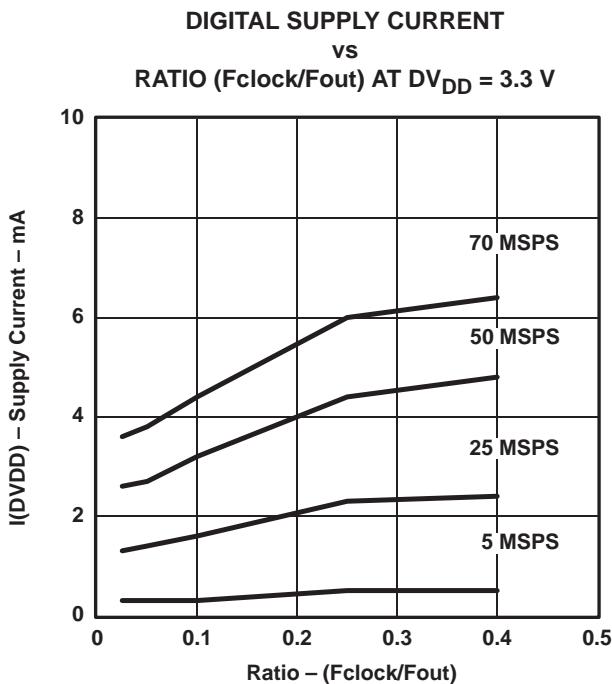


Figure 22

† AV_{DD} = DV_{DD} = 5 V, I_{OUTFS} = 20 mA, differential transformer coupled output, 50 Ω doubly terminated load, TA = 25°C (unless otherwise noted.)

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
SLAS200A – MAY 1999 – REVISED JULY 1999

APPLICATION INFORMATION

The THS5661 architecture is based on current steering, combining high update rates with low power consumption. The CMOS device consists of a segmented array of PMOS transistor current sources, which are capable of delivering a full-scale current up to 20 mA. High-speed differential current switches direct the current of each current source to either one of the output nodes, IOUT1 or IOUT2. The complementary output currents thus enable differential operation, canceling out common mode noise sources (on-chip and PCB noise), dc offsets, even order distortion components, and increase signal output power by a factor of two. Major advantages of the segmented architecture are minimum glitch energy, excellent DNL, and very good dynamic performance. The DAC's high output impedance of >300 k Ω and fast switching result in excellent dynamic linearity (spurious free dynamic range SFDR).

The full-scale output current is set using an external resistor R_{BIAS} in combination with an on-chip bandgap voltage reference source (1.2 V) and control amplifier. The current I_{BIAS} through resistor R_{BIAS} is mirrored internally to provide a full-scale output current equal to 32 times I_{BIAS} . The full-scale current can be adjusted from 20 mA down to 2 mA.

data interface and timing

The THS5661 comprises separate analog and digital supplies, i.e. AV_{DD} and DV_{DD} . The digital supply voltage can be set from 5.5 V down to 3 V, thus enabling flexible interfacing with external logic. The THS5661 provides two operating modes, as shown in Table 1. Mode 0 (mode pin connected to DGND) supports a straight binary input data word format, whereas mode 1 (mode pin connected to DV_{DD}) sets a two's complement input configuration.

Figure 23 shows the timing diagram. Internal edge-triggered flip-flops latch the input word on the rising edge of the input clock. The THS5661 provides for minimum setup and hold times (> 1 ns), allowing for noncritical external interface timing. Conversion latency is one clock cycle for both modes. The clock duty cycle can be chosen arbitrarily under the timing constraints listed in the digital specifications table. However, a 50% duty cycle will give optimum dynamic performance. Figure 24 shows a schematic of the equivalent digital inputs of the THS5661, valid for pins D11–D0, SLEEP, and CLK. The digital inputs are CMOS-compatible with logic thresholds of $DV_{DD}/2 \pm 20\%$. Since the THS5661 is capable of being updated up to 100 MSPS, the quality of the clock and data input signals are important in achieving the optimum performance. The drivers of the digital data interface circuitry should be specified to meet the minimum setup and hold times of the THS5661, as well as its required min/max input logic level thresholds. Typically, the selection of the slowest logic family that satisfies the above conditions will result in the lowest data feed-through and noise. Additionally, operating the THS5661 with reduced logic swings and a corresponding digital supply (DV_{DD}) will reduce data feed-through. Note that the update rate is limited to 67 MSPS for a digital supply voltage DV_{DD} of 3 V to 3.6 V.

APPLICATION INFORMATION

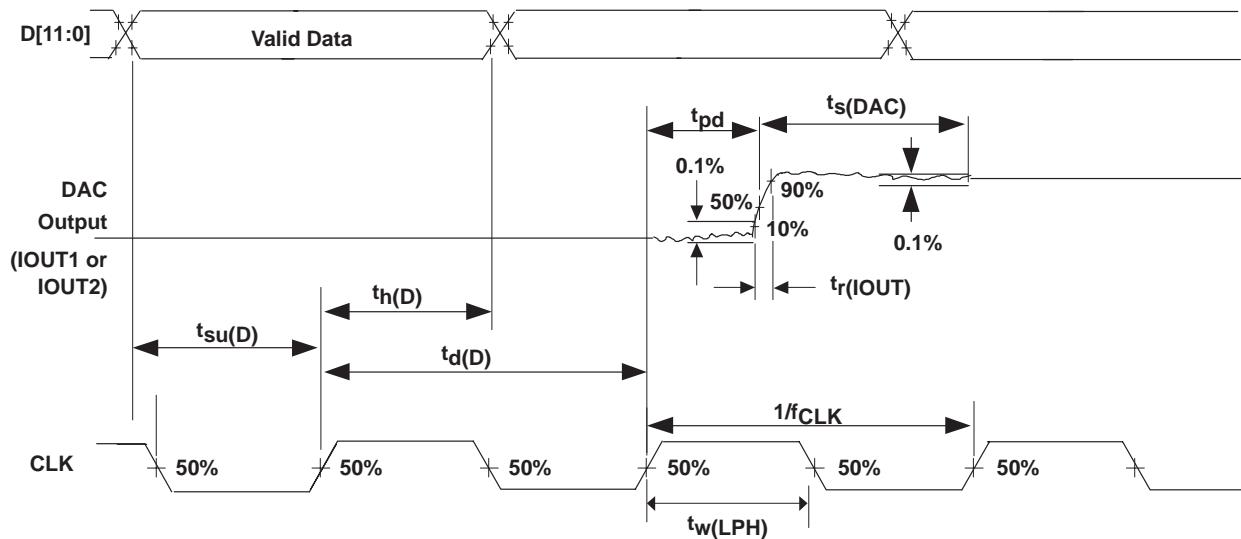


Figure 23. Timing Diagram

Table 1. Input Interface Modes

FUNCTION/MODE	MODE 0	MODE 1
	MODE PIN CONNECTED TO DGND	MODE PIN CONNECTED TO DV _{DD}
Input code format	Binary	Twos complement

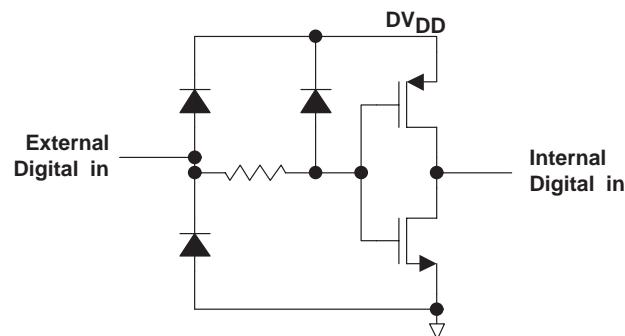


Figure 24. Digital Equivalent Input

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
SLAS200A – MAY 1999 – REVISED JULY 1999

APPLICATION INFORMATION

DAC transfer function

The THS5661 delivers complementary output currents I_{OUT1} and I_{OUT2} . Output current I_{OUT1} equals the approximate full-scale output current when all input bits are set high in mode 0 (straight binary input), i.e. the binary input word has the decimal representation 4095. For mode 1, the MSB is inverted (twos complement input format). Full-scale output current will flow through terminal I_{OUT2} when all input bits are set low (mode 0, straight binary input). The relation between I_{OUT1} and I_{OUT2} can thus be expressed as:

$$I_{OUT1} = I_{OUT_{FS}} - I_{OUT2}$$

where $I_{OUT_{FS}}$ is the full-scale output current. The output currents can be expressed as:

$$I_{OUT1} = I_{OUT_{FS}} \times \frac{CODE}{4096}$$

$$I_{OUT2} = I_{OUT_{FS}} \times \frac{(4095 - CODE)}{4096}$$

where CODE is the decimal representation of the DAC data input word. Output currents I_{OUT1} and I_{OUT2} drive resistor loads R_{LOAD} or a transformer with equivalent input load resistance R_{LOAD} . This would translate into single-ended voltages V_{OUT1} and V_{OUT2} at terminal I_{OUT1} and I_{OUT2} , respectively, of:

$$V_{OUT1} = I_{OUT1} \times R_{LOAD} = \frac{CODE}{4096} \times I_{OUT_{FS}} \times R_{LOAD}$$

$$V_{OUT2} = I_{OUT2} \times R_{LOAD} = \frac{(4095 - CODE)}{4096} \times I_{OUT_{FS}} \times R_{LOAD}$$

The differential output voltage $V_{OUT_{DIFF}}$ can thus be expressed as:

$$V_{OUT_{DIFF}} = V_{OUT1} - V_{OUT2} = \frac{(2CODE - 4095)}{4096} \times I_{OUT_{FS}} \times R_{LOAD}$$

The latter equation shows that applying the differential output will result in doubling of the signal power delivered to the load. Since the output currents of I_{OUT1} and I_{OUT2} are complementary, they become additive when processed differentially. Care should be taken not to exceed the compliance voltages at node I_{OUT1} and I_{OUT2} , which would lead to increased signal distortion.

APPLICATION INFORMATION

reference operation

The THS5661 comprises a bandgap reference and control amplifier for biasing the full-scale output current. The full-scale output current is set by applying an external resistor R_{BIAS} . The bias current I_{BIAS} through resistor R_{BIAS} is defined by the on-chip bandgap reference voltage and control amplifier. The full-scale output current equals 32 times this bias current. The full-scale output current $I_{OUT_{FS}}$ can thus be expressed as:

$$I_{OUT_{FS}} = 32 \times I_{BIAS} = \frac{32 \times V_{EXTIO}}{R_{BIAS}}$$

where V_{EXTIO} is the voltage at terminal EXTIO. The bandgap reference voltage delivers an accurate voltage of 1.2 V. This reference is active when terminal EXTLO is connected to AGND. An external decoupling capacitor C_{EXT} of 0.1 μ F should be connected externally to terminal EXTIO for compensation. The bandgap reference can additionally be used for external reference operation. In that case, an external buffer with high impedance input should be applied in order to limit the bandgap load current to a maximum of 100 nA. The internal reference can be disabled and overridden by connecting EXTLO to AV_{DD}. Capacitor C_{EXT} may hence be omitted. Terminal EXTIO thus serves as either input or output node.

The full-scale output current can be adjusted from 20 mA down to 2 mA by varying resistor R_{BIAS} or changing the externally applied reference voltage. The internal control amplifier has a wide input range, supporting the full-scale output current range of 20 dB. The bandwidth of the internal control amplifier is defined by the internal 1 nF compensation capacitor at pin COMP1 and the external compensation capacitor C_1 . The relatively weak internal control amplifier may be overridden by an externally applied amplifier with sufficient drive for the internal 1 nF load, as shown in Figure 25. This provides the user with more flexibility and higher bandwidths, which are specifically attractive for gain control and multiplying DAC applications. Pin SLEEP should be connected to AGND or left disconnected when an external control amplifier is used.

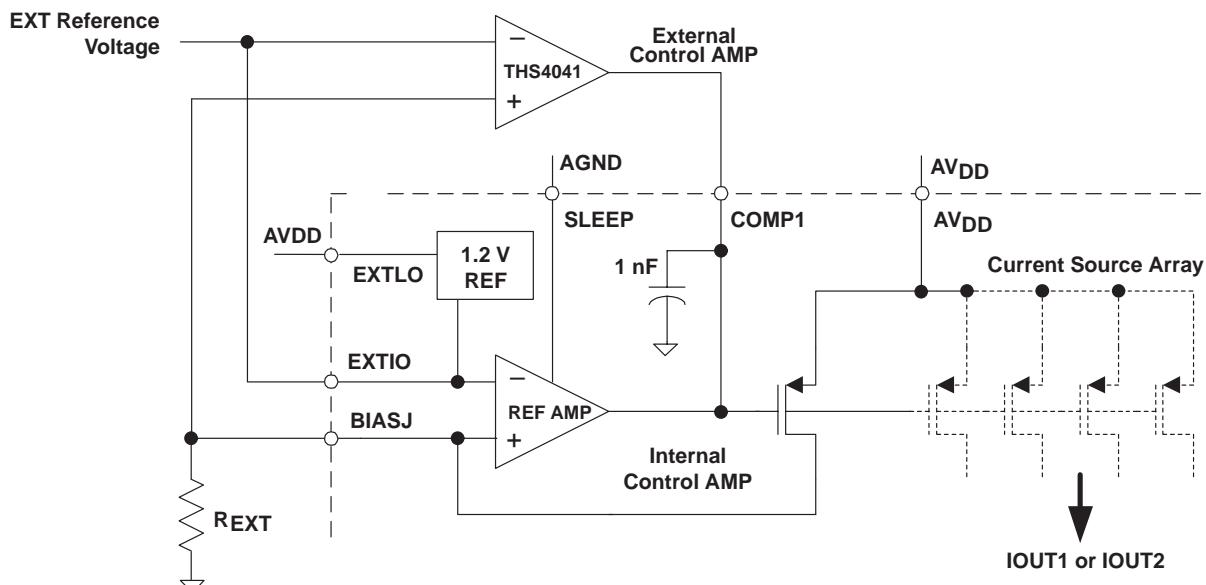


Figure 25. Bypassing the Internal Reference and Control Amplifier

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
SLAS200A – MAY 1999 – REVISED JULY 1999

APPLICATION INFORMATION

analog current outputs

Figure 26 shows a simplified schematic of the current source array output with corresponding switches. Differential PMOS switches direct the current of each individual PMOS current source to either the positive output node IOUT1 or its complementary negative output node IOUT2. The output impedance is determined by the stack of the current sources and differential switches, and is typically $>300\text{ k}\Omega$ in parallel with an output capacitance of 5 pF.

Output nodes IOUT1 and IOUT2 have a negative compliance voltage of -1 V , determined by the CMOS process. Beyond this value, transistor breakdown may occur, resulting in reduced reliability of the THS5661 device. The positive output compliance depends on the full-scale output current $I_{OUT,FS}$ and positive supply voltage AV_{DD} . The positive output compliance equals 1.25 V for $AV_{DD} = 5\text{ V}$ and $I_{OUT,FS} = 20\text{ mA}$. Exceeding the positive compliance voltage adversely affects distortion performance and integral nonlinearity. The optimum distortion performance for a single-ended or differential output is achieved when the maximum full-scale signal at IOUT1 and IOUT2 does not exceed 0.5 V (e.g. when applying a $50\text{ }\Omega$ doubly terminated load for 20 mA full-scale output current). Applications requiring the THS5661 output (i.e., OUT1 and/or OUT2) to extend its output compliance should size R_{LOAD} accordingly.

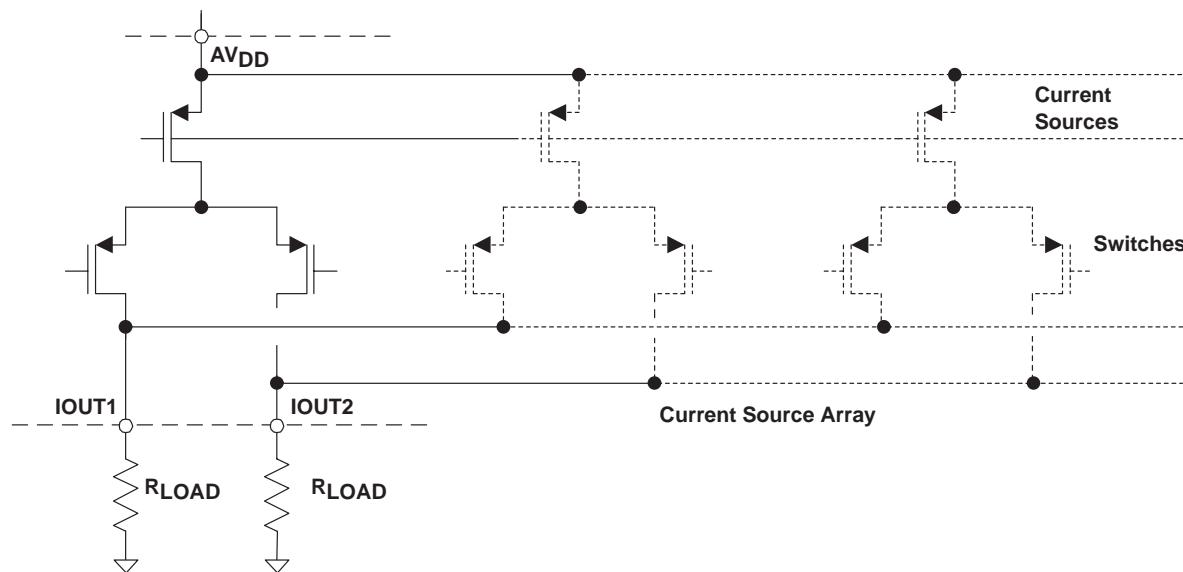


Figure 26. Equivalent Analog Current Output

Figure 27(a) shows the typical differential output configuration with two external matched resistor loads. The nominal resistor load of $50\text{ }\Omega$ will give a differential output swing of 2 V_{PP} when applying a 20 mA full-scale output current. The output impedance of the THS5661 depends slightly on the output voltage at nodes IOUT1 and IOUT2. Consequently, for optimum dc integral nonlinearity, the configuration of Figure 27(b) should be chosen. In this I-V configuration, terminal IOUT1 is kept at virtual ground by the inverting operational amplifier. The complementary output should be connected to ground to provide a dc current path for the current sources switched to IOUT2. Note that the INL/DNL specifications for the THS5661 are measured with IOUT1 maintained at virtual ground. The amplifier's maximum output swing and the DAC's full-scale output current determine the value of the feedback resistor R_{FB} . Capacitor C_{FB} filters the steep edges of the THS5661 current output, thereby reducing the operational amplifier slew-rate requirements. In this configuration, the op amp should operate on a dual supply voltage due to its positive and negative output swing. Node IOUT1 should be selected if a single-ended unipolar output is desirable.

APPLICATION INFORMATION

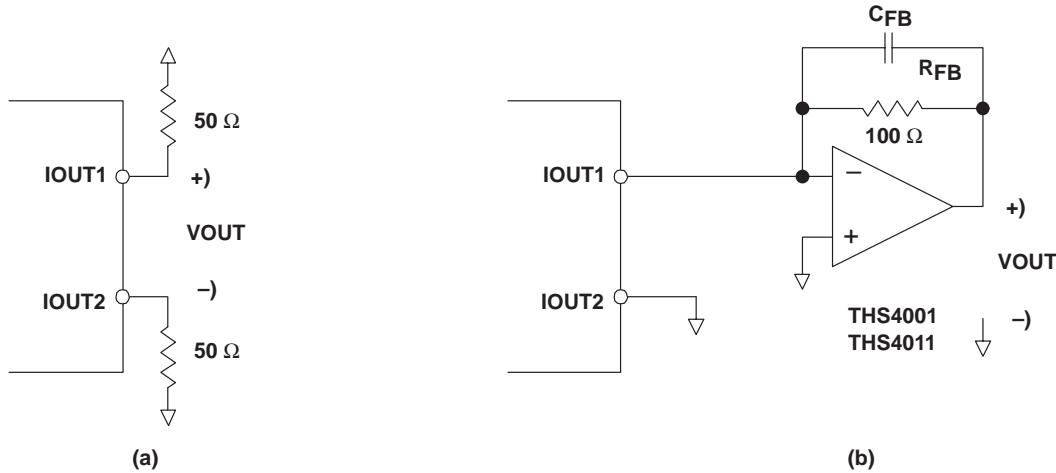


Figure 27. Differential and Single-Ended Output Configuration

The THS5661 can be easily configured to drive a doubly terminated $50\ \Omega$ cable. Figure 28(a) shows the single-ended output configuration, where the output current I_{OUT1} flows into an equivalent load resistance of $25\ \Omega$. Node I_{OUT2} should be connected to ground or terminated with a resistor of $25\ \Omega$. Differential-to-single conversion (e.g., for measurement purposes) can be performed using a properly selected RF transformer, as shown in Figure 28(b). This configuration provides maximum rejection of common-mode noise sources and even order distortion components, thereby doubling the power to the output. The center tap on the primary side of the transformer is connected to AGND, enabling a dc current flow for both I_{OUT1} and I_{OUT2} . Note that the ac performance of the THS5661 is optimum and specified using this differential transformer coupled output, limiting the voltage swing at I_{OUT1} and I_{OUT2} to $\pm 0.5\ V$.

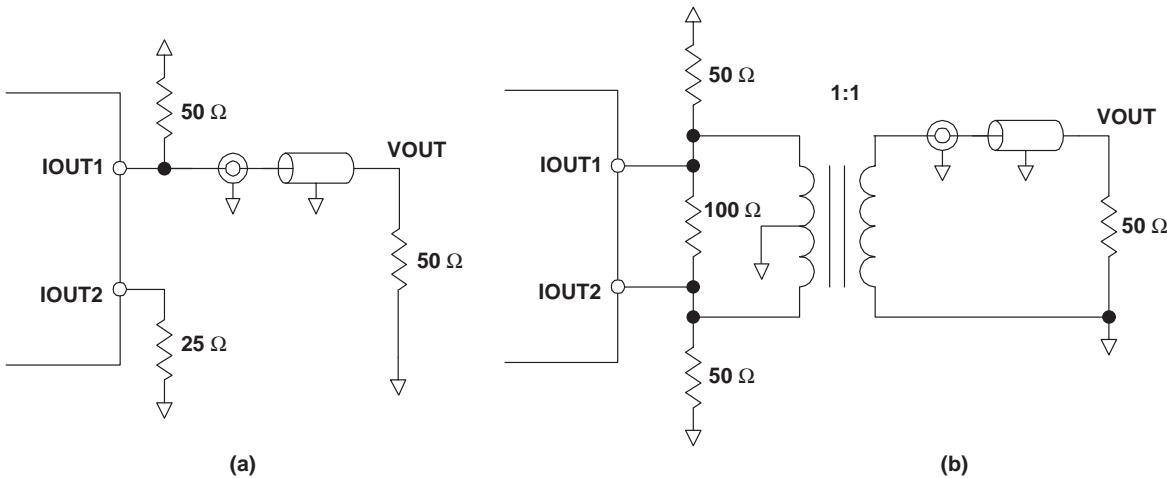


Figure 28. Driving a Doubly Terminated $50\ \Omega$ Cable

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
SLAS200A – MAY 1999 – REVISED JULY 1999

APPLICATION INFORMATION

sleep mode

The THS5661 features a power-down mode that turns off the output current and reduces the supply current to less than 5 mA over the analog supply range of 4.5 V to 5.5 V and temperature range. The power-down mode is activated by applying a logic level 1 to the SLEEP pin (e.g., by connecting pin SLEEP to AVDD). An internal pulldown circuit at node SLEEP ensures that the THS5661 is enabled if the input is left disconnected. Power-up and power-down activation times depend on the value of external capacitor at node SLEEP. For a nominal capacitor value of 0.1 μ F power down takes less than 5 μ s, and approximately 3 ms to power backup. The SLEEP mode should not be used when an external control amplifier is used, as shown in Figure 25.

definitions of specifications and terminology

integral nonlinearity (INL)

The relative accuracy or integral nonlinearity (INL), sometimes referred to as linearity error, is the maximum deviation of the output from the line between zero and full scale excluding the effects of zero code and full-scale errors.

differential nonlinearity (DNL)

The differential nonlinearity (DNL), sometimes referred to as differential error, is the difference between the measured and ideal 1 LSB amplitude change of any two adjacent codes. Monotonic means the output voltage changes in the same direction (or remains constant) as a change in the digital input code.

offset error

Offset error is defined as the deviation of the output current from the ideal of zero at a digital input value of 0.

gain error

Gain error is the error in slope of the DAC transfer function.

signal-to-noise ratio + distortion (S/N+D or SINAD)

S/N+D or SINAD is the ratio of the rms value of the output signal to the rms sum of all other spectral components below the Nyquist frequency, including harmonics but excluding dc. The value for S/N+D is expressed in decibels.

spurious free dynamic range (SFDR)

SFDR is the difference between the rms value of the output signal and the rms value of the largest spurious signal within a specified bandwidth. The value for SFDR is expressed in decibels.

total harmonic distortion (THD)

THD is the ratio of the rms sum of the first six harmonic components to the rms value of the fundamental signal and is expressed in decibels.

output compliance range

The maximum and minimum allowable voltage of the output of the DAC, beyond which either saturation of the output stage or breakdown may occur.

settling time

The time required for the output to settle within a specified error band.

glitch energy

The time integral of the analog value of the glitch transient.

APPLICATION INFORMATION

definitions of specifications and terminology (continued)

offset drift

The change in offset error versus temperature from the ambient temperature ($T_A = 25^\circ\text{C}$) in ppm of full-scale range per $^\circ\text{C}$.

gain drift

The change in gain error versus temperature from the ambient temperature ($T_A = 25^\circ\text{C}$) in ppm of full-scale range per $^\circ\text{C}$.

reference voltage drift

The change in reference voltage error versus temperature from the ambient temperature ($T_A = 25^\circ\text{C}$) in ppm of full-scale range per $^\circ\text{C}$.

THS5661 evaluation board

An evaluation module (EVM) board for the THS5661 digital-to-analog converter is available for evaluation. This board allows the user the flexibility to operate the THS5661 in various configurations. Possible output configurations include transformer coupled, resistor terminated, and inverting/noninverting amplifier outputs. The digital inputs are designed to interface with the TMS320 C5000 or C6000 family of DSPs or to be driven directly from various pattern generators with the onboard option to add a resistor network for proper load termination.

See the *THS56x1 Evaluation Module User's Guide* for more details (SLAU032).

**THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER**
SLAS200A – MAY 1999 – REVISED JULY 1999

APPLICATION INFORMATION

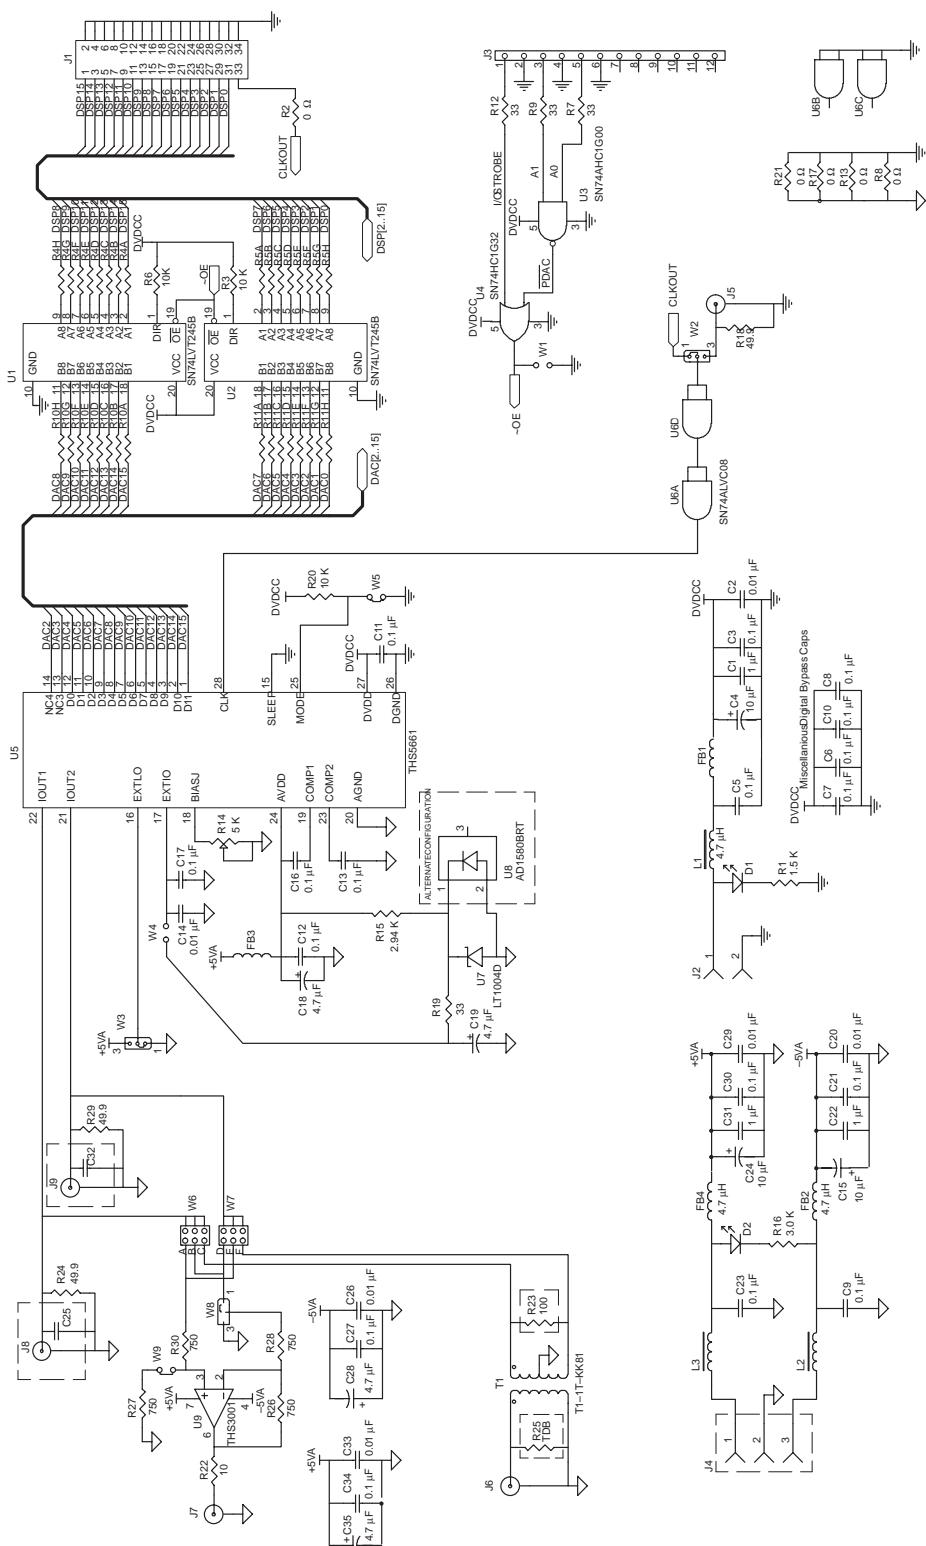


Figure 29. Schematic

APPLICATION INFORMATION

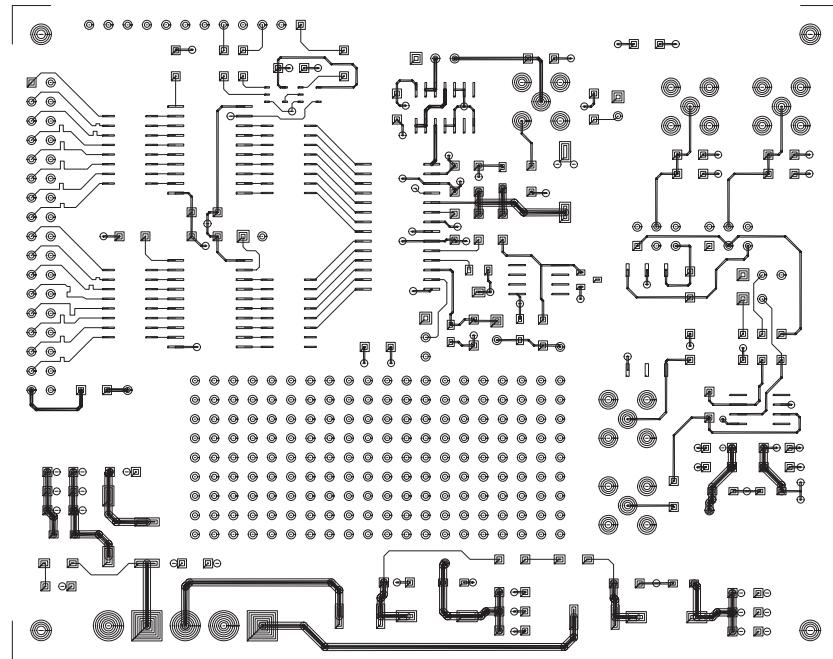


Figure 30. Board Layout, Layer 1

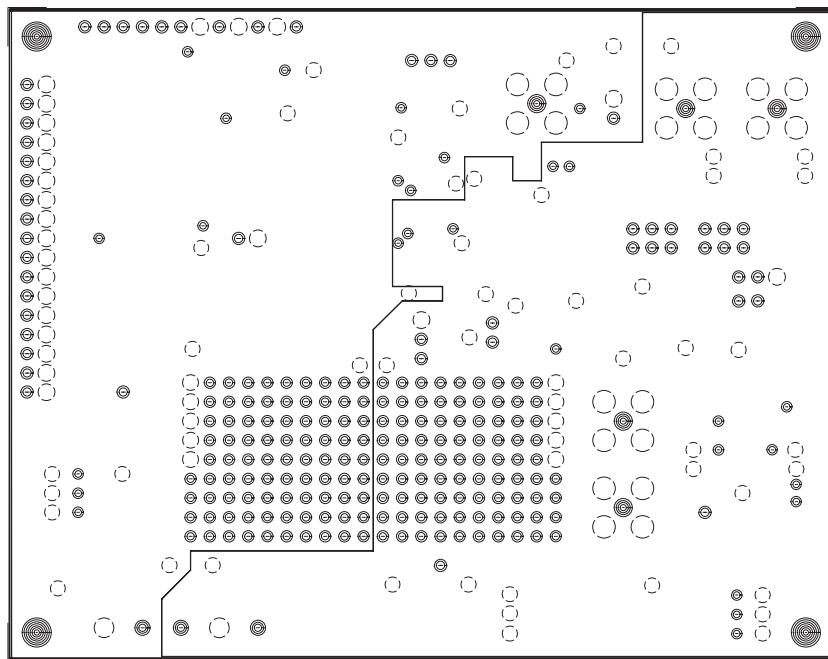


Figure 31. Board Layout, Layer 2

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER

SLAS200A – MAY 1999 – REVISED JULY 1999

APPLICATION INFORMATION

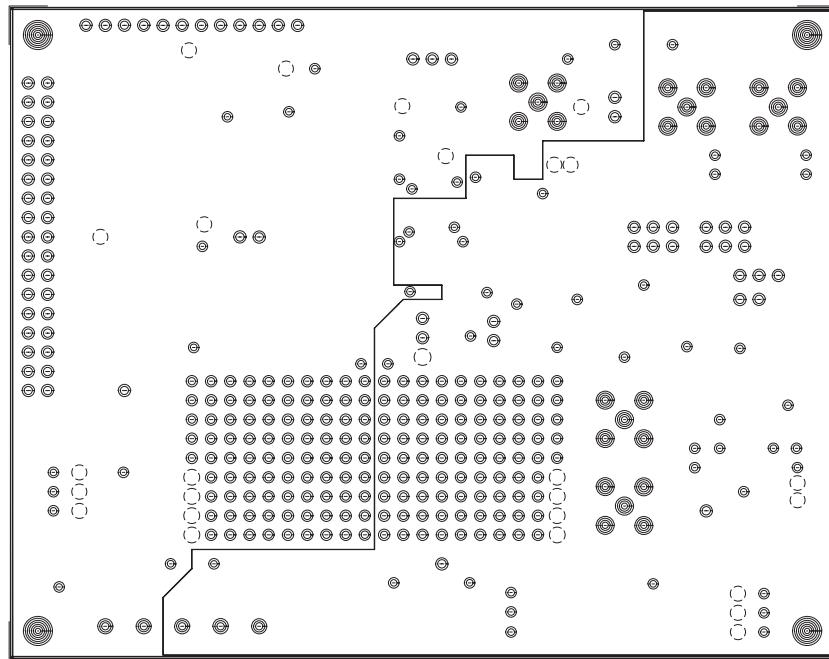


Figure 32. Board Layout, Layer 3


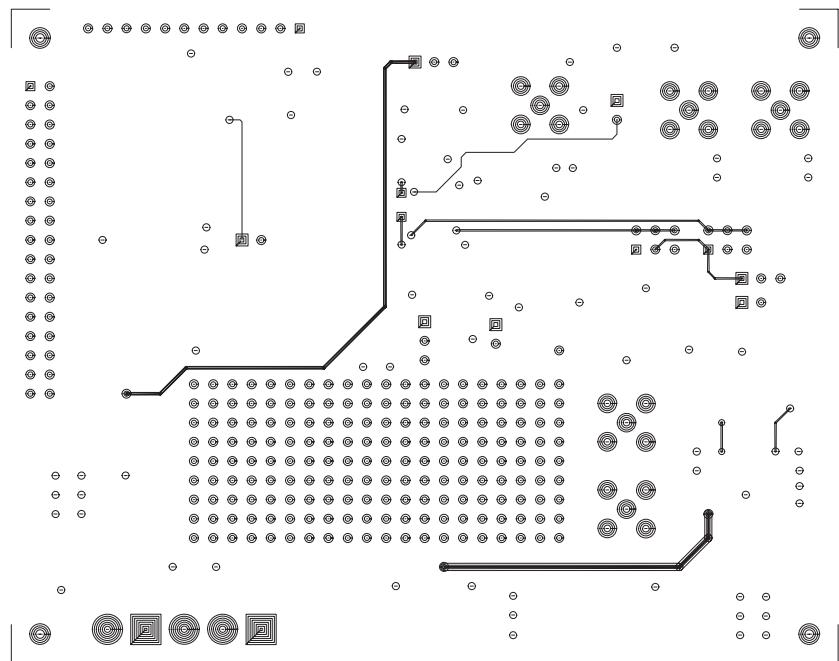


Figure 33. Board Layout, Layer 4

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
 SLAS200A – MAY 1999 – REVISED JULY 1999

APPLICATION INFORMATION

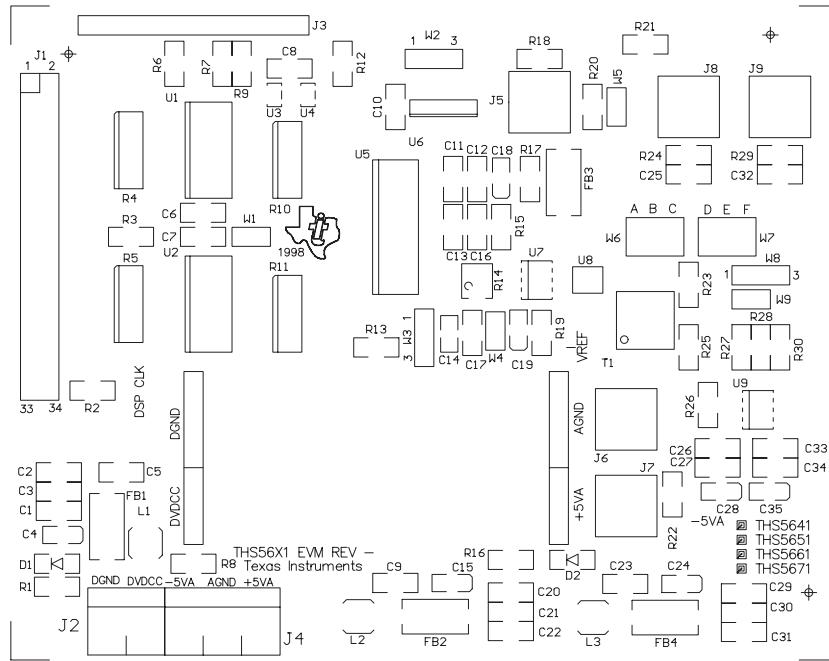

THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
 SLAS200A – MAY 1999 – REVISED JULY 1999

APPLICATION INFORMATION

Table 2. Bill of Materials (Continued)


QTY	REF. DES	PART NUMBER	DESCRIPTION	MFG.
4	R12, R19, R7, R9	1206	1206 Chip resistor, 33 Ω, 1/4 W, 1%	
5	R13, R17, R2, R21, R8	1206	1206 Chip resistor, 0 Ω, 1/4 W, 1%	
1	R14	3214W-1-502 E or equivalent	4 mm SM Pot, 5K	Bourns
1	R15	1206	1206 Chip resistor, 2.94K, 1/4 W, 1%	
1	R16	1206	1206 Chip resistor, 3K, 1/4 W, 1%	
3	R18, R24, R29	1206	1206 Chip resistor, 49.94K, 1/4 W, 1%	
3	R20, R3, R6	1206	1206 Chip resistor, 10K, 1/4 W, 1%	
1	R22	1206	1206 Chip resistor, 10K, 1/4 W, 1%	
1	R23	1206	1206 Chip resistor, 100K, 1/4 W, 1%	
1	R25	1206	1206 Chip resistor, TBD, 1/4 W, 1%	
4	R26, R27, R28, R30	1206	1206 Chip resistor, 750K, 1/4 W, 1%	
1	T1	T1-1T-KK81	RF Transformer, T1-1T-KK81	MiniCircuits
2	U1, U2	SN74LVT245BDW	Octal bus transceiver, 3-state, SN74LVT245B	TI
1	U3	SN74AHCT1G00DBVR/ SN74AHC1G00DBVR	Single gate NAND, SN74AHC1G00	TI
1	U4	SN74AHCT1G32DBVR/ SN74AHCC1G32DBVR	Single 2 input positive or gate, SN74AHC1G32	TI
	THS5641	THS5641IDW	DAC, 2.7–5.5 V, 8 Bit, 125 MHz	TI
	THS5651	THS5651IDW	DAC, 2.7–5.5 V, 10 Bit, 125 MHz	TI
	THS5661	THS5661IDW	DAC, 2.7–5.5 V, 12 Bit, 125 MHz	TI
	THS5671	THS5647IDW	DAC, 2.7–5.5 V, 14 Bit, 125 MHz	TI
1	SN74ALVC08	SN74ALVC08D	Quad AND gate	TI
1	LT1004D	LT1004CD-1-2/LT1004ID-1-2	Precision 1.2 V reference	TI
0	NOT INSTALLED	AD1580BRT	Precision voltage reference, not installed	
1	THS3001	THS3001CD/THS2001ID	THS3001 high-speed op amp	TI
4	W2	TSW-102-07-L-S or equivalent	2 position jumper_.1" spacing, W2	Samtec
3	W3	TSW-102-07-L-S or equivalent	3 position jumper_.1" spacing, W3	Samtec
2	2X3_JUMPER	TSW-102-07-L-S or equivalent	6-Pin header dual row, 0.025×0.1, 2X3_JUMPER	Samtec

MECHANICAL DATA

DW (R-PDSO-G**)

16 PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE

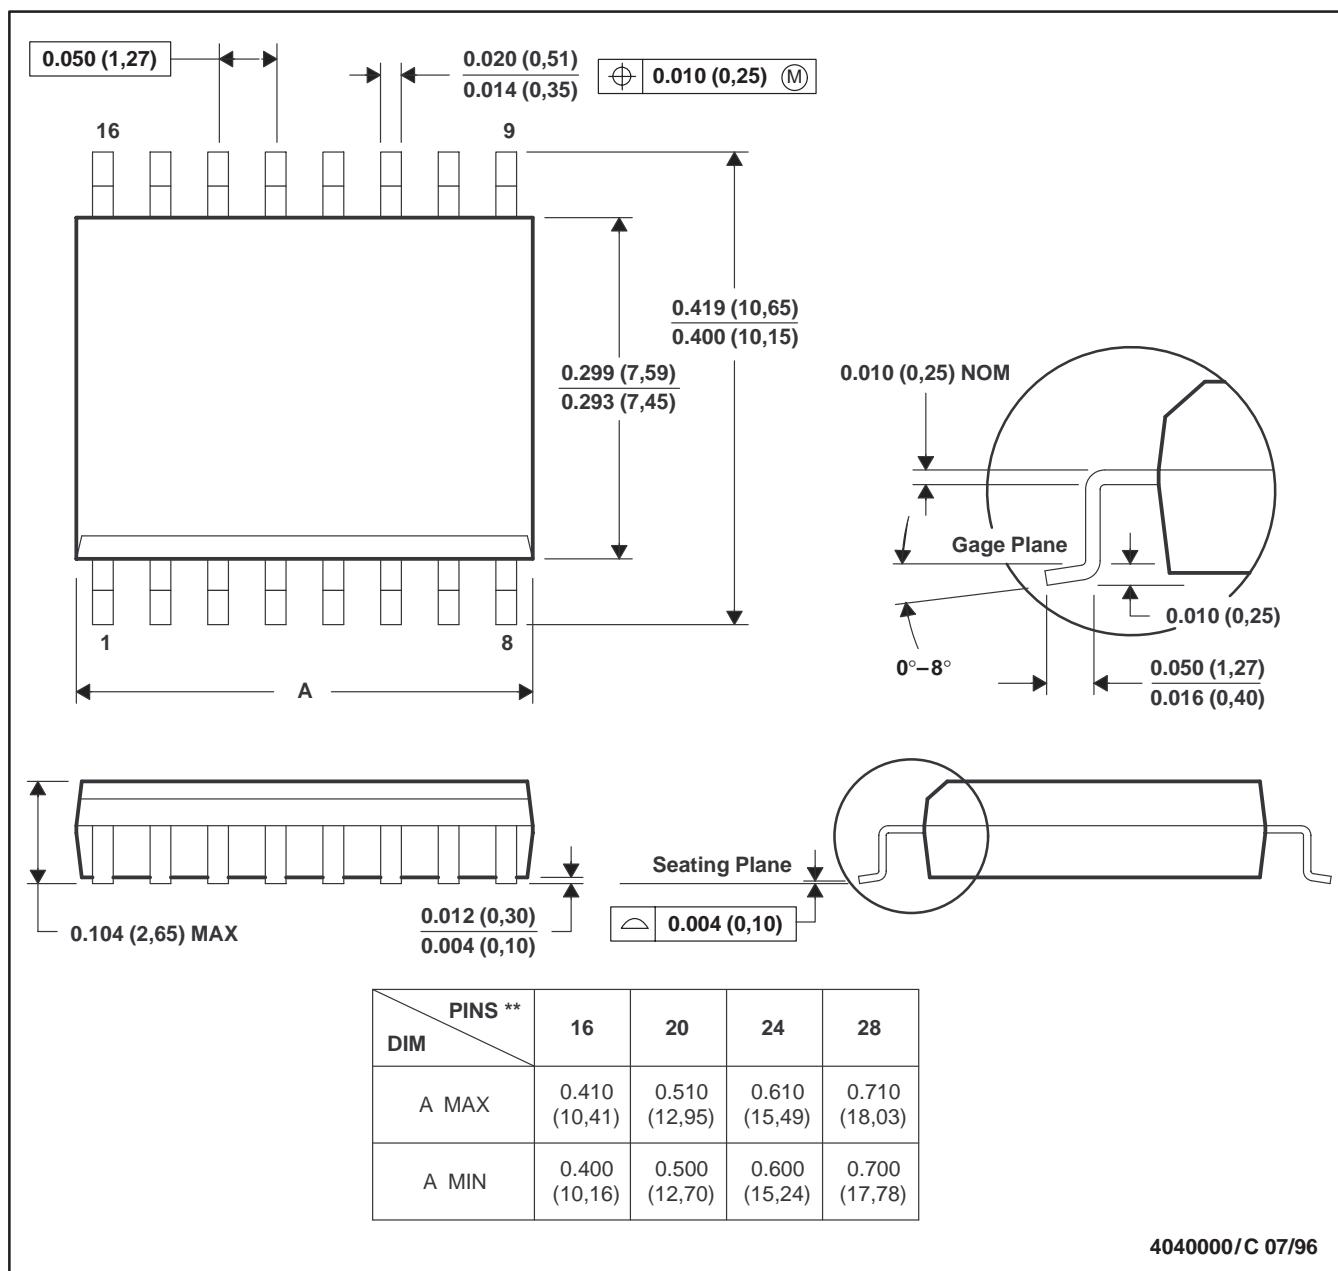

NOTES: A. All linear dimensions are in inches (millimeters).
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
 D. Falls within JEDEC MS-013


THS5661
12-BIT, 100 MSPS, CommsDAC™
DIGITAL-TO-ANALOG CONVERTER
 SLAS200A – MAY 1999 – REVISED JULY 1999

MECHANICAL DATA

PW (R-PDSO-G)**

14 PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE

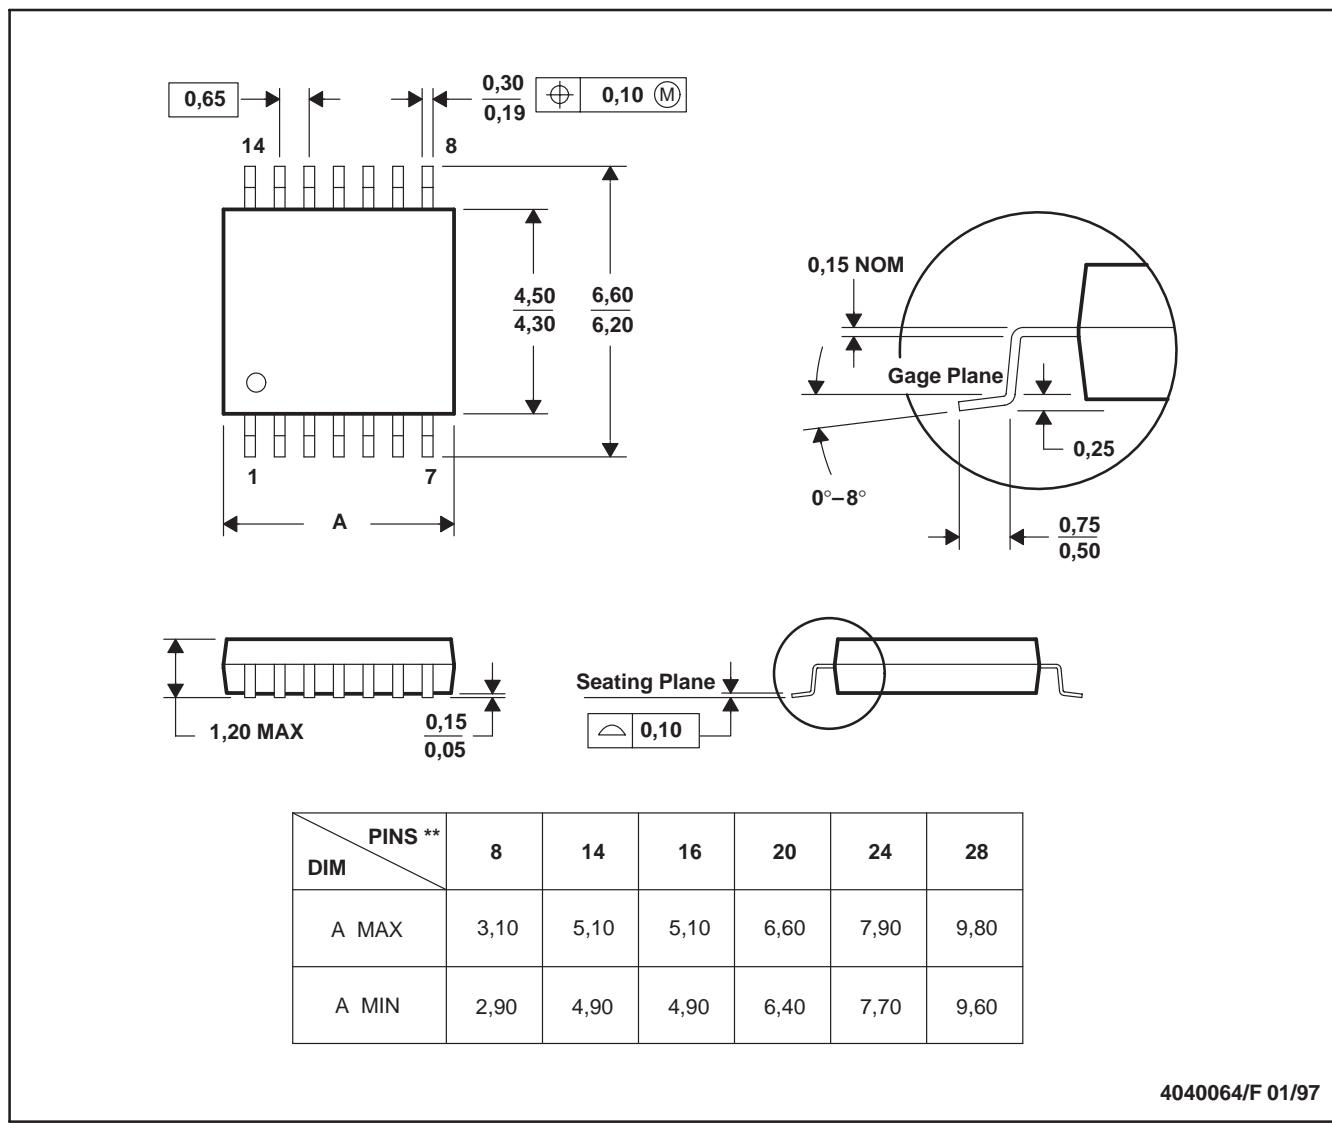

4040064/F 01/97

NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-153

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.