

[查询MC33164/MC34164供应商](#)



LINFINITY
MICROELECTRONICS

THE INFINITE POWER OF INNOVATION

捷多邦，专业PCB打样工厂，24小时加急出货 Doc #: 33164

MC33164/MC34164

5V UNDERTRIGGER SENSING CIRCUIT

PRODUCTION DATA SHEET

DESCRIPTION


The MC33164 and the MC34164 are micropower undervoltage sensing circuits ideal for use in low-power battery applications, computer peripheral, consumer, appliance and automotive equipment. The device offers a 1.2V temperature compensated bandgap reference, a precision comparator with hysteresis and a high

current open collector output. This device operates from 1 to 10V input supply and drains <10 μ A in the non-fault condition and trip level of 4.33V.

Both devices are available in an 8-pin, 150mil SOIC package and a plastic TO-92 package. The MC33164 is rated from -40°C to 85°C and the MC34164 from 0°C to 70°C.

PRODUCT HIGHLIGHT

LOW-VOLTAGE MICROPROCESSOR RESET

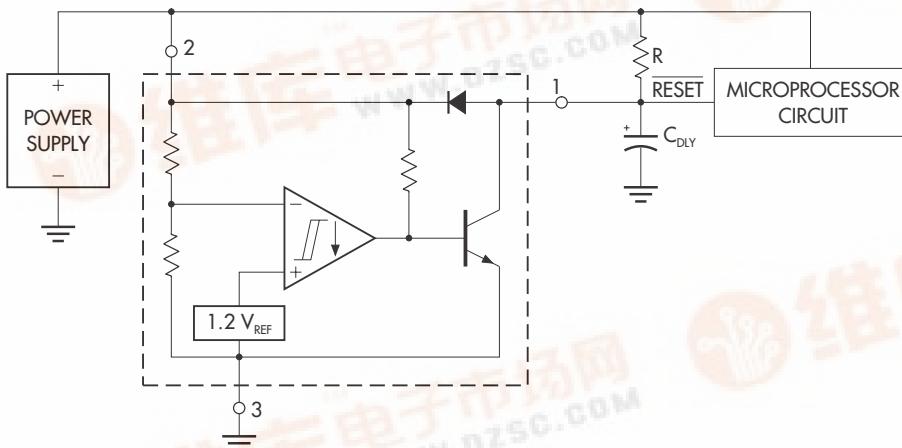

KEY FEATURES

- LOW STANDBY CURRENT
- TEMPERATURE COMPENSATED BANDGAP REFERENCE
- PRECISION COMPARATOR WITH 50MV OF HYSTERESIS
- CLAMP DIODE FOR DISCHARGING DELAY CAPACITOR
- OUTPUT CURRENT SINK CAPABILITY FROM 7 TO 50MA
- 1-10V INPUT SUPPLY RANGE
- AVAILABLE IN 150MIL, 8-PIN SOIC AND PLASTIC TO-92 PACKAGES
- PIN-FOR-PIN COMPATIBLE WITH MC33164/34164

APPLICATIONS

- μ POWER RESET GENERATOR
- 5V VOLTAGE MONITOR
- BATTERY-LEVEL DETECTOR

PACKAGE ORDER INFORMATION

T _A (°C)	DM	Plastic SOIC 8-pin	LP	Plastic TO-92 3-pin
0 to 70		MC34164DM		MC34164LP
-40 to 85		MC33164DM		MC33164LP

Note: All surface-mount packages are available in Tape & Reel.
Append the letter "T" to part number. (i.e. MC34164DMT)

FOR FURTHER INFORMATION CALL (714) 898-8121

MC33164/MC34164

5V UNDERVOLTAGE SENSING CIRCUIT

PRODUCTION DATA SHEET

ABSOLUTE MAXIMUM RATINGS (Note 1)


Input Supply Voltage (V_{IN})	-1V to 12V
RESET Output Voltage (V_{OUT})	-1V to 12V
Clamp Diode Forward Current	100mA
Operating Junction Temperature	
Plastic (DM - Package)	150°C
Storage Temperature Range	-65°C to 150°C
Lead Temperature (Soldering, 10 seconds)	300°C

Note 1. Values beyond which damage may occur. All voltages are specified with respect to ground, and all currents are positive into the specified terminal.

PACKAGE PIN OUTS

RESET	1	8	N.C.
INPUT	2	7	N.C.
N.C.	3	6	N.C.
GROUND	4	5	N.C.

DM PACKAGE
(Top View)



LP PACKAGE
(Top View)

THERMAL DATA

DM PACKAGE:

Thermal Resistance-Junction to Ambient, θ_{JA} **165°C/W**


LP PACKAGE:

Thermal Resistance-Junction to Ambient, θ_{JA} **156°C/W**

Junction Temperature Calculation: $T_J = T_A + (P_D \times \theta_{JA})$.

The θ_{JA} numbers are guidelines for the thermal performance of the device/pc-board system.
All of the above assume no ambient airflow.

BLOCK DIAGRAM

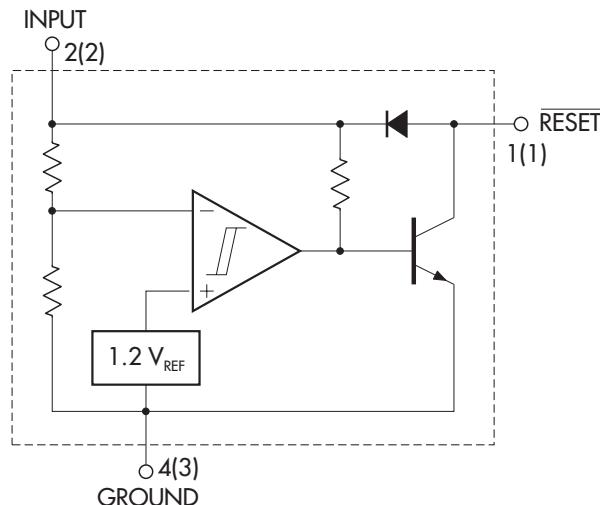

MC33164/MC34164

5V UNDERVOLTAGE SENSING CIRCUIT

PRODUCTION DATA SHEET

RECOMMENDED OPERATING CONDITIONS (Note 2)

Parameter	Symbol	Recommended Operating Conditions			Units
		Min.	Typ.	Max.	
Input Supply Voltage		1		10	V
RESET Output Voltage				10	V
Clamp Diode Forward Current				50	mA
Operating Ambient Temperature Range:					
MC34164	T _A	0		70	°C
MC33164	T _A	-40		85	°C

Note 2. Range over which the device is guaranteed functional.

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, these specifications apply over the operating ambient temperatures of 0°C ≤ T_A ≤ 70°C for the MC34164 and -40°C ≤ T_A ≤ 85°C for the MC33164. Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.)

Parameter	Symbol	Test Conditions	MC33164 / MC34164			Units
			Min.	Typ.	Max.	
Total Device						
Operating Input Voltage Range	V _{IN}		1.0		10	V
Quiescent Input Current	I _{IN}	V _{IN} = 5.0V		10	20	µA
		V _{IN} = 10V		19	50	µA
Comparator Section						
Threshold Voltage						
High-State Output	V _H	V _{IN} Increasing	4.15	4.33	4.45	V
Low-State Output	V _L	V _{IN} Decreasing	4.15	4.27	4.45	V
Hysteresis	V _H		0.02	0.06		V
RESET Output Section						
Output Sink Saturation	V _{OL}	V _{IN} = 4.0V, I _{SINK} = 1.0mA		0.05	0.40	V
		V _{IN} = 1.0V, I _{SINK} = 0.25mA		0.06	0.30	V
Output Sink Current	I _{SINK}	V _{IN} , RESET = 4.0V	7.0		50	mA
Output Off-State Leakage		V _{IN} , RESET = 5.0V			0.5	µA
		V _{IN} , RESET = 10V			2.0	µA
Clamp Diode Forward Voltage	V _F	Pin 1 to pin 2, (I _F = 5.0mA)	0.6		1.2	V

MC33164/MC34164

5V UNDERVOLTAGE SENSING CIRCUIT

PRODUCTION DATA SHEET

GRAPH / CURVE INDEX

Characteristic Curves

FIGURE

1. COMPARATOR THRESHOLD VOLTAGE vs. TEMPERATURE
2. RESET OUTPUT VOLTAGE vs. INPUT VOLTAGE
3. RESET OUTPUT SATURATION vs. SINK CURRENT
4. INPUT CURRENT vs. INPUT VOLTAGE
5. RESET DELAY TIME (LOW to HIGH)
6. RESET DELAY TIME (HIGH to LOW)

FIGURE INDEX

Application Circuits

FIGURE

7. SWITCHING THE LOAD OFF WHEN BATTERY REACHES BELOW 4.3V
8. LOW VOLTAGE MICROPROCESSOR RESET
9. VOLTAGE MONITOR
10. MOSFET LOW VOLTAGE GATE DRIVE PROTECTION

5V UNDERVOLTAGE SENSING CIRCUIT

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES

FIGURE 1. — COMPARATOR THRESHOLD VOLTAGE vs. TEMPERATURE

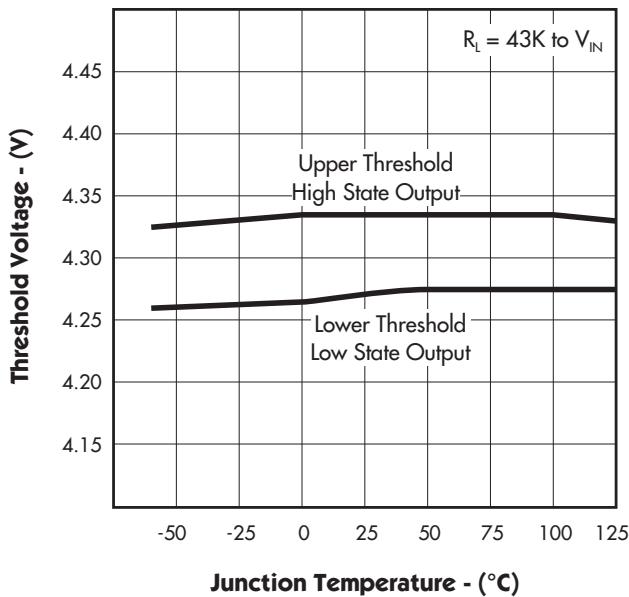


FIGURE 2. — RESET OUTPUT VOLTAGE vs. INPUT VOLTAGE

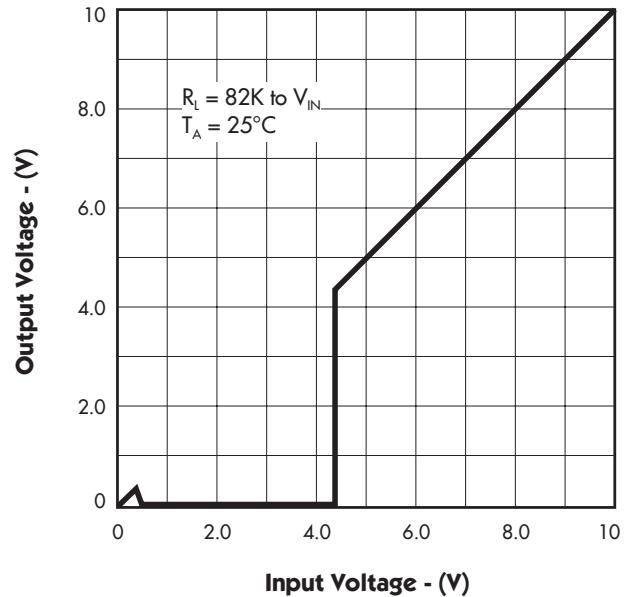


FIGURE 3. — RESET OUTPUT SATURATION vs. SINK CURRENT


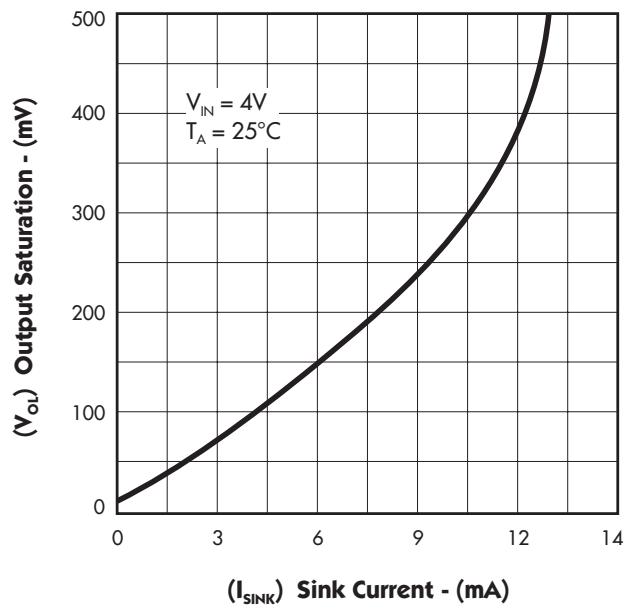


FIGURE 4. — INPUT CURRENT vs. INPUT VOLTAGE

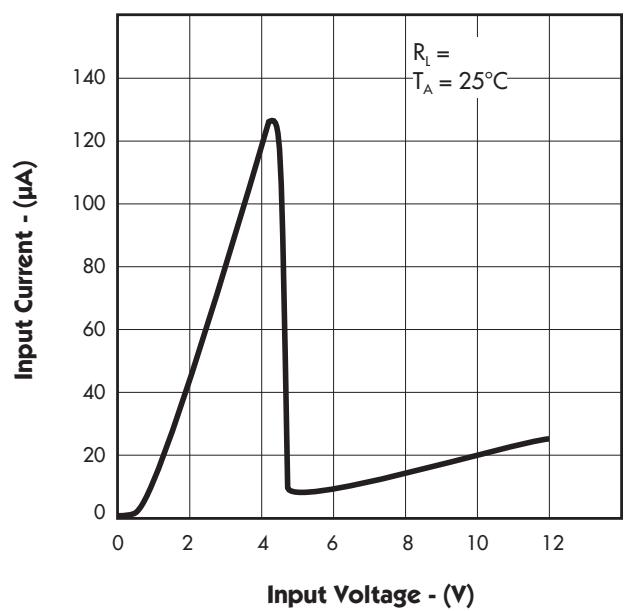

MC33164/MC34164

5V UNDERVOLTAGE SENSING CIRCUIT

PRODUCTION DATA SHEET

CHARACTERISTIC CURVES

FIGURE 5. — RESET DELAY TIME (LOW TO HIGH)


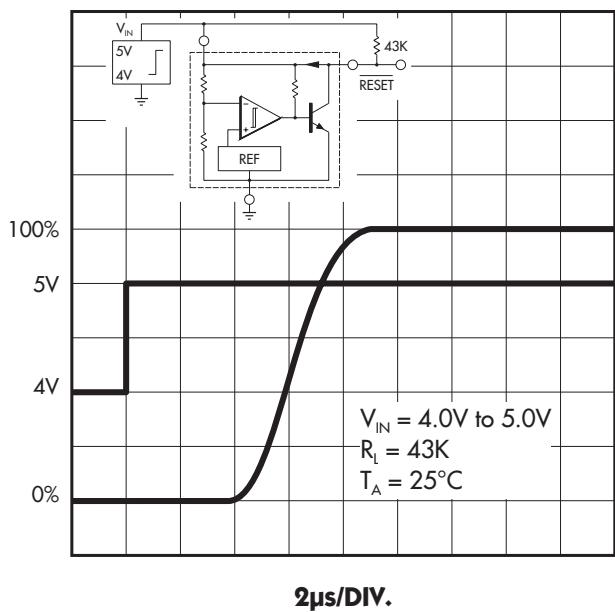


FIGURE 6. — RESET DELAY TIME (HIGH TO LOW)

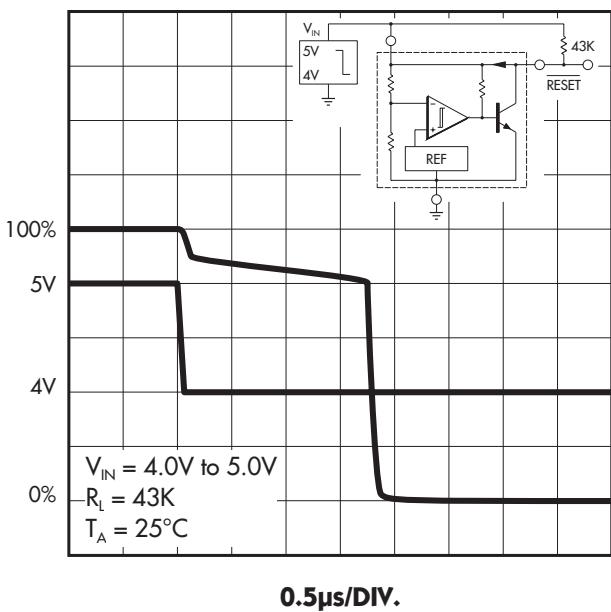

MC33164/MC34164

5V UNDERVOLTAGE SENSING CIRCUIT

PRODUCTION DATA SHEET

TYPICAL APPLICATION CIRCUITS


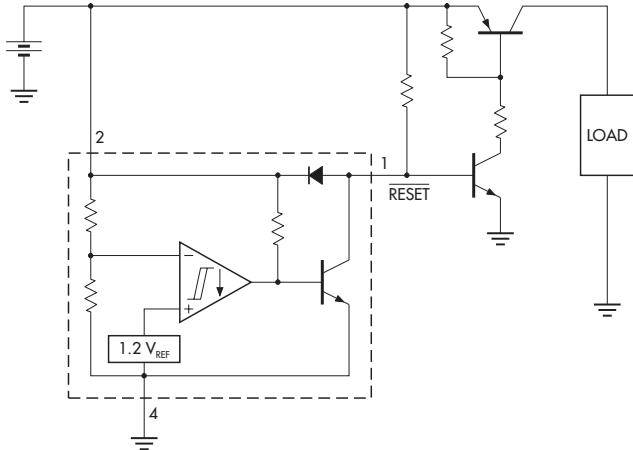


FIGURE 7. — SWITCHING THE LOAD OFF WHEN BATTERY VOLTAGE REACHES BELOW 4.3V

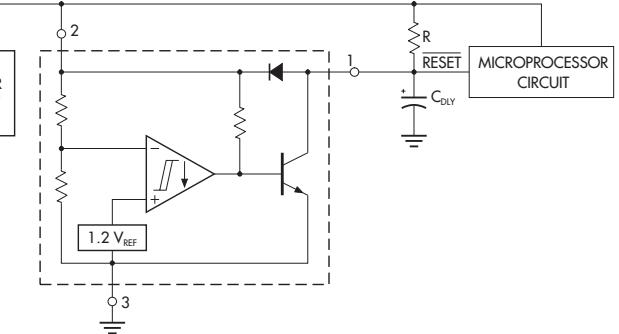

A time delayed reset can be accomplished with the addition of C_{DLY}. For systems with extremely fast power supply rise times (< 500ns) it is recommended that the RC_{DLY} time constant be greater than 5.0µs. V_{TH(MPU)} is the microprocessor reset input threshold.

$$t_{DLY} = R C_{DLY} \ln \left[\frac{1}{1 - \frac{V_{TH(MPU)}}{V_{IN}}} \right]$$

FIGURE 8. — LOW-VOLTAGE MICROPROCESSOR RESET


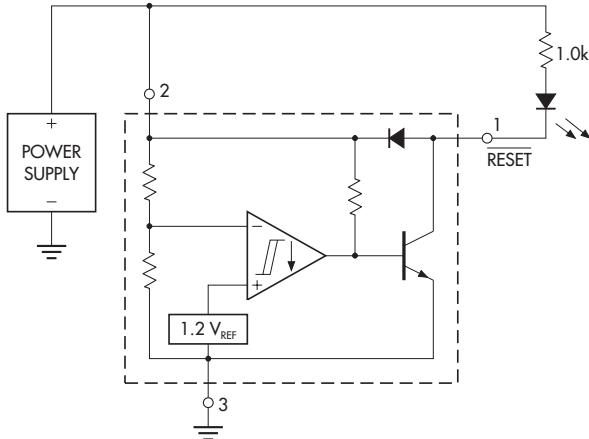


FIGURE 9. — VOLTAGE MONITOR

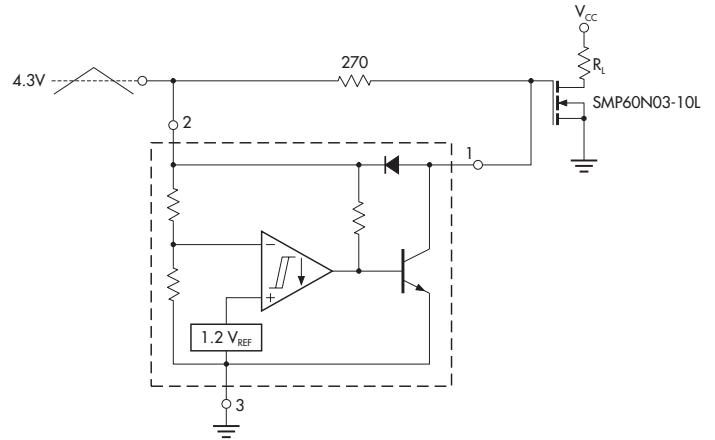

Overheating of the logic level power MOSFET due to insufficient gate voltage can be prevented with the above circuit. When the input signal is below the 4.3 volt threshold of the MC34164, its output grounds the gate of the L² MOSFET.

FIGURE 10. — MOSFET LOW-VOLTAGE GATE DRIVE PROTECTION