


# International IOR Rectifier


Bulletin I27125 rev. A 04/99

## P100 SERIES

### PASSIVATED ASSEMBLED CIRCUIT ELEMENTS

#### Features

- Glass passivated junctions for greater reliability
- Electrically isolated base plate
- Available up to 1200 V<sub>RRM</sub>, V<sub>DRM</sub>
- High dynamic characteristics
- Wide choice of circuit configurations
- Simplified mechanical design and assembly
- UL E78996 approved 



#### Description

The P100 series of Integrated Power Circuits consists of power thyristors and power diodes configured in a single package. With its isolating base plate, mechanical designs are greatly simplified giving advantages of cost reduction and reduced size.

Applications include power supplies, control circuits and battery chargers.

#### Major Ratings and Characteristics

| Parameters        | P100        | Units                |
|-------------------|-------------|----------------------|
| I <sub>b</sub>    | 25          | A                    |
| @ T <sub>C</sub>  | 85          | °C                   |
| I <sub>FSM</sub>  | @ 50Hz      | 357 A                |
|                   | @ 60Hz      | 375 A                |
| I <sup>2</sup> t  | @ 50Hz      | 637 A <sup>2</sup> s |
|                   | @ 60Hz      | 580 A <sup>2</sup> s |
| I <sup>2</sup> √t | 6365        | A <sup>2</sup> √s    |
| V <sub>RRM</sub>  | 400 to 1200 | V                    |
| V <sub>INS</sub>  | 2500        | V                    |
| T <sub>J</sub>    | - 40 to 125 | °C                   |



## P100 Series

Bulletin I27125 rev. A 04/99

International  
IR Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

| Type number      | $V_{RRM}$ maximum repetitive peak reverse voltage<br>V | $V_{RSM}$ maximum non-repetitive peak reverse voltage<br>V | $V_{DRM}$ maximum repetitive peak off-state voltage<br>V | $I_{RRM}$ max. @ $T_J$ max.<br>mA |
|------------------|--|--|--|-----------------------------------|
| P101, P121, P131 | 400  | 500  | 400  | 10                                |
| P102, P122, P132 | 600  | 700  | 600  |                                   |
| P103, P123, P133 | 800  | 900  | 800  |                                   |
| P104, P124, P134 | 1000   | 1100   | 1000   |                                   |
| P105, P125, P135 | 1200   | 1300   | 1200   |                                   |

#### On-state Conduction

| Parameter  | P100 | Units            | Conditions  |  |
|--|------|------------------|---|--|
| $I_D$ Maximum DC output current  | 25   | A                | @ $T_C = 85^\circ\text{C}$ , full bridge  |  |
| $I_{TSM}$ Max. peak one-cycle non-repetitive on-state or forward current | 357  | A                | t = 10ms No voltage reappplied  |  |
| $I_{FSM}$  | 375  |                  | t = 8.3ms   | 100% $V_{RRM}$ reappplied                      |
|  | 300  |                  | t = 10ms  | Sinusoidal half wave, Initial $T_J = T_J$ max. |
|  | 315  |                  | t = 8.3ms   |  |
| $I^2t$ Maximum $I^2t$ for fusing   | 637  | $A^2s$           | t = 10ms No voltage reappplied  |  |
|  | 580  |                  | t = 8.3ms   | 100% $V_{RRM}$ reappplied                      |
|  | 450  |                  | t = 10ms  | Initial $T_J = T_J$ max.                       |
|  | 410  |                  | t = 8.3ms   |  |
| $I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing                           | 6365 | $A^2\sqrt{s}$    | t = 0.1 to 10ms, no voltage reappplied<br>$I^2t$ for time tx = $I^2\sqrt{t} \cdot \sqrt{tx}$  |  |
| $V_{T(TO)}$ Max. value of threshold voltage                              | 0.82 | V                | $T_J = 125^\circ\text{C}$   |  |
| $r_{t1}$ Max. level value of on-state slope resistance                   | 12   | m $\Omega$       | $T_J = 125^\circ\text{C}$ , Av. power = $V_{T(TO)} \cdot I_{T(AV)} + r_t + (I_{T(RMS)})^2$  |  |
| $V_{TM}$ Max. peak on-state or forward voltage drop                      | 1.35 | V                | $T_J = 25^\circ\text{C}$ , $I_{TM} = \pi \times I_{T(AV)}$  |  |
| di/dt Maximum non repetitive rate of rise of turned on current           | 200  | A/ $\mu\text{s}$ | $T_J = 125^\circ\text{C}$ from 0.67 $V_{DRM}$<br>$I_{TM} = \pi \times I_{T(AV)}$ , $I_g = 500\text{mA}$ , tr < 0.5 $\mu\text{s}$ , tp > 6 $\mu\text{s}$ |  |
| $I_H$ Maximum holding current  | 130  | mA               | $T_J = 25^\circ\text{C}$ anode supply = 6V, resistive load, gate open   |  |
| $I_L$ Maximum latching current   | 250  | mA               | $T_J = 25^\circ\text{C}$ anode supply = 6V, resistive load  |  |

**Blocking**

| Parameter  | P100 | Units      | Conditions  |
|--|------|------------|---|
| $dv/dt$ Maximum critical rate of rise of off-state voltage   | 200  | V/ $\mu$ s | $T_J = 125^\circ\text{C}$ , exponential to $0.67 V_{\text{DRM}}$ gate open              |
| $I_{\text{RRM}}$ Max. peak reverse and off-state leakage current at $V_{\text{RRM}}, V_{\text{DRM}}$ | 10   | mA         | $T_J = 125^\circ\text{C}$ , gate open circuit   |
| $I_{\text{RRM}}$ Max peak reverse leakage current  | 100  | $\mu$ A    | $T_J = 25^\circ\text{C}$  |
| $V_{\text{INS}}$ RMS isolation voltage   | 2500 | V          | 50Hz, circuit to base, all terminal shorted, $T_J = 25^\circ\text{C}$ , $t = 1\text{s}$ |

**Triggering**

| Parameter  | P100 | Units                     | Conditions   |                           |
|--|------|---------------------------|--|---------------------------|
| $P_{\text{GM}}$ Maximum peak gate power                    | 8    | W                         |  |                           |
| $P_{\text{G(AV)}}$ Maximum average gate power              | 2    |                           |  |                           |
| $I_{\text{GM}}$ Maximum peak gate current                  | 2    | A                         |  |                           |
| $-V_{\text{GM}}$ Maximum peak negative gate voltage        | 10   | V                         | Anode Supply = 6V resistive load                           |                           |
| $V_{\text{GT}}$ Maximum gate voltage required to trigger   | 3    |                           |  | $T_J = -40^\circ\text{C}$ |
|  | 2    |                           |  | $T_J = 25^\circ\text{C}$  |
|  | 1    | $T_J = 125^\circ\text{C}$ |  |                           |
| $I_{\text{GD}}$ Maximum gate current required to trigger   | 90   | mA                        | Anode Supply = 6V resistive load                           |                           |
|  | 60   |                           |  | $T_J = 25^\circ\text{C}$  |
|  | 35   |                           |  | $T_J = 125^\circ\text{C}$ |
| $V_{\text{GD}}$ Maximum gate voltage that will not trigger | 0.2  | V                         | $T_J = 125^\circ\text{C}$ , rated $V_{\text{DRM}}$ applied |                           |
| $I_{\text{GD}}$ Maximum gate current that will not trigger | 2    | mA                        | $T_J = 125^\circ\text{C}$ , rated $V_{\text{DRM}}$ applied |                           |

**Thermal and Mechanical Specification**

| Parameter   | P100       | Units            | Conditions  |
|---|------------|------------------|---|
| $T_J$ Max. operating temperature range                      | -40 to 125 | $^\circ\text{C}$ |   |
| $T_{\text{stg}}$ Max. storage temperature range             | -40 to 125 |                  |   |
| $R_{\text{thJC}}$ Max. thermal resistance, junction to case | 2.24       | K/W              | DC operation per junction   |
| $R_{\text{thCS}}$ Max. thermal resistance, case to heatsink | 0.10       | K/W              | Mounting surface, smooth and greased  |
| T Mounting torque, base to heatsink                         | 4          | Nm               | A mounting compound is recommended and the torque should be checked after a period of 3 hours to allow for the spread of the compound |
| wt Approximate weight                                       | 58 (2.0)   | g (oz)           |   |

## P100 Series

Bulletin I27125 rev. A 04/99


International  
IRF Rectifier

### Circuit Type and Coding \*

|   | Circuit "0"                            | Circuit "2"                      | Circuit "3"               |
|---|--|----------------------------------|---------------------------|
| Terminal Positions                                    |  |                                  |                           |
| Schematic diagram                                     |  |                                  |                           |
|   | SinglePhase HybridBridge CommonCathode | SinglePhase HybridBridge Doubler | SinglePhase AllSCR Bridge |
| Basic series  | P10.                                   | P12.                             | P13.                      |
| With voltage suppression                              | P10.K                                  | P12.K                            | P13.K                     |
| With free-wheeling diode                              | P10.W                                  | -                                | -                         |
| With both voltage suppression and free-wheeling diode | P10.KW                                 | -                                | -                         |

\* To complete code refer to voltage ratings table, i.e.: for 600V P10.W complete code is P102W

### Outline Table

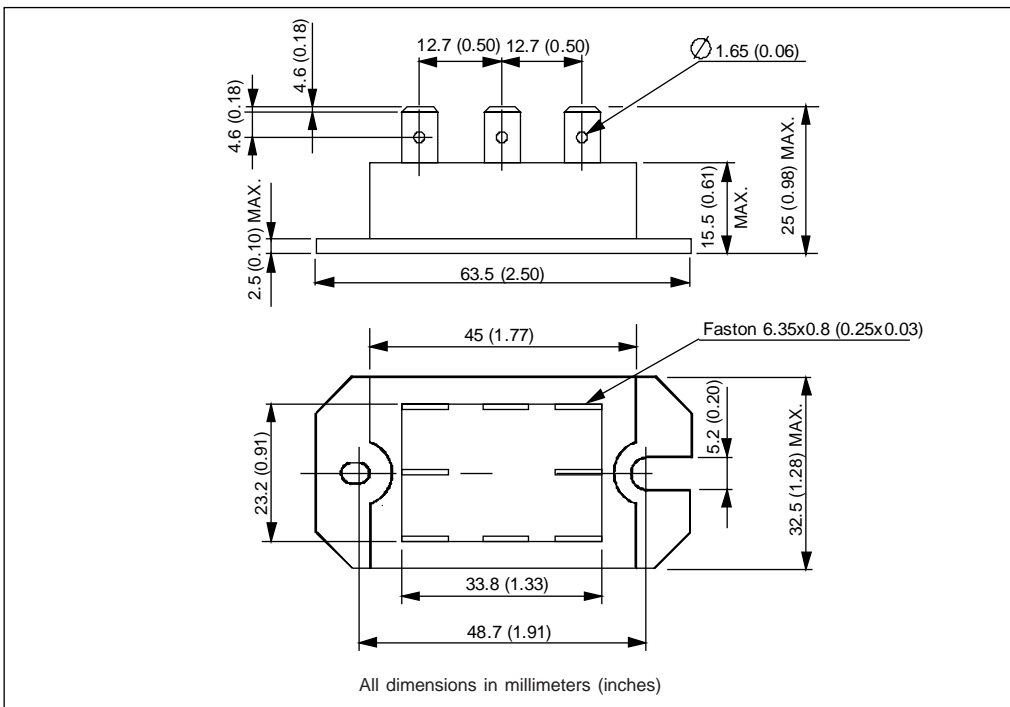

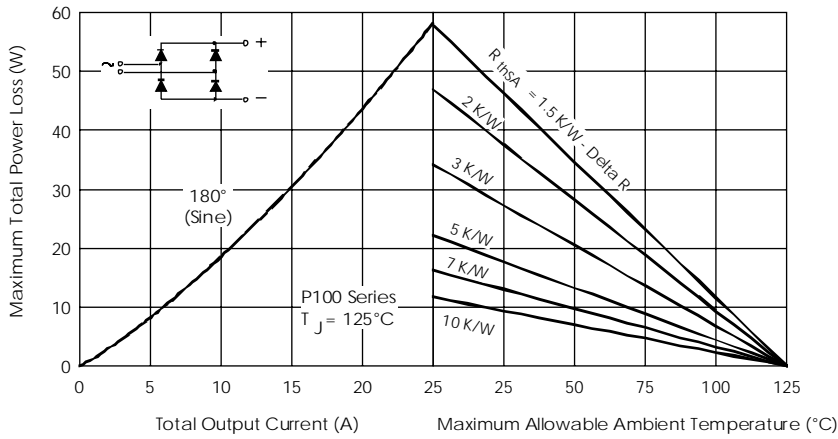


Fig. 1 - Current Ratings Nomogram (1 Module Per Heatsink)

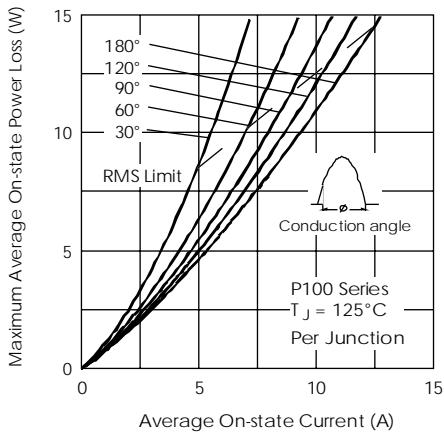


Fig. 2 - On-state Power Loss Characteristics

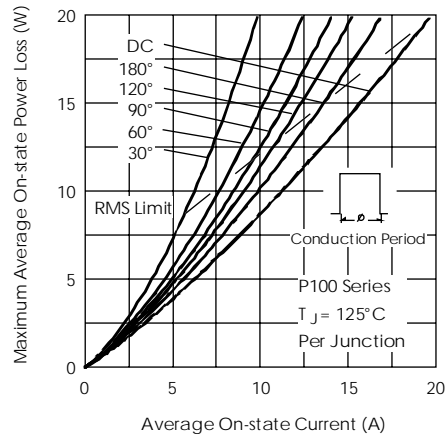


Fig. 3 - On-state Power Loss Characteristics

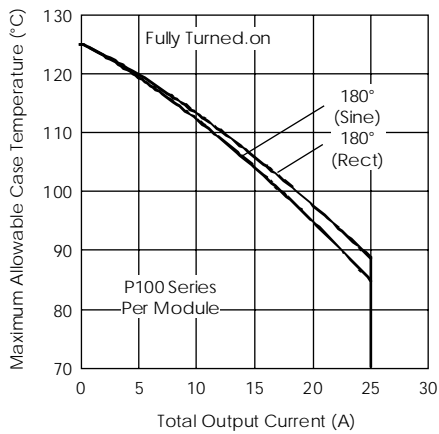


Fig. 4 - Current Ratings Characteristics

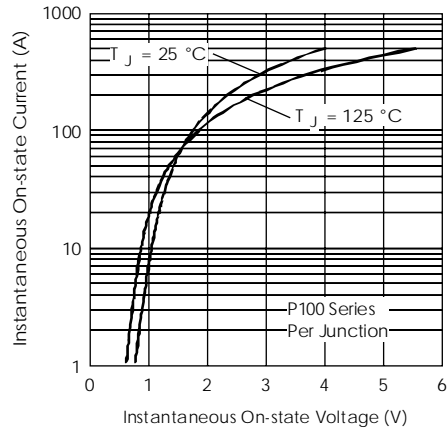


Fig. 5 - On-state Voltage Drop Characteristics

# P100 Series

Bulletin I27125 rev. A 04/99

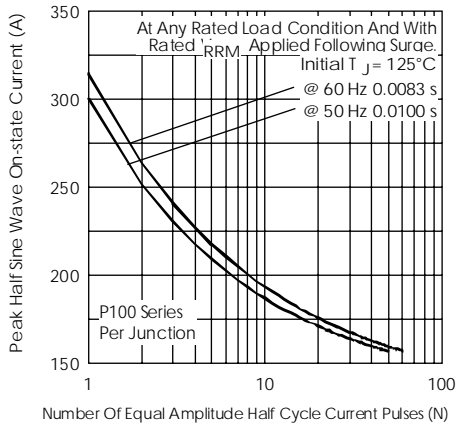


Fig. 6 - Maximum Non-Repetitive Surge Current

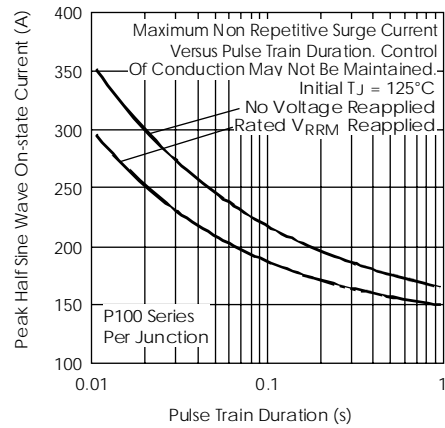


Fig. 7 - Maximum Non-Repetitive Surge Current

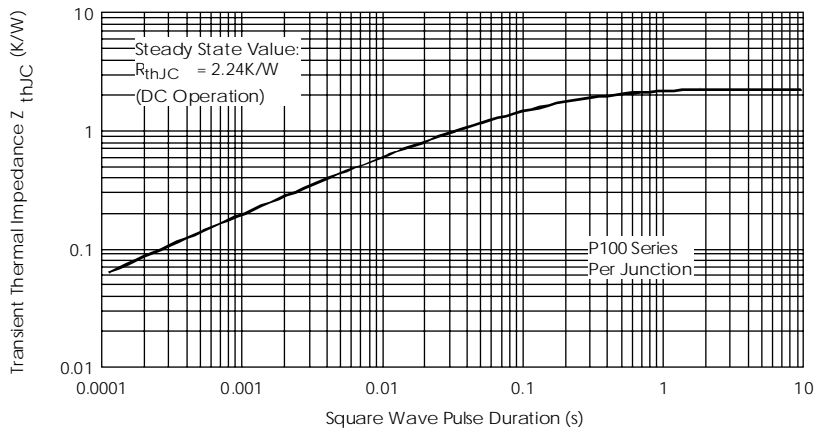


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics

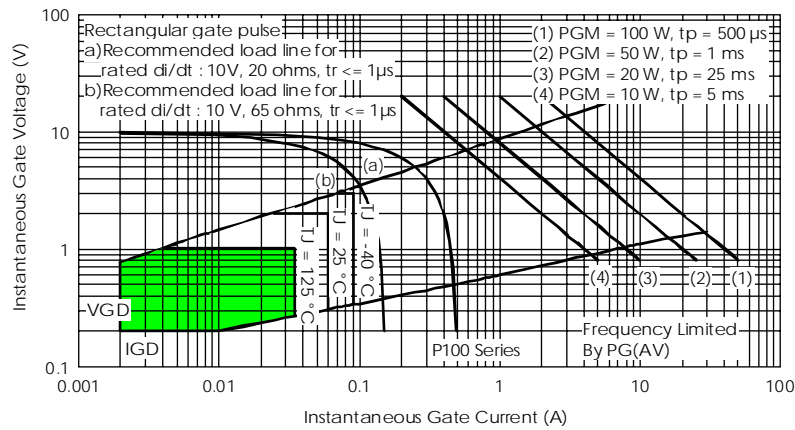


Fig. 9 - Gate Characteristics

**WORLDHEADQUARTERS:** 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.  
**EUROPEAN HEADQUARTERS:** Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.  
**IR CANADA:** 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.  
**IR GERMANY:** Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.  
**IR ITALY:** Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.  
**IR FAR EAST:** K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.  
**IR SOUTHEAST ASIA:** 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.  
**IR TAIWAN:** 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.