


- **Schottky Circuitry for High Speed, Typical Propagation Delay Time . . . 12 ns**
- **Drivers Feature Open-Collector Outputs for Party-Line (Data Bus) Operation**
- **Driver Outputs Can Sink 100 mA at 0.8 V Maximum**
- **pnp Inputs for Minimal Input Loading**
- **Designed to Be Interchangeable With Advanced Micro Devices AM26S10**

**D OR N PACKAGE  
(TOP VIEW)**



**description**

The AM26S10C is a quadruple bus transceiver utilizing Schottky-diode-clamped transistors for high speed. The drivers feature open-collector outputs capable of sinking 100 mA at 0.8 V maximum. The driver and strobe inputs use pnp transistors to reduce the input loading.

The driver of the AM26S10C is inverting and has two ground connections for improved ground current-handling capability. For proper operation, the ground pins should be tied together.

The AM26S10C is characterized for operation over the temperature range of 0°C to 70°C.

**Function Tables**

**AM26S10C  
(transmitting)**


INPUTS		OUTPUTS	
S	D	B	R
L	H	L	H
L	L	H	L

**AM26S10C  
(receiving)**

INPUTS			OUTPUT
S	B	D	R
H	H	X	L
H	L	X	H

H = high level, L = low level, X = irrelevant


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



# AM26S10C QUADRUPLE BUS TRANSCEIVERS


SLLS116C – JANUARY 1977 – REVISED MARCH 1997

## logic symbol†

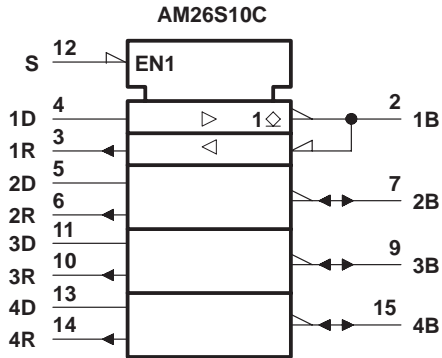


† These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

## logic diagram (positive logic)

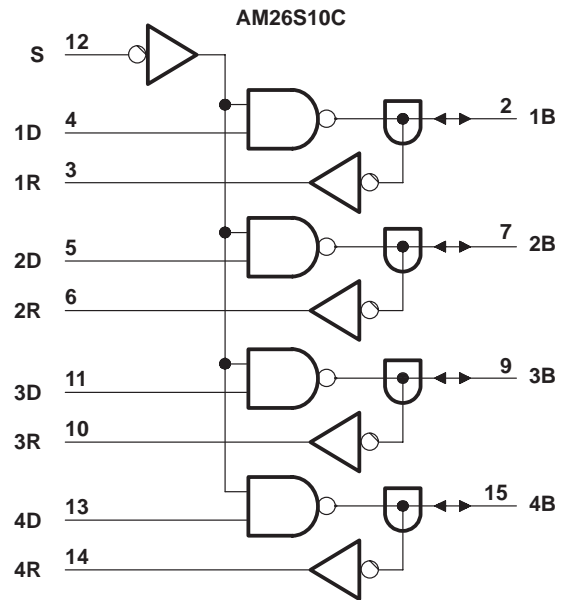

## schematic (each transceiver)

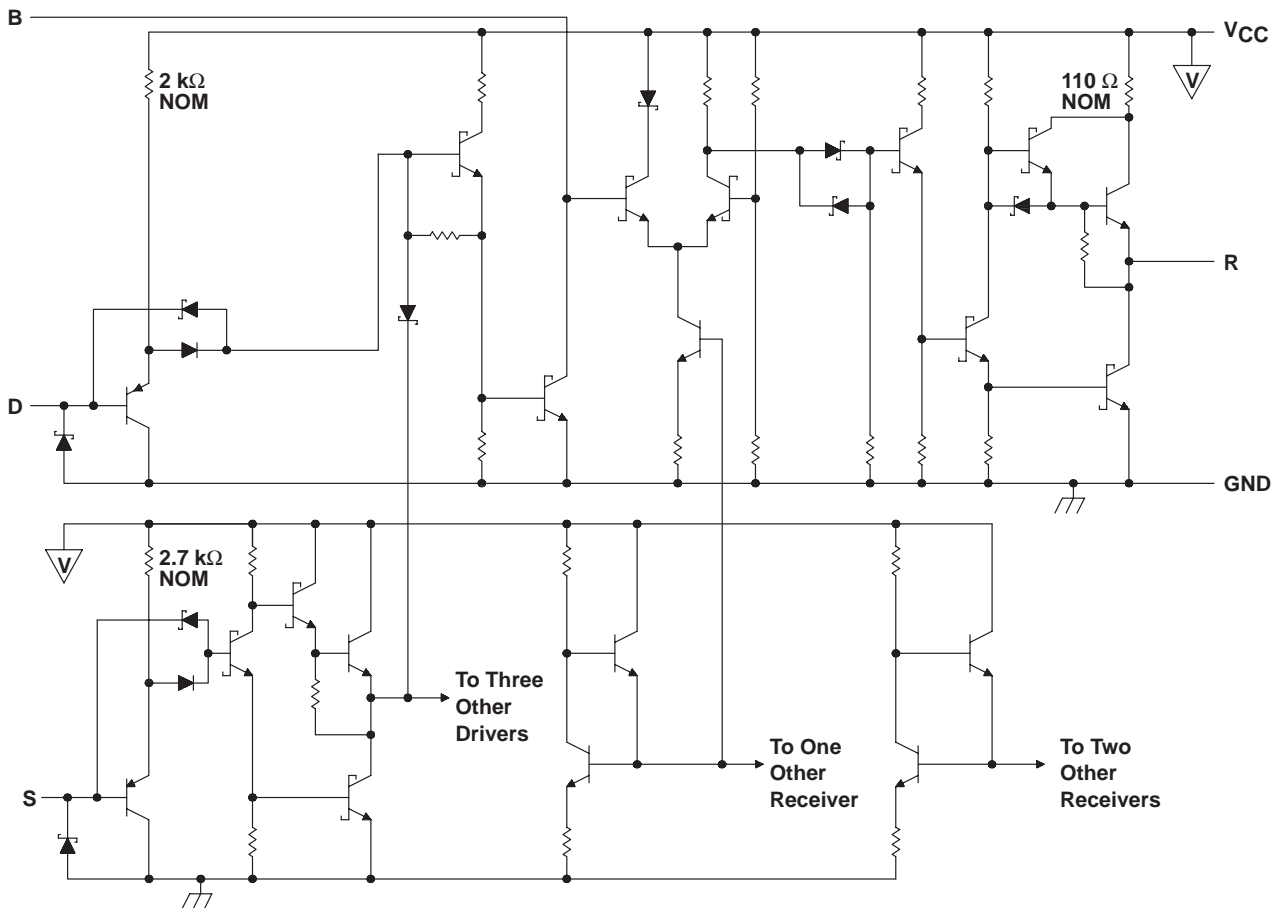

# AM26S10C QUADRUPLE BUS TRANSCEIVERS

SLLS116C – JANUARY 1977 – REVISED MARCH 1997

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage, $V_{CC}$ (see Note 1)	–0.5 V to 7 V
Driver or strobe input voltage range, $V_I$	–0.5 V to 5.5 V
Bus voltage range, driver output off, $V_O$	–0.5 V to 5.25 V
Driver or strobe input current range, $I_I$	–30 mA to 5 mA
Driver output current, $I_O$	200 mA
Receiver output current, $I_O$	30 mA
Continuous total power dissipation	See Dissipation Rating Table
Operating free-air temperature range, $T_A$	0°C to 70°C
Storage temperature range, $T_{stg}$	–65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to network ground terminals connected together.

**DISSIPATION RATING TABLE**

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING
D	950 mW	7.6 mW/°C	608 mW
N	1150 mW	9.2 mW/°C	736 mW

## recommended operating conditions

		MIN	NOM	MAX	UNIT
Supply voltage, $V_{CC}$		4.75	5	5.25	V
High-level input voltage, $V_{IH}$	D or S	2			V
	B	2.25			
Low-level input voltage, $V_{IL}$	D or S	0.8			V
	B	1.75			
Receiver high-level output current, $I_{OH}$		–1			mA
Low-level output current, $I_{OL}$	Driver	100			mA
	Receiver	20			
Operating free-air temperature, $T_A$		0	70		°C

# AM26S10C QUADRUPLE BUS TRANSCEIVERS

SLLS116C – JANUARY 1977 – REVISED MARCH 1997

## electrical characteristics over recommended operating free-air temperature range

PARAMETER				TEST CONDITIONS			MIN	TYP†	MAX	UNIT
V <sub>IK</sub>	Input clamp voltage	D or S		V <sub>CC</sub> = 4.75 V,	I <sub>I</sub> = -18 mA			-1.2	V	
V <sub>OH</sub>	High-level output voltage	R		V <sub>CC</sub> = 4.75 V,	V <sub>IH</sub> = 2 V,	V <sub>IL</sub> = 0.8 V,	2.7	3.4	V	
V <sub>OH</sub>	Low-level output voltage	R		V <sub>CC</sub> = 4.75 V,	V <sub>IH</sub> = 2 V,	I <sub>OL</sub> = 20 mA		0.5	V	
		B	I <sub>OL</sub> = 40 mA			0.33	0.5			
			I <sub>OL</sub> = 70 mA			0.42	0.7			
			I <sub>OL</sub> = 100 mA			0.51	0.8			
I <sub>O(off)</sub>	Off-stage output current	B	V <sub>IH</sub> = 2 V,	V <sub>IL</sub> = 0.8 V	V <sub>CC</sub> = 5.25 V,	V <sub>O</sub> = 0.8 V		-50	μA	
					V <sub>CC</sub> = 5.25 V,	V <sub>O</sub> = 4.5 V		100		
					V <sub>CC</sub> = 0,	V <sub>O</sub> = 4.5 V		100		
I <sub>IH</sub>	High-level input current	D		V <sub>CC</sub> = 5.25 V,	V <sub>I</sub> = 2.7 V			30	μA	
		S					20			
I <sub>I</sub>	Input current at maximum input voltage	D or S		V <sub>CC</sub> = 5.25 V,	V <sub>I</sub> = 5.5 V			100	μA	
I <sub>IL</sub>	Low-level input current	D		V <sub>CC</sub> = 5.25 V,	V <sub>I</sub> = 0.4 V			-0.54	mA	
		S					-0.36			
I <sub>OS</sub>	Short-circuit output current‡	R		V <sub>CC</sub> = 5.25 V			-18	-60	mA	
I <sub>CC</sub>	Supply current			V <sub>CC</sub> = 5.25 V,	Strobe at 0 V,	No load,		45	70	mA
								All driver outputs low		

† All typical values are at T<sub>A</sub> = 25°C and V<sub>CC</sub> = 5 V.

‡ Not more than one output should be shorted to ground at a time, and duration of the short circuit should not exceed one second.



## switching characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	AM26S10C			UNIT
				MIN	TYP	MAX	
t <sub>PLH</sub>	D	B	See Figure 1		10	15	ns
t <sub>PHL</sub>					10	15	
t <sub>PLH</sub>	S	B			14	18	ns
t <sub>PHL</sub>					13	18	
t <sub>PLH</sub>	B	R			10	15	ns
t <sub>PHL</sub>					10	15	
t <sub>TLH</sub>		B			4	10	ns
t <sub>THL</sub>					2	4	

# AM26S10C QUADRUPLE BUS TRANSCEIVERS

SLLS116C – JANUARY 1977 – REVISED MARCH 1997

## PARAMETER MEASUREMENT INFORMATION

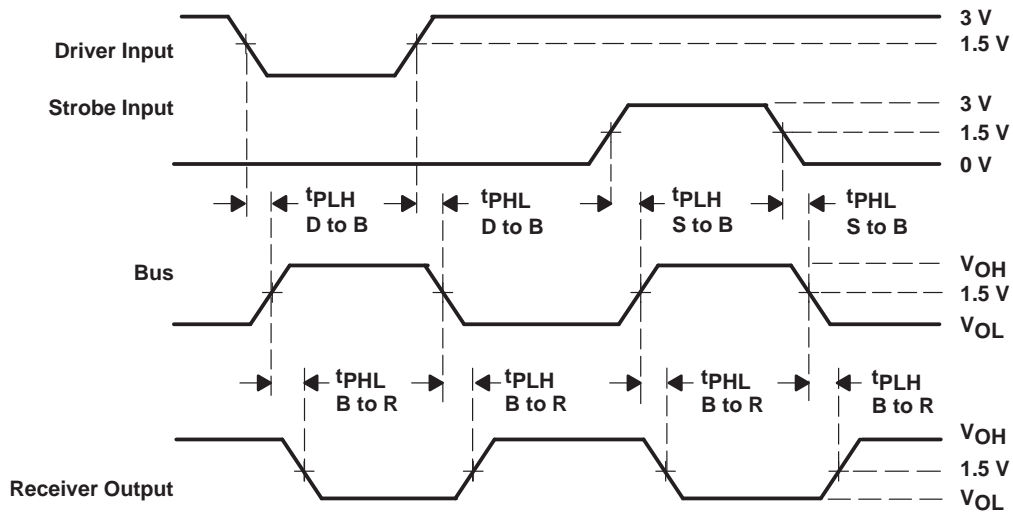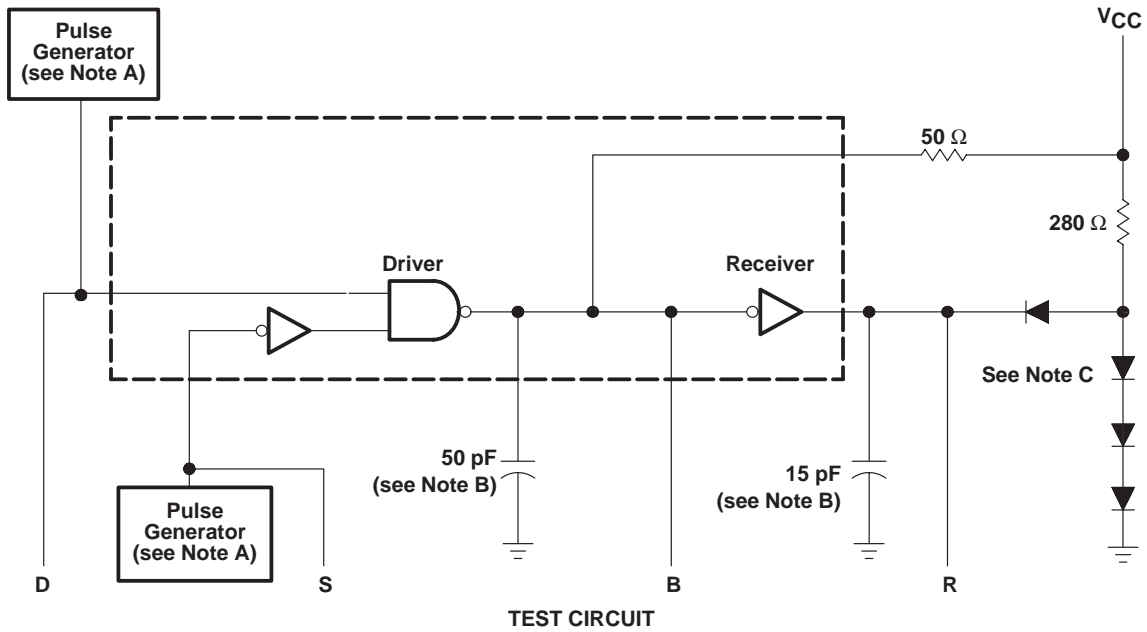

- NOTES: A. The pulse generators have the following characteristics:  $Z_O = 50 \Omega$ ,  $t_r = 10 \pm 5$  ns.  
 B. Includes probe and jig capacitance.  
 C. All diodes are 1N916 or equivalent.

**Figure 1. Test Circuit and Voltage Waveforms**

# AM26S10C QUADRUPLE BUS TRANSCEIVERS

SLLS116C – JANUARY 1977 – REVISED MARCH 1997

## APPLICATION INFORMATION

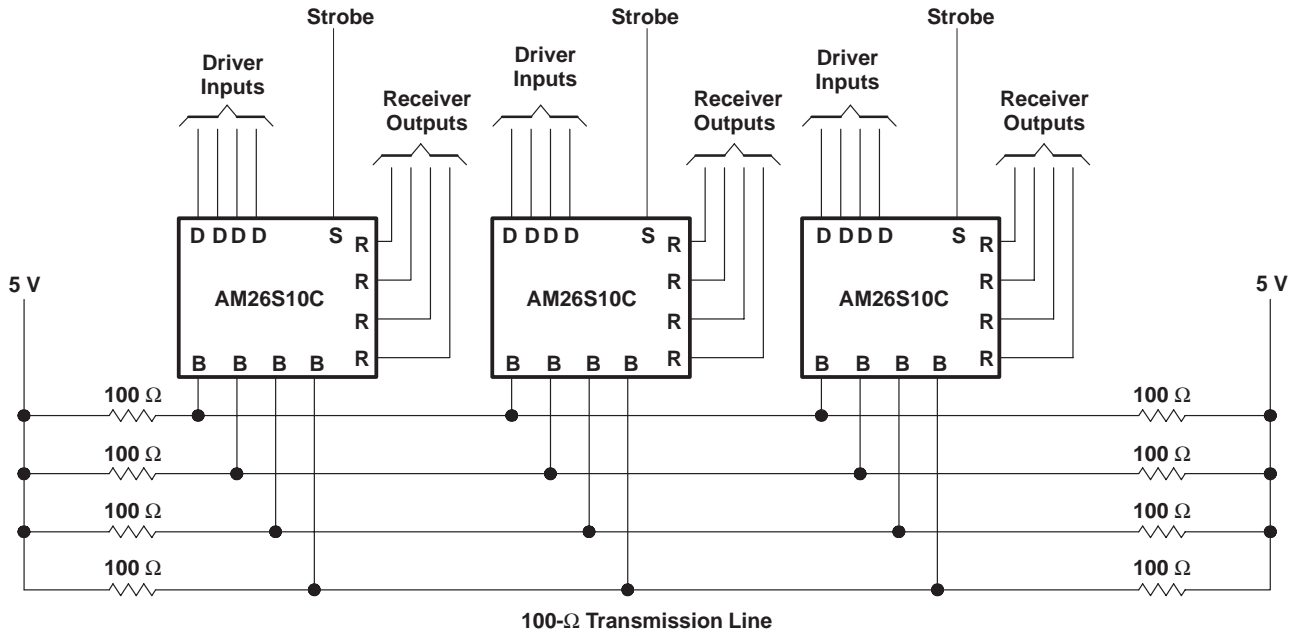


Figure 2. Party-Line System

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.