




The RT0608 is a CMOS Design for six different alarm sounds application. The sound of RT0608 will be generated in cycling sequence.

Features

- Low Operationg Voltage 2V ~ 5V
- CMOS process
- On-Chip RC oscillator
- 6 different sounds
- Low stand by current

Pin Diagram

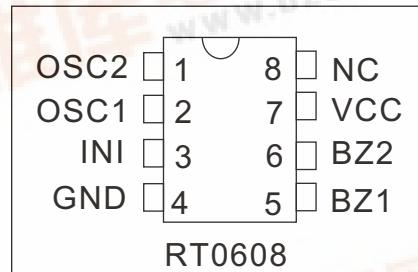

Pin Out And Description

Symbol	Description	Pin	I / O
OSC2	Oscillator pin with external resistor.	1	O
OSC1		2	I
INI	An internal pull-up resistor. Might disable Sound out of BZ1,BZ2 while connected GND.	3	I
GND	Ground	4	
BZ1	SIREN sound output pin.	5	O
BZ2		6	O
VCC	Power pin.	7	
NC	No connecting	8	

Electrical Characteristics

Vcc=3V , Temp=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operating Voltage	Vcc	2.0	3.0	5.0	V
Stand-By Current	Isb		10	20	uA
Operating Current	Iop		300	500	uA
BZ1, BZ2	Ioh	1.0			mA
Driving Current	Iol	1.0			mA
Operating Frequency	Fop	70	80	128	KHz

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Vcc	Supply Voltage	-0.3 ~ 6	V
Vi	Input Voltage	-0.3 ~ Vcc + 0.3	V
Vo	Output Voltage	-0.3 ~ Vcc + 0.3	V
Tst	Storage Temperature	-40 ~ 125	°C
Ttp	Operating Temperature	0 ~ 65	°C