



New Product

SUM45N25-58
Vishay Siliconix

N-Channel 250-V (D-S) 175°C MOSFET

PRODUCT SUMMARY		
$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
250	0.058 @ $V_{GS} = 10$ V	45
	0.062 @ $V_{GS} = 6$ V	43



FEATURES

- TrenchFET® Power MOSFETS
- 175°C Junction Temperature
- New Low Thermal Resistance Package

APPLICATIONS

- Primary Side Switch
- Plasma Display Panel Sustainer Function

TO-263

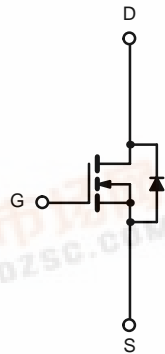

Ordering Information: SUM45N25-58-

N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)			
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	250	V
Gate-Source Voltage	V_{GS}	± 30	
Continuous Drain Current ($T_J = 175^\circ\text{C}$)	I_D	$T_C = 25^\circ\text{C}$	A
		$T_C = 125^\circ\text{C}$	
Pulsed Drain Current	I_{DM}	70	
Avalanche Current	I_{AR}	35	
Repetitive Avalanche Energy ^a	E_{AR}	61	mJ
Maximum Power Dissipation ^a	P_D	$T_C = 25^\circ\text{C}$	W
		$T_A = 25^\circ\text{C}$	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 175	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS			
Parameter	Symbol	Limit	Unit
Junction-to-Ambient (PCB Mount) ^c	R_{thJA}	40	$^\circ\text{C/W}$
Junction-to-Case (Drain)	R_{thJC}	0.4	

Notes:

- Duty cycle $\leq 1\%$.
- See SOA curve for voltage derating.
- When mounted on 1" square PCB (FR-4 material).

SUM45N25-58

Vishay Siliconix

New Product



SPECIFICATIONS (T _J = 25 °C UNLESS OTHERWISE NOTED)							
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit	
Static							
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{DS} = 0 V, I _D = 250 μA	250			V	
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	2		4		
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ± 30 V			± 250	nA	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 200 V, V _{GS} = 0 V			1	μA	
		V _{DS} = 200 V, V _{GS} = 0 V, T _J = 125 °C			50		
		V _{DS} = 200 V, V _{GS} = 0 V, T _J = 175 °C			250		
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≥ 5 V, V _{GS} = 10 V	70			A	
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = 10 V, I _D = 20 A		0.047	0.058	Ω	
		V _{GS} = 10 V, I _D = 20 A, T _J = 125 °C			0.121		
		V _{GS} = 10 V, I _D = 20 A, T _J = 175 °C			0.163		
		V _{GS} = 6 V, I _D = 15 A,		0.049	0.062		
Forward Transconductance ^a	g _{fs}	V _{DS} = 15 V, I _D = 20 A		70		S	
Dynamic^b							
Input Capacitance	C _{iss}	V _{GS} = 0 V, V _{DS} = 25 V, f = 1 MHz		5000		pF	
Output Capacitance	C _{oss}			300			
Reverse Transfer Capacitance	C _{rss}			170			
Total Gate Charge ^c	Q _g	V _{DS} = 125 V, V _{GS} = 10 V, I _D = 45 A		95	140	nC	
Gate-Source Charge ^c	Q _{gs}			28			
Gate-Drain Charge ^c	Q _{gd}			34			
Gate Resistance	R _g	f = 1 MHz		1.6		Ω	
Turn-On Delay Time ^c	t _{d(on)}	V _{DD} = 100 V, R _L = 2.78 Ω I _D ≅ 45 A, V _{GEN} = 10 V, R _G = 2.5 Ω		22	35	ns	
Rise Time ^c	t _r			220	330		
Turn-Off Delay Time ^c	t _{d(off)}			40	60		
Fall Time ^c	t _f			145	220		
Source-Drain Diode Ratings and Characteristics (T_C = 25 °C)^b							
Continuous Current	I _S				45	A	
Pulsed Current	I _{SM}				70		
Forward Voltage ^a	V _{SD}	I _F = 45 A, V _{GS} = 0 V		1.0	1.5	V	
Reverse Recovery Time	t _{rr}	I _F = 45 A, di/dt = 100 A/μs		150	225	ns	
Peak Reverse Recovery Current	I _{RM(REC)}				12	18	A
Reverse Recovery Charge	Q _{rr}				0.9	2	μC

Notes







- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.
- c. Independent of operating temperature.



New Product





SUM45N25-58
Vishay Siliconix

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

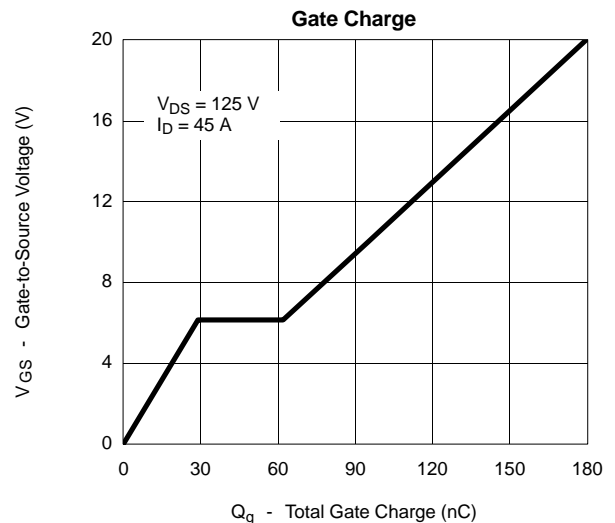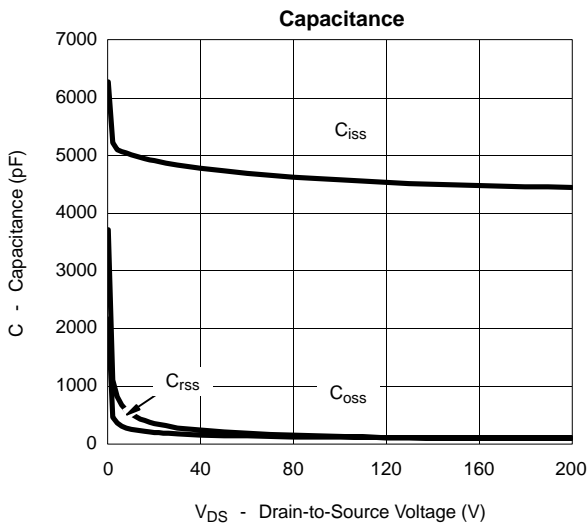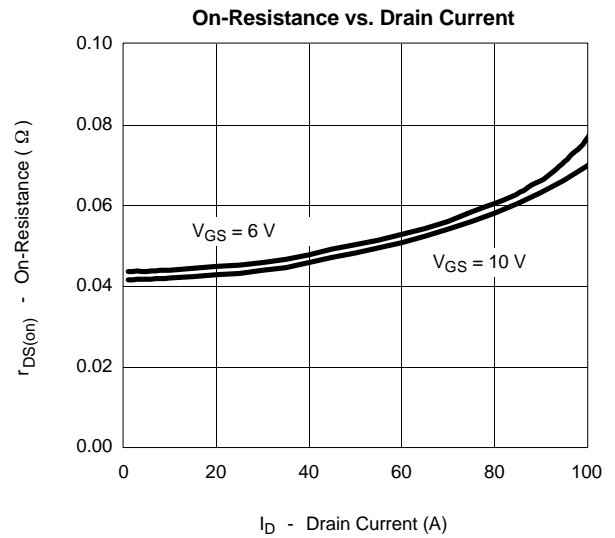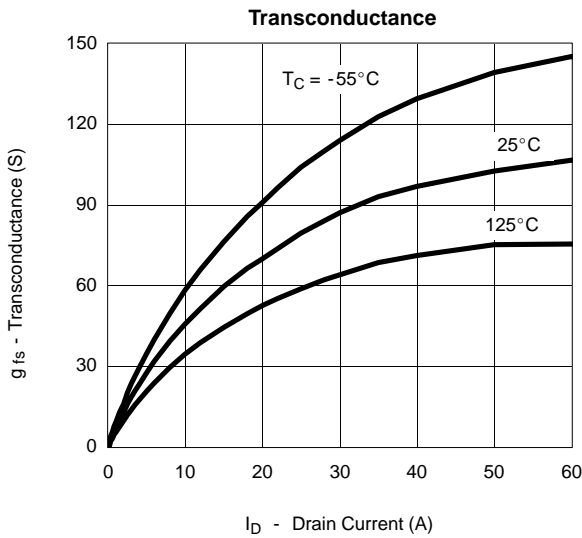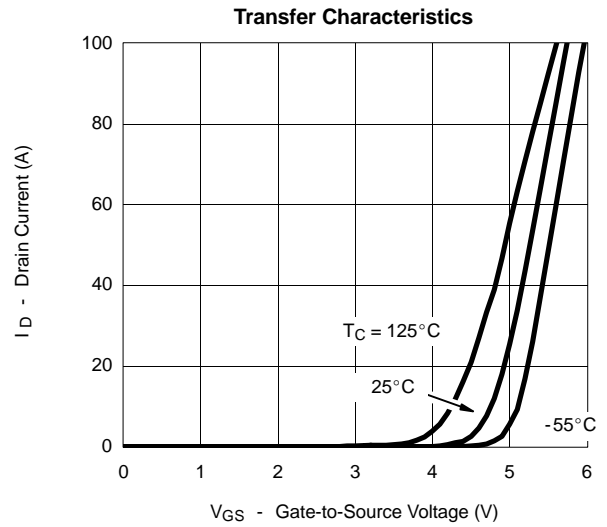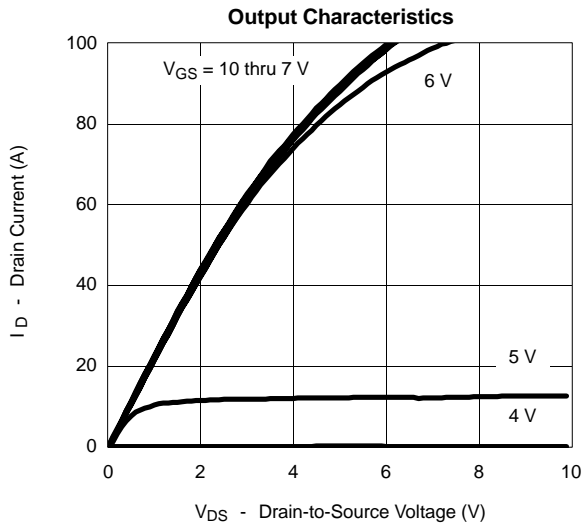




TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

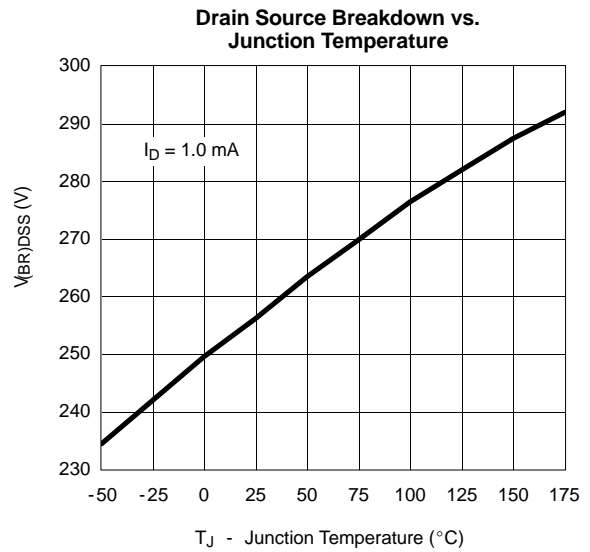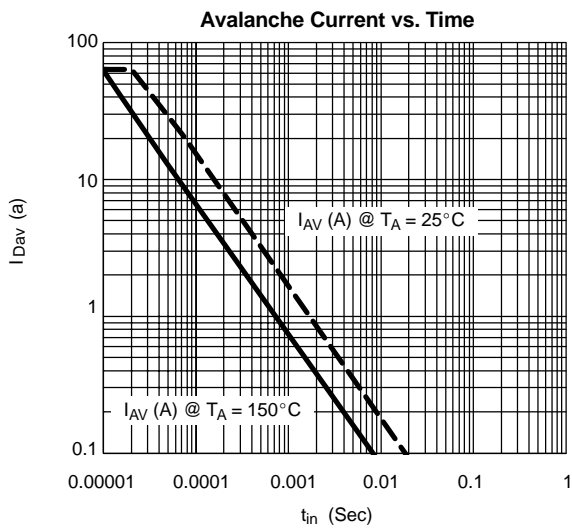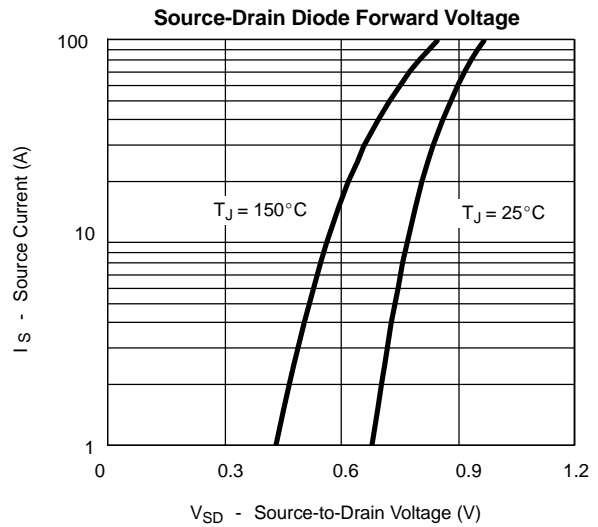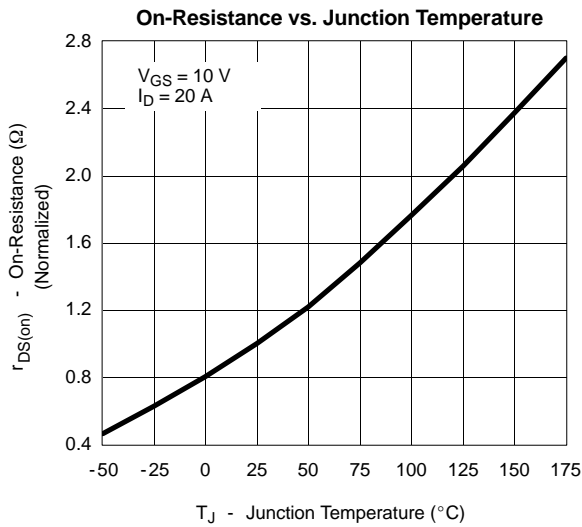




THERMAL RATINGS

Maximum Avalanche and Drain Current vs. Case Temperature

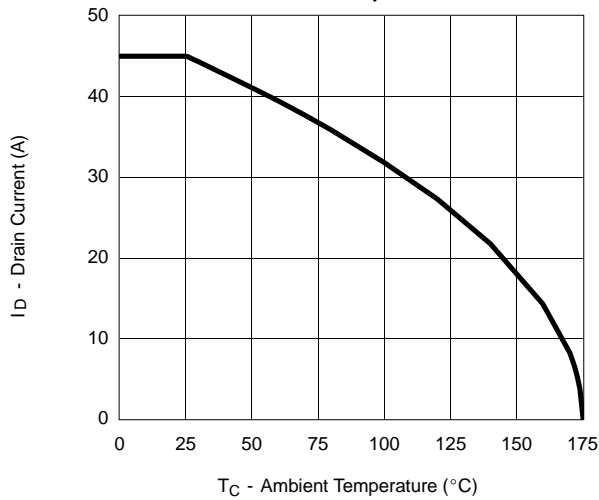

Safe Operating Area, Case Temperature

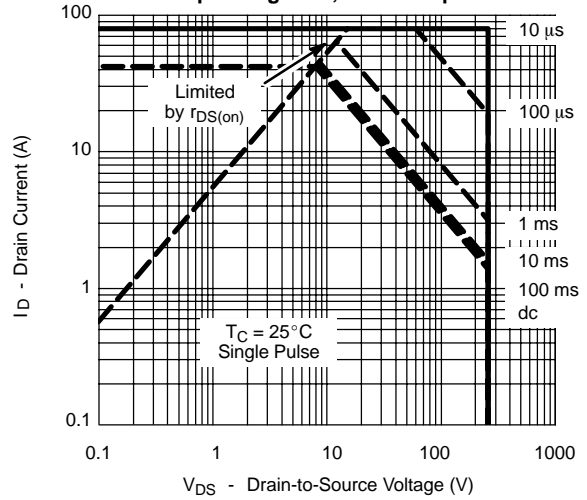

Normalized Thermal Transient Impedance, Junction-to-Case

