

# M5229P/FP

## Hi-Fi 7-ELEMENT GRAPHIC EQUALIZER IC


### DESCRIPTION

The M5229 is a 7-element graphic equalizer IC best suited to Hi-Fi audio systems. It has 7-element resonance circuits with OP amp system and an output OP amp.

The IC can be used in compact sets of high-density assemblies, modules, and hybrid ICs. Its applications cover Hi-Fi stereo sets, radio cassette tape players, car audio systems, music centers, and electronic instruments.


### FEATURES

- High withstand voltage and wide supply voltage range  
.....  $V_{CC} = \pm 2$  to  $\pm 18V$  (4 to 36V)
- Low distortion ..... THD = 0.002 % (typ)  
(@  $f = 1\text{kHz}$ , Flat,  $V_o = 5V_{rms}$ )
- Low noise .....  $V_{no} = 9 \mu V_{rms}$  (typ)  
(@ Flat, input short)
- Variable  $G_v$  by external resistance .....  $G_v = \pm 12\text{dB}$  (typ)
- Single power (use GND pin  $\text{\textcircled{1}}$  for  $V_{CC}/2$  pin)
- Large allowable input voltage .....  $V_{im} = 9.5V_{rms}$  (typ)  
(@  $f = 1\text{kHz}$ , THD = 1 %, Flat)

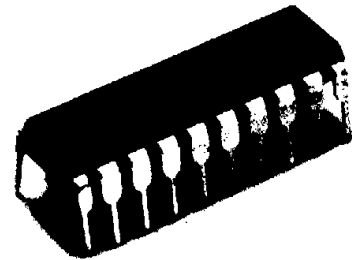

Outline 20P4(P)

2.54mm pitch 300mil DIP  
(6.3mm × 24.0mm × 3.3mm)



Outline 20P2N-A(FP)

1.27mm pitch 300mil SOP  
(5.3mm × 12.6mm × 1.8mm)


### RECOMMENDED OPERATING CONDITIONS

Supply voltage range .....  $V_{CC}, V_{EE} = \pm 2$  to  $\pm 18V$   
or  $V_{CC} = 4$  to 36V

Rated supply voltage .....  $V_{CC}, V_{EE} = \pm 15V$  or  $V_{CC} = 30V$



Rated power dissipation ..... 1000mW(DIP)  
550mW(FP)

### SYSTEM CONFIGURATION

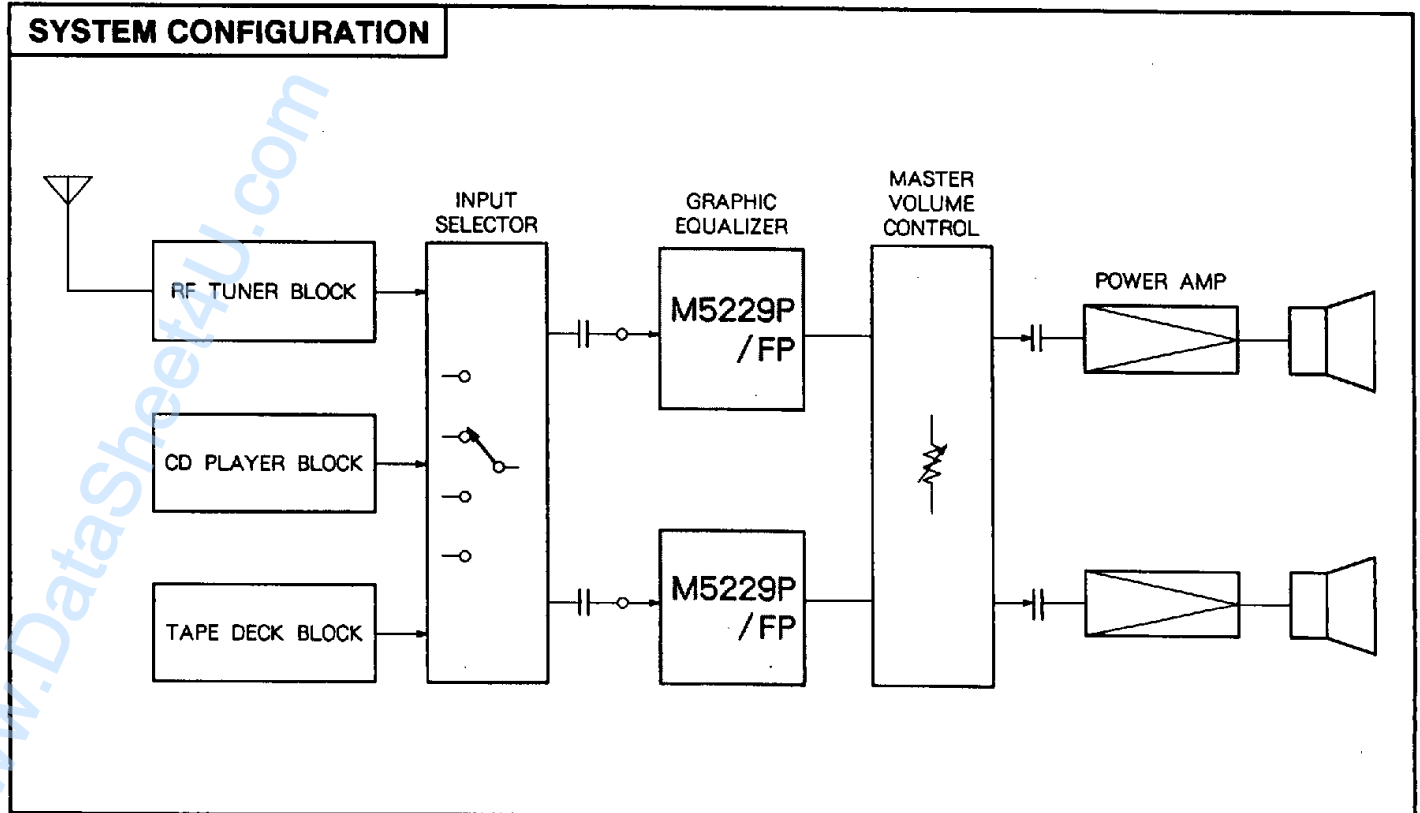

# M5229P/FP

## HI-FI 7-ELEMENT GRAPHIC EQUALIZER IC

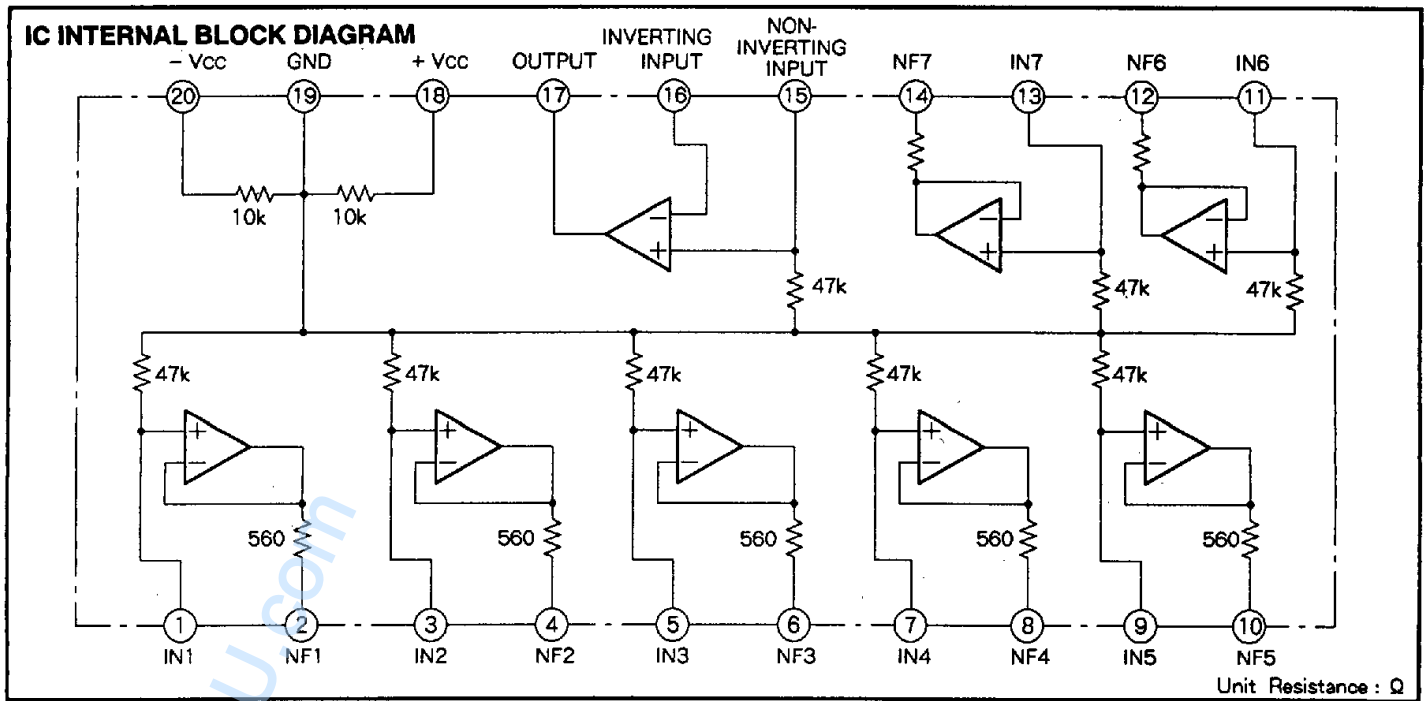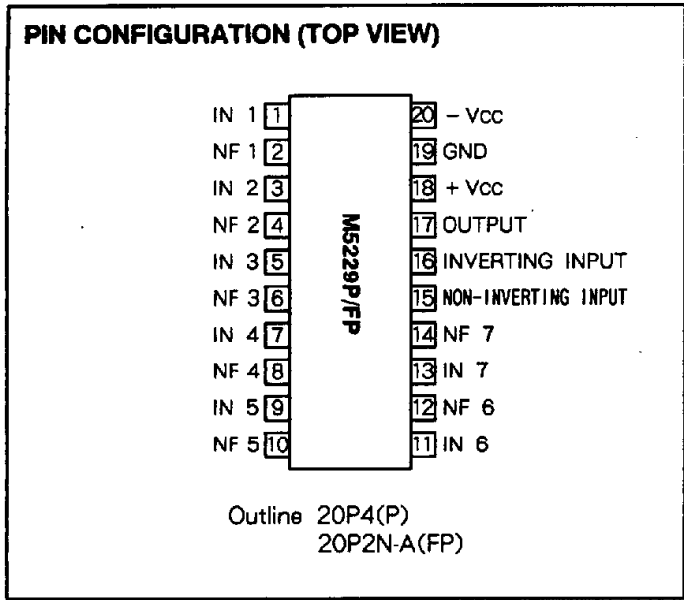

## M5229P/FP

## HI-FI 7-ELEMENT GRAPHIC EQUALIZER IC



## ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C, unless otherwise noted)

Symbol	Parameter	Ratings	Unit
V <sub>cc</sub>	Supply voltage	36 (± 18)	V
I <sub>LP</sub>	Load current	50	mA
P <sub>d</sub>	Power dissipation	1000(P)/550(FP)	mW
T <sub>opr</sub>	Operating temperature	- 20 to + 75	°C
T <sub>stg</sub>	Storage temperature	- 55 to + 125	°C

ELECTRICAL CHARACTERISTICS (Ta = 25 °C, V<sub>cc</sub> = ± 15V)

Symbol	Parameter		f (Hz)	Test conditions	Limit			Unit
					Min	Typ	Max	
I <sub>cc</sub>	Circuit current		-	V <sub>in</sub> = 0	8	12	16	mA
G <sub>v</sub> (FLAT)	Voltage Gain	Flat	1k	V <sub>in</sub> = - 10dBm	- 2.3	- 0.3	+ 1.7	dB
G <sub>v</sub> (BOOST)		Boost (Response)	60	V <sub>in</sub> = - 10dBm V <sub>o</sub> (FLAT) = 0dB	9.0	12.0	14.0	dB
			120		9.0	12.0	14.0	
			360		9.0	12.0	14.0	
			1k		9.0	12.0	14.0	
			2.5k		9.0	12.0	14.0	
			6.7k		9.0	12.0	14.0	
			15.7k		9.0	12.0	14.0	
G <sub>v</sub> (CUT)		Cut (Response)	60	V <sub>in</sub> = - 10dBm V <sub>o</sub> (FLAT) = 0dB	- 14.0	- 12.0	- 9.0	dB
			120		- 14.0	- 12.0	- 9.0	
			360		- 14.0	- 12.0	- 9.0	
			1k		- 14.0	- 12.0	- 9.0	
			2.5k		- 14.0	- 12.0	- 9.0	
			15.7k		- 14.0	- 12.0	- 9.0	
V <sub>om</sub>	Maximum output voltage		1k	THD = 1 %, Flat	7	9.5	-	V <sub>rms</sub>
THD	Distortion ratio		1k	V <sub>o</sub> = 5V <sub>rms</sub> , Flat	-	0.002	0.1	%
V <sub>no</sub>	Output noise voltage		Input short BM : 10Hz to 30kHz, Flat		-	9	35	μV <sub>rms</sub>


## TYPICAL CHARACTERISTICS

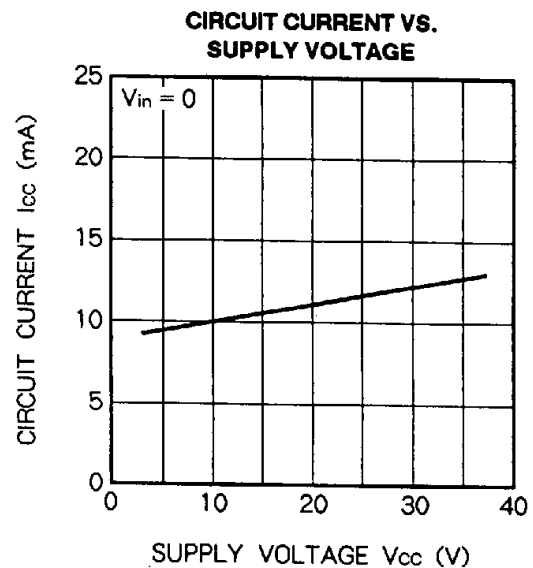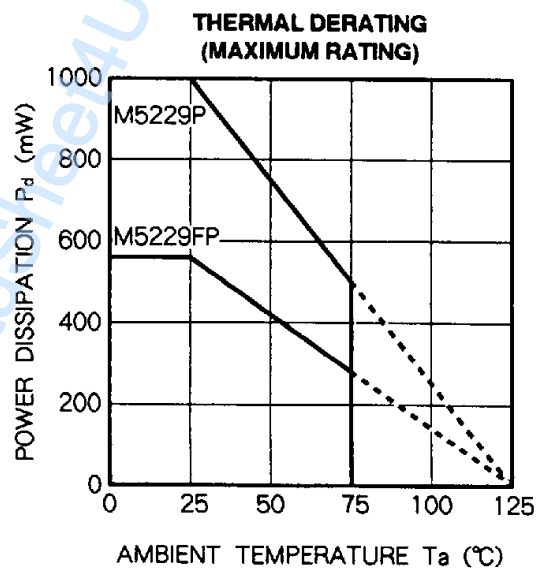

# M5229P/FP

## HI-FI 7-ELEMENT GRAPHIC EQUALIZER IC

### APPLICATION EXAMPLE (STANDARD)

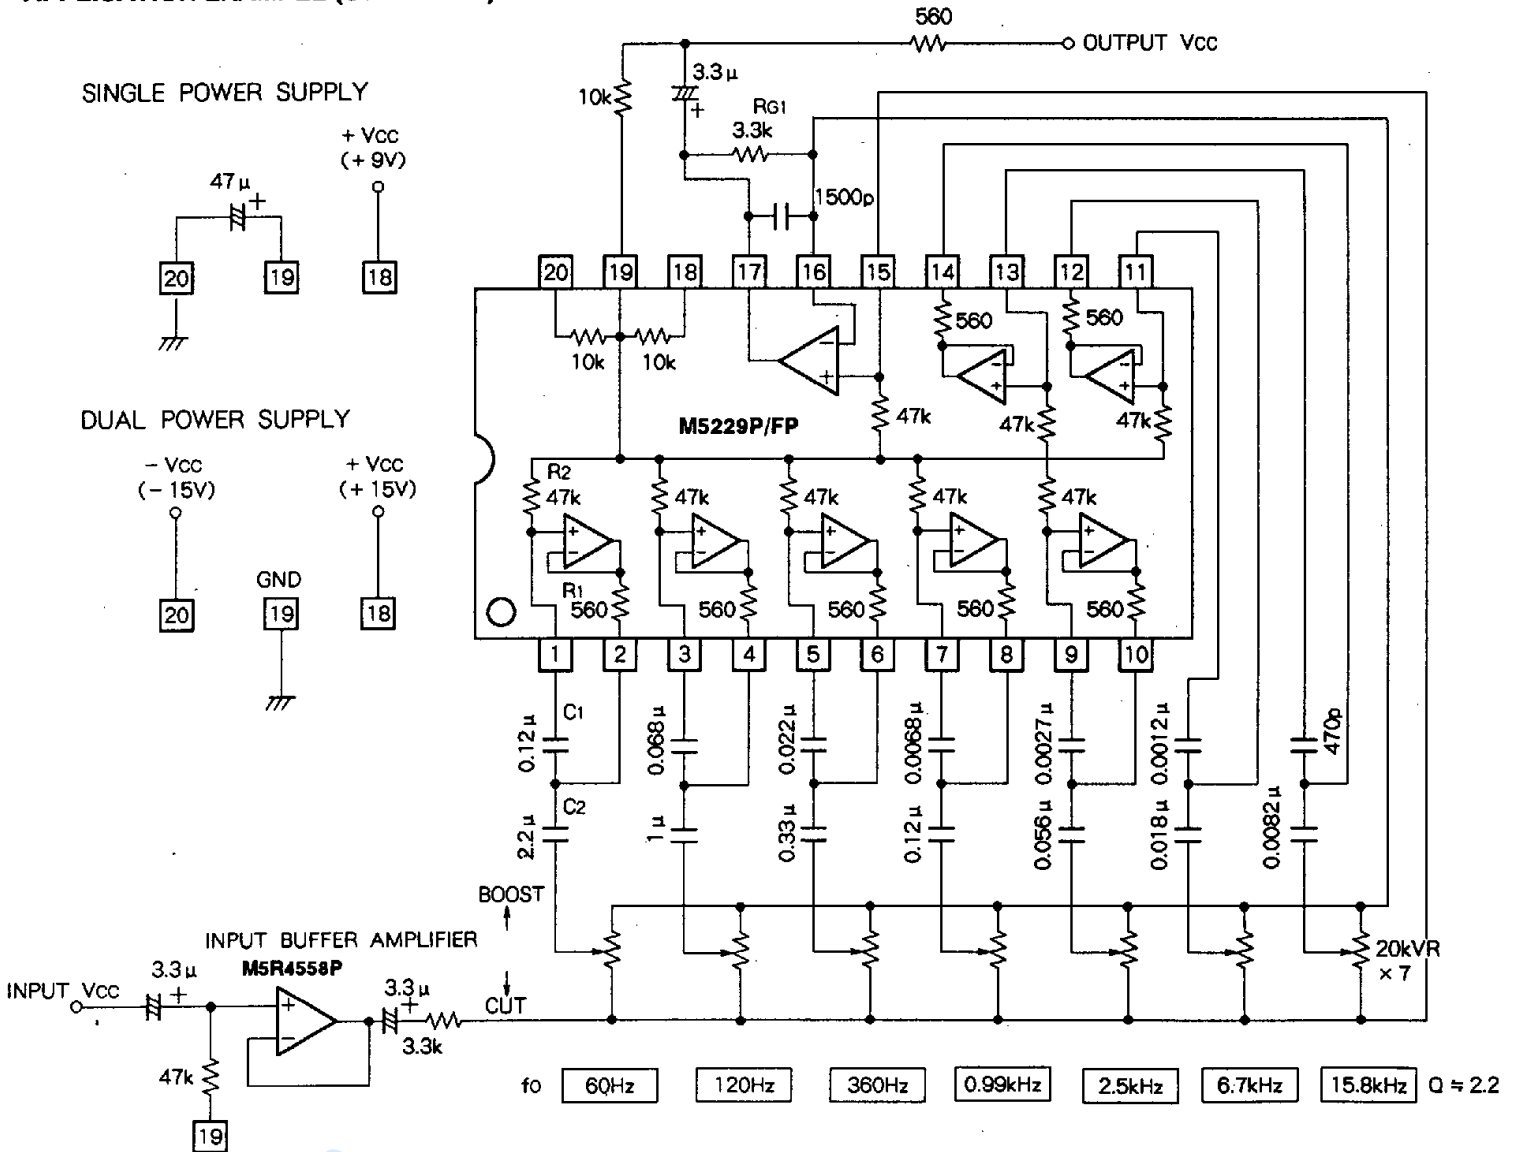




$$\text{RESONANCE FREQUENCY } f_o = \frac{1}{2 \pi \sqrt{C_1 \cdot C_2 \cdot R_1 \cdot R_2}} \text{ [Hz]} \quad Q = \sqrt{C_1 \cdot R_2 / C_2 \cdot R_1}$$

Units Resistance : Ω  
Capacitance : F

www.DataSheet4U.com

# M5229P/FP

## HI-FI 7-ELEMENT GRAPHIC EQUALIZER IC

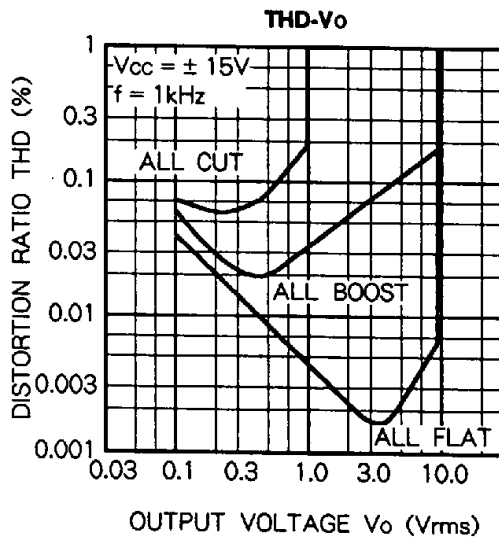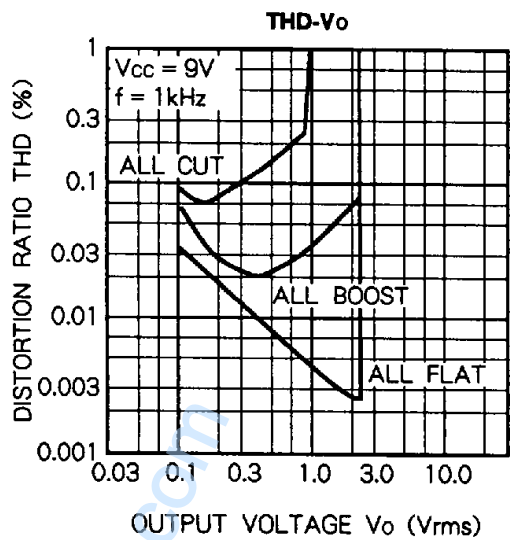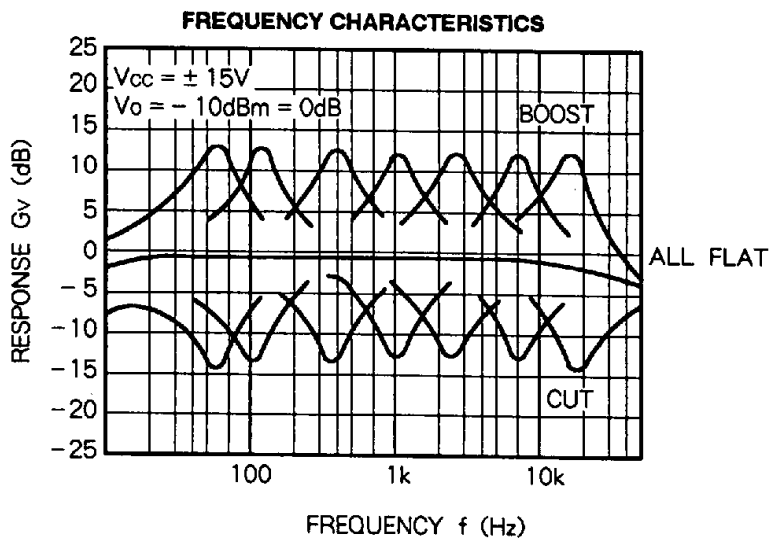

www.DataSheet4U.com

# M5229P/FP


## HI-FI 7-ELEMENT GRAPHIC EQUALIZER IC

### OPERATION DESCRIPTION

The M5229 consists of 7 resonance circuits and an output amplifier, and can also form a graphic equalizer, which has optional resonance frequency,  $f_0$ , by the externally connecting condenser  $C_1$ ,  $C_2$  of variable resistance and a resonance circuit. The impedance is minimized by resonating and the semiconductor inductor, which is adopted in the resonance circuit, can therefore vary the frequency gain.


#### 1. Flat boost cut

The resonance frequency gain can be altered by varying the external variable register.

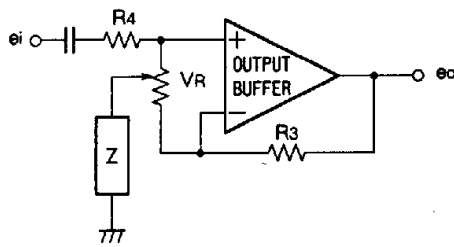


Z is an impedance in the resonance circuit

#### (1) Flat

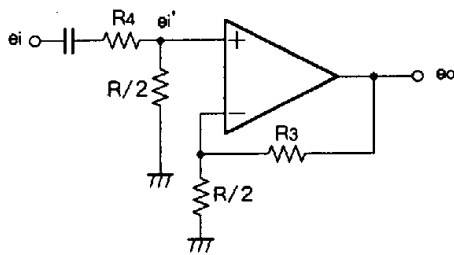

R/2 is resistance at the center of VR





When the variable register is in center position, the equivalent circuit as in the above diagram can be obtained. At this stage if  $R_3$ ,  $R_4$  are set at the same level of resistance, then

$$e_i' = \frac{R/2}{R_4 + R/2} \cdot e_i, \quad A_v = \frac{R_3 + R/2}{R/2}$$

$$e_o = A_v \cdot e_i' = e_i$$

and, the frequency characteristics will be level regardless of the resonance circuit.

#### (2) Boost

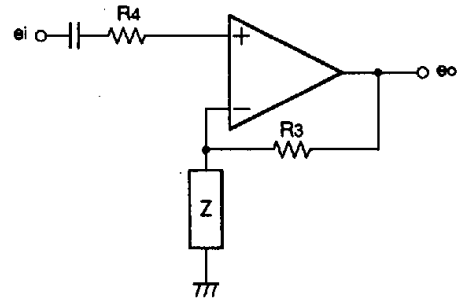



When the variable register is in boost position, the resonance circuit is connected to the NF loop of the output buffer amplifier. At this stage,  $R$  is much smaller than  $R_3$ ,  $R_4$ , so it can be disregarded.

The gain  $A_v$  is  $A_v = \frac{R_3 + Z}{Z}$  and,

the output voltage  $e_o$  is  $e_o = A_v \cdot e_i = \frac{R_3 + Z}{Z} \cdot e_i$

When  $Z$  is smallest, the gain in resonance is the greatest, and the optional frequency is then boosted.

#### (3) Cut

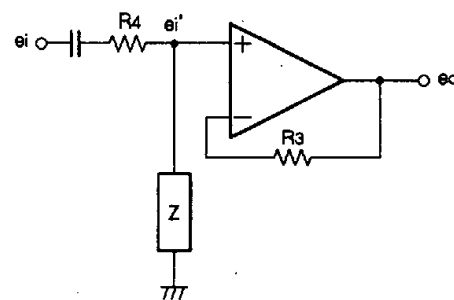

HI-FI 7-ELEMENT GRAPHIC EQUALIZER IC

When the variable register is in cut position, the resonance circuit is connected to the input side of the output buffer amplifier. When R is disregarded as the boost,

$$e_i' = \frac{Z}{R_4 + Z} \cdot e_i \cdot A_v = 1 \text{ and,}$$

$$\text{the output voltage } e_o \text{ is } e_o = A_v \cdot e_i' = \frac{Z}{R_4 + Z} \cdot e_i$$

When Z is smallest, the gain in resonance is the greatest, and the optional frequency is then cut.

**2. Resonance circuit**

The semiconductor inductor converts L in the R, L, C serial resonance circuit into a CR pin by the buffer functions of active pins such as registers, Operational amplifiers, and works in a almost the same way as the R, L, C serial resonance circuit.

The R, L, C resonance frequency fo is

$$f_o = 1/2 \pi \sqrt{LC} \dots\dots\dots \text{Equation No.1}$$

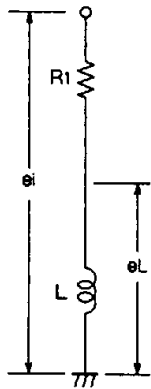


Fig. 1

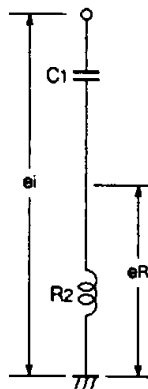


Fig. 2

When the voltage ei is supplied to the resonance circuit as shown in Fig. 1.

$$e_L = j \omega L \cdot e_i / (R_1 + j \omega L)$$

If ei is then supplied to the pins C1, R2 as shown in Fig.2,

$$e_R = e_i \cdot j \omega C_1 \cdot R_2 / C_1 + j \omega C_1 \cdot R_2$$

$$= j \omega C_1 \cdot R_1 \cdot R_2 / CR_1 + j \omega C_1 \cdot R_1 \cdot R_2$$

$$\text{When } e_L = e_R, L = C_1 \cdot R_1 \cdot R_2 \dots\dots \text{Equation No.2}$$

But if eR is replaced by L of the R and L serial circuit, R1 and C1 are automatically connected in a parallel manner, and the value of eR will be changed. So, in order to keep the value of eR stable, a buffer amplifier should be used. The buffer amplifier is equivalent to an impedance.


By equations 1 and 2, the resonance frequency, fo is

$$f_o = 1/2 \pi \sqrt{C_1 \cdot C_2 \cdot R_1 \cdot R_2}$$

The buffer amplifier in the resonance circuit of the M5229 is composed of operational amplifiers.

**3. Angle of maximum resonance**

The angle of maximum resonance, Q, is defined by the ratio of  $\omega_o$  ( $\omega_o = 2 f_o$ ) and the frequency band width,  $\omega_2 - \omega_1$ , ( $G_{max}/\sqrt{2}$ )

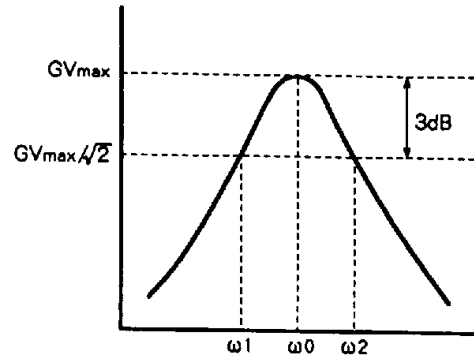

The value of Q is found by the following equation ;

$$Q = \sqrt{C_1 \cdot R_2 / C_2 \cdot R_1}$$

The greater the value of Q, the narrower the frequency band width, and vice versa.

The M5229 is composed of R1, R2, so Q is defined by selecting the external condensor.