

[查询"800B"供应商](#)

SERIES 800B SWITCHES

SEALED SUB-MINIATURE PUSHBUTTON SWITCHES




SPECIFICATIONS

Contact Rating: 0.4 VA max. @ 20 VAC or DC max.
Electrical Life: 50,000 make-and-break cycles at full load
Contact Resistance: 20 mΩ typical initial @ 2-4 VDC, 100 mA
Insulation Resistance: 10⁹ ohm min.
Dielectric Strength: 1,000 V RMS @ sea level.
Operating Temperature: -30° C to 85° C
Packaging: Tape & Reel


MATERIALS

Case & Bushing: High temperature material, glass filled 4/6 Nylon, flame retardant, heat stabilized (UL94-V0)
Plunger: High temperature material, glass filled Nylon 4/6, flame retardant, heat stabilized (UL94-V0) Internal O-Ring seal standard.
Switch Support: Brass/Steel, tin or tin-lead plated.
Contacts / Terminals: Gold plate over nickel plated copper alloy.
Terminal Seal: Epoxy


HOW TO ORDER

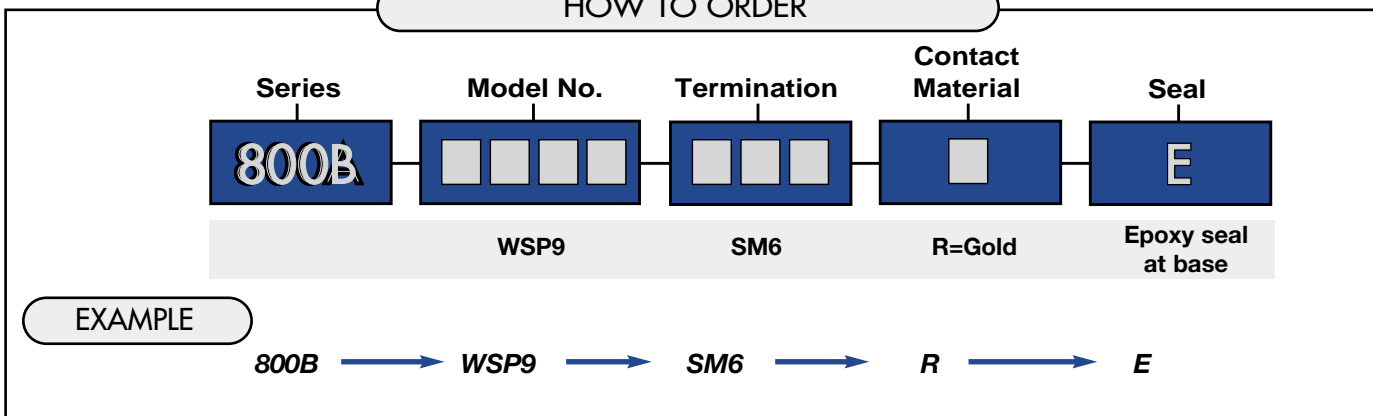

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

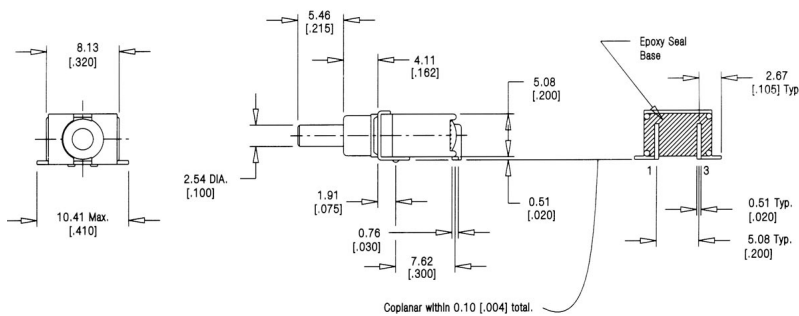

P.C. MOUNTING



Schematic

