multimec® 3A + 1A/1H/1M

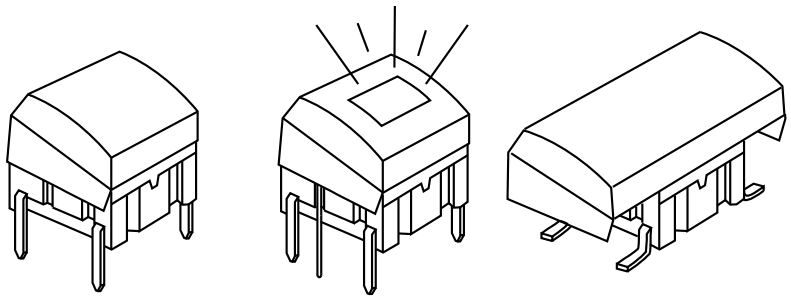

Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10.000.000 operations life time
- IP67 sealing
- temperature range:
  low temp: -40/+65°C
  high temp: -40/+160°C

Dimensions (through-hole)

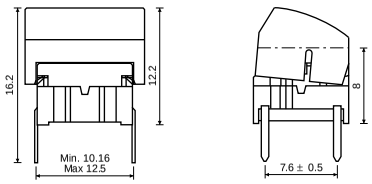

PCB layout

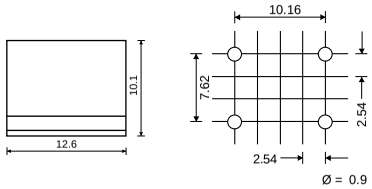

Dimensions (w/LED)

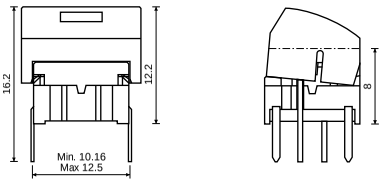

PCB layout
(top view)

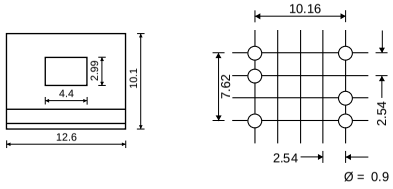

Dimensions (SMD)

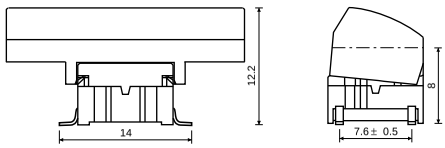

PCB layout

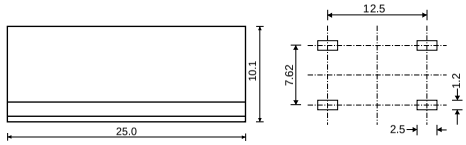

HOW TO ORDER

3 A	☐	☐☐	+	1 A	☐☐
Switch	**Mounting** **T** through-hole **S** surface mount	**L 6** low temp. **H 9** high temp.		**Cap**	**00** blue **02** green **03** grey **04** yellow **06** white **08** red **09** black



Standard versions:
3ATL6, 3ATH9, 3ASH9

3 A	T	☐☐	☐☐	+	1 H	☐☐	☐
Switch	**Mounting** **T** through-hole	**L 6** low temp. **H 9** high temp.	**LED** **20** green **40** yellow **80** red		**Cap**	**00** blue **02** green **03** grey **04** yellow **06** white **08** red **09** black	**Lens** **1** transparent **2** green **4** yellow **8** red



Standard versions:
3ATL620, 3ATL640, 3ATL680

3 A	☐	☐☐	+	1 M	☐☐
Switch	**Mounting** **T** through-hole **S** surface mount	**L 6** low temp. **H 9** high temp.		**Cap**	**00** blue **02** green **03** grey **04** yellow **06** white **08** red **09** black



Standard versions:
3ATL6, 3ATH9, 3ASH9

查询1403"供应商

Ordering example: 3ATL680 + 1H098

MEC · Industriparken 23 · P.O. BOX 26 · DK-2750 Ballerup · Denmark
Tel.: +45 44 97 33 66 · Fax: +45 44 68 15 14 · Web: http://www.mec.dk · E-mail: danmec@vip.cybercity.dk