

[查询"KTIR0711S"供应商](#)

### KTIR0711S


#### Features

- Compact and thin
- Visible light cut-off type
- High sensitivity

#### Applications

- Cassette tape recorders, VCRs.
- Floppy disk drives.
- Various microcomputerized control equipment.

#### Package Dimensions

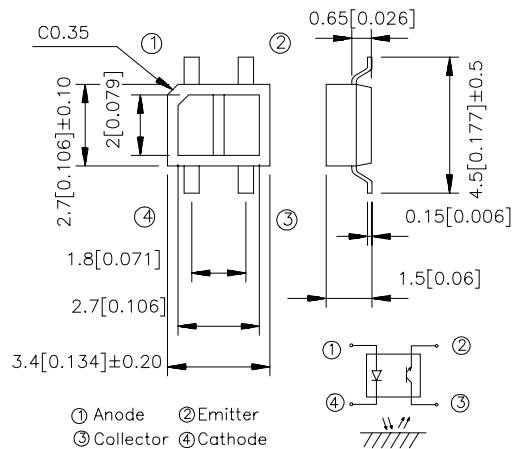

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

#### Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ )

Parameter		Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	Reverse voltage	$V_R$	5	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	$V_{CEO}$	30	V
	Emitter-collector voltage	$V_{ECO}$	5	V
	Collector current	$I_C$	20	mA
	Collector power dissipation	$P_C$	75	mW
Operating temperature		$T_{opr}$	-25~+85	$^\circ\text{C}$
Storage temperature		$T_{stg}$	-40~+100	$^\circ\text{C}$
Soldering temperature(1/16 inch from body for 5 seconds)		$T_{sol}$	260	$^\circ\text{C}$


## Electro-optical Characteristics ( $T_a=25^\circ\text{C}$ )

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit	
Input	Forward voltage	$V_F$	$I_F=20\text{mA}$	—	1.2	1.5	V	
	Reverse current	$I_R$	$V_R=5\text{V}$	—	—	10	$\mu\text{A}$	
Output	Collector dark current	$I_{CEO}$	$V_{CE}=20\text{V}$	—	$10^{-9}$	$10^{-7}$	A	
Transfer characteristics	*1Collector current		$I_c$	$V_{CE}=2\text{V}, I_F=4\text{mA}$	—	100	—	$\mu\text{A}$
	*2Leak current		$I_{LEAK}$	$V_{CE}=2\text{V}, I_F=4\text{mA}$	—	—	0.1	$\mu\text{A}$
	Response time	Rise time	$t_r$	$V_{CE}=2\text{V}, I_C=100\mu\text{A}$ $R_L=1\text{K}\Omega, d=1\text{mm}$	—	20	100	$\mu\text{sec}$
		Fall time	$t_f$		—	20	100	$\mu\text{sec}$


\*1 The condition and arrangement of the reflective object are shown below

\*2 Without reflective object


Test Condition and Arrangement for Collector Current

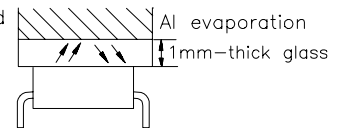


**Fig.1 Forward Current vs. Forward Voltage**

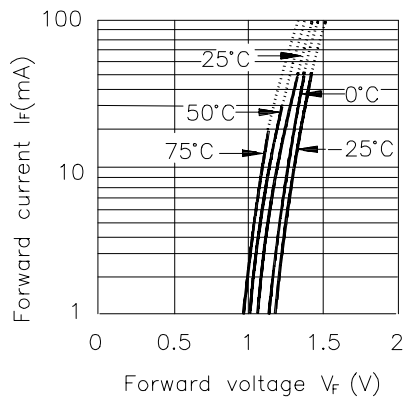


**Fig.2 Collector Current vs. Forward Current**

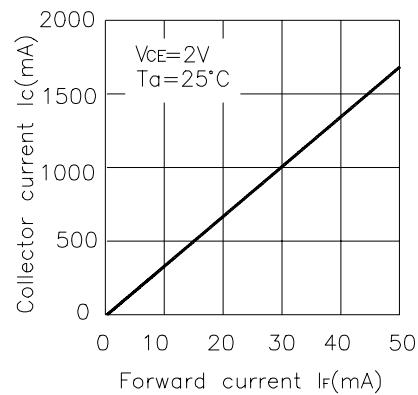


**Fig.3 Collector Current vs. Collector-emitter Voltage**

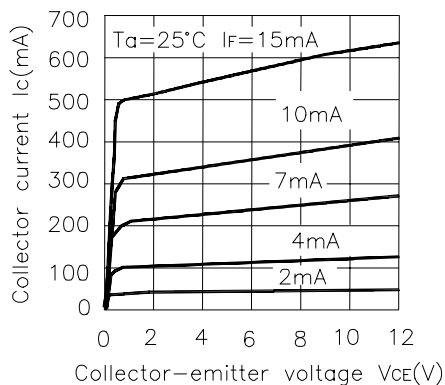


**Fig.4 Relative Collector Current vs. Ambient Temperature**

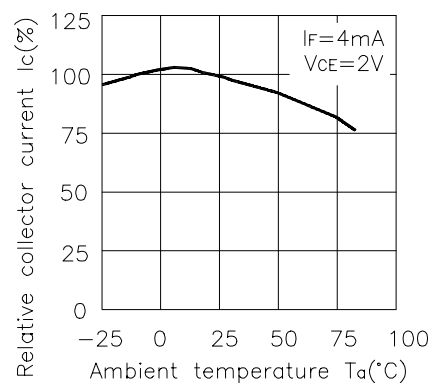


**Fig.5 Response Time vs. Load Resistance**

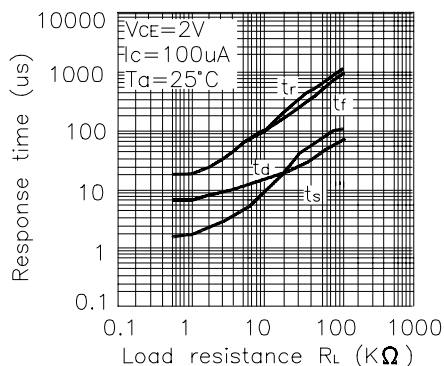


**Test Circuit for Response Time**

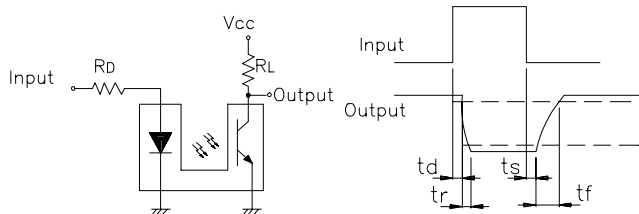


**Fig.6 Collector Dark Current vs. Ambient Temperature**

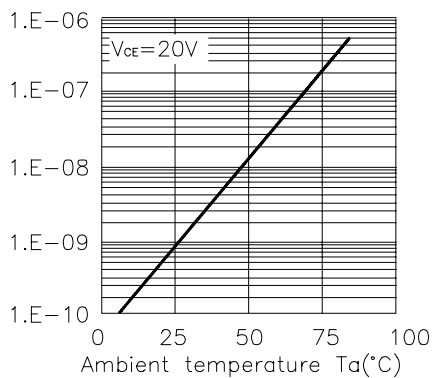


**Fig.7 Relative Collector Current vs. Distance between Sensor and Al Evaporation Glass**

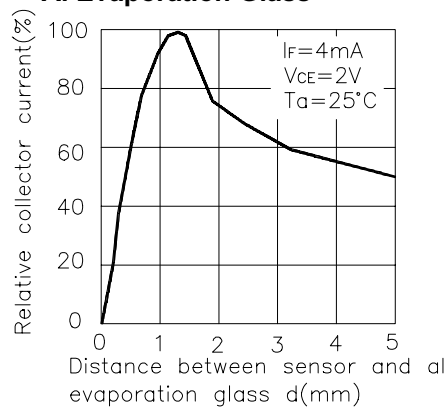

**Fig.8 Relative Collector Current vs. Card Moving Distance (1)**

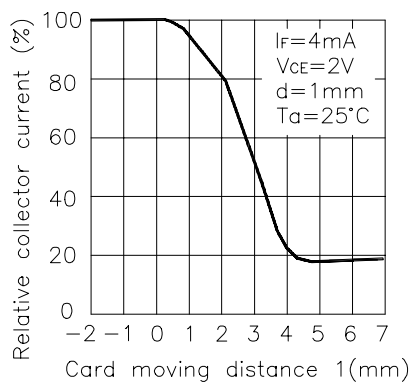


**Fig.9 Relative Collector Current vs. Card Moving Distance (2)**

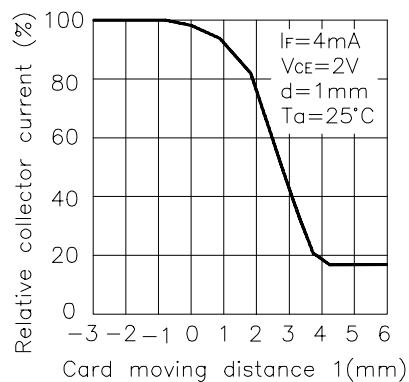


## The Condition for Distance&Detecting Position Characteristics

Correpond to Fig.7

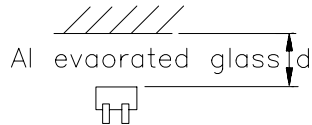

Correpond to Fig.8  
Test condition

$I_F = 4\text{mA}$   
 $V_{CE} = 2\text{V}$   
 $d = 1\text{mm}$

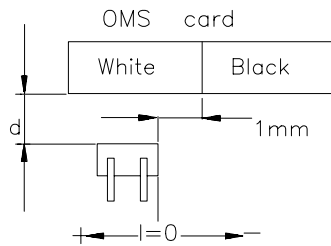

Correpond to Fig.9  
Test condition

$I_F = 4\text{mA}$   
 $V_{CE} = 2\text{V}$   
 $d = 1\text{mm}$

