

**POWER MAGNETICS**  
**8-Line Filter**

PM01102


- Operating temperature range 0° to +70° C

**ELECTRICAL SPECIFICATIONS at 25° C**

| Part Number  | Inductance<br>μH nom<br>per winding | Current<br>mA<br>max | DCR<br>Ω<br>max |
|--------------|-------------------------------------|----------------------|-----------------|
| 0571-4000-01 | 28                                  | 100                  | 100             |

**SCHEMATIC**

0571-4000-01

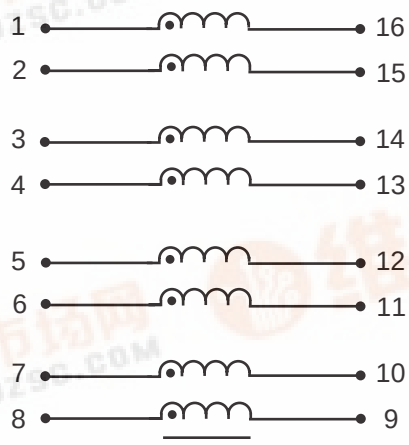



# POWER MAGNETICS

## 8-Line Filter

PM01102

### MECHANICAL

0571-4000-01

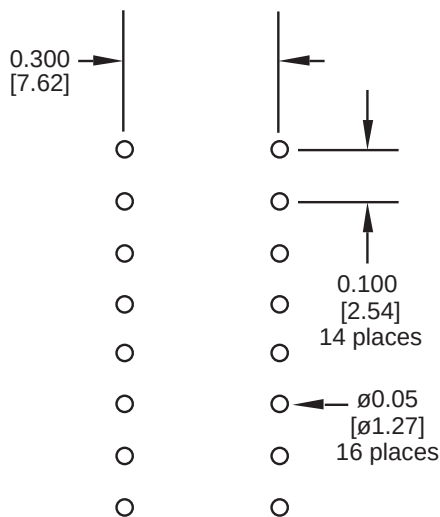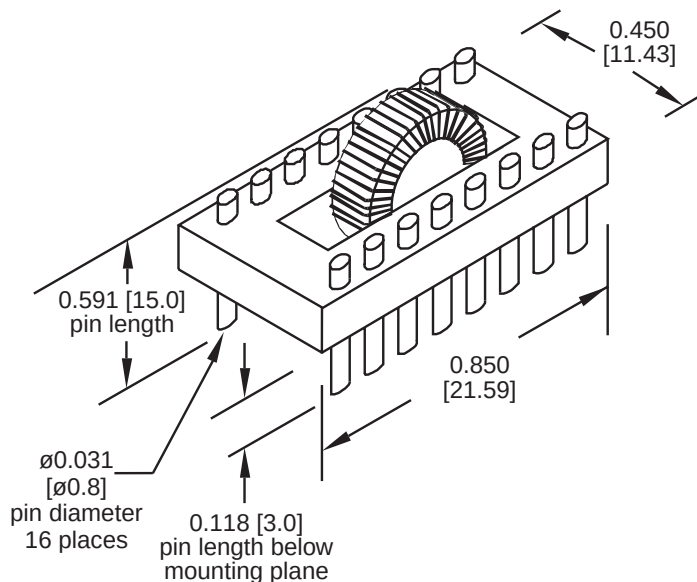

Suggested PCB  
Pad Layout

Dimensions are in inches [millimeters].  
Standard dimension tolerance is  $\pm 0.005$  [0.13] unless otherwise noted.

©2001 Bel Fuse Inc. Specifications subject to change without notice. 09.01

#### CORPORATE

**Bel Fuse Inc.**  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
www.belfuse.com

#### FAR EAST

**Bel Fuse Ltd.**  
8F / 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
www.belfuse.com

#### EUROPE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
www.belfuse.com