
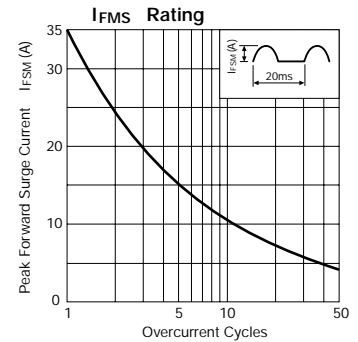
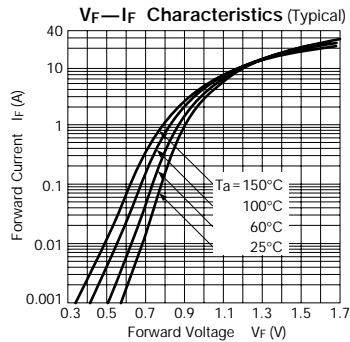


Rectifier Diodes




查询"EM1A"供应商

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta = 25°C)				Others						
	V _{RM} (V)	I _{F(AV)} (A)	I _{F(SM)} (A)	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _{R(H)} (μA)	R _{th(j-ℓ)} (°C/W)	Mass (g)	Fig.				
			50Hz Half-cycle Sinewave Single Shot			max	I _F (A)	V _R = V _{RM} max	V _R = V _{RM} Ta = 100°C max							
AM01Z	200	1.0	35	-40 to +150	0.98	1.0	10	50	22	0.13	Ⓐ					
AM01	400															
AM01A	600															
EM01Z	200	1.0	45		0.97	1.0						20	100	20	0.2	Ⓑ
EM01	400															
EM01A	600															
EM 1Y	100	1.0	45		0.97	1.0	17	0.3	Ⓒ							
EM 1Z	200															
EM 1	400															
EM 1A	600															
EM 1B	800															
EM 1C	1000															




AM01 series



EM01 series

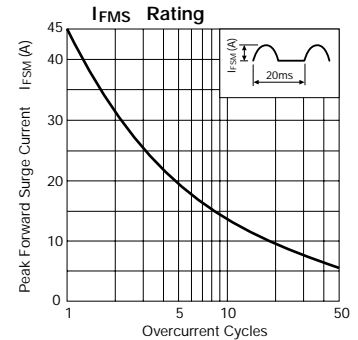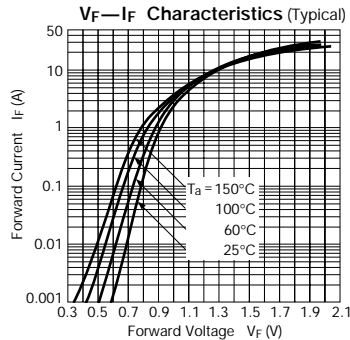

EM 1 series

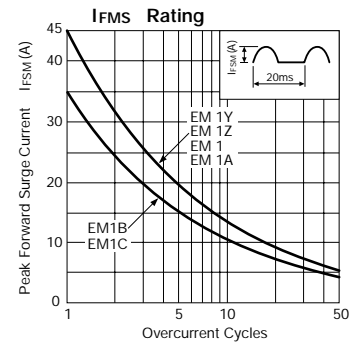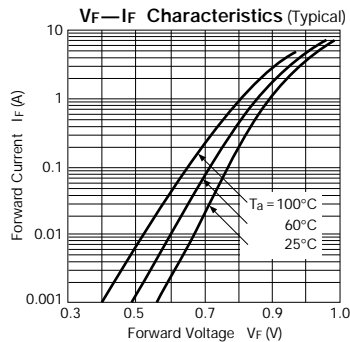

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

