

DESCRIPTION

The M35053-XXXSP/FP is TV screen display control IC which can be used to display information such as number of channels, the date and messages and program schedules on the TV screen.

In particular, owing to the built-in SYNC-SEP (synchronous separation) circuit, the synchronous correction circuit, the Decoder circuit, and to the Encoder circuit, external circuits can be decrease and character turbulence that occurs when superimposing can be reduced. The processor can conform to the EDS broadcast service and is suitable for AV systems such as VTRs, LDs, and so on.

It is a silicon gate CMOS process and M35053-XXXSP is housed in a 20-pin shrink DIP package, M35053-XXXFP is housed in a 20-pin shrink SOP package.

For M35053-001SP/FP that is a standard ROM version of M35053-XXXSP/FP respectively, the character pattern is also mentioned.

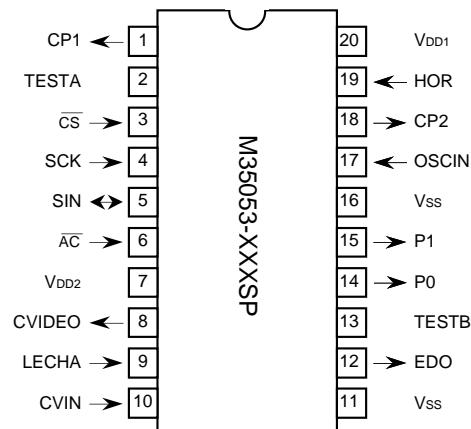
FEATURES

- Screen composition 24 characters X 10 lines,
32 characters X 7 lines
- Number of characters displayed 240 (Max.)
- Character composition 12 X 18 dot matrix
- Characters available 256 characters
- Character sizes available 4 (horizontal) X 4 (vertical)
- Display locations available
 - Horizontal direction 240 locations
 - Vertical direction 256 locations
- Blinking Character units
 - Cycle : approximately 1 second, or approximately 0.5 seconds
 - Duty : 25%, 50%, or 75%
- Data input By the serial input function (16 bits)
- Coloring
 - Background coloring (composite video signal)
- Blanking
 - Total blanking (14 X 18 dots)
 - Border size blanking
 - Character size blanking
- Synchronizing signal
 - Composite synchronizing signal generation (PAL, NTSC, M-PAL)
- 2 output ports (1 digital line)
- Oscillation stop function
 - It is possible to stop the oscillation for synchronizing signal generation
- Built-in half-tone display function
- Built-in reversed character display function
- Built-in Decoder (NTSC only)
- Built-in Encoder (NTSC only)
- Built-in synchronous correction circuit
- Built-in synchronous separation circuit


APPLICATION

TV, VCR, Movie

PIN CONFIGURATION (TOP VIEW)



Outline 20P4B

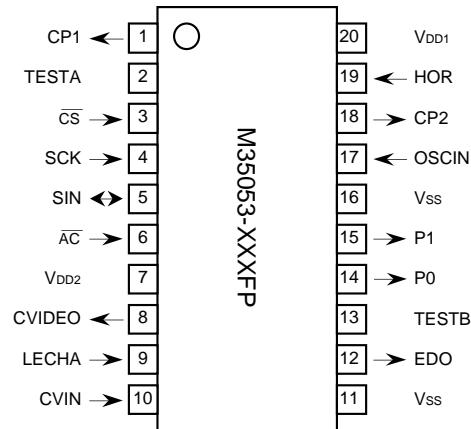


Outline 20P2Q-A

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

PIN DESCRIPTION

Symbol	Pin name	Input/ Output	Function
OSC1	Clock input	Input	This is the filter output pin 1.
TESTA	Test pin	—	This is the pin for test. Connect this pin to GND during normal operation.
CS	Chip select input	Input	This is the chip select pin, and when serial data transmission is being carried out, it goes to "L". Hysteresis input. Includes built-in pull-up resistor.
SCK	Serial clock input	Input	When CS pin is "L", SIN serial data is taken in when SCK rises. Hysteresis input. Built-in pull-up resistor is included.
SIN	Serial data input/ output	Input/ Output	This is the pin for serial input of data and addresses for the display control register and the display data memory. Also, serially outputs decode data according to the settings in the relevant registers (serial I/O).
AC	Auto-clear input	Input	When "L", this pin resets the internal IC circuit. Hysteresis input. Includes built-in pull-up resistor.
VDD2	Power pin	—	Please connect to +5V with the analog circuit power pin.
CVIDEO	Composite video signal output	Output	This is the output pin for composite video signals. It outputs 2Vp-p composite video signals. In superimpose mode, character output etc. is superimposed on the external composite video signals from CVIN.
LECHA	Character level input	Input	This is the input pin which determines the "white" character color level in the composite video signal.
CVIN	Composite video signal input	Input	This is the input pin for external composite video signals. In superimpose mode, character output etc. is superimposed on these external composite video signals.
Vss	Earthing pin	—	Please connect to GND using circuit earthing pin.
EDO	Encode data output	Output	This is the output pin for encode data. It outputs digital three-value data or composite video signals.
TESTB	Test pin	—	This is the pin for test. Connect this pin to GND during normal operation.
P0	Port P0 output	Output	This pin outputs the port output or BLNK1 (character background) signal.
P1	Port P1 output	Output	This pin outputs the port output or CO1(character) signal.
Vss	Earthing pin	—	Please connect to GND using circuit earthing pin (Analog side).
OSCIN	fsc input pin for synchronous signal generation	Input	This is the input pin for the sub-carrier frequency (fsc) for generating a synchronous signal. A frequency of 3.580MHz is needed for NTSC, and a frequency of 4.434MHz is needed for PAL and 3.576MHz is needed for M-PAL.
CP2	Filter output	Output	Filter output pin 2.
HOR	Horizontal synchro- nizing signal input	Input	This is the input pin for external composite video signals. This pin inputs the external video signal clamped sync-chip to 1.5V, and internally carries out synchronous separation.
VDD1	Power pin	—	Please connect to +5V with the digital circuit power pin.

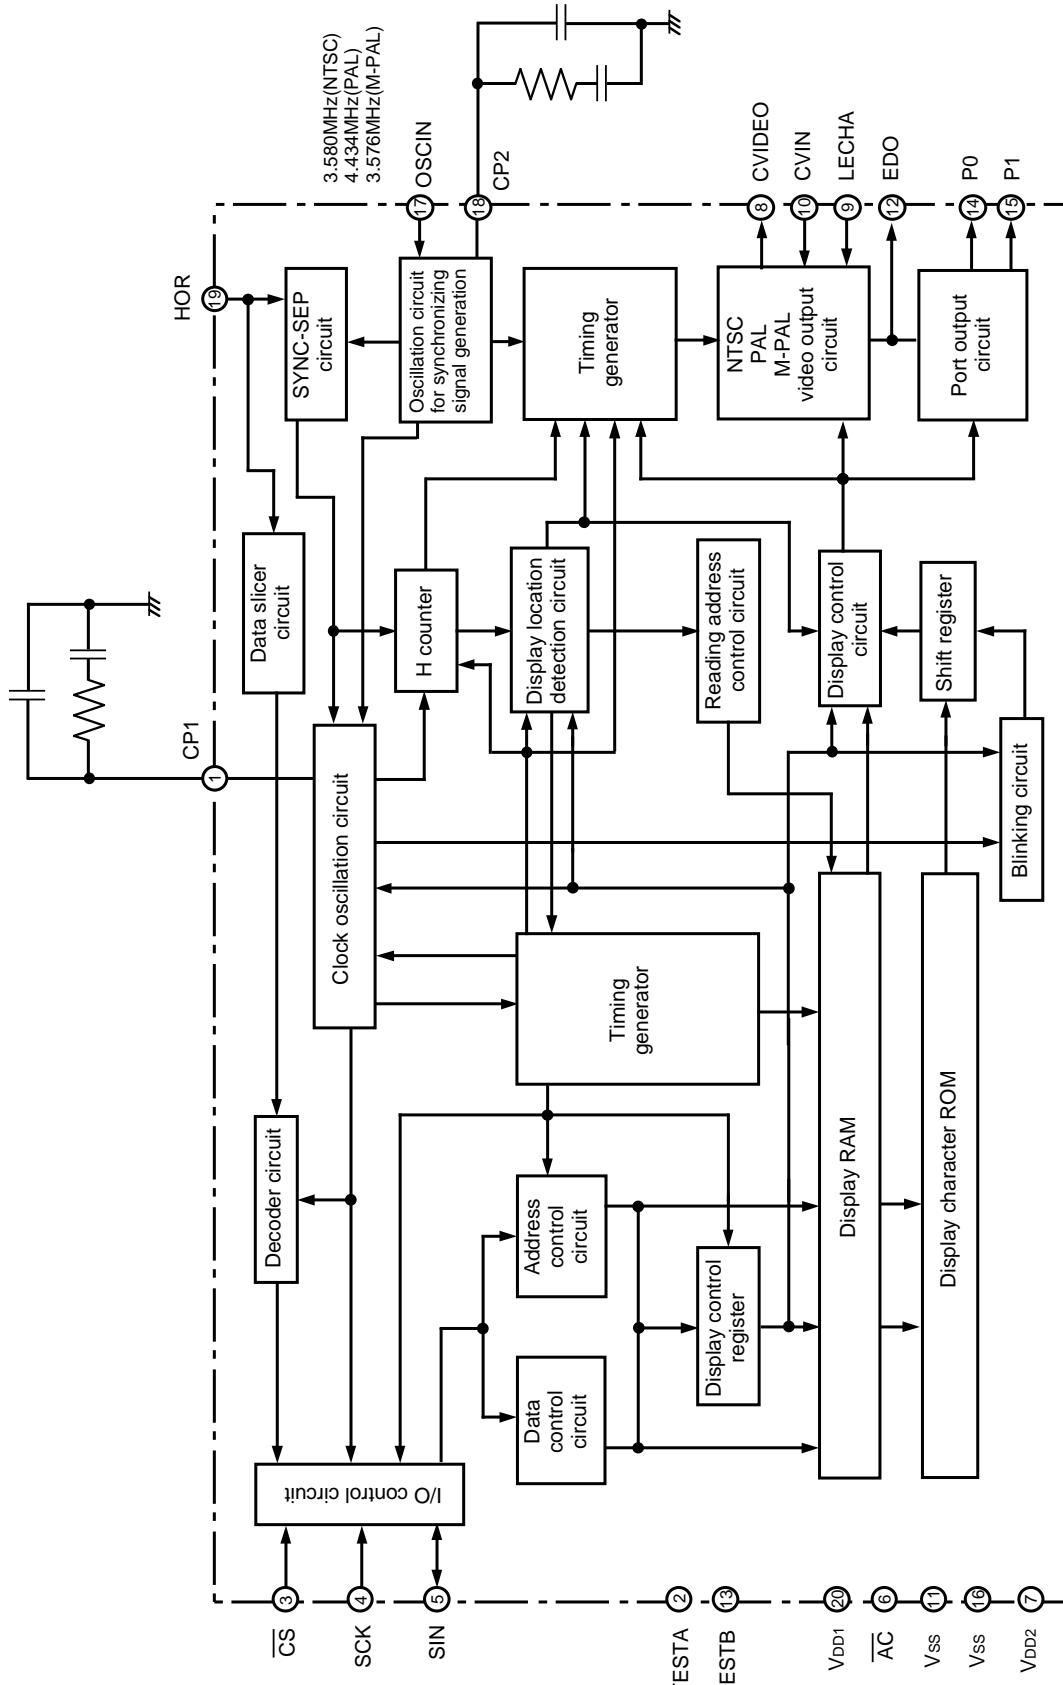BLOCK DIAGRAM



SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

MEMORY CONSTITUTION

Address 0016 to EF16 are assigned to the display RAM, address F016 to F816 are assigned to the display control registers.

The internal circuit is reset and all display control registers (address F016 to F816) are set to "0" and display RAM (address 0016 to EF16) are RAM erased when the AC pin level is "L".

Set "0" in any of bits DAD through DAF of addresses 0016 through EF16, and of bits DAE and DAF of addresses F016 through F816.

TESTn (n : a number) is MITSUBISHI test memory, so be sure to observe the setting conditions.

Bit Address	DAF	DAE	DAD	DAC	DAB	DAA	DA9	DA8	DA7	DA6	DA5	DA4	DA3	DA2	DA1	DA0	Remarks	
0016	0	0	0	REV	BLINK Blinking	EC2	EC1	EC0	C7	C6	C5	C4	C3	C2	C1	C0	Display RAM	
	⋮	⋮	⋮	⋮		Encode data or character color			Character code									
EF16	0	0	0	REV		EC2	EC1	EC0	C7	C6	C5	C4	C3	C2	C1	C0		
F016	0	0	TEST25	W/R	TEST11	TEST10	DEC B1	DEC B0	SYSEP1	SYSEP0	SEPV1	SEPV0	PTD1	PTD0	PTC1	PTC0	Port output specify and so on	
F116	0	0	TEST26	DVP4	DVP3	DVP2	DVP1	DVP0	HP7	HP6	HP5	HP4	HP3	HP2	HP1	HP0	Horizontal display start position and Decode position specify	
F216	0	0	TEST27	EVP4	EVP3	EVP2	EVP1	EVP0	VP7	VP6	VP5	VP4	VP3	VP2	VP1	VP0	Vertical display start position and Encode position specify	
F316	0	0	TEST28	D/V	EFLD1	EFLD0	DFLD1	DFLD0	VSZ21	VSZ20	VSZ11	VSZ10	HSZ21	HSZ20	HSZ11	HSZ10	Character size and Encode-Decode specify	
F416	0	0	TEST29	TEST14	TEST13	SPACE	DSP9	DSP8	DSP7	DSP6	DSP5	DSP4	DSP3	DSP2	DSP1	DSP0	Display mode specify	
F516	0	0	TEST30	TEST19	MB/LB	TEST17	TEST16	TEST15	EQP	PALH	MPAL	INT/NON	N/P	BLINK2	BLINK1	BLINK0	Blinking specify and so on	
F616	0	0	TEST31	TEST2	TEST1	TEST0	LBLACK	LN24/32	BLKHF	BB	BG	BR	LEVEL0	PHASE2	PHASE1	PHASE0	Raster color specify	
F716	0	0	TEST32	TEST24	RGBON	TEST22	CL17/18	CBLINK	CURS7	CURS6	CURS5	CURS4	CURS3	CURS2	CURS1	CURS0	Cursor display specify	
F816	0	0	LEVEL1	EHP4	EHP3	EHP2	EHP1	EHP0	RAMERS	DSPON	STOP1	STOPIN	SCOR	EX	BLK1	BLK0	Control display and so on	

Fig. 1 Memory constitution (M35053-XXXSP/FP)

SCREEN CONSTITUTION

The screen lines and rows are determined from each address of the display RAM. The screen constitution (24 characters X 10 lines) is shown in Figure 2 the screen constitution (32 characters X 7 lines) is shown in 3.

Lines	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
1	0016	0116	0216	0316	0416	0516	0616	0716	0816	0916	0A16	0B16	0C16	0D16	0E16	0F16	1016	1116	1216	1316	1416	1516	1616	1716
2	1816	1916	1A16	1B16	1C16	1D16	1E16	1F16	2016	2116	2216	2316	2416	2516	2616	2716	2816	2916	2A16	2B16	2C16	2D16	2E16	2F16
3	3016	3116	3216	3316	3416	3516	3616	3716	3816	3916	3A16	3B16	3C16	3D16	3E16	3F16	4016	4116	4216	4316	4416	4516	4616	4716
4	4816	4916	4A16	4B16	4C16	4D16	4E16	4F16	5016	5116	5216	5316	5416	5516	5616	5716	5816	5916	5A16	5B16	5C16	5D16	5E16	5F16
5	6016	6116	6216	6316	6416	6516	6616	6716	6816	6916	6A16	6B16	6C16	6D16	6E16	6F16	7016	7116	7216	7316	7416	7516	7616	7716
6	7816	7916	7A16	7B16	7C16	7D16	7E16	7F16	8016	8116	8216	8316	8416	8516	8616	8716	8816	8916	8A16	8B16	8C16	8D16	8E16	8F16
7	9016	9116	9216	9316	9416	9516	9616	9716	9816	9916	9A16	9B16	9C16	9D16	9E16	9F16	A016	A116	A216	A316	A416	A516	A616	A716
8	A816	A916	AA16	AB16	AC16	AD16	AE16	AF16	B016	B116	B216	B316	B416	B516	B616	B716	B816	B916	BA16	BB16	BC16	BD16	BE16	BF16
9	C016	C116	C216	C316	C416	C516	C616	C716	C816	C916	CA16	CB16	CC16	CD16	CE16	CF16	D016	D116	D216	D316	D416	D516	D616	D716
10	D816	D916	DA16	DB16	DC16	DD16	DE16	DF16	E016	E116	E216	E316	E416	E516	E616	E716	E816	E916	EA16	EB16	EC16	ED16	EE16	EF16

Note : The hexadecimal numbers in the boxes show the display RAM address.

Fig. 2 Screen constitution (24 characters X 10 lines)

Lines	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
1	0016	0116	0216	0316	0416	0516	0616	0716	0816	0916	0A16	0B16	0C16	0D16	0E16	0F16	1016	1116	1216	1316	1416	1516	1616	1716	1816	1916	1A16	1B16	1C16	1D16	1E16	1F16
2	2016	2116	2216	2316	2416	2516	2616	2716	2816	2916	2A16	2B16	2C16	2D16	2E16	2F16	3016	3116	3216	3316	3416	3516	3616	3716	3816	3916	3A16	3B16	3C16	3D16	3E16	3F16
3	4016	4116	4216	4316	4416	4516	4616	4716	4816	4916	4A16	4B16	4C16	4D16	4E16	4F16	5016	5116	5216	5316	5416	5516	5616	5716	5816	5916	5A16	5B16	5C16	5D16	5E16	5F16
4	6016	6116	6216	6316	6416	6516	6616	6716	6816	6916	6A16	6B16	6C16	6D16	6E16	6F16	7016	7116	7216	7316	7416	7516	7616	7716	7816	7916	7A16	7B16	7C16	7D16	7E16	7F16
5	8016	8116	8216	8316	8416	8516	8616	8716	8816	8916	8A16	8B16	8C16	8D16	8E16	8F16	9016	9116	9216	9316	9416	9516	9616	9716	9816	9916	9A16	9B16	9C16	9D16	9E16	9F16
6	A016	A116	A216	A316	A416	A516	A616	A716	A816	A916	AA16	AB16	AC16	AD16	AE16	AF16	B016	B116	B216	B316	B416	B516	B616	B716	B816	B916	BA16	BB16	BC16	BD16	BE16	BF16
7	C016	C116	C216	C316	C416	C516	C616	C716	C816	C916	CA16	CB16	CC16	CD16	CE16	CF16	D016	D116	D216	D316	D416	D516	D616	D716	D816	D916	DA16	DB16	DC16	DD16	DE16	DF16

Notes 1 The hexdecimal numbers in the boxes show the display RAM address.

2. When 32 characters X 7 lines are displayed, set blank code "FF16" to character code of addresses E016 to EF16.

Fig. 3 Screen constitution (32 characters X 7 lines)

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

Display RAM DESCRIPTION

Display RAM Address 0016 to EF16

DA 0~C	Name	Contents		Remarks
		Status	Function	
0	C0 (LSB)	0	Set ROM-held character code of a character needed to display.	
		①		
1	C1	0		
		①		
2	C2	0		
		①		
3	C3	0		
		①		
4	C4	0		
		①		
5	C5	0		
		①		
6	C6	0		
		①		
7	C7 (MSB)	0		
		①		
8	EC0	0	When EFILD1, 0=1, 0 or 0, 1, set code of the data needed to encode.	Refer to encode function.
		①		
9	EC1	0	When RGBON=1, set background color by character unit.	Refer to supplemental explanation (4).
		①		
A	EC2	0		
		①		
B	BLINK	0	No blinking	Refer to BLINK2 to 0 (address F516)
		①	Blinking	
C	REV	①	Normal character	
		1	Reversed character	

Note. Resetting at the AC pin RAM-erases the display RAM, and the status turns as indicated by the mark ○ around in the status column.

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

Display control register

(1) Address F016

DA 0~D	Register	Contents			Remarks	
		Status	Function			
0	PTC0	①	P0 output (port 0)			
		1	BLNK1 output			
1	PTC1	①	P1 output (port 1)			
		1	CO1 output			
2	PTD0	①	It is negative polarity at P0 output "L", BLINK1 output.		Control the port data	
		1	It is positive polarity at P0 output "H", BLINK1 output.			
3	PTD1	①	It is negative polarity at P01 output "L", CO1 output.			
		1	It is positive polarity at P01 output "H", CO1 output.			
4	SEPV0	①	It should be fixed to "0".		Specifies the vertical synchronous separation criterion	
		1	Can not be used.			
5	SEPV1	①	It should be fixed to "0".		Refer to supplemental explanation (1).	
		1	Can not be used.			
6	SYSEP0	①	SYSEP1	SYSEP0	Specifies the sync-bias potential	
		1		0		
7	SYSEP1	①	0	1	Can not be used.	
		1		1		
8	DECB0	①	DECB1	DECB0	Specifies the decoding bias potential	
		1		0		
9	DECB1	①	0	1	2.35V	
		1		1		
A	TEST10	①	Can not be used.			
		1	It should be fixed to "1".			
B	TEST11	①	It should be fixed to "0".			
		1	Can not be used.			
C	W/R	①	Input data from SIN pin		Control data I/O Refer to decode data output timing.	
		1	Output data from SIN pin (Note 2)			
D	TEST25	①	It should be fixed to "0".			
		1	Can not be used.			

Notes 1. The mark ① around the status value means the reset status by the "L" level is input to AC pin.

2. Not necessary to release after setting W/R to "1". Turn CS to "H" to switch over to input mode.

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(2) Address F116

DA 0~D	Register	Contents		Remarks
		Status	Function	
0	HP0 (LSB)	①	Let horizontal display start position be HS, $HS=T \times \left(\sum_{n=0}^7 2^n HP_n + 6 \right)$	Set the horizontal display start position by use of HP7 through HP0. HP7 to HP0 = (00000000) to (00001111) setting is forbidden.
		1		
1	HP1	①	HOR	It can be set this up to 240 steps in increments of one T.
		1		
2	HP2	①	Character displaying area	
		1		
3	HP3	①	T : The oscillation cycle of display clock	
		1		
4	HP4	①		
		1		
5	HP5	①		
		1		
6	HP6	①		
		1		
7	HP7 (MSB)	①		
		1		
8	DVP0 (LSB)	①	Let the slice lines be DVS, $DVS = \sum_{n=0}^4 2^n DVP_n + 6$	Set the slice lines (horizontal scanning lines) under decoding by use of DVP4 through DVP0. DVP4 to DVP0 = (00000) to (00011) setting is forbidden.
		1		
9	DVP1	①		Thus, it can be defined a setting up to 26 steps covered by a range from line 10 to line 35.
		1		
A	DVP2	①		Refer to supplemental explanation (2) about slice lines (DVS).
		1		
B	DVP3	①		
		1		
C	DVP4 (MSB)	①	It should be fixed to "0".	
		1		
D	TEST26	①	Can not be used.	
		1		

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(3) Address F216

DA 0~D	Register	Contents		Remarks	
		Status	Function		
0	VP0 (LSB)	①	Let vertical display start position be VS, $VS = H \times \sum_{n=0}^7 2^n VP_n$	Set the vertical display start position by use of VP7 through VP0. VP7 to VP0 = (00000000) to (00000110) setting is forbidden.	
		1			
1	VP1	①		It can be set this up to 249 steps in increments of one H.	
		1			
2	VP2	①		VP7 to VP0 = (00000000) to (00100011) setting is forbidden under encoding or decoding.	
		1			
3	VP3	①			
		1			
4	VP4	①			
		1			
5	VP5	①			
		1			
6	VP6	①			
		1			
7	VP7 (MSB)	①	H : The oscillation cycle of horizontal synchronous signal		
		1			
8	EVP0 (LSB)	①	Let the encode lines be EVS, $EVS = \sum_{n=0}^4 2^n EVP_n + 6$	Sets the lines (horizontal scanning lines) under encoding by use of EVP4 through EVP0. EVP4 to EVP0 = (00000) to (00011) setting is forbidden.	
		1			
9	EVP1	①		Thus, it can be defined a setting up to 26 steps covered by a range from line 10 to line 35.	
		1			
A	EVP2	①		Refer to supplemental explanation (2) about the encode lines (EVS).	
		1			
B	EVP3	①			
		1			
C	EVP4 (MSB)	①	It should be fixed to "0".		
		1			
D	TEST27	①	Can not be used.		
		1			

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(4) Address F316

DA 0~D	Register	Contents			Remarks	
		Status	Function			
0	HSZ10	①	HSZ11	HSZ10	Horizontal direction size	Character size setting in the horizontal direction for the first line.
		1		0	1T/dot	
1	HSZ11	①	HSZ11	0	2T/dot	Character size setting in the horizontal direction for the 2nd line to 10th line.
		1		1	3T/dot	
2	HSZ20	①	HSZ21	HSZ20	Horizontal direction size	Character size setting in the vertical direction for the first line.
		1		0	1T/dot	
3	HSZ21	①	HSZ21	0	2T/dot	Character size setting in the vertical direction for the 2nd line to 10th line.
		1		1	3T/dot	
4	VSZ10	①	VSZ11	VSZ11	Vertical direction size	Character size setting in the vertical direction for the first line.
		1		0	1H/dot	
5	VSZ11	①	VSZ11	0	2H/dot	Character size setting in the vertical direction for the 2nd line to 10th line.
		1		1	3H/dot	
6	VSZ20	①	VSZ21	VSZ21	Vertical direction size	Character size setting in the vertical direction for the 2nd line to 10th line.
		1		0	1H/dot	
7	VSZ21	①	VSZ21	0	2H/dot	Character size setting in the vertical direction for the 2nd line to 10th line.
		1		1	3H/dot	
8	DFLD0	①	DFLD1	DFLD1	Field detection	Specifies the field determination procedure in relation to the Decoding functions. Refer to supplemental explanation (2).
		1		0	OFF	
9	DFLD1	①		0	The first field	Specifies the field determination procedure in relation to the Encoding functions. Refer to supplemental explanation (2).
		1		1	The second field	
A	EFILD0	①	EFILD1	EFILD1	Field detection	Specifies the field determination procedure in relation to the Encoding functions. Refer to supplemental explanation (2).
		1		0	OFF	
B	EFILD1	①		0	The first field	Encode (EDO) output control. Refer to encode function (3).
		1		1	The second field	
C	D/V	①	It outputs digital signal.			Encode (EDO) output control. Refer to encode function (3).
		1	It outputs composite video signal (Note).			
D	TEST28	①	It should be fixed to "0".			
		1	Can not be used.			

Note. Output buffer is needed with EDO (12-pin) at D/V= "1". (Refer to example of peripheral circuit)

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(5) Address F416

DA 0~D	Register	Contents				Remarks		
		Status	Function					
0	DSP0	①				Set the display mode of line 1.		
		1						
1	DSP1	①				Set the display mode of line 2.		
		1						
2	DSP2	①				Set the display mode of line 3.		
		1						
3	DSP3	①				Set the display mode of line 4.		
		1						
4	DSP4	①				Set the display mode of line 5.		
		1						
5	DSP5	①				Set the display mode of line 6.		
		1						
6	DSP6	①				Set the display mode of line 7.		
		1						
7	DSP7	①				Set the display mode of line 8.		
		1						
8	DSP8	①				Set the display mode of line 9.		
		1						
9	DSP9	①				Set the display mode of line 10.		
		1						
A	SPACE	①	Normal display			Put a space line between line 2 and line 3 in displaying 32 characters.		
		1	Put a space line between line 2 and line 3, and between line 8 and line 9.					
B	TEST13	①	It should be fixed to "0".					
		1	Can not be used.					
C	TEST14	①	It should be fixed to "0".					
		1	Can not be used.					
D	TEST29	①	It should be fixed to "0".					
		1	Can not be used.					

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(6) Address F516

DA 0~D	Register	Contents			Remarks	
		Status	Function			
0	BLINK0	①		BLINK0	BLINK1	Blinking duty ratio can be altered. (Note)
		1		0	0	
1	BLINK1	①		0	1	Blinking cycle can be altered.
		1		1	0	
2	BLINK2	①	Division of vertical synchronizing signal into 1/64. Cycle approximately 1 second.			Blinking cycle can be altered.
		1	Division of vertical synchronizing signal into 1/32. Cycle approximately 0.5 second.			
3	N/P	①	NTSC, M-PAL mode			Refer to register MPAL
		1	PAL mode			
4	INT/NON	①	Interlace			Scanning lines control (only in internal synchronization)
		1	Non interlace			
5	MPAL	①		N/P	MPAL	Synchronizing signal is selected with this register and N/P register.
		1		0	0	
6	PALH	①		PALH	INT/NON	It should be fixed to "0" at NTSC
		1		0	0	
7	EQP	①	Not include the equivalent pulse.			Effective only at non-interlace
		1	Include the equivalent pulse.			
8	TEST15	①	It should be fixed to "0".			
		1	Can not be used.			
9	TEST16	①	It should be fixed to "0".			
		1	Can not be used.			
A	TEST17	①	It should be fixed to "0".			
		1	Can not be used.			
B	MB/LB	①	Output from MSB side			Setting the decode data output form
		1	Output from LSB side			
C	TEST19	①	It should be fixed to "0".			
		1	Can not be used.			
D	TEST30	①	It should be fixed to "0".			
		1	Can not be used.			

Note. To blink a character, set 1 to DAB (the blinking bit) of the display RAM.

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(7) Address F616

DA 0~D	Register	Contents				Remarks	
		Status	Function				
0	PHASE0	①		PHASE2	PHASE1	PHASE0	Raster color setting Refer to supplemental explanation (3) about video signal level
		1		0	0	0	
1	PHASE1	①		0	0	1	
		1		0	1	0	
2	PHASE2	①		1	0	0	
		1		1	0	1	
3	LEVEL0	①	Internal bias off				Generates bias potential for composite video signals
		1	Internal bias on				
4	BR	①		BB	BG	BR	Character background color setting. Refer to supplemental explanation (3) about video signal level
		1		0	0	0	
5	BG	①		0	0	1	
		1		0	1	0	
6	BB	①		1	0	0	
		1		1	0	1	
7	BLKHF	①	The halftone displaying "OFF" in superimpose				This register is available in the superimpose displaying only. (Note)
		1	The halftone displaying "ON" in superimpose				
8	LIN24/32	①	24 characters 5 10 lines display				"1" setting is forbidden under encoding.
		1	32 characters 5 7 lines display				
9	LBLACK	①	Blanking level I 2.3V				Set a blackness level
		1	Blanking level II 2.1V				
A	TEST0	①	It should be fixed to "0".				
		1	Can not be used.				
B	TEST1	①	It should be fixed to "0".				
		1	Can not be used.				
C	TEST2	①	It should be fixed to "0".				
		1	Can not be used.				
D	TEST31	①	Can not be used.				
		1	It should to be fixed to "1".				

Note. It is necessary to input the external composite video signal to the CVIN pin, and externally connect a 100 to 200Ω register in series.

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(8) Address F716

DA 0~D	Register	Contents		Remarks
		Status	Function	
0	CUR0	①	Let cursor displaying address be CURS, $CURS = \sum_{n=0}^7 2^n CUR_n$	Set the cursor displaying address by use of CUR7 through CUR0. CUR7 to CUR0 $\geq (11110000)$ setting is forbidden under 24 characters display. CUR7 to CUR0 $\geq (11100000)$ setting is forbidden under 32 characters display. Set CUR7 to CUR0 = (11111111) under cursor is not be displayed. The cursor displaying address (CURS) is correspond to display construction.
		1		
1	CUR1	①		
		1		
2	CUR2	①		
		1		
3	CUR3	①		
		1		
4	CUR4	①		
		1		
5	CUR5	①		
		1		
6	CUR6	①		
		1		
7	CUR7	①		
		1		
8	CBLINK	①	No blinking	The cursor blinking setting
		1	Blinking	
9	CL17/18	①	Cursor displaying at the 17th dot by vertical direction.	Refer to character construction.
		1	Cursor displaying at the 18th dot by vertical direction.	
A	TEST22	①	It should be fixed to "0".	
		1	Can not be used.	
B	RGBON	①	Normal	Refer to supplemental explanation (4).
		1	Character background coloring	
C	TEST24	①	It should be fixed to "0".	
		1	Can not be used.	
D	TEST32	①	It should be fixed to "0".	
		1	Can not be used.	

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(9) Address F816

DA 0~D	Register	Contents				Remarks	
		Status	Function				
0	BLK0	①	BLK1	BLK0	DSPn= "1"	DSPn= "0"	Display mode (BLNK output) variable
		1		0	Matrix-outline border size	Matrix-outline size	
1	BLK1	①	0	1	Border size	Character size	
		1		1	Matrix-outline size	Border size	
2	EX	①	External synchronization				Synchronizing signal switching (Note1)
		1	Internal synchronization				
3	SCOR	①	Superimpose monotone display				"1" setting is forbidden at internal synchronous or PAL, M-PAL mode displaying.
		1	Superimpose coloring display (only NTSC)				
4	STOPIN	①	fsc input mode				OSCIN oscillation control
		1	Can not be used.				
5	STOP1	①	Oscillation VCO for display				Control oscillation VCO for display
		1	Stop oscillation VCO for display				
6	DSPON	①	Display OFF				
		1	Display ON				
7	RAMERS	①	RAM not erased				This register does not exist (Note 3).
		1	RAM erased				
8	EHP0	①	Let encode data programming start position be EHS, $EHS = \sum_{n=0}^4 2^n EHPn + 6$				Set encode start position by use of EHP4 through EHP0. EHP4 to EHP0 = (00000) to (01111) is setting forbidden. Refer to encode function (3)
		1					
9	EHP1	①					
		1					
A	EHP2	①					
		1					
B	EHP3	①					
		1					
C	EHP4	①					
		1					
D	LEVEL1	①	Internal bias OFF				Generates bias potential for decod- ing and synchronous separation.
		1	Internal bias ON				

Notes 1. In dealing with the internal synchronization, cut off external video signals outside the IC. The leakage of external input video signals can be avoided.

2. In displaying color superimposition, enter into the OSCIN pin the fsc signal that phase-synchronizes with the color burst of the composite video signals (input to the CVIN pin).
3. Erases all the display RAM. The character code turns to blank-FF16, the encode data bit and the blinking bit turn to "1" respectively, and reversed character bit turns to "0".

Supplemental explanation about display control register

(1) How to effect synchronous separation from composite video signals

Synchronous separation is effected as follows depending on the width of L-level of the vertical synchronous period.

1. Less than 8.4 μ s Not to be determined to be a vertical synchronous signal.
2. Equal to or higher than 8.4 μ s but less than 15.6 μ s When two clocks continue, if take place, it is "L" period is determined to be a vertical synchronization signal.
3. Equal to or higher than 15.6 μ s It is "L" period is determined to be a vertical synchronous signal with no condition.

The determination is made at the timing indicated by V in Fig.3 either in case 2 or in case 3.

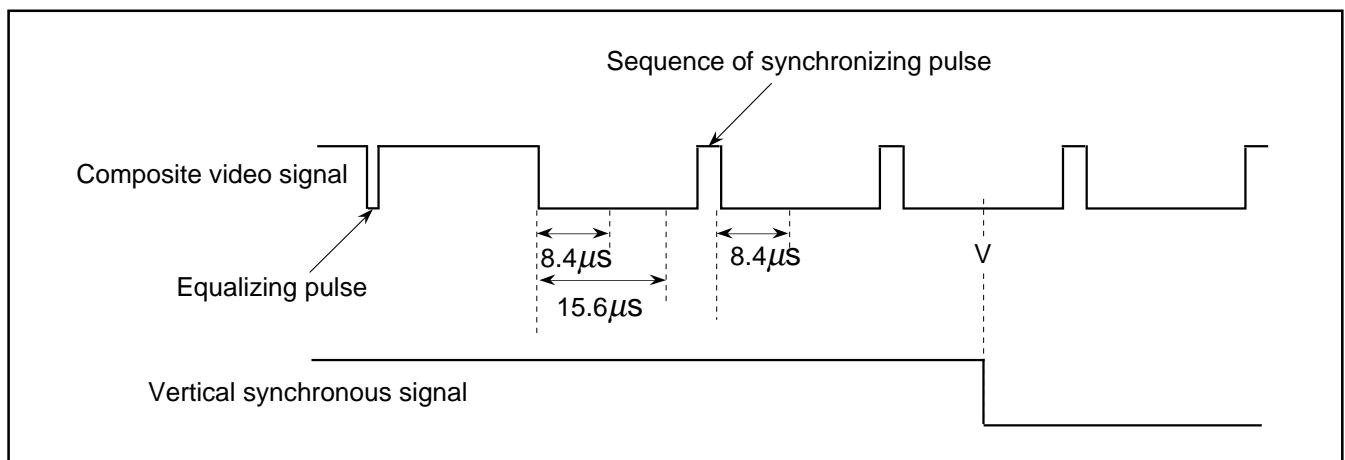


Fig. 4 The method of synchronous separation from composite video signal.

(2) Field definition

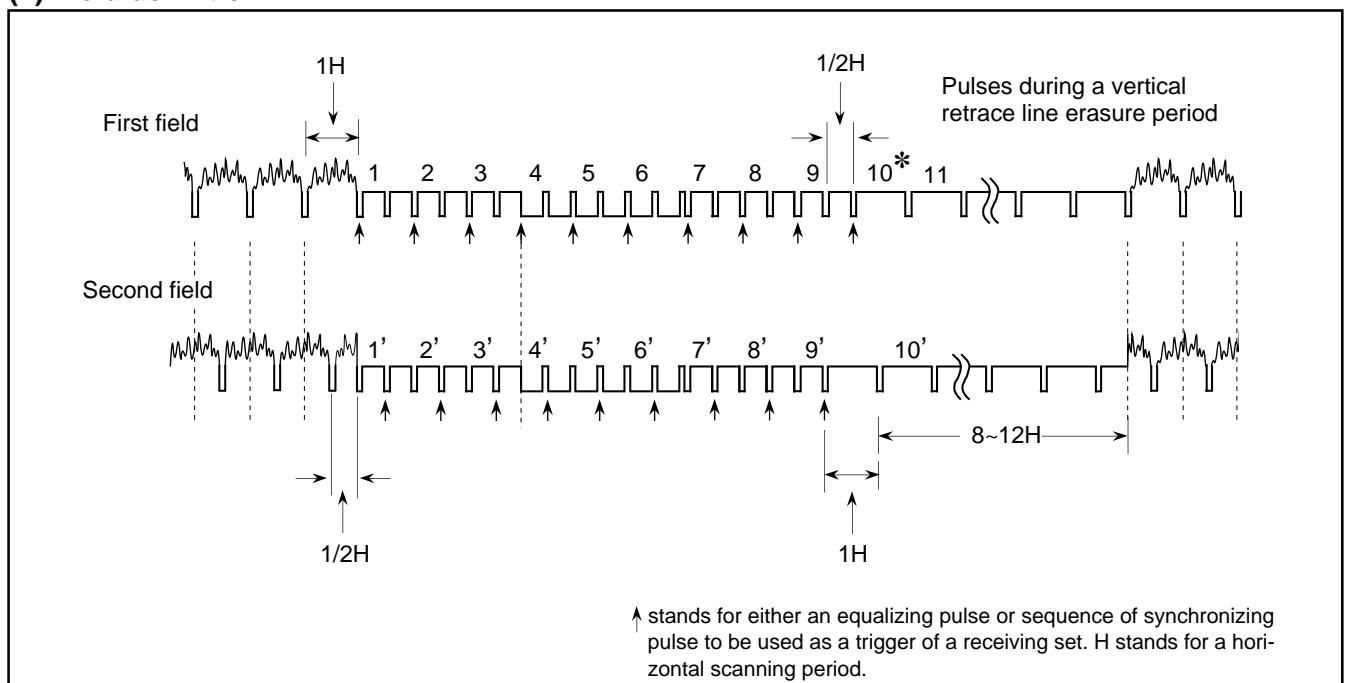


Fig. 5 Field definition

* A horizontal scanning line number corresponds to slice lines DVP4 through DVP0 (address F116) and to encode lines EVP4 through EVP0 (address F216).

(3) Video signal level

VDD : 5.0V, Ta : 25°C

Color	Phase angle (rad)		Brightness level (V)			Amplitude ratio (to color burst)		
	NTSC method	PAL, M-PAL method	Min.	Typ.	Max.	Min.	Typ.	Max.
Sync-chip	—	—	1.3	1.5	1.7	—	—	—
Pedestal	—	—	1.9	2.1	2.3	—	—	—
Color burst	0	$\pm 4\pi/16$	1.9	2.1	2.3	—	1.0	—
Black	—	—	2.1	2.3	2.5	—	—	—
Red	$7\pi/16 \pm 2\pi/16$	$\pm 7\pi/16 \pm 2\pi/16$	2.3	2.5	2.7	1.5	3.0	4.5
Green	$27\pi/16 \pm 2\pi/16$	$\mp 5\pi/16 \pm 2\pi/16$	2.7	2.9	3.1	1.4	2.8	4.2
Yellow	$\pi/16 \pm 2\pi/16$	$\pm \pi/16 \pm 2\pi/16$	3.1	3.3	3.5	1.0	2.0	3.0
Blue	$17\pi/16 \pm 2\pi/16$	$\mp 15\pi/16 \pm 2\pi/16$	2.0	2.2	2.4	1.0	2.0	3.0
Magenta	$11\pi/16 \pm 2\pi/16$	$\pm 11\pi/16 \pm 2\pi/16$	2.5	2.7	2.9	1.4	2.8	4.2
Cyan	$23\pi/16 \pm 2\pi/16$	$\mp 9\pi/16 \pm 2\pi/16$	2.9	3.1	3.3	1.5	3.0	4.5
White	—	—	3.1	3.3	3.5	—	—	—

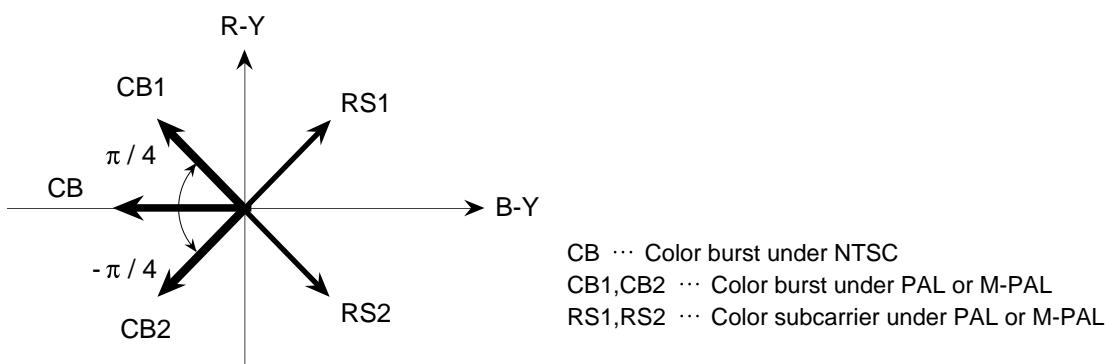


Fig. 6 Bector phases

(4) Setting RGBON (address F716)

a) When encode is off EFILD1, 0 (address F316) = 0,0
Encode setting.... Not effected
RGBON = "0" Sets background colors depending on BB, BG, and BR (address F616), screen by screen.
RGBON = "1" Sets background colors depending on EC2 to EC0 (address 0016 to EF16), character by character. The color setting is shown below.

b) When encode is on ... EFILD1, 0 (address F316) = 0, 1 or 1, 0
Encode setting.... Sets encode data depending on EC2 through EC0. (Refer to the encode functions for details.)
RGBON = "0" Sets background colors depending on BB, BG and BR (address F616) screen by screen.
RGBON = "1" This setting can not be used.
(When encode is on, setting RGBON to "1" results in setting both encode data and background colors depending on the same memory (EC2 through EC0), so this setting can not be used.

Color Setting

EC2	EC1	EC0	Color
0	0	0	Black
0	0	1	Red
0	1	0	Green
0	1	1	Yellow
1	0	0	Blue
1	0	1	Magenta
1	1	0	Cyan
1	1	1	White

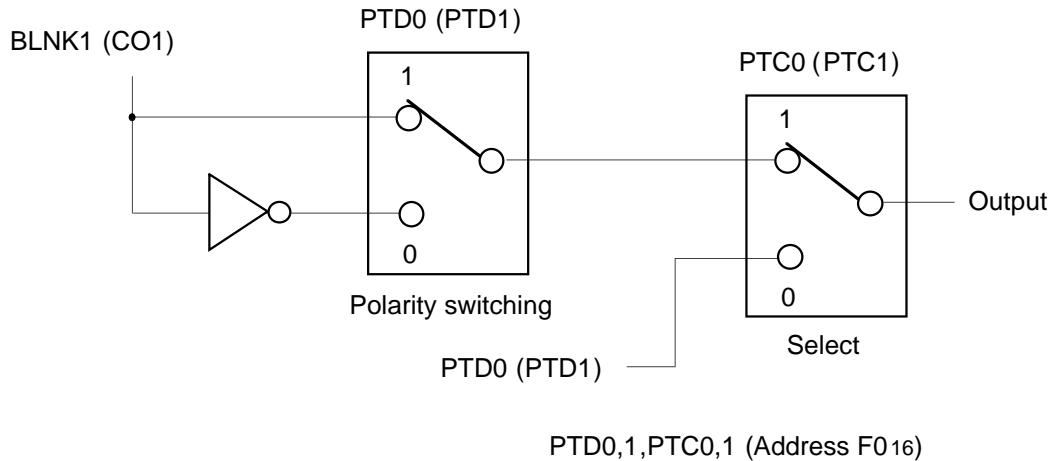
(5) Port output and BLNK1, CO1 output

Fig. 7 Example of port control

(6) Setting conditions for oscillating or stopping the display clock

	at display clock operating	at display clock stop
STOP1	0	1
DSPON	1	0
CS pin	L	H

STOP1,DSPON (Address F816)

(7) Setting condition at LEVEL0,1

	Operation state (Character display)		Now-working condition (no characters are displayed)
	Internal synchronous	External synchronous	
LEVEL0	1	1	0
LEVEL1	0	1	0

LEVEL0 (address F616), LEVEL1 (address F816)

DISPLAY FORMS

M35052-XXXSP/FP has the following four display forms as the blanking function, when CO1 and BLNK1 are output.

- (1) Character size : Blanking same as the character size.
- (2) Border size : Blanking the background as a size from character.
- (3) Matrix-outline size: Blanking the background as a size from all character font size.
- (4) Matrix-outline border size : Blanking the background as a size from all character font size.
Border display.

This display format allows each line to be controlled independently, so that two kinds of display formats can be combined on the same screen.

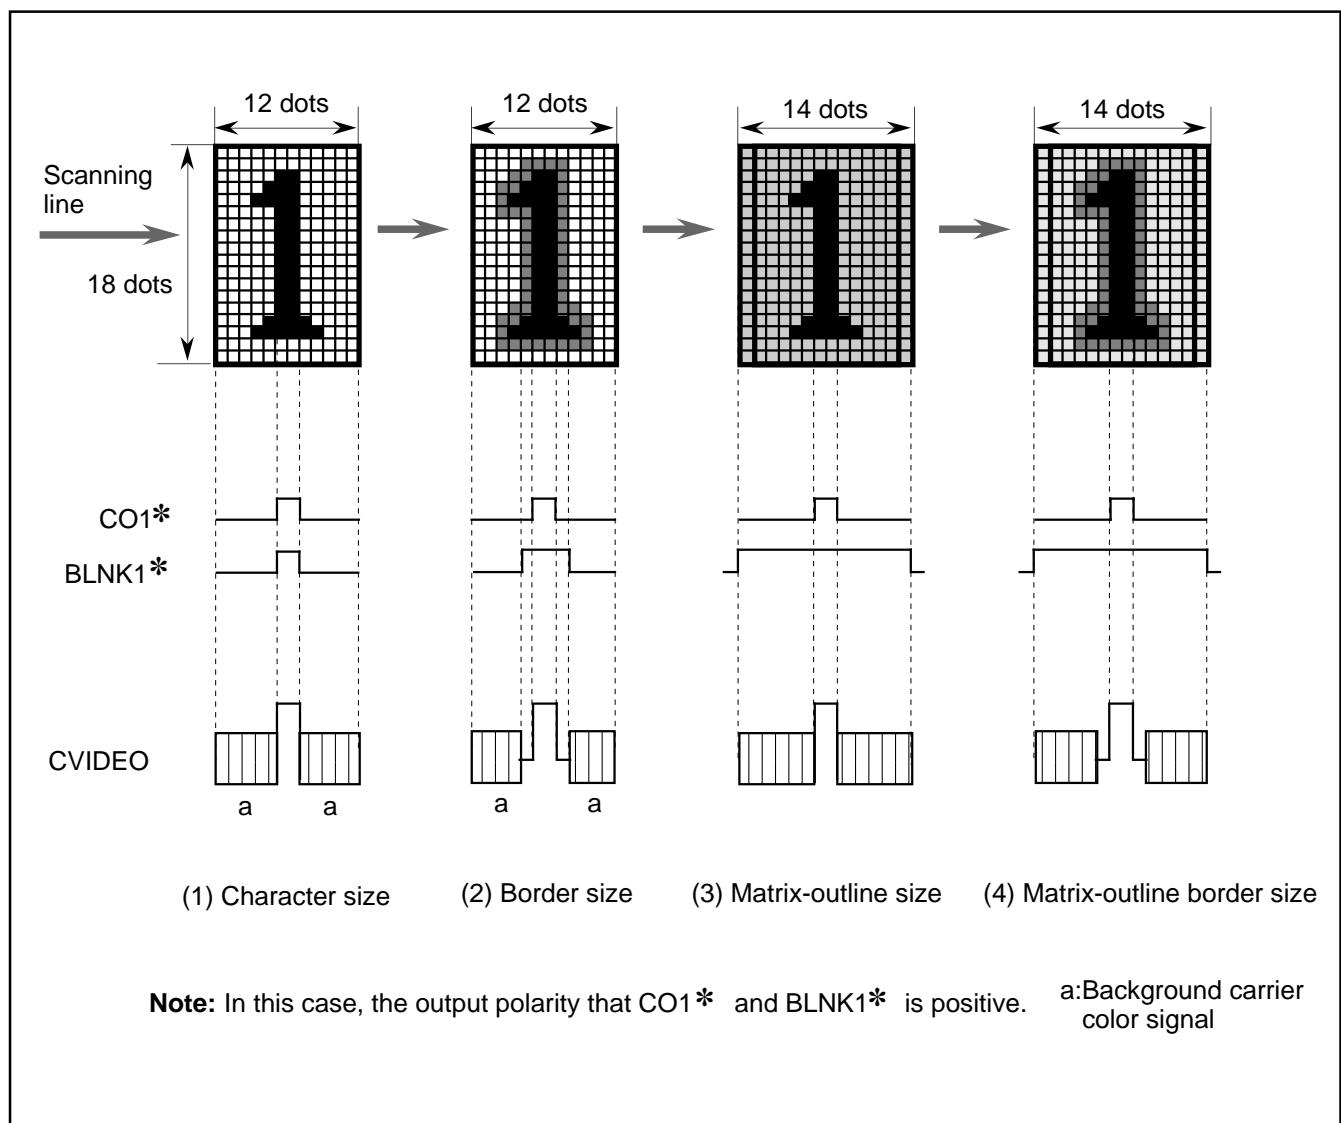


Fig. 8 Display forms at each display mode

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

DATA INPUT EXAMPLE

Data of display RAM and display control registers can be set by then serial input function. Example of data setting is shown in Figure 9.

Owing to automatic address increment, not necessary to enter addresses for the second and subsequent data.

In automatically, the next of address F816 is assigned to address 0016.

Fig. 9 shows an example of data serially entered.

Address /Data	DA F	DA E	DA D	DA C	DA B	DA A	DA 9	DA 8	DA 7	DA 6	DA 5	DA 4	DA 3	DA 2	DA 1	DA 0	Remarks
Address (F816)	0	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	Specify address
Data (F816)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Display OFF
Data (0016)	0	0	0	REV	BLINK	EC2	EC1	EC0	C7	C6	C5	C4	C3	C2	C1	C0	Specify address display RAM 0 to EF16.
Data (0116)	0	0	0	REV	BLINK	EC2	EC1	EC0	C7	C6	C5	C4	C3	C2	C1	C0	
Data (EE16)	0	0	0	REV	BLINK	EC2	EC1	EC0	C7	C6	C5	C4	C3	C2	C1	C0	
Data (EF16)	0	0	0	REV	BLINK	EC2	EC1	EC0	C7	C6	C5	C4	C3	C2	C1	C0	
Data (F016)	0	0	0	W/R	0	1	0	0	1	0	0	0	PTD 1	PTD 0	PTC 1	PTC 0	
Data (F116)	0	0	0	DVP 4	DVP 3	DVP 2	DVP 1	DVP 0	HP 7	HP 6	HP 5	HP 4	HP 3	HP 2	HP 1	HP 0	
Data (F216)	0	0	0	EVP 4	EVP 3	EVP 2	EVP 1	EVP 0	VP 7	VP 6	VP 5	VP 4	VP 3	VP 2	VP 1	VP 0	
Data (F316)	0	0	0	D/V	EFLD 1	EFLD 0	DFLD 1	DFLD 0	VSZ 21	VSZ 20	VSZ 11	VSZ 10	HSZ 21	HSZ 20	HSZ 11	HSZ 10	Specify address register F016 to F716.
Data (F416)	0	0	0	0	0	SPACE	DSP 9	DSP 8	DSP 7	DSP 6	DSP 5	DSP 4	DSP 3	DSP 2	DSP 1	DSP 0	
Data (F516)	0	0	0	0	MB/LB	0	0	0	EQP	PALH	MPAL	INT /NON		BLINK 2	BLINK 1	BLINK 0	
Data (F616)	0	0	1	0	0	0	LBLACK	LIN 24/32	BLKHF	BB	BG	BR	LEVEL 0	PHASE 2	PHASE 1	PHASE 0	
Data (F716)	0	0	0	0	RGBON	0	CL 17/18	CBLINK	CURS 7	CURS 6	CURS 5	CURS 4	CURS 3	CURS 2	CURS 1	CURS 0	
Data (F816)	0	0	LEVEL 1	EHP 4	EHP 3	EHP 2	EHP 1	EHP 0	RAM ERS	DSPON	STOP 1	STOP IN	SCOR	EX	BLK 1	BLK 0	Display ON

Fig. 9 Example of data setting by the serial input function

SERIAL DATA INPUT TIMING

- (1) The address consists of 16 bits.
- (2) The data consists of 16 bits.
- (3) The 16 bits in the SCK after the CS signal has fallen are the address, and for succeeding input data, the address is incremented every 16 bits.

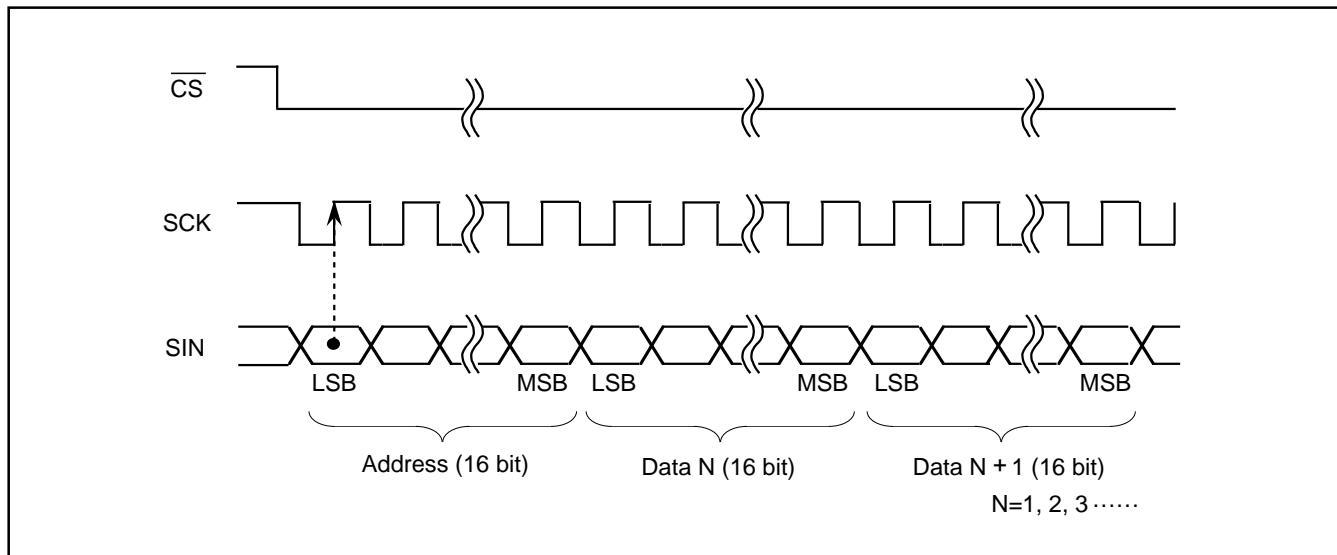


Fig. 10 Serial input timing

Output timing of decode data

- (1) Setting "1" in the W/R register activates output mode.
- (2) Outputs decode data in 16 clocks of the SCK after switching over to output mode. (Don't enter the SCK for more than 16 clocks.)
- (3) Raising the CS signal deactivates output mode. (To switch over to input mode, cause CS to fall.)
- (4) If no data are present, or if data have already been read, 000016 is output.

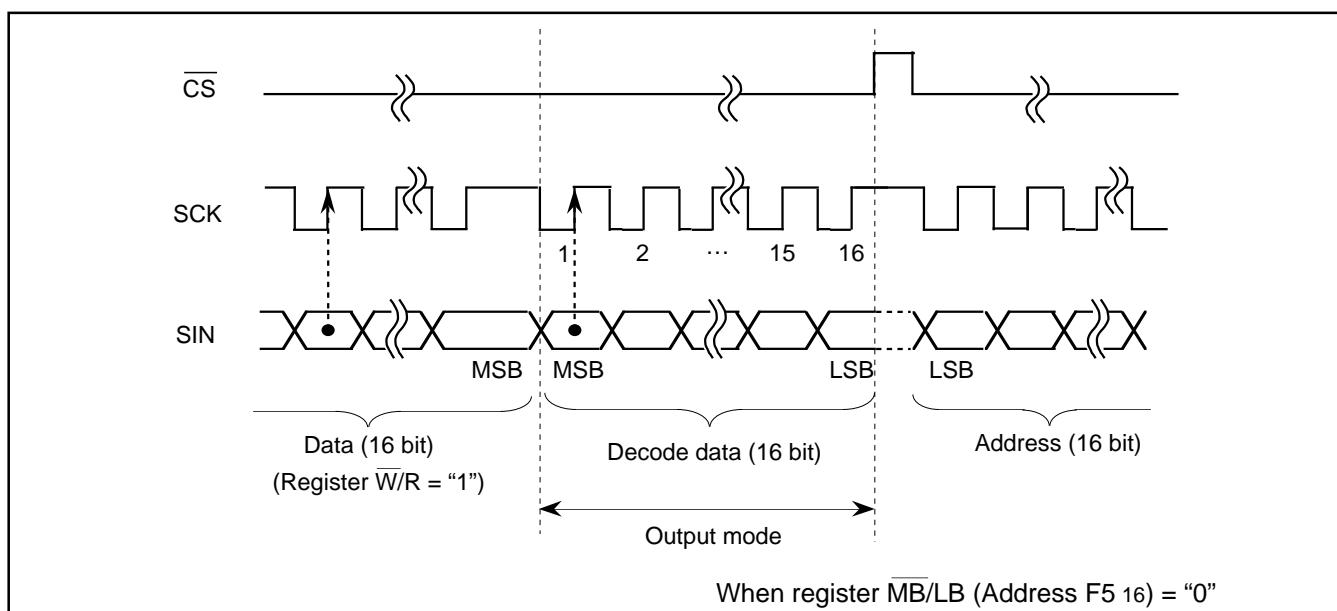


Fig. 11 Decode data output timing

Encode functions (effective for NTSC only)

(1) Setting encode data

Setting data code (000 – 111) in EC0 through EC2 (bits DA8 through DAA) of the display RAM (addresses 0 through EF16) encodes. A sample setting and data code are shown below.

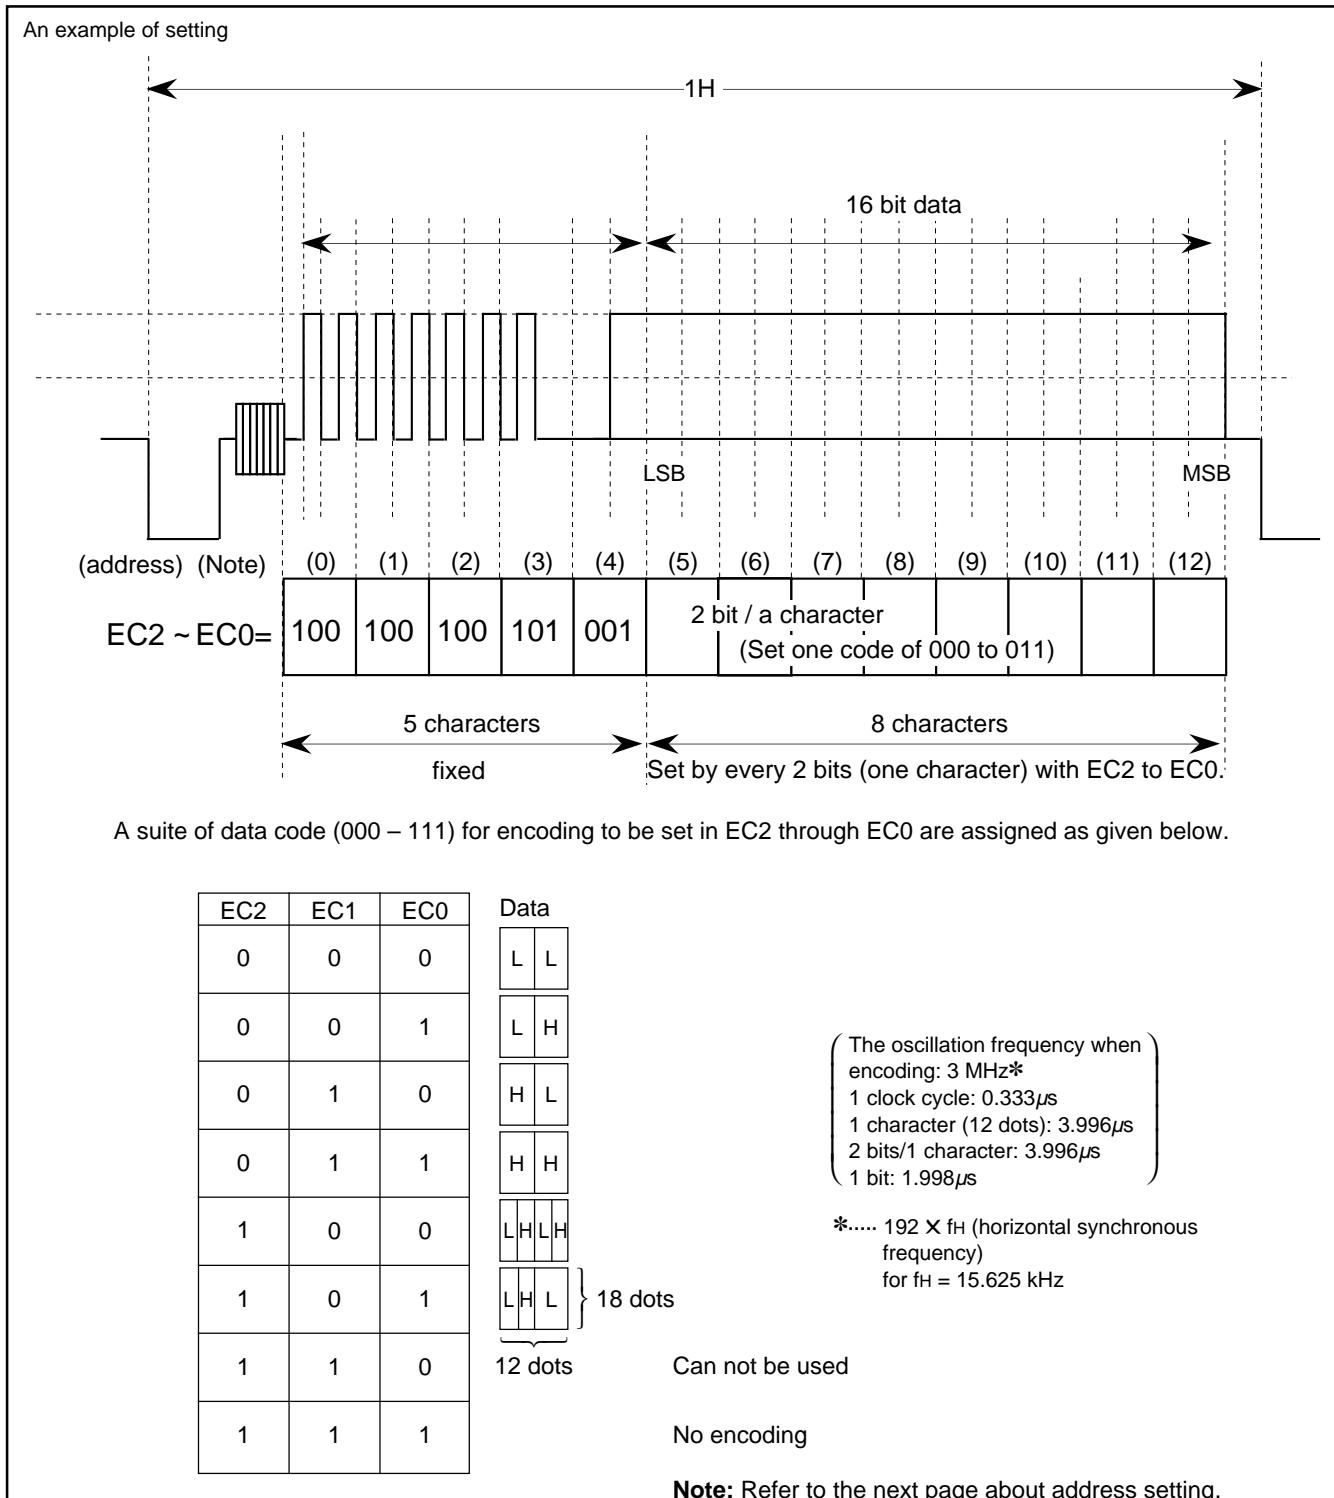


Fig. 12 An example of data code setting

(2) Setting addresses

Set encode data in EC0 through EC2 of addresses (that correspond to an extent from the first character to the thirteenth character in each line as appearing on the screen.) Set "111" to EC2 through EC0 of all the addresses in which you set no encode data.

Screen

The first character The 13th character The 24th character

line 1	0016	0116	0216	0316	0416	0516	0616	0716	0816	0916	0A16	0B16	0C16	0D16	0E16	0F16	1016	1116	1216	1316	1416	1516	1616	1716
line 2	1816	1916	1A16	1B16	1C16	1D16	1E16	1F16	2016	2116	2216	2316	2416	2516	2616	2716	2816	2916	2A16	2B16	2C16	2D16	2E16	2F16
line 3	3016	3116	3216	3316	3416	3516	3616	3716	3816	3916	3A16	3B16	3C16	3D16	3E16	3F16	4016	4116	4216	4316	4416	4516	4616	4716
line 4	4816	4916	4A16	4B16	4C16	4D16	4E16	4F16	5016	5116	5216	5316	5416	5516	5616	5716	5816	5916	5A16	5B16	5C16	5D16	5E16	5F16
line 5	6016	6116	6216	6316	6416	6516	6616	6716	6816	6916	6A16	6B16	6C16	6D16	6E16	6F16	7016	7116	7216	7316	7416	7516	7616	7716
line 6	7816	7916	7A16	7B16	7C16	7D16	7E16	7F16	8016	8116	8216	8316	8416	8516	8616	8716	8816	8916	8A16	8B16	8C16	8D16	8E16	8F16
line 7	9016	9116	9216	9316	9416	9516	9616	9716	9816	9916	9A16	9B16	9C16	9D16	9E16	9F16	A016	A116	A216	A316	A416	A516	A616	A716
line 8	A816	A916	AA16	AB16	AC16	AD16	AE16	AF16	B016	B116	B216	B316	B416	B516	B616	B716	B816	B916	BA16	BB16	BC16	BD16	BE16	BF16
line 9	C016	C116	C216	C316	C416	C516	C616	C716	C816	C916	CA16	CB16	CC16	CD16	CE16	CF16	D016	D116	D216	D316	D416	D516	D616	D716
line 10	D816	D916	DA16	DB16	DC16	DD16	DE16	DF16	E016	E116	E216	E316	E416	E516	E616	E716	E816	E916	EA16	EB16	EC16	ED16	EE16	EF16

Using area for encode data setting Useless area

Fig.13 Display monitor

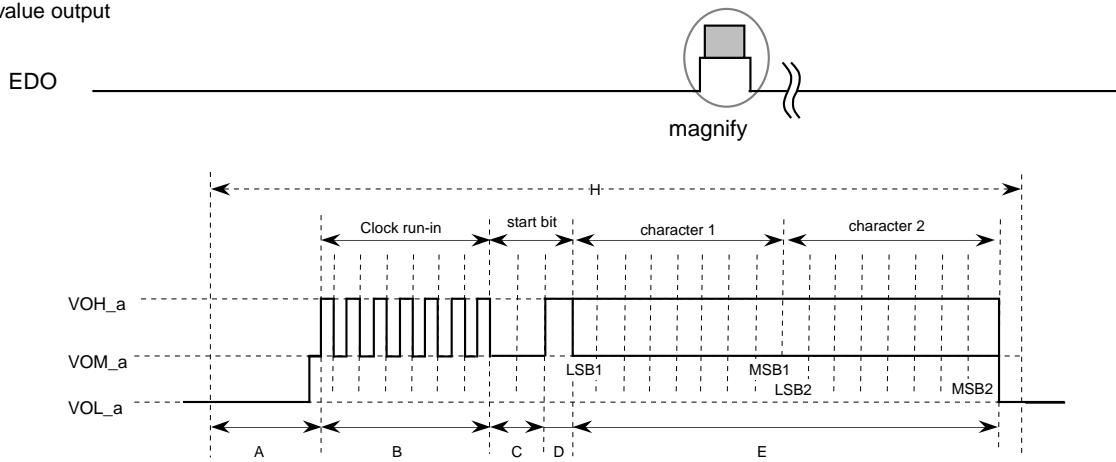
SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(3) Encode data output

Control encode data (EDO) output by register D/V (address F316)


a) Register D/V (address F316)="0"

Digital 3 value output



b) Register D/V (address F316)="1"

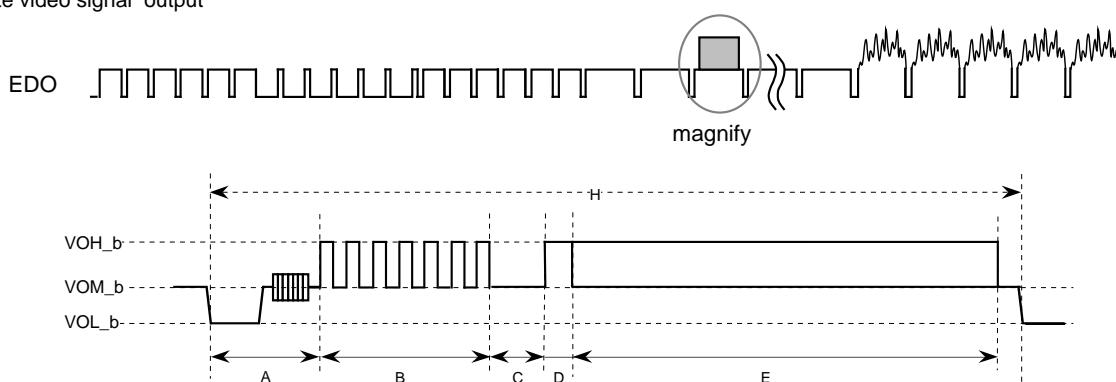Composite video signal output



VDD : 5.0V, Ta : 25°C

Symbol	Min.	Typ.	Max.	Unit
A	—	(EHS+9)X 1/(fHX192)※	—	μs
B	—	6.5P	—	μs
C	—	2P	—	μs
D	—	1P	—	μs
E	—	16P	—	μs
H	—	1/fH	—	μs
(a)	VOH_a	5.0	—	V
	VOM_a	0.4	2.3	V
	VOL_a	—	0	V
(b)	VOH_b	3.1	3.3	V
	VOM_b	1.9	2.1	V
	VOL_b	1.3	1.5	V

1P=1/(fHX32)

fH : Horizontal synchronous frequency(MHz)

※ It is possible to make a fine adjustment (EHS=16 to 31. 16 settings. in increments of 1/(fH X 192)) by use of EHS (registers EHP4 to EHP0 of address F816). (EHS≤15 setting is forbidden.)


Fig. 14 Encode data output

CHARACTER FONT

Images are composed on a 12 X 18 dot matrix, and characters can be linked vertically and horizontally with other characters to allow the display the continuous symbols.

Character code "FF16" is so fixed as to be blank and to have no background, thus cannot assign a character font to this code.

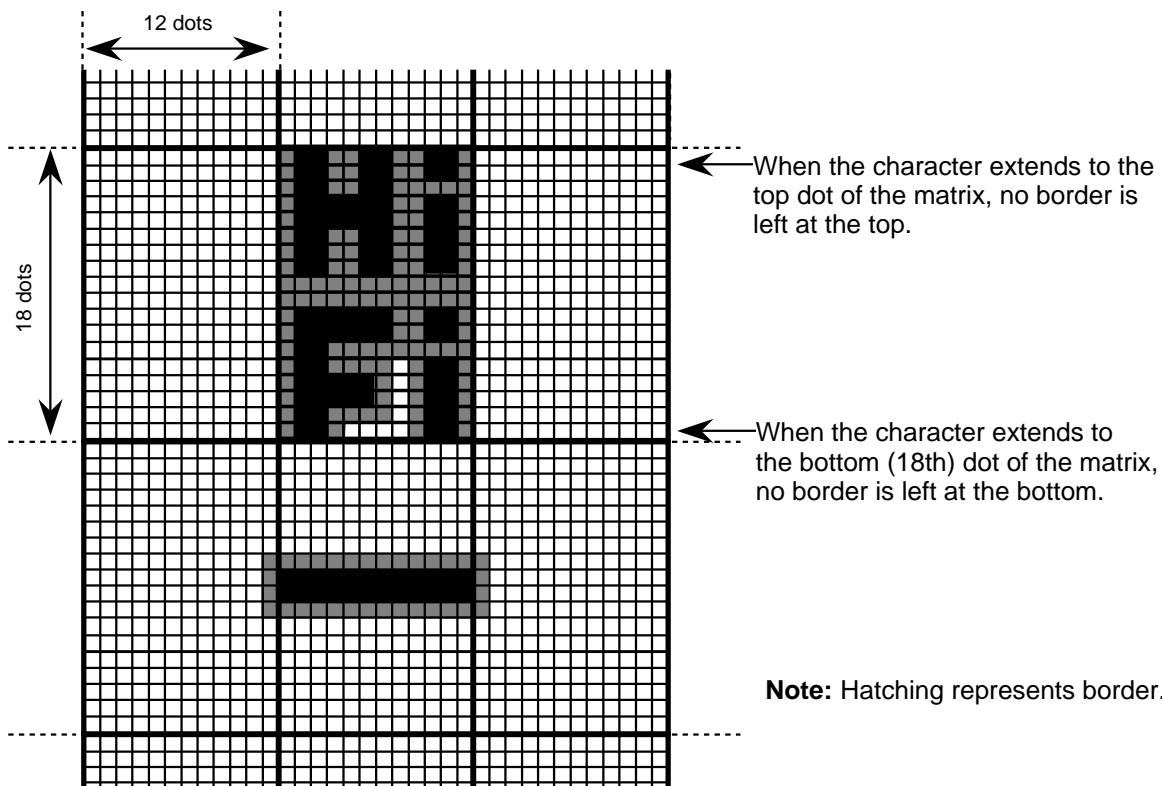(1) Border display (set by register BLK0, 1 (address F816))



(2) Cursor display (Border display)

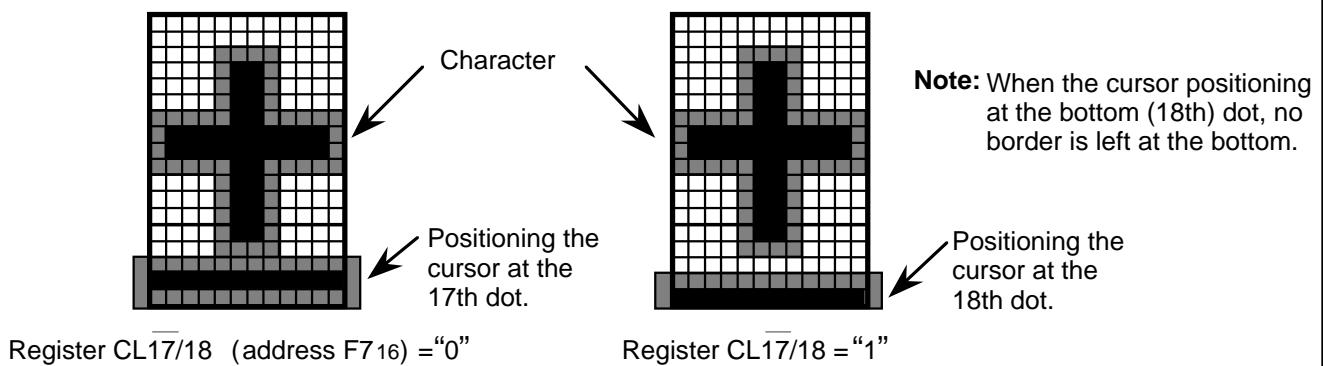


Fig. 15 Character font and border

Precautions

(1) Points to note in setting the display RAMs

- Be careful to the edges may sway depending on the combination of character's background color and raster color.

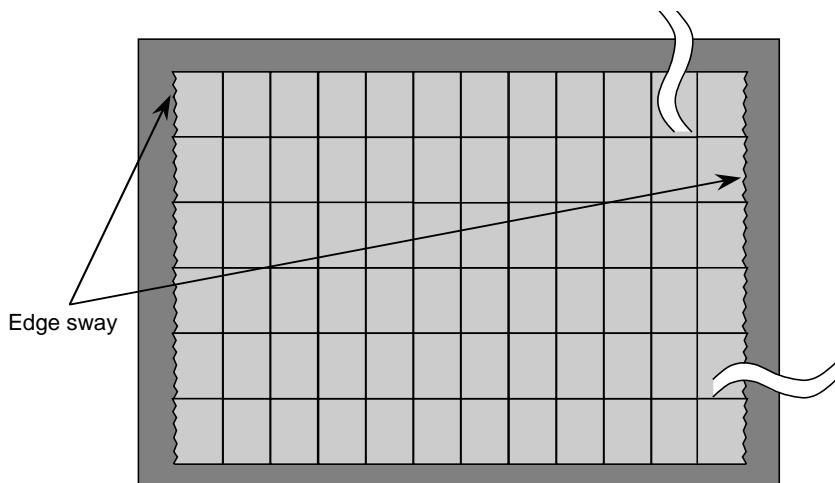


Fig. 16 Example of display

b) If what display exceeds the display area in dealing with external synchronization, (if use double - size characters), set the character code of the addresses lying outside that display area blank code – “FF16”.

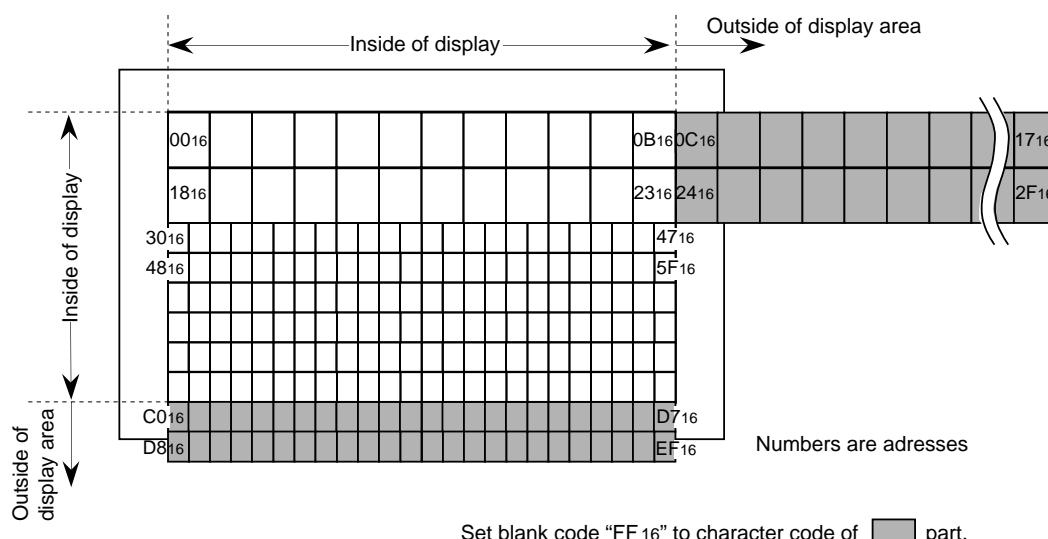


Fig. 17 Example of display

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

(2) Before setting registers at the starting of system, be sure to reset the M35052-XXXSP/FP by applying "L" level to the \overline{AC} pin.

(3) Power supply noise

When power supply noise is generated, the internal oscillator circuit does not stabilize, whereby causing horizontal jitters across the picture display. Therefore, connect a bypass capacitor between the power supply and GND.

(4) Synchronous correction action

When switching channel or in the special playback mode (quick playback, rewinding, and so on) of VTR, effect of synchronous correction becomes strong, and distortion of a character is apt to occur because the continuity of video signal is suddenly switched. When the continuity of video signal is out of order, erasure of displayed characters is recommended in a extreme short time to raise the quality of displayed characters.

(5) Notes on fsc signal input

This IC amplifies the subcarrier frequency (fsc) signal (NTSC, M-PAL system: 3.58MHz, PAL system: 4.43MHz) input to the OSCIN pin (17-pin) and generates the composite video signal internally. The amplified fsc signal can be destabilized in the following cases.

- a) When the fsc signal is outside of recommended operating conditions.
- b) When the waveform of the fsc signal is distorted.
- c) When DC level in the fsc waveform fluctuates.

When the amplified signal is unstable, the composite video signal generated inside the IC is also unstable in terms of synchronization with the subcarrier and phase.

Consequently, this results in color flicker and lost synchronization when the composite video signal is generated. Make note of the fact that this may prevent a stable blue background from being formed.

(6) Forbidding to stop entering the fsc signal

This IC doesn't properly work if the fsc signal is not entered into the OSCIN pin (pin 17), so don't stop the fsc signal so as to work the IC. To stop the IC, turn the display off (set 0 in the register DSPON (address F816).)

(7) Forbidding to set data during the period in which the internal oscillation circuit stabilizes

- a) To start entering the fsc signal when its input is stopped.
- b) To start oscillating the oscillation circuit for display when its oscillation is stopped. (to assign "1" to the register STOP1 (address F816) when it is assigned "0", or the like.)
- c) To turn on the internal bias when it is turned off. (to assign "1" to the register LEVEL1 (address F816) when it is assigned "0".)

There can be instances in which data are not properly set in the registers until the internal oscillation circuit stabilizes, so follow the steps in sequence as given below.

- 1) Set "0" in the register DSPON (address F816). (the display is turned off)
- 2) Effect the settings a), b), and c) given above.

M35053-XXXSP/FP PERIPHERAL CIRCUIT

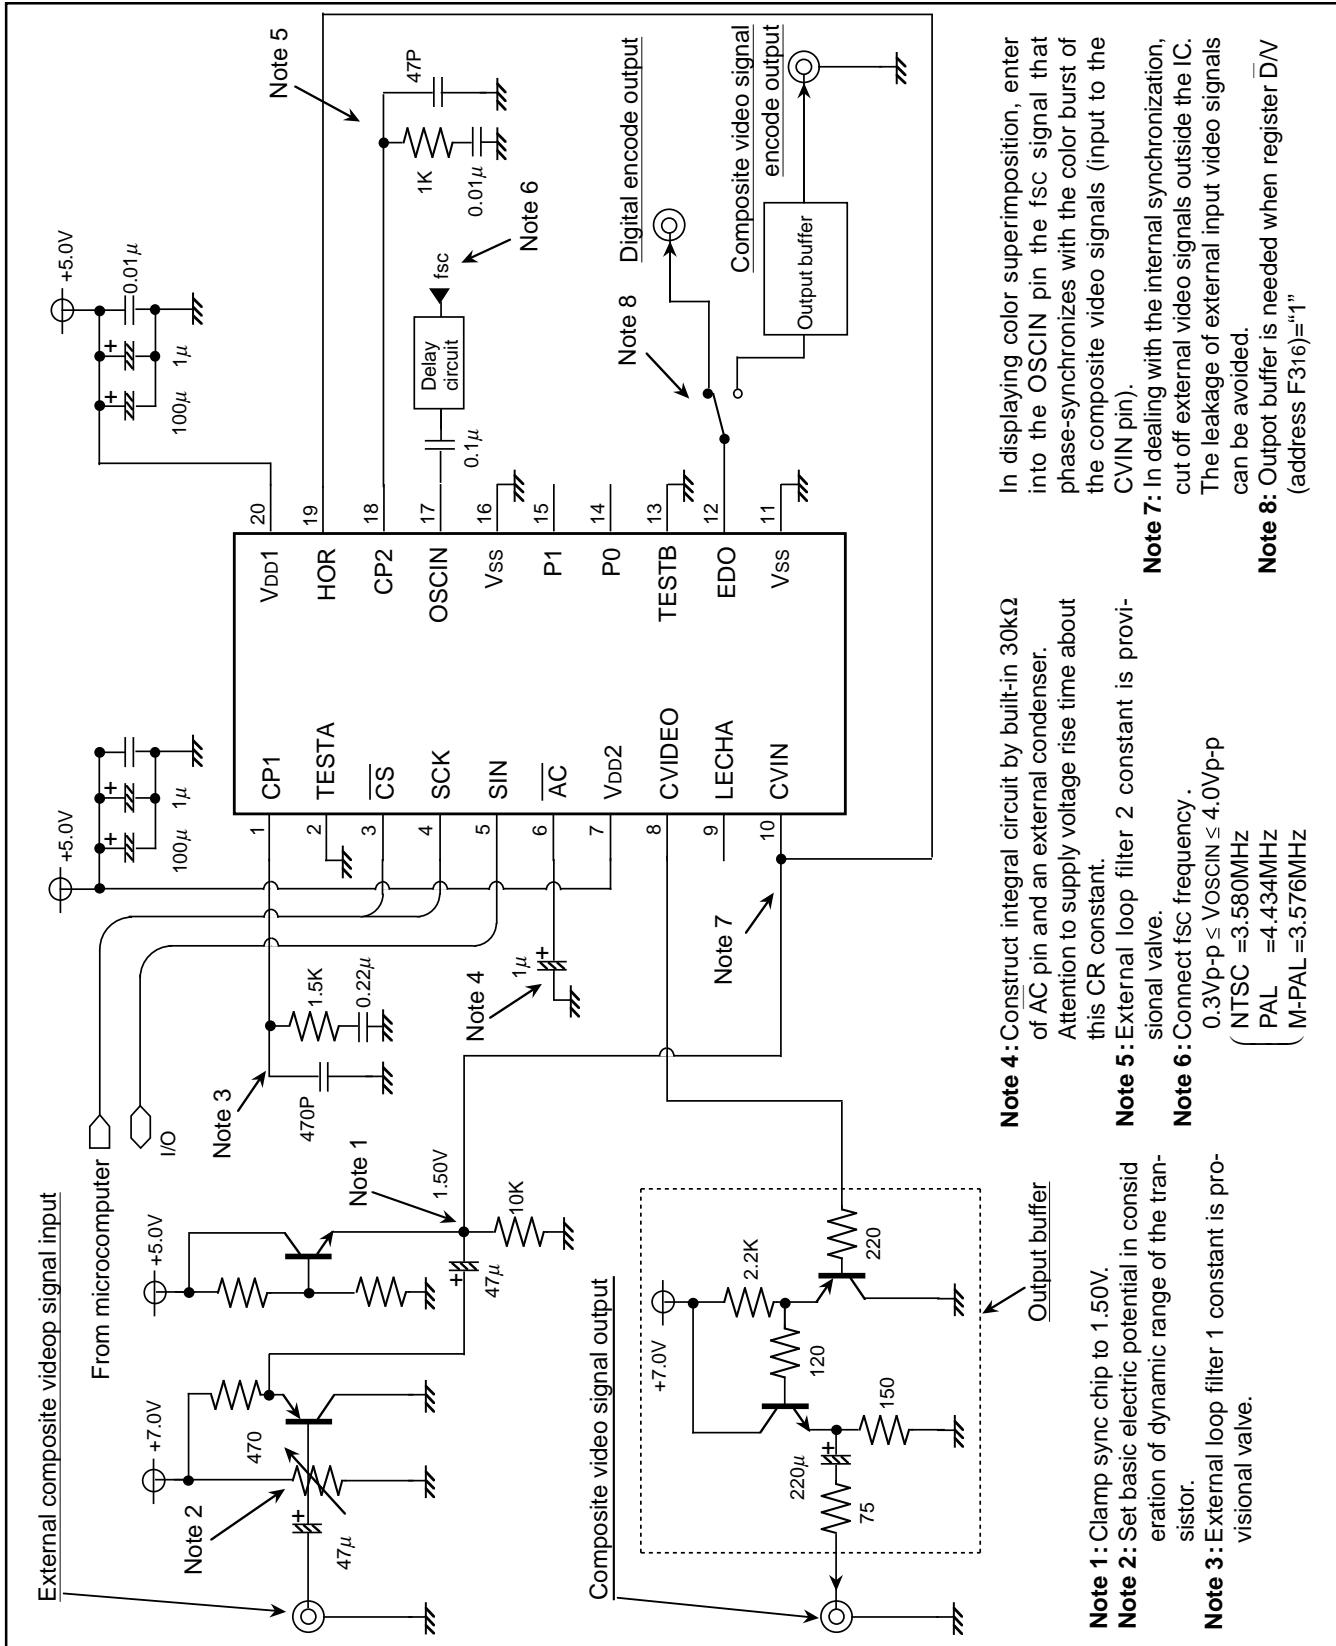


Fig. 18 M35053-XXXSP/FP example of peripheral circuit

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

TIMING REQUIREMENTS (Ta = -20°C to 70°C, VDD = 5±0.25V, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
tw(SCK)	SCK width	400	—	—	ns
tsu(CS)	CS setup time	200	—	—	ns
th(CS)	CS hold time	2	—	—	μs
tsu(SIN)	SIN setup time	200	—	—	ns
th(SIN)	SIN hold time	200	—	—	ns
tword	1 word writing time	12.8	—	—	μs

Note. When oscillation stop at register STOR1 (address F816), 1V (field term) or more of tsu(CS) and th(CS) are needed.

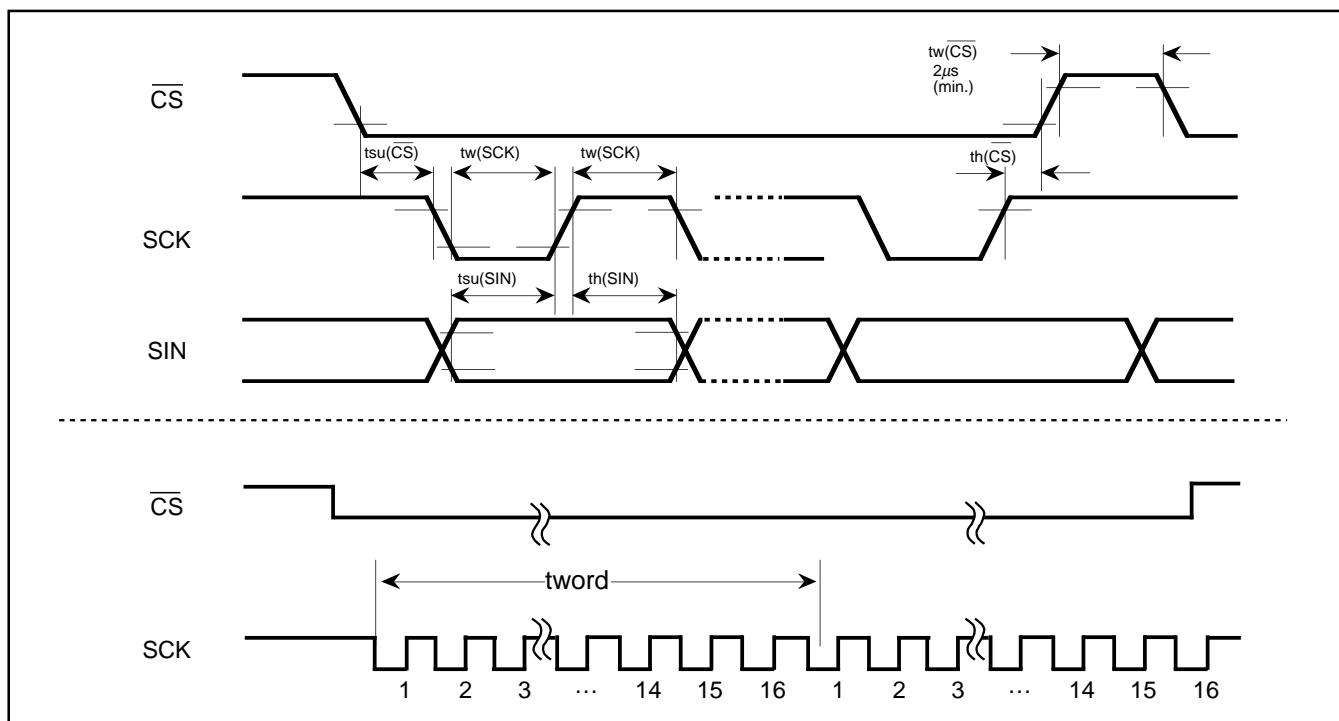


Fig. 19 Serial input timing requirements

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

ABSOLUTE MAXIMUM RATINGS ($V_{DD} = 5V$, $T_a = -20$ to $70^{\circ}C$, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V_{DD}	Supply voltage	With respect to V_{SS}	-0.3~6.0	V
V_I	Input voltage		$V_{SS}-0.3 \leq V_I \leq V_{DD}+0.3$	V
V_O	Output voltage		$V_{SS} \leq V_O \leq V_{DD}$	V
P_d	Power dissipation	$T_a=25^{\circ}C$	300	mW
T_{opr}	Operating temperature		-20~70	$^{\circ}C$
T_{stg}	Storage temperature		-40~125	$^{\circ}C$

RECOMMENDED OPERATING CONDITIONS ($V_{DD} = 5V$, $T_a = -20$ to $70^{\circ}C$, unless otherwise noted)

Symbol	Parameter	Limits			Unit	
		Min.	Typ.	Max.		
V_{DD}	Supply voltage	4.75	5.00	5.25	V	
V_{IH}	"H"level input voltage AC, CS, SIN, SCK, TESTA, TESTB	$0.8 \times V_{DD}$	V_{DD}	V_{DD}	V	
V_{IL}	"L" level input voltage AC, CS, SIN, SCK, TESTA, TESTB	0	0	$0.2 \times V_{DD}$	V	
V_{CVIN}	CVIN, HOR	-	$2.0V_{P-P}$	-	V	
V_{OSCIN}	Input voltage OSCIN (Note 1)	$0.3V_{P-P}$	-	$4.0V_{P-P}$	V	
f_{OSCIN}	Synchronous signal oscillation frequency (Duty 40~60%)	-	3.580	-	MHz	
			4.434			
			3.576			
f_{OSC1}	Display oscillation frequency	24 characters \times 10 lines	-	$480 \times f_H$ (Note 2)	-	MHz
f_{OSC2}		32 characters \times 7 lines	-	$640 \times f_H$ (Note 2)	-	MHz

Notes 1. Noise component is within 30mV.

2. f_H : Horizontal synchronous frequency (MHz).ELECTRICAL CHARACTERISTICS ($V_{DD} = 5V$, $T_a = 25^{\circ}C$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V_{DD}	Supply voltage	$T_a=-20$ ~ $70^{\circ}C$	4.75	5.00	5.25	V
I_{DD}	Supply current	$V_{DD}=5.00V$	-	30	50	mA
V_{OH}	"H"level output voltage P0, P1, SIN	$V_{DD}=4.75V$, $I_{OH}=-0.4mA$	3.75	-	-	V
V_{OL}	"L" level output voltage P0, P1, SIN	$V_{DD}=4.75V$, $I_{OL}=0.4mA$	-	-	0.4	V
R_I	Pull-up resistance AC, CS, SCK, SIN, TESTB	$V_{DD}=5.00V$	10	30	100	k Ω
V_{OH_a}	"H" level output voltage EDO	$V_{DD}=5.00V$, $I_{OH}=-0.04mA$	4.0	-	-	V
V_{OM_a}	"M"level output voltage EDO	$V_{DD}=5.00V$, $I_{OM}=\pm 0.04mA$	0.4	2.3	4.0	V
V_{OL_a}	"L" level output voltage EDO	$V_{DD}=5.00V$, $I_{OL}=0.04mA$	-	-	0.4	V

VIDEO SIGNAL INPUT CONDITIONS ($V_{DD} = 5V$, $T_a = -20$ to $70^{\circ}C$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V_{IN-SC}	Composite video signal input clamp voltage	Sync-chip voltage	-	1.5	-	V

Note for Supplying Power

(1) Timing of power supplying to AC pin

The internal circuit of M35052-XXXSP/FP is reset when the level of the auto clear input pin AC is "L". This pin is hysteresis input with the pull-up resistor. The timing about power supplying of AC pin is shown in Figure 20. tw is the interval after the supply voltage becomes $0.8 \times VDD$ or more and before the supply voltage to the AC pin (VAC) becomes $0.2 \times VDD$ or more.

After supplying the power (VDD and VSS) to M35052-XXXSP/FP, the tw time must be reserved for 1ms or more. Before starting

input from the microcomputer, the waiting time (ts) must be reserved for 500ms after the supply voltage to the AC pin becomes $0.8 \times VDD$ or more.

(2) Timing of power supplying to $VDD1$ pin and $VDD2$ pin

The power need to supply to $VDD1$ and $VDD2$ at a time, though it is separated perfectly between the $VDD1$ as the digital line and the $VDD2$ as the analog line.

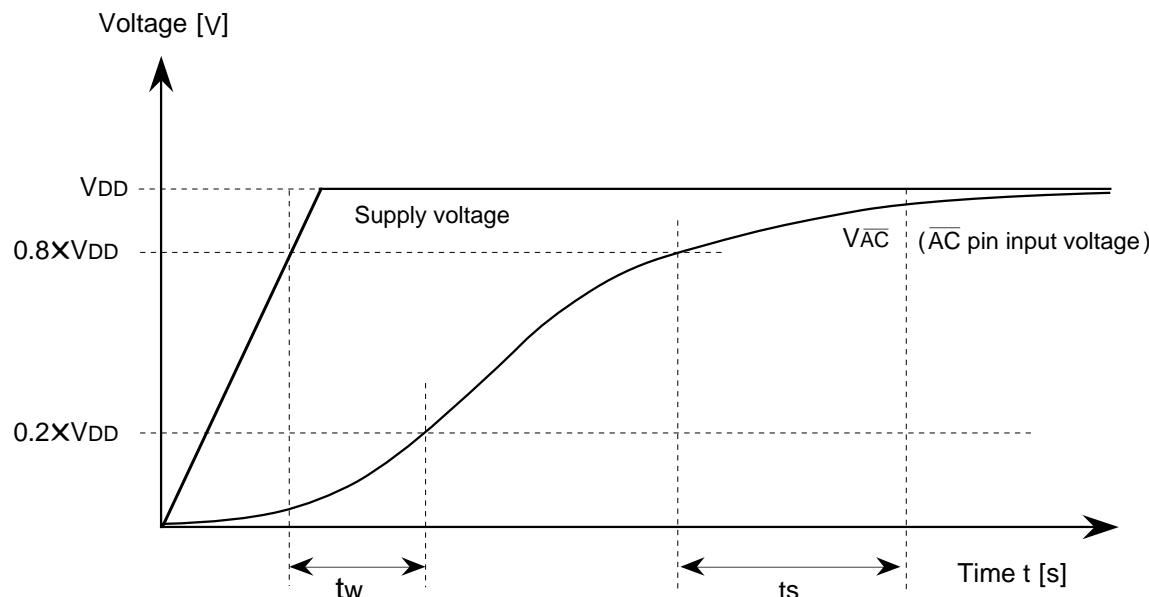


Fig. 20 Timing of power supplying to AC pin

PRECAUTION FOR USE

Notes on noise and latch-up

Connect a capacitor (approx. $0.1 \mu F$) between pins VDD and VSS at the shortest distance using relatively thick wire to prevent noise and latch up.

ROM ORDERING METHOD

Please submit the information described below when ordering Mask ROM.

- (1) ROM Order Confirmation Form 1
- (2) Data to be written into mask ROM EPROM
(three sets containing the identical data)
- (3) Mark Specification Form 1
- (4) Program for character font generating + floppy disk in which character data is input

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

STANDARD ROM TYPE : M35053-001SP/FP

M35053-001SP/FP is a standard ROM type of M35053-XXXSP/FP
character patterns are fixed to the contents of Figure 21 to 24.

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

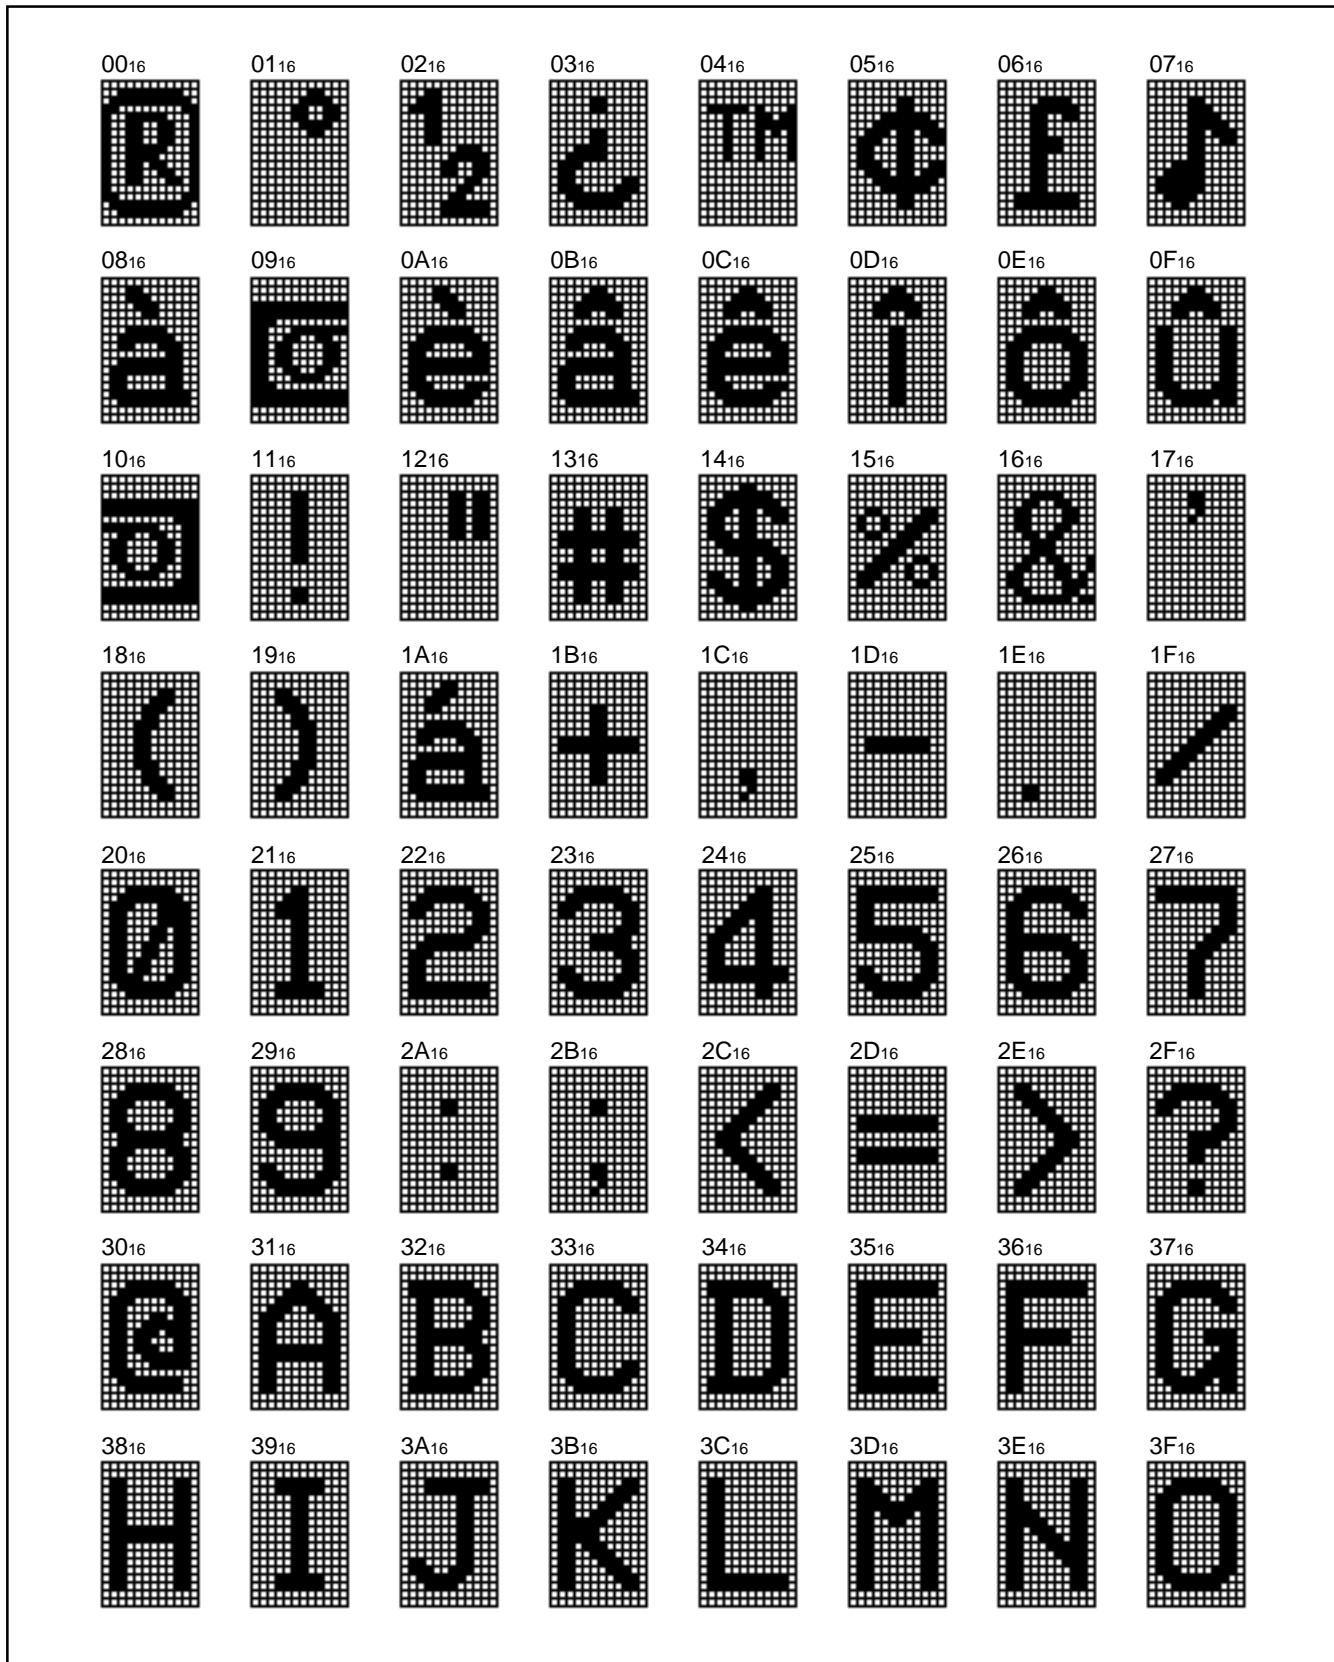


Fig. 21 M35053-001SP/FP character pattern (1)

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS



Fig. 22 M35053-001SP/FP character pattern (2)

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS



Fig. 23 M35053-001SP/FP character pattern (3)

SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS



Fig. 24 M35053-001SP/FP character pattern (4)

MASK ROM ORDER CONFIRMATION FORM
GZZ-SH00-51B <69A0>

Mask ROM number	
-----------------	--

MASK ROM ORDER CONFIRMATION FORM
SCREEN DISPLAY IC M35053-XXXSP/FP
MITSUBISHI ELECTRIC

Receipt	Data :	
	Section head signature	Supervisor signature

Note : Please fill in all items marked **※**, .

※ Customer	Company name	TEL ()	Issuance signature	Approval	Verification	Framing
	Data issued	Date :				
※ Program version name	M053R	V				

※ Remarks

- Return the Character Font Preparation Program after use.
- Three EPROMs are required. (All the three EPROMs must be same types. Check @ in the appropriate box.)

 27512

- (1) The font data prepared by the Character Font Preparation Program is saved as a binary type object file (addresses 0000h to 7FFFh). Three sets of these EPROMs are required.
- (2) Attach the erase protect seals on three EPROMs. Each seal bears the type name (M35053), and ROM No. (-...SP/FP).

- Write the checksum code (hexadecimal notation) for entire EPROM areas.

 Checksum

--	--	--	--

- Select the marking type (Check @ in the appropriate box).

Special Mark Fill in the Mark Specification Form (20P4B for M35053-XXXSP, 20P2Q-A for M35053-XXXFP) and attach to the Mask ROM Order Confirmation Form.

Standard Mark No writing is required.

- The package type

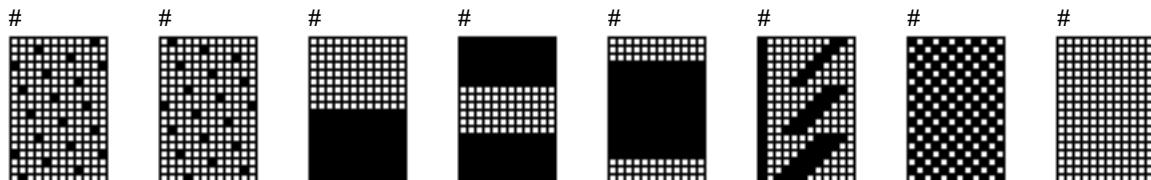
..... SDIP type (M35053-XXXSP)

..... SSOP type (M35053-XXXFP)

※● Comments

GZZ-SH00-51B <69A0>Mask ROM number

※1. Test patterns





























































(The patterns with the mark "#" are test patterns)


※2. Character patterns

(See the next page)


SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

00 ₁₆	01 ₁₆	02 ₁₆	03 ₁₆	04 ₁₆	05 ₁₆	06 ₁₆	07 ₁₆
							
08 ₁₆	09 ₁₆	0A ₁₆	0B ₁₆	0C ₁₆	0D ₁₆	0E ₁₆	0F ₁₆
							
10 ₁₆	11 ₁₆	12 ₁₆	13 ₁₆	14 ₁₆	15 ₁₆	16 ₁₆	17 ₁₆
							
18 ₁₆	19 ₁₆	1A ₁₆	1B ₁₆	1C ₁₆	1D ₁₆	1E ₁₆	1F ₁₆
							
20 ₁₆	21 ₁₆	22 ₁₆	23 ₁₆	24 ₁₆	25 ₁₆	26 ₁₆	27 ₁₆
							
28 ₁₆	29 ₁₆	2A ₁₆	2B ₁₆	2C ₁₆	2D ₁₆	2E ₁₆	2F ₁₆
							
30 ₁₆	31 ₁₆	32 ₁₆	33 ₁₆	34 ₁₆	35 ₁₆	36 ₁₆	37 ₁₆
							
38 ₁₆	39 ₁₆	3A ₁₆	3B ₁₆	3C ₁₆	3D ₁₆	3E ₁₆	3F ₁₆
							































































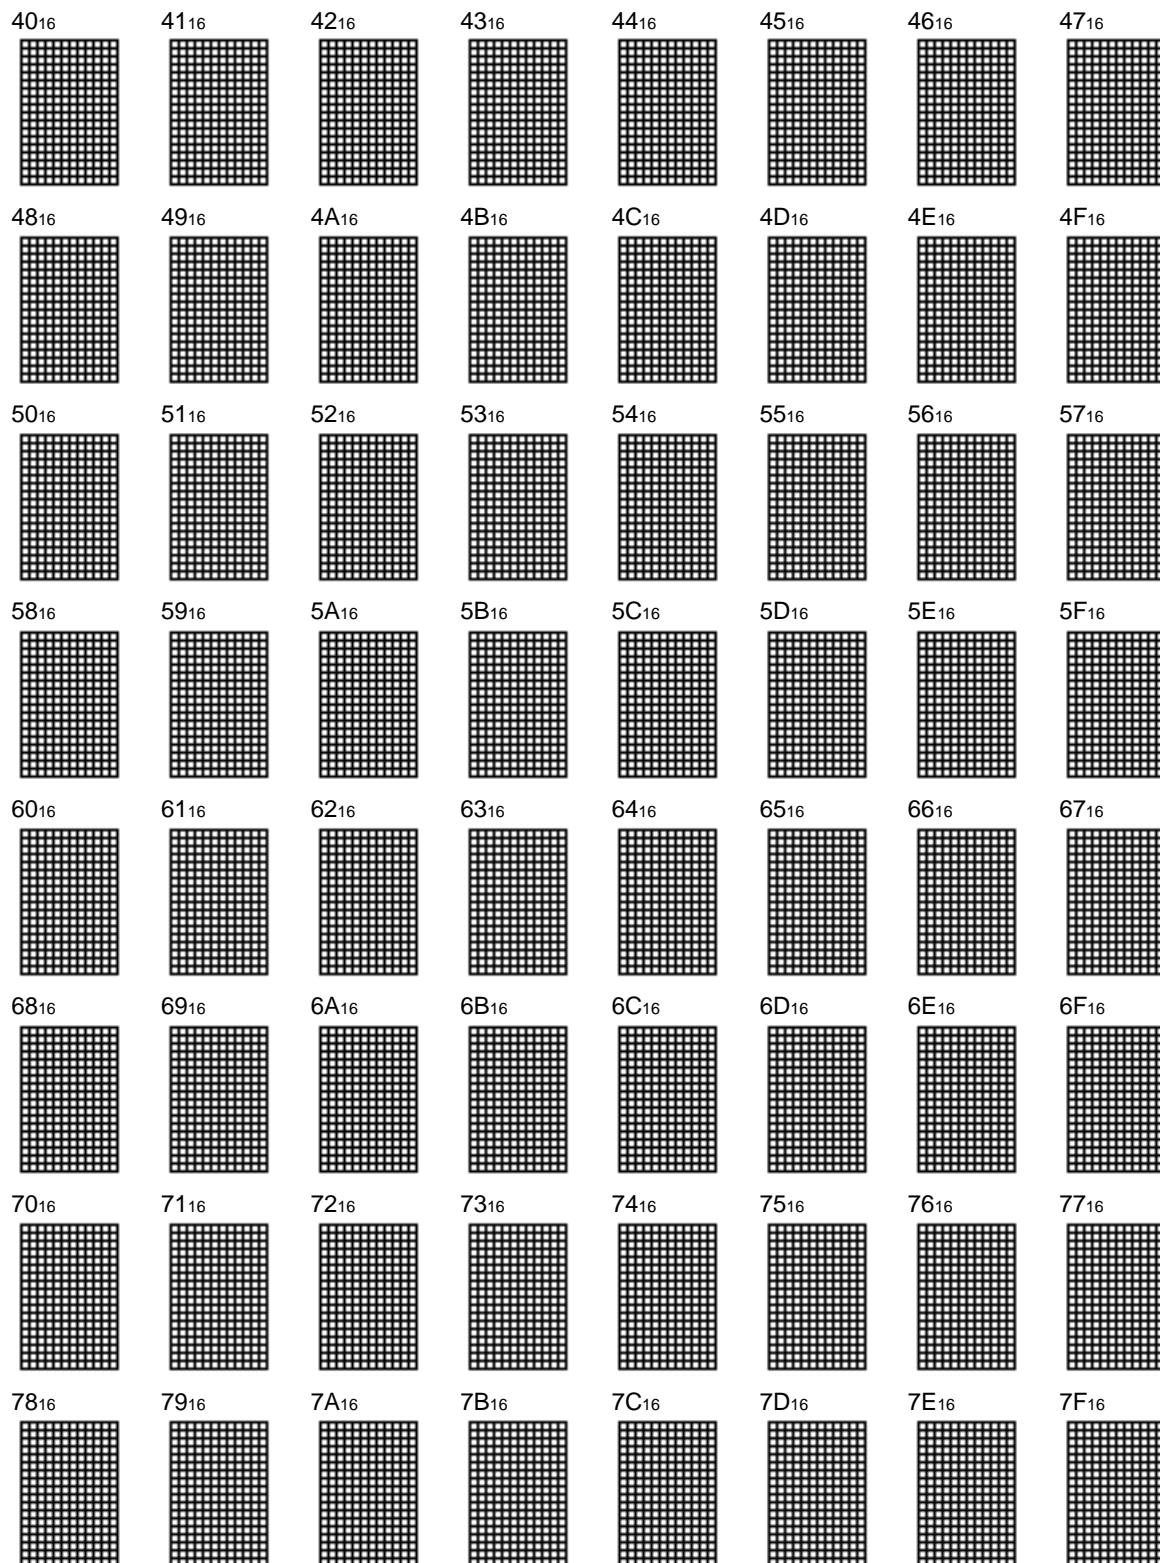
SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS



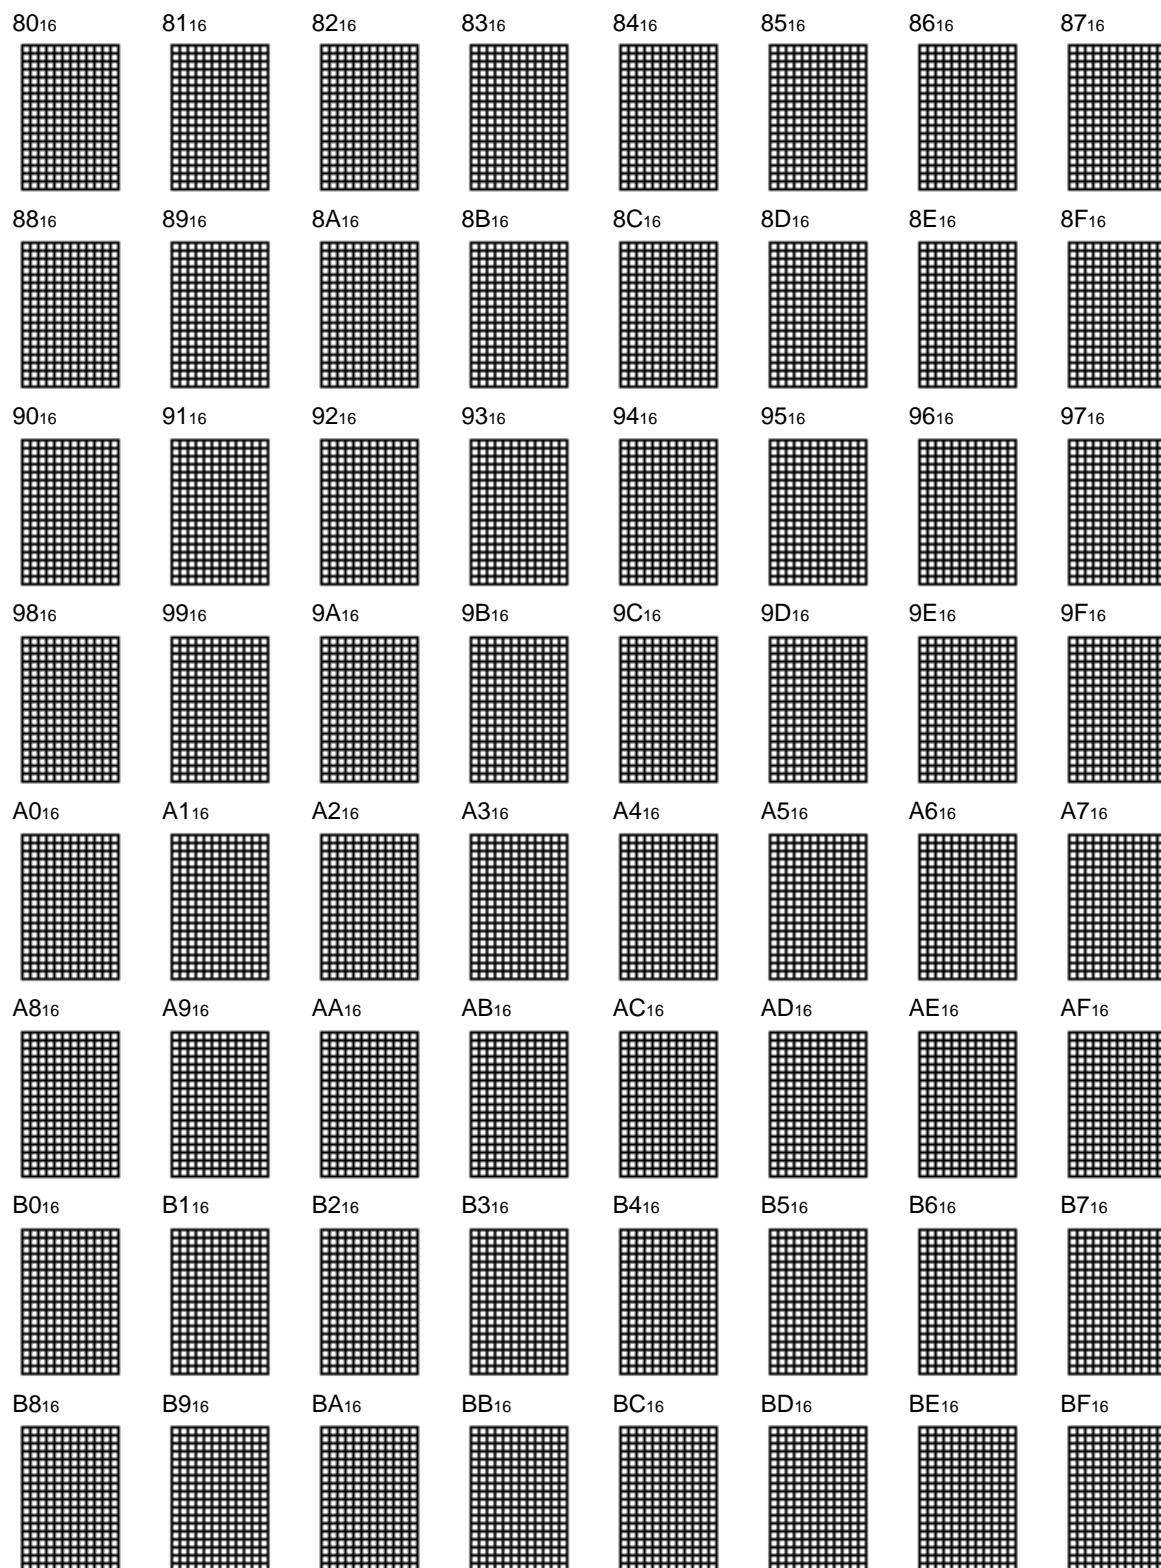SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS



SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS


C016	C116	C216	C316	C416	C516	C616	C716
							
C816	C916	CA16	CB16	CC16	CD16	CE16	CF16
							
D016	D116	D216	D316	D416	D516	D616	D716
							
D816	D916	DA16	DB16	DC16	DD16	DE16	DF16
							
E016	E116	E216	E316	E416	E516	E616	E716
							
E816	E916	EA16	EB16	EC16	ED16	EE16	EF16
							
F016	F116	F216	F316	F416	F516	F616	F716
							
F816	F916	FA16	FB16	FC16	FD16	FE16	FF16 blank
							

20P2Q-A (20-PIN SHRINK SOP) MARK SPECIFICATION FORM


Mitsubishi IC catalog name

Please choose one of the marking types below (A, B, C), and enter the Mitsubishi catalog name and the special mark (if needed).

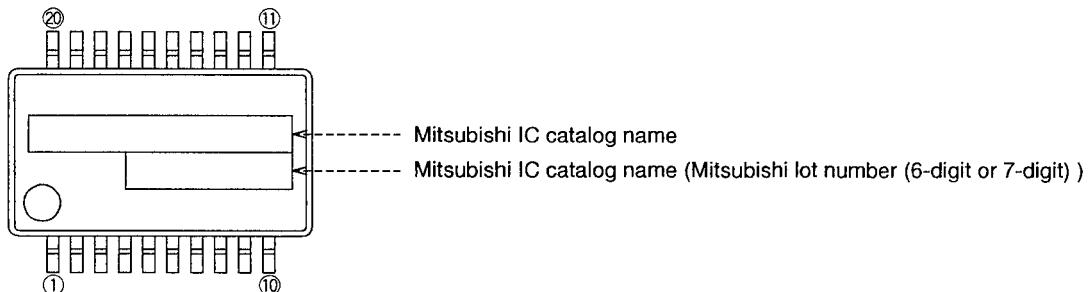
A. Standard Mitsubishi Mark



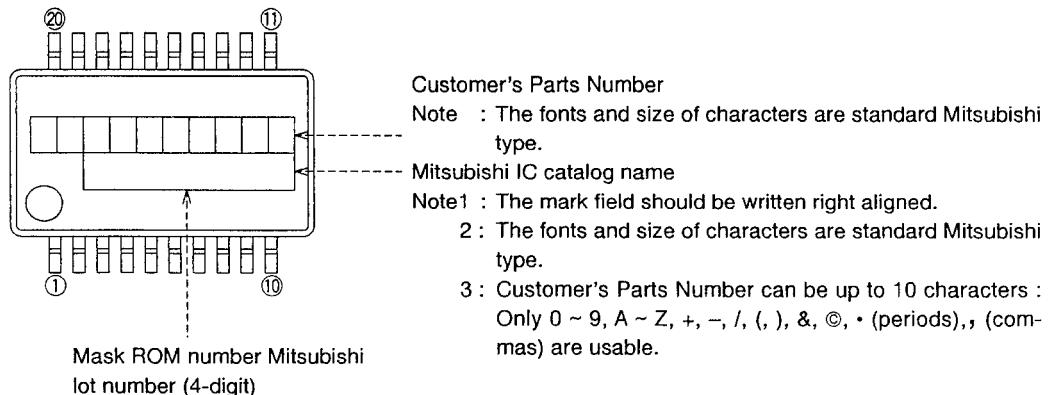B. Customer's Parts Number + Mitsubishi catalog name



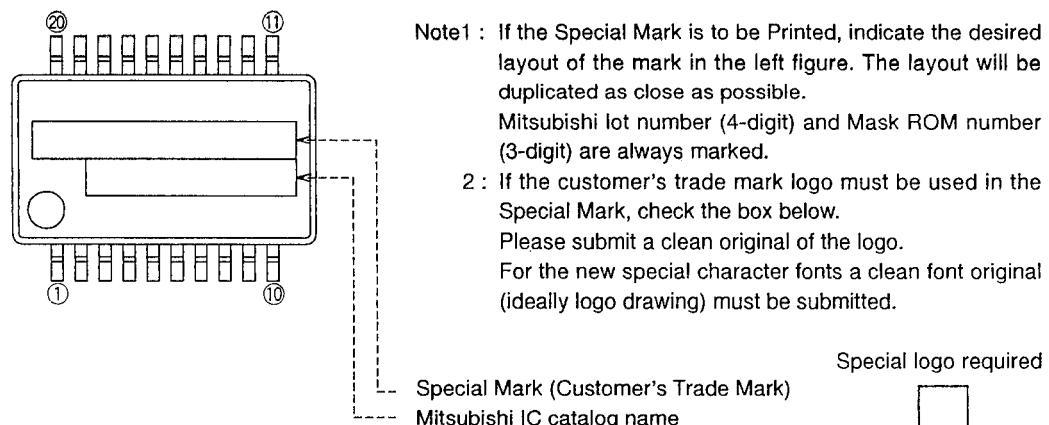C. Special Mark Required




SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS

20P4B (20-PIN DIP) MARK SPECIFICATION FORM


Mitsubishi IC catalog name

Please choose one of the marking types below (A, B, C), and enter the Mitsubishi catalog name and the special mark (if needed).

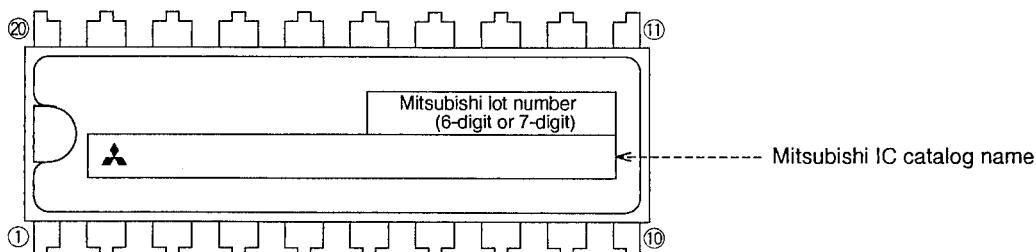A. Standard Mitsubishi Mark



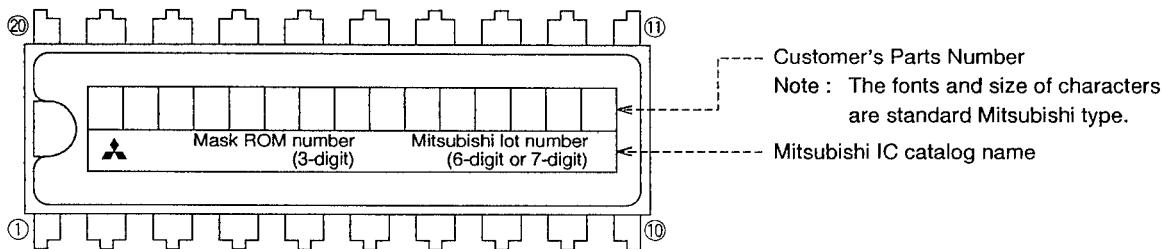B. Customer's Parts Number + Mitsubishi catalog name




Note1 : The mark field should be written right aligned.

2 : The fonts and size of characters are standard Mitsubishi type.

3 : Customer's Parts Number can be up to 15 characters : Only 0 ~ 9, A ~ Z, +, -, /, (,), &, ©, • (periods), , (commas) are usable.

4 : If the Mitsubishi logo  is not required, check the box on the right. Mitsubishi logo is not required

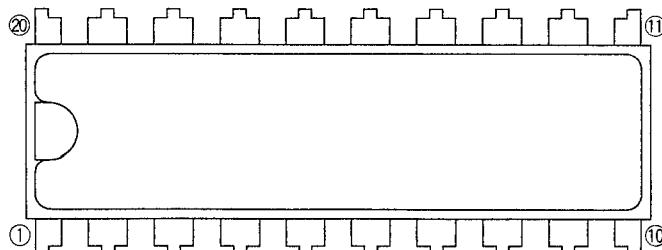C. Special Mark Required



Note1 : If the Special Mark is to be Printed, indicate the desired layout of the mark in the upper figure. The layout will be duplicated as close as possible. Mitsubishi lot number (6-digit or 7-digit) and Mask ROM number (3-digit) are always marked.

2 : If the customer's trade mark logo must be used in the Special Mark, check the box on the right. Please submit a clean original of the logo. For the new special character fonts a clean font original (ideally logo drawing) must be submitted.

Special logo required



SCREEN CHARACTER and PATTERN DISPLAY CONTROLLERS


PACKAGE OUTLINE

20P4B

Plastic 20pin 300mil SDIP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
SDIP20-P-300-1.78	—	1.0	—

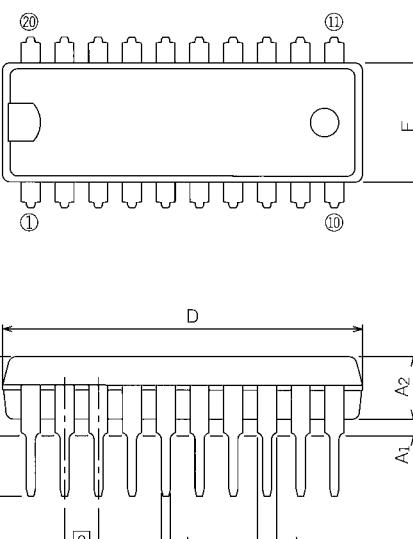Scale : 2.5/1



Dimensions (mm):


- Symbol: A, Min: —, Nom: —, Max: 4.5
- Symbol: A₁, Min: 0.51, Nom: —, Max: —
- Symbol: A₂, Min: —, Nom: 3.3, Max: —
- Symbol: b, Min: 0.38, Nom: 0.48, Max: 0.58
- Symbol: b₁, Min: 0.9, Nom: 1.0, Max: 1.3
- Symbol: c, Min: 0.22, Nom: 0.27, Max: 0.34
- Symbol: D, Min: 18.8, Nom: 19.0, Max: 19.2
- Symbol: E, Min: 6.15, Nom: 6.3, Max: 6.45
- Symbol: [e], Min: —, Nom: 1.778, Max: —
- Symbol: [e₁], Min: —, Nom: 7.62, Max: —
- Symbol: L, Min: 3.0, Nom: —, Max: —
- Symbol: θ, Min: 0°, Nom: —, Max: 15°

20P2Q-A

Plastic 20pin 300mil SSOP

EIAJ Package Code	JEDEC Code	Weight(g)	Lead Material
SSOP20-P-0300	—	0.2	Cu Alloy

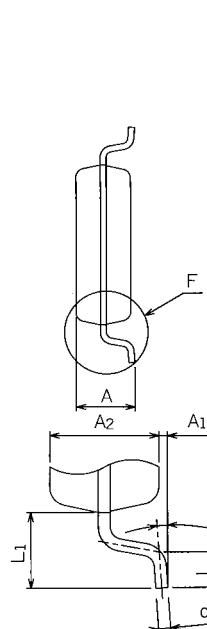Scale : 4/1



Dimensions (mm):

- Symbol: A, Min: —, Nom: —, Max: 2.1
- Symbol: A₁, Min: 0, Nom: 0.1, Max: 0.2
- Symbol: A₂, Min: —, Nom: 1.8, Max: —
- Symbol: b, Min: 0.3, Nom: 0.35, Max: 0.45
- Symbol: c, Min: 0.18, Nom: 0.2, Max: 0.25
- Symbol: D, Min: 10.0, Nom: 10.1, Max: 10.2
- Symbol: E, Min: 5.2, Nom: 5.3, Max: 5.4
- Symbol: [e], Min: —, Nom: 0.8, Max: —
- Symbol: H_E, Min: 7.5, Nom: 7.8, Max: 8.1
- Symbol: L, Min: 0.4, Nom: 0.6, Max: 0.8
- Symbol: L₁, Min: —, Nom: 1.25, Max: —
- Symbol: y, Min: —, Nom: —, Max: 0.1
- Symbol: θ, Min: 0°, Nom: —, Max: 8°
- Symbol: b₂, Min: —, Nom: 0.5, Max: —
- Symbol: [e₁], Min: —, Nom: 7.62, Max: —
- Symbol: l₂, Min: 1.27, Nom: —, Max: —

Keep safety first in your circuit designs!

- Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.

REVISION DESCRIPTION LIST

M35053-XXXSP/FP DATA SHEET

Rev. No.	Revision Description	Rev. date
1.0	First Edition	971130