


SF1083B 286 MHz SAW Filter

- Designed for GSM BTS Transmitter Applications
- Low Insertion Loss and Small Size
- 8.5 x 5.8 mm Surface-Mount Case
- Unbalanced Input and Output



Characteristic	Sym	Min	Typ	Max	Units	Notes
Nominal Center Frequency	fc		286.000		MHz	1
Passband	Insertion Loss at fc	IL	6	8.0	dB	1, 2
	3 dB Passband	BW ₃	±275		kHz	
	Amplitude Ripple over fc ±75 kHz			0.3	dB _{P-P}	
	Group Delay Variation over fc ±75 kHz	GDV		100	nSp-P	
Rejection	100 kHz to fc-6.0 MHz and fc+6.0 to 540 MHz		20	40	dB	1, 2, 3
	Ultimate		>40			
Operating Temperature Range	T _A	-40		+85	°C	1

Impedance Matching to 50 Ω unbalanced	External L-C
Case Style	SM8558-8 8.5 x 5.8 mm Nominal Footprint
Lid Symbolization (YY=year, WW=week, XXX=lot code)	RFM SF1083B YYWWXXX

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Max Soldering Profile	235°C for 90 s	

Electrical Connections



Connection	Terminals
Port 1 Hot	7
Port 1 Gnd Return	1
Port 2 Hot	3
Port 2 Gnd Return	5
Case Ground	All Others

Notes:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.
9. ©Copyright 1999, RF Monolithics Inc.
10. Electrostatic Sensitive Device. Observe precautions for handling.




SF1083B 286 MHz SAW Filter

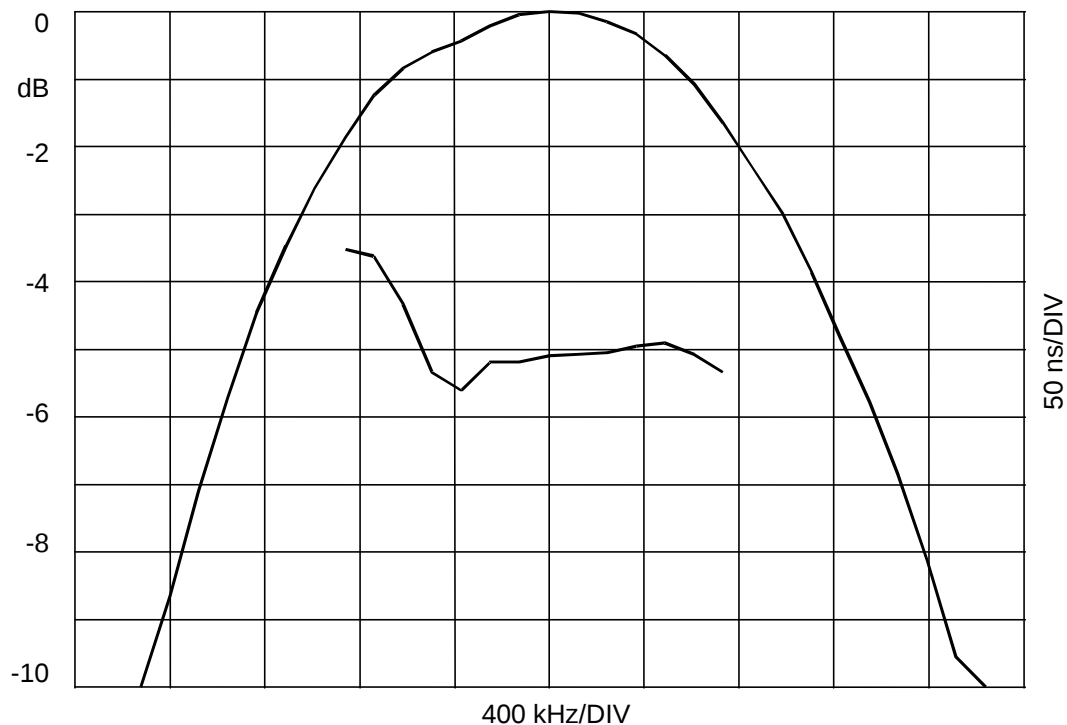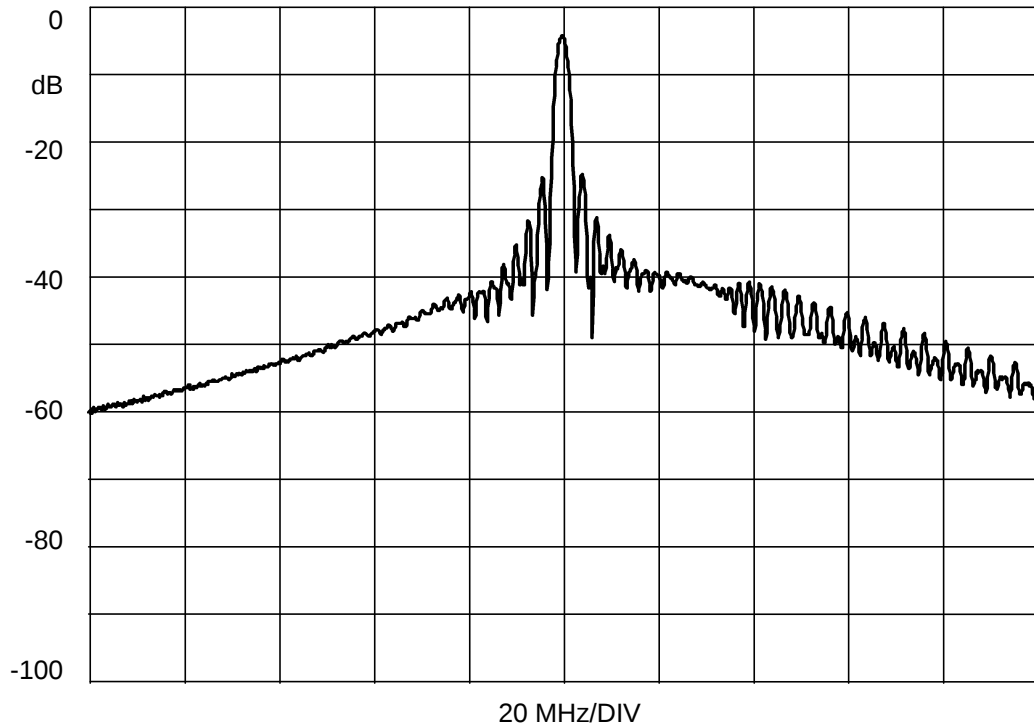


SM8558-8 Case



8-Terminal Ceramic Surface-Mount Case 8.5 x 5.8 mm Nominal Footprint



Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	8.26	8.51	8.76	0.325	0.335	0.345
B	5.59	5.84	6.10	0.220	0.230	0.240
C		1.70	2.00		0.067	0.079
D		0.79			0.031	
E		1.14			0.045	
F		1.98			0.078	
H		0.51			0.020	
M		0.76			0.030	
N		0.51			0.020	
P		2.54			0.100	
R		0.51			0.020	

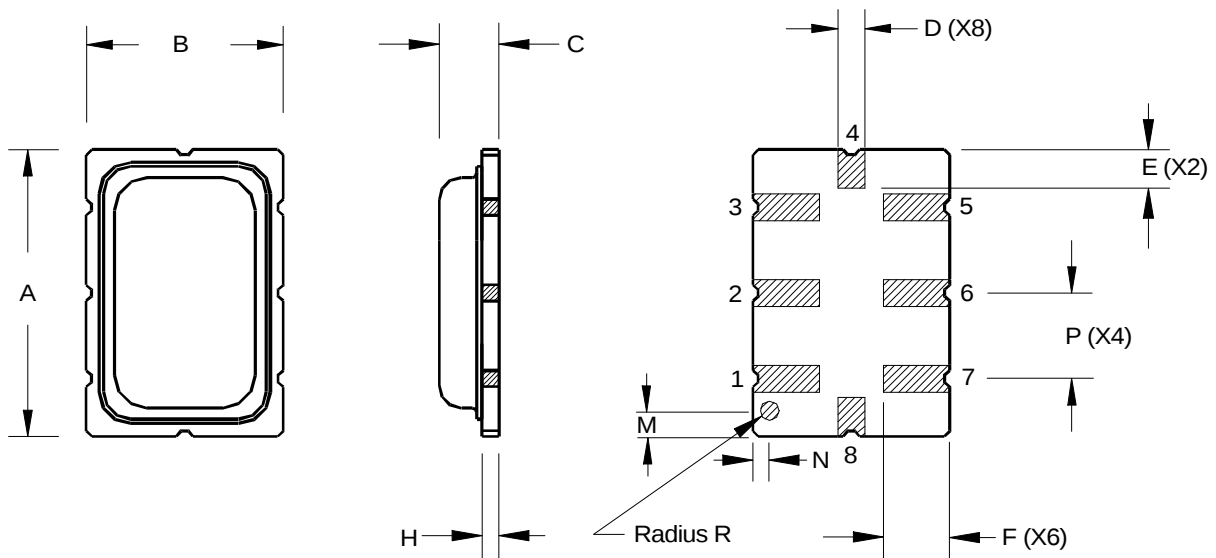

BILL OF MATERIALS

PART IDENTIFIER	DESCRIPTION 1	DESCRIPTION 2	QTY/ASSY	REFERENCE DESCRIPTION
SF1083B(DEMO)	FILTER,SM,286.000MHZ			
SF1083B-100	ASSY DIAGRAM,DEMO BOARD	SF1083B	0	
400-1446-001	PCB,DEMO BOARD,CRF		1.0000	PCB1
500-0003-180	CAP,CHIP,NPO,18(J),STD		1.0000	C 1
500-0248-001	CONN,COAX,FLANGE MT,JACK	4 HOLE	2.0000	J 1,2
500-0010-470	IND,CHIP,1008CS,47NH,10%		2.0000	L 1,2
500-0003-150	CAP,CHIP,NPO,15(J),STD		1.0000	C2

		SIZE	FSCM NO.	DWG NO.					
		A	2U874	SF1083B(DEMO)					
		W/O or ECN							
SCALE		NONE	7677	REV	B	SHEET	1	OF	2

[illegible]

			SIZE	FSCM NO.	DWG NO.	SF1083B(DEMO)			
			A	2U874					
	SCALE	NONE	W/O or ECN	7677	REV		B	SHEET	2