

# STR9000 Series

## Dropper Type — Low-Dropout Voltage Type

### Features


- Input/output voltage difference of less than 1V during operation
- Reduces power loss for electronic equipment
- Small size with 4 A output
- An easy-to-use 5-pin plastic-mold regulator
- Capable of remote ON/OFF
- Capable of fine adjustment of output voltage
- Built-in foldback current protection circuit
- High reliability due to use of SANKEN's semiconductor elements

### Absolute maximum Ratings (Ta = 25°C)

| Description                                    | Symbol               | Ratings                    |         |         | Unit |
|--|----------------------|----------------------------|---------|---------|------|
|  |                      | STR9005                    | STR9012 | STR9015 |      |
| DC Input Voltage                               | V <sub>IN</sub>      | 25                         | 30      | 30      | V    |
| DC Output Current                              | I <sub>o</sub>       | 4.0                        |         |         | A    |
| Power Dissipation                              | P <sub>D</sub>       | 75 (T <sub>C</sub> = 25°C) |         |         | W    |
|  |                      | 3.2 (no fin)               |         |         |      |
| Junction Temperature                           | T <sub>J</sub>       | -30 to +125                |         |         | °C   |
| Operating Case Temperature                     | T <sub>C</sub>       | -20 to +100                |         |         | °C   |
| Storage Temperature                            | T <sub>stg</sub>     | -30 to +125                |         |         | °C   |
| Thermal Resistance (between junction and case) | R <sub>th(j-c)</sub> | 1.25 max.                  |         |         | °C/W |

### Applications

- For battery-operated VTR cameras, 8 mm cameras and automotive appliances
- For various types of electronic equipment including micro computers, personal computers, floppy disk drives, CATV sets, VTRs, video disks, and printers
- For stabilization of secondary side of multi-output switching regulators

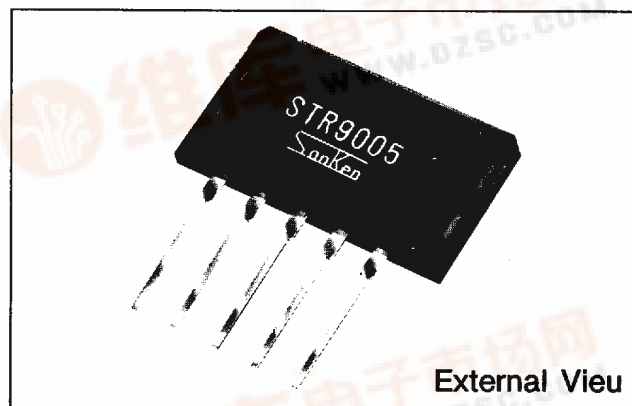


External View

### Electrical Characteristics (Ta = 25°C)

| Description  | Symbol               | Ratings  |       |      |  |       |      |  |       |      | Unit  |
|--|----------------------|--|-------|------|--|-------|------|--|-------|------|-------|
|  |                      | STR9005  |       |      | STR9012  |       |      | STR9015  |       |      |       |
|  |                      | min.   | typ.  | max. | min.   | typ.  | max. | min.   | typ.  | max. |       |
| DC Input Voltage   | V <sub>IN</sub>      | 6  |       | 15   | 13   |       | 25   | 16   |       | 25   | V     |
| Output Voltage   | V <sub>O</sub>       | 4.9  | 5.0   | 5.1  | 11.8   | 12.0  | 12.2 | 14.8   | 15.0  | 15.2 | V     |
|  | Condition            | V <sub>IN</sub> = 8.0V, I <sub>O</sub> = 2.0A      |       |      | V <sub>IN</sub> = 16V, I <sub>O</sub> = 2.0A       |       |      | V <sub>IN</sub> = 20V, I <sub>O</sub> = 2.0A       |       |      |       |
| Dropout Voltage  | V <sub>DIF</sub>     |  |       | 0.5  |  |       | 0.5  |  |       | 0.5  | V     |
|  |                      | I <sub>O</sub> = 2.0A                              |       |      |  |       |      |  |       |      |       |
|  |                      |  |       | 1.0  |  |       | 1.0  |  |       | 1.0  |       |
|  |                      | I <sub>O</sub> = 4.0A                              |       |      |  |       |      |  |       |      |       |
| Line Regulation  | ΔV <sub>LINE</sub>   |  | 10    | 30   |  | 30    | 80   |  | 50    | 100  | mV    |
|  | Condition            | V <sub>IN</sub> = 6 to 15V, I <sub>O</sub> = 2.0A  |       |      | V <sub>IN</sub> = 13 to 25V, I <sub>O</sub> = 2.0A |       |      | V <sub>IN</sub> = 16 to 25V, I <sub>O</sub> = 2.0A |       |      |       |
| Load Regulation  | ΔV <sub>LOAD</sub>   |  | 40    | 100  |  | 80    | 200  |  | 100   | 200  | mV    |
|  | Condition            | V <sub>IN</sub> = 8.0V, I <sub>O</sub> = 0 to 3.0A |       |      | V <sub>IN</sub> = 16V, I <sub>O</sub> = 0 to 3.0A  |       |      | V <sub>IN</sub> = 20V, I <sub>O</sub> = 0 to 3.0A  |       |      |       |
| Temperature Coefficient of Output Voltage                  | ΔV <sub>O</sub> /ΔT  |  | ± 0.5 |      |  | ± 1.5 |      |  | ± 1.5 |      | mV/°C |
| Ripple Rejection   | R <sub>REJ</sub>     |  | 54    |      |  | 54    |      |  | 54    |      | dB    |
|  | Condition            | f = 100 to 120Hz                                   |       |      |  |       |      |  |       |      |       |
| Foldback Current   | I <sub>S1</sub>      | 4.1  |       |      | 4.1  |       |      | 4.1  |       |      | A     |
|  | Condition            | V <sub>IN</sub> = 8.0V                             |       |      | V <sub>IN</sub> = 16V                              |       |      | V <sub>IN</sub> = 20V                              |       |      |       |
| Output ON/OFF Control Vtg. * (Vtg. between pin No.3 and 5) | V <sub>O</sub> (ON)  |  |       | 0.6  |  |       | 0.6  |  |       | 0.6  | V     |
|  | V <sub>O</sub> (OFF) | 2.0  |       |      | 2.0  |       |      | 2.0  |       |      | V     |
| Voltage with output off                                    | V <sub>O</sub>       |  |       | 0.5  |  |       | 0.5  |  |       | 0.5  | V     |
|  | Condition            | V <sub>IN</sub> = 8.0V, I <sub>O</sub> = 0A        |       |      | V <sub>IN</sub> = 15V, I <sub>O</sub> = 0A         |       |      | V <sub>IN</sub> = 20V, I <sub>O</sub> = 0A         |       |      |       |

\* Output is turned on with voltage of less than 0.6 V between pin No.3 and 5, and turned off at more than 2.0 V.

## ■ Outline Drawing/Pin Connections (unit : mm)

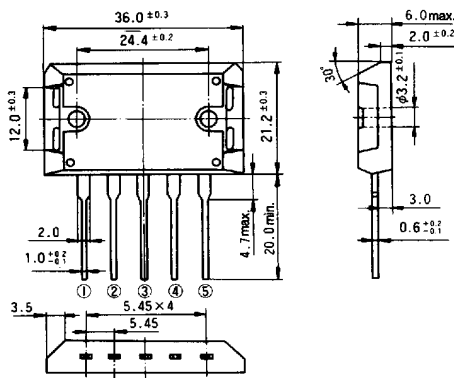


Full Plastic Mold Package Type  
Flammability : UL94V-O or equivalent

### Pin Connections


- ① Output (backside of case)
- ② Output Fine Adjustment
- ③ Output ON/OFF Control
- ④ Input
- ⑤ Ground

Weight : Approx. 14.5g

## ■ Equivalent Circuit

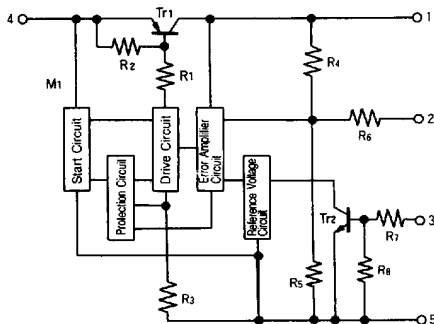

## ■ External Circuit




**C<sub>1</sub>** : Oscillation Prevention Capacitor  
(approx. 0.33  $\mu$ F)  
Connection with pin No.4 shall be made as short as possible.

**C<sub>2</sub>** : Output Capacitor (47 to 100  $\mu$ F, 50 V)  
Connection with pin No.1 shall be made as short as possible.


**D<sub>1</sub>** : Protection Diode (RM1Z)  
Required when between input and output is reverse biased. However, it is not required if the output capacitor is less than 100  $\mu$ F.

## ■ Typical Operating Characteristics

### Power Dissipation

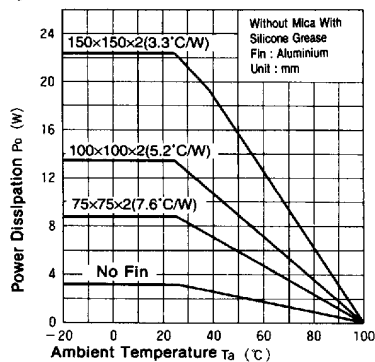

### I<sub>O</sub> vs. V<sub>DIF</sub> Characteristics

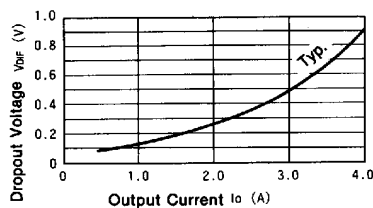

### Note 1 : Prevention of oscillation at low temperature

When an output capacitor with smaller  $\tan \delta$  is not used at low temperature, oscillation may happen. Be sure to connect tantalum capacitor (approx. 10  $\mu$ F) in parallel with output capacitor C<sub>2</sub>.

**Note 2** : As an isolation type diode is provided between input ~ ground and output ~ ground, they may be destroyed when reverse biased. In that case, use a diode with low V<sub>F</sub> to prevent them.


Refer to the 13th page for other precautions.

## Output Voltage Adjustable Circuit

### 1. Adjustment of output voltage by single external resistor

The output voltage of STR9000 series may be decreased by inserting a resistor between the pin No.1 (output pin) and the pin No.2 (output fine adjustment pin). On the other hand, the output voltage may be increased by inserting a resistor between the pin No.2 and 5 (ground pin).


#### <External Circuit>

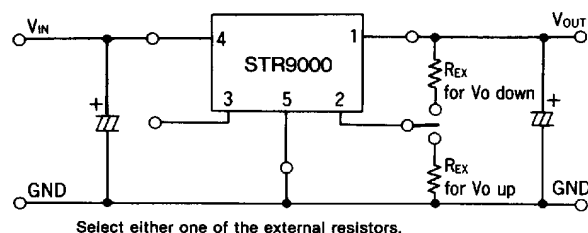

### 2. Fine adjustment of output voltage

The output voltage may be finely adjusted by using the pins 1, 2 and 5 as shown in the following connections.

#### <External Circuit>



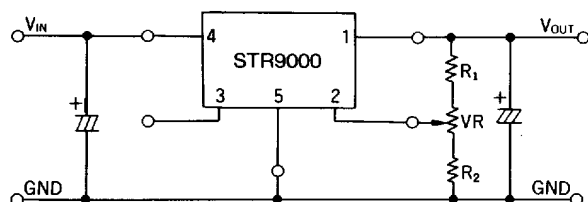


#### Note: Fine adjustment of output voltage

The fine adjustment range of output voltage for STR9000 series are max.  $\pm 0.2$  V for STR9005,  $\pm 0.5$  V for STR9012 and  $+1.0$  V /  $-2.0$  V for STR9015.

Adjustment exceeding these values may cause starting error.

① Typical Characteristics of Output Voltage Adjustment (Ta = 25°C)

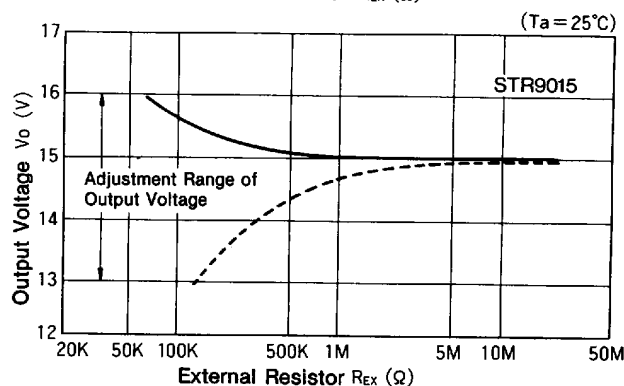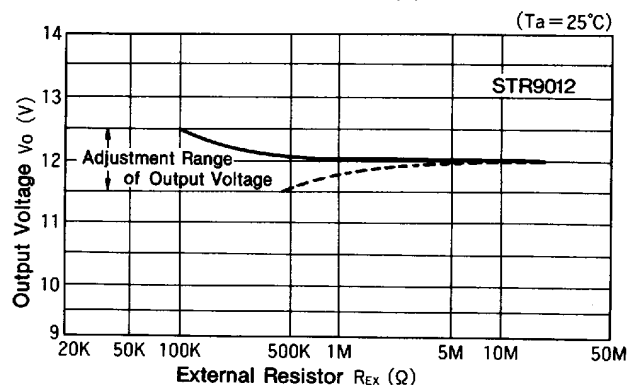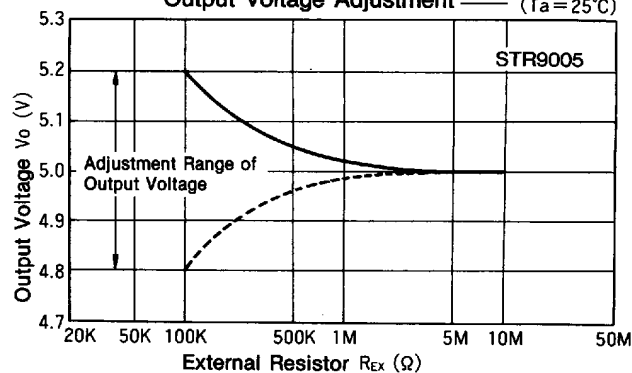

— : Insertion of resistor between the pins 2 and 5  
 ..... : Insertion of resistor between the pins 2 and 1

② Typical Characteristics of Output Voltage Fine Adjustment

