


multimec® 3A + 1A/1H/1M

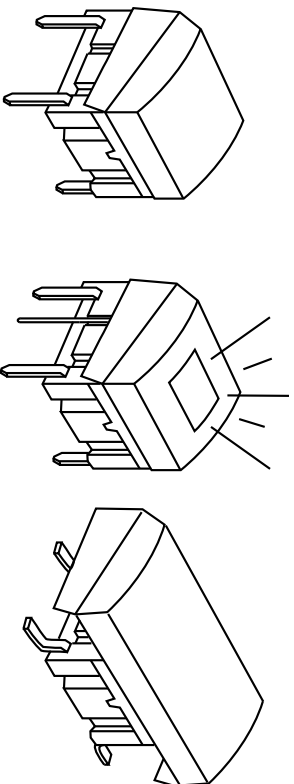

Technical Data:

- through-hole or SMD
- 50mA/24VDC
- single pole/momentary
- 10 000 000 operations life time
- IP67 sealing
- temperature range:
low temp: -40/+65°C
high temp: -40/+160°C

Dimensions (through-hole)	Dimensions (w/LED)	Dimensions (SMD)
PCB layout 	PCB layout (top view) 	PCB layout

HOW TO ORDER

3 A

Switch
M Mounting
T through-hole
S surface mount

L 6 low temp.

H 9 high temp.

1 A

Cap
 00 blue
 02 green
 03 grey
 04 yellow
 06 white
 08 red
 09 black

Standard versions:
 3ATL6, 3ATH9, 3ASH9

3 A

Switch
T Mounting
T through-hole

L 6 low temp.

H 9 high temp.

LED

20 green
 40 yellow
 80 red

1 H

Cap
 00 blue
 02 green
 03 grey
 04 yellow
 06 white
 08 red
 09 black
 Lens
 1 transparent
 2 green
 4 yellow
 8 red

Standard versions:
 3ATL620, 3ATL640, 3ATL680

3 A

Switch
M Mounting
T through-hole
S surface mount

L 6 low temp.

H 9 high temp.

+

1 M

Cap
 00 blue
 02 green
 03 grey
 04 yellow
 06 white
 08 red
 09 black

Standard versions:
 3ATL6, 3ATH9, 3ASH9

Ordering example: 3ATL680 + 1H098