

**LB1981V****Three-Phase Brushless Motor Driver****Overview**

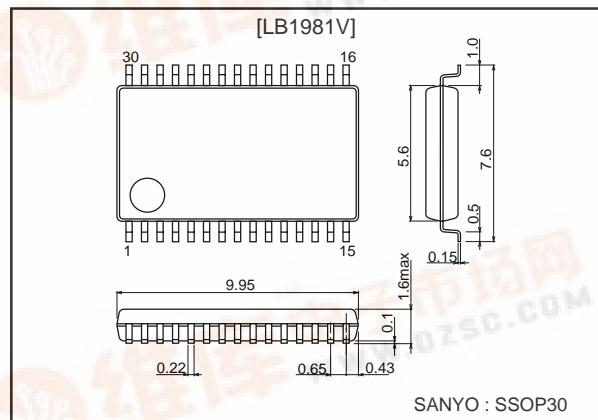
The LB1981V is a three-phase brushless motor driver especially suited for use mainly with drum motors of portable VCRs.

Features

- Three-phase full-wave drive brushless sensorless motor drive
- Soft switching drive
- Power-saving speed control function due to motor voltage
- Use with 3V power supply possible
- Output residual voltage can be set in 4 ways
- Forward/reverse switching possible
- Built-in standby function (FG and PG amplifier only remain operative)
- Built-in braking circuit
- Built-in thermal shutdown circuit
- Built-in FG and PG amplifiers
- Built-in saturation prevention amplifier and midpoint control circuit

Package Dimensions

unit: mm

3191-SSOP30

SANYO : SSOP30

Specifications**Absolute Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Conditions	Ratings	Unit
Power supply voltage	V _{CC1} max		7	V
	V _{CC2} max		12	V
	V _S max		V _{CC2}	V
Applied output voltage	V _O max		V _S +2	V
Applied input voltage	V _{IN1} max	Control circuits	-0.3 to V _{CC1} +0.3	V
	V _{IN2} max	U, V, W, COM	V _S +2	V
Output current	I _O max		1.0	A
Allowable power dissipation	P _d max		0.5	W
Operating temperature	T _{opr}		-20 to +75	°C
Storage temperature	T _{stg}		-55 to +150	°C

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

LB1981V

Allowable Operating Ranges at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings		Unit
Power supply voltage	V_{CC1}		2.7 to 6.0		V
	V_{CC2}		2.7 to 10.0		V
	V_S		0 to V_{CC2}		V

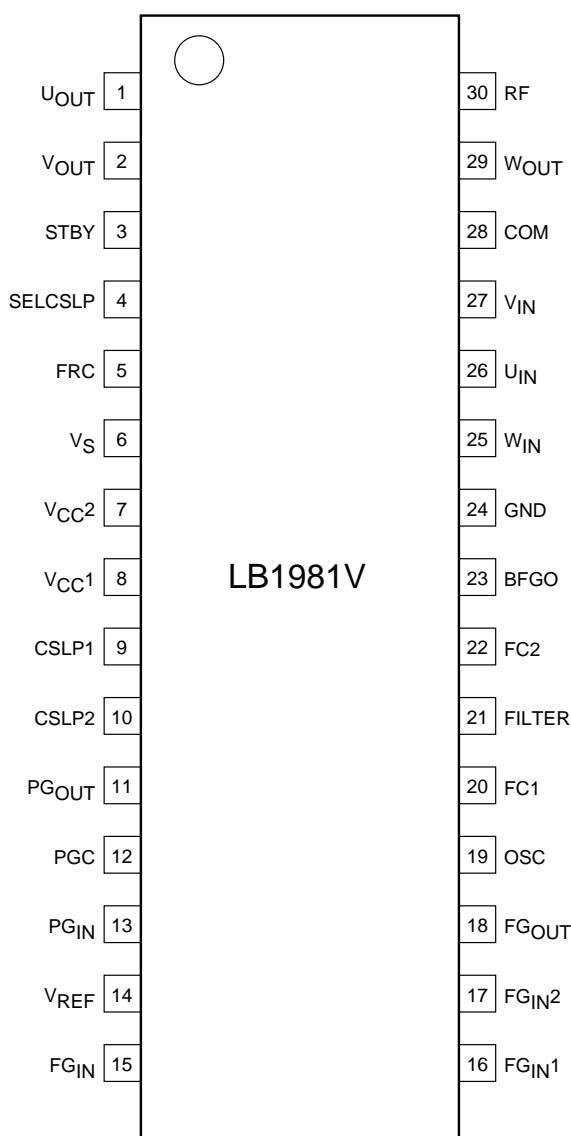
Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC1} = 3\text{V}$, $V_{CC2} = 4.75\text{V}$, $V_S = 3\text{V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Power supply current	I_{CC1}	$I_O = 76 \text{ mA}$		5	7.5	mA
	I_{CC2}	$I_O = 76 \text{ mA}$		1.2	2.5	mA
Output idle current	I_{CC10Q}	$V_{STBY} = 0\text{V}$		1.0	1.5	mA
	I_{CC20Q}	$V_{STBY} = 0\text{V}$			10	μA
	I_{S30Q}	$V_{STBY} = 0\text{V}$		60	120	μA
Output saturation voltage, upper side 1	V_{OU1}	$I_O = 0.1\text{A}$		0.2	0.5	V
Output saturation voltage, lower side 1	V_{OD1}	$I_O = 0.1\text{A}$		0.2	0.5	V
Output saturation voltage, upper side 2	V_{OU2}	$I_O = 0.4\text{A}$		0.4	0.8	V
Output saturation voltage, lower side 2	V_{OD2}	$I_O = 0.4\text{A}$		0.4	0.8	V
COM pin common mode input voltage range	V_{IC}		0.3	$V_{CC2}-0.9$		V
Standby pin High level voltage	V_{STBYH}		2	V_{CC1}		V
Standby pin Low level voltage	V_{STBYL}		-0.2	+0.7		V
Standby pin input current	I_{STBYH}	$V_{STBY} = 3\text{V}$		50		μA
Standby pin leakage current	I_{STBYL}	$V_{STBY} = 0\text{V}$	-10	μA		μA
FRC pin High level voltage	V_{FRCH}		2	V_{CC1}		V
FRC pin Low level voltage	V_{FRCL}		-0.2	+0.7		V
FRC pin input current	I_{FRCI}	$V_{FRC} = 3\text{V}$		50		μA
FRC pin leakage current	I_{FRCL}	$V_{FRC} = 0\text{V}$	-10	μA		μA
Slope pin source current ratio	R_{SOURCE}	$I_{CSLP1 \text{ source}}/I_{CSLP2 \text{ source}}$	-12	+12		%
Slope pin sink current ratio	R_{SINK}	$I_{CSLP1 \text{ sink}}/I_{CSLP2 \text{ sink}}$	-12	+12		%
CSLP1 source - sink current ratio	R_{CSLP1}	$I_{CSLP1 \text{ source}}/I_{CSLP1 \text{ sink}}$	-35	+15		%
CSLP2 sink - source current ratio	R_{CSLP2}	$I_{CSLP2 \text{ source}}/I_{CSLP2 \text{ sink}}$	-35	+15		%
Startup frequency	Freq	$C_{OSC} = 0.1 \mu\text{F}$, OSC frequency *1		11.5	Hz	
Phase delay width	Dwidth	*1		30	deg	
Thermal shutdown operating temperature	T_{TSD}	*1	150	180	210	°C
Thermal shutdown hysteresis	ΔT_{TSD}	*1		15	°C	
SELCSLP pin High level voltage	V_{SELH}		2	V_{CC}		V
SELCSLP pin Low level voltage	V_{SELL}		-0.2	+0.7		V
SELCSLP input current	I_{SELH}	$V_{SELCSLP} = 3\text{V}$		50		μA
SELCSLP pin leakage current	I_{SELL}	$V_{SELCSLP} = 0\text{V}$	-10	μA		μA
[FG amplifier]						
Input offset voltage	V_{IO}	*1		±1		mV
Input bias current	I_{BIN^-}			250		nA
Common mode input voltage range	V_{ICOM}	*1	1	2		V
Open loop gain	G_{VFG}	$f = 1 \text{ kHz}$ *1		55	dB	
Input ON voltage	V_{OL}	$I_O = 10 \mu\text{A}$		0.4		V
Input OFF voltage	V_{OH}	$I_O = 10 \mu\text{A}$	$V_{CC1}-0.5$	V		
Schmitt amplifier hysteresis width	V_{SHIS}	*1		20	mV	
Output duty	Duty	$f = 720 \text{ Hz}$, $V_{IN} = 20 \text{ mVp-p}$	30	70		%
Reference voltage	V_{REF}		1.15	1.30	1.45	V
[PG amplifier]						
Input offset voltage	V_{IO}	*1		±1		mV
Input bias voltage	I_{BIN^-}	*1		250		nA
Common mode input voltage range	V_{ICOM}	*1	1	2		V
Open loop gain	G_{VPG}	$f = 1 \text{ kHz}$ *1		55	dB	
Output ON voltage	V_{OL}	$I_O = 10 \mu\text{A}$		0.4		V
Output OFF voltage	V_{OH}	$I_O = 10 \mu\text{A}$	$V_{CC1}-0.5$	V		
Schmitt amplifier hysteresis width	V_{SHIS}	*1		50	mV	

Note: Items shown to be “*1” are not measured.

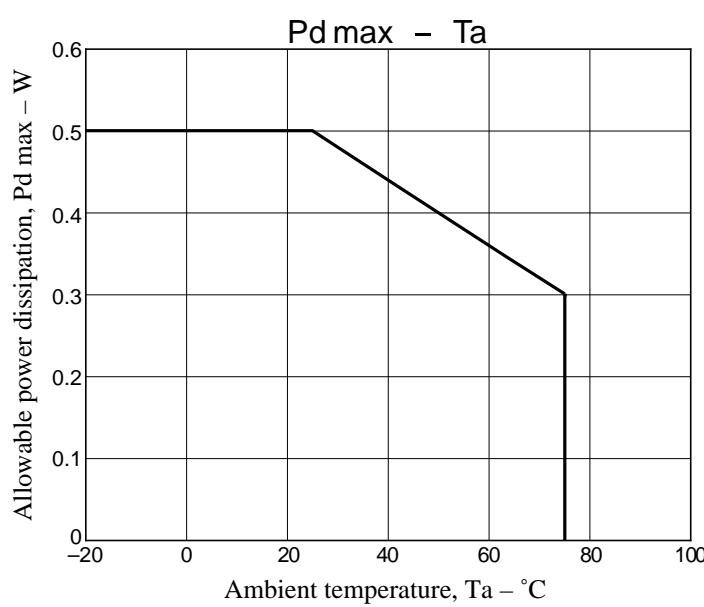
LB1981V

Pin Assignment



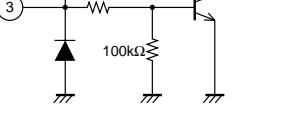
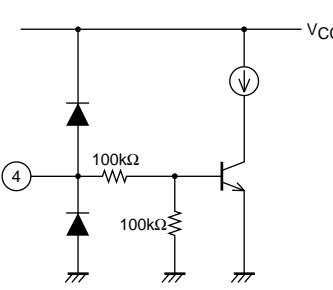
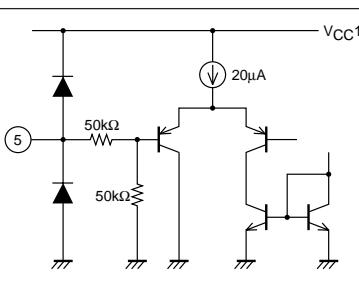
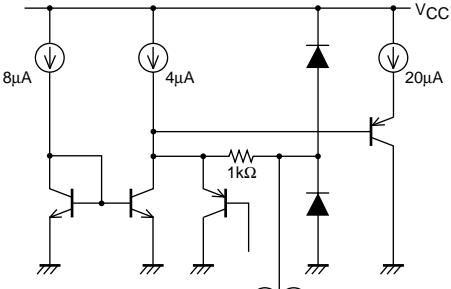
Top view

A10857



LB1981V

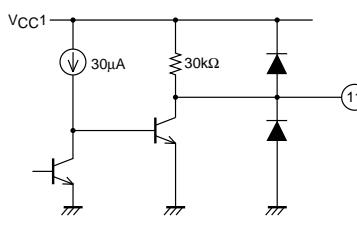
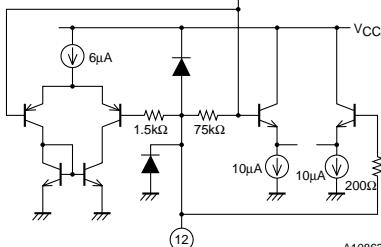
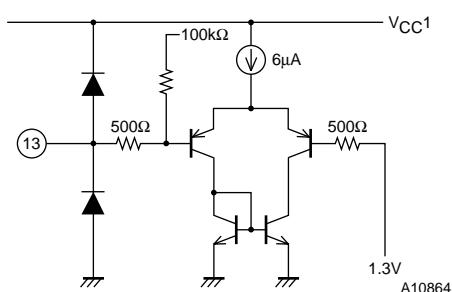
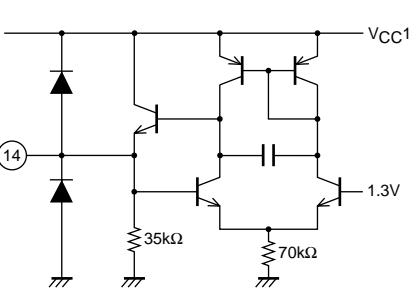
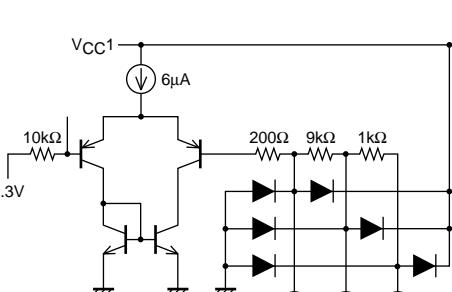
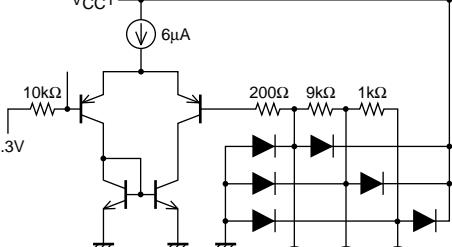
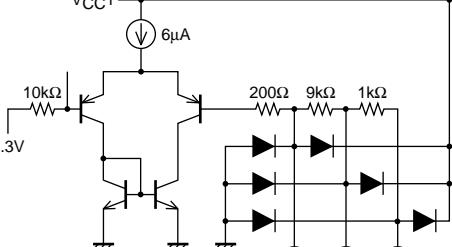
Pin Descriptions

Pin number	Pin name	Pin voltage	Equivalent circuit	Pin function
3	STBY	V_{CC1} max -0.2V min		When this pin is at 0.7V or less or when it is open, only the FG/PG amplifier operates. In the motor drive state, the pin should be at 2V or higher.
4	SEL CSLP	V_{CC1} max -0.2V min		CSLP pin charge/discharge current switching pin. Setting this pin to 2V or higher switches the triangular wave slope that determines soft switching.
5	FRC	V_{CC1} max -0.2V min		Motor forward/reverse switching pin. Low: reverse (-0.2V to +0.7V or open) High: forward (2V to V_{CC1})
6	V_S	0V to V_{CC2}		Power supply pin for determining output amplitude by supplying motor voltage. Must be lower than V_{CC2} voltage.
7	V_{CC2}	2.7V to 10V		Power supply pin for supplying source side predriver voltage and coil waveform detect comparator voltage.
8	V_{CC1}	2.7V to 6V		Power supply pin for circuits except motor voltage, source side predriver voltage, and coil waveform detect comparator voltage.
9	CLSP1			Pins for connecting triangular wave oscillator capacitor. This triangular wave coil output performs waveform soft switching.
10	CLSP2			

Continued on next page

LB1981V

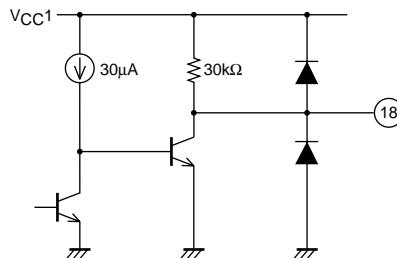
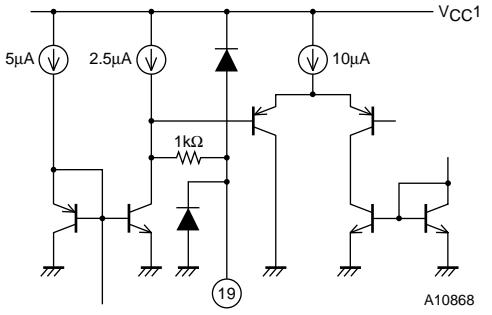
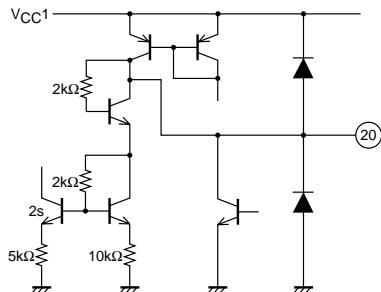
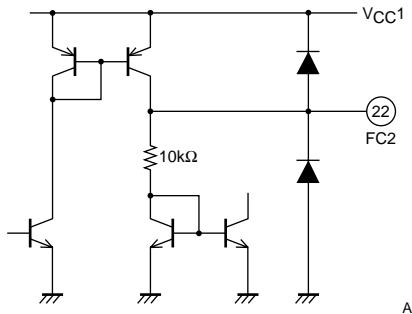
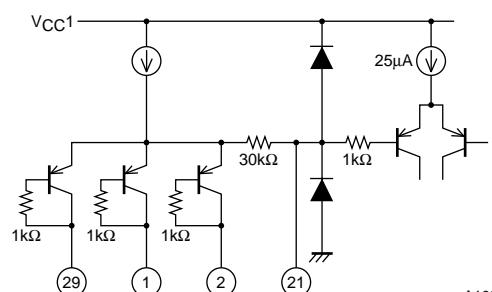
Continued from preceding page

Pin number	Pin name	Pin voltage	Equivalent circuit	Pin function
11	PG _{OUT}		 <p>A10862</p>	PG amplifier output pin.
12	PGC		 <p>A10863</p>	PG amplifier peak hold capacitor connection pin.
13	PGIN	2.0V max 1.0V min (V _{CC} = 3V)	 <p>A10864</p>	PG amplifier input pin. Connect PG coil between this pin and V _{REF} .
14	V _{REF}		 <p>A10865</p>	Internal 1.3V reference voltage. Used as reference voltage for FG and PG amplifiers.
15	FG _{IN}	2.0V max 1.0V min (V _{CC} = 3V)		FG amplifier input pin. Connect FG coil between this pin and V _{REF} .
16	FG _{IN1}			FG amplifier input signal noise filter capacitor connection pin.
17	FG _{IN2}			FG amplifier input signal noise filter capacitor pin.

Continued on next page

LB1981V

Continued from preceding page

Pin number	Pin name	Pin voltage	Equivalent circuit	Pin function
18	PG _{OUT}		 <p>A10867</p>	FG amplifier output pin.
19	OSC		 <p>A10868</p>	Pin for connecting triangular wave oscillator capacitor. Serves for forced startup waveform generation.
20	FC1		 <p>A10869</p>	Frequency characteristics pin. Connecting a capacitor between this pin and ground serves to prevent closed-loop oscillation in the current control circuitry. (Lower-side output transistor drive current)
22	FC2		 <p>A10870</p>	Frequency characteristics pin. Connecting a capacitor between this pin and ground serves to prevent closed-loop oscillation in the current control circuitry. (Lower-side output transistor drive current)
21	FILTER		 <p>A10871</p>	Connecting a capacitor between this pin and ground activates the coil output saturation prevention function. In this condition, the VS pin is controlled for motor voltage control. By adjusting the external capacitor, torque ripple compensation can be varied.

Continued on next page

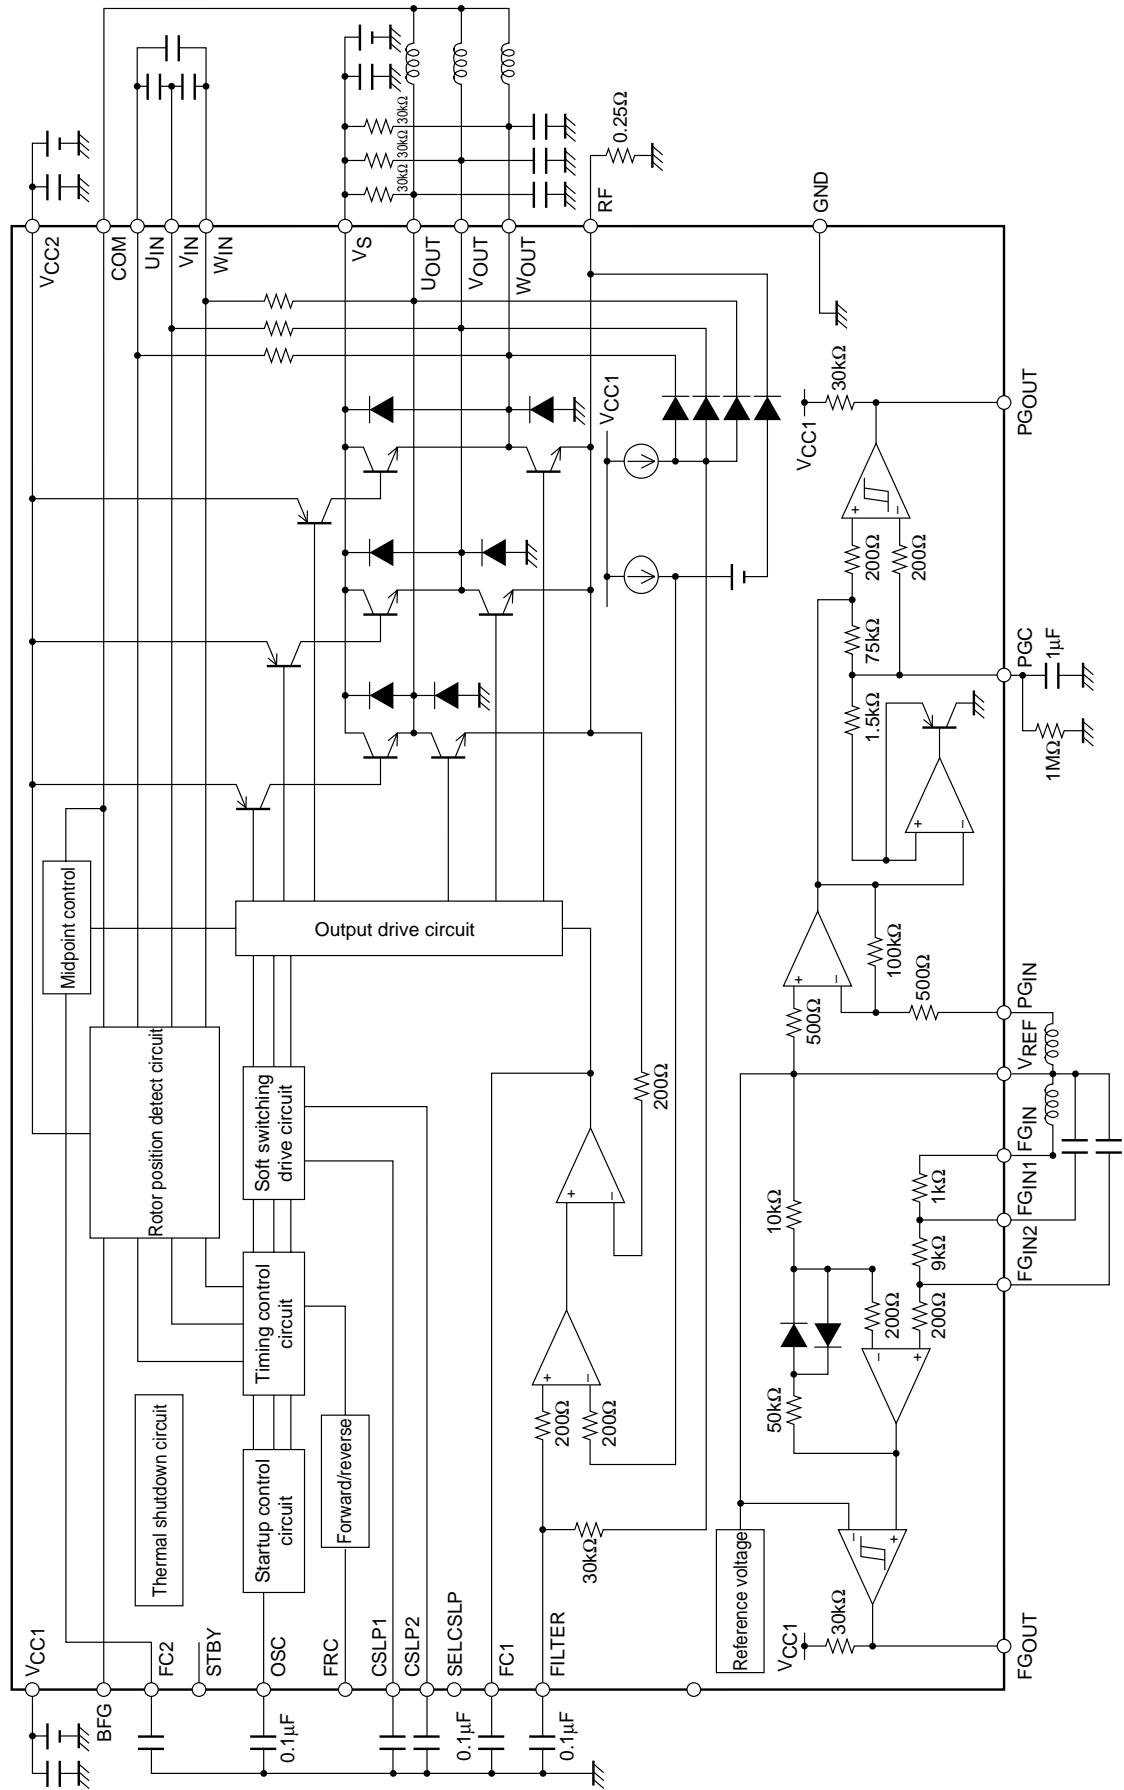
LB1981V

Continued from preceding page

Pin number	Pin name	Pin voltage	Equivalent circuit	Pin function
23	BFG0		<p>A10872</p>	<p>Motor counterelectromotive voltage FG pulse pin. Outputs a pulse using W phase counterelectromotive voltage as FG. Connect to ground if not used.</p>
24	GND			Ground for all circuits except output.
25	W _{IN}			Coil waveform detect comparator input pins.
26	U _{IN}			
27	V _{IN}		<p>A10873</p>	
28	COM			<p>Motor coil midpoint input pin. Using this voltage as a reference, the coil voltage waveform is detected.</p>
29	W _{OUT}			W phase coil output pin.
1	U _{OUT}			U phase coil output pin.
2	V _{OUT}			V phase coil output pin.
30	RF		<p>A10874</p>	<p>Output transistor ground. Constant current drive is performed by detecting the voltage at this pin.</p>

LB1981V

Block Diagram (Constants for external components depend on motor.)



- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.