

**AIC1740**

Low Output Voltage, 500mA Low Dropout Linear Regulator


■ FEATURES

- Low Dropout Voltage of 900mV at 500mA Output Current (3.0V Output Version).
- Guaranteed 500mA Output Current.
- Internal 1.5Ω P-MOSFET Draws no Base Current.
- Low Ground Current at 65µA.
- 2% Accuracy Output Voltage of 1.8V/ 2.0V/ 2.5V/ 2.7V/ 3.0V.
- Input Voltage Range up to 12V.
- Needs only 4.7µF for Stability.
- Current and Thermal Limiting.

■ APPLICATIONS

- Voltage Regulator for CD-ROM Drivers.
- Voltage Regulator for LAN Cards.
- Voltage Regulator for Monitor Microprocessor.
- Voltage Regulator for RAM Module.
- Wireless Communication Systems.
- Battery Powered Systems.

■ TYPICAL APPLICATION CIRCUIT

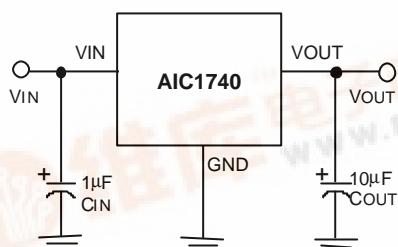

Low Dropout Linear Regulator

■ DESCRIPTION

The AIC1740 is a 3-pin low dropout linear regulator. The superior characteristics of the AIC1740 include zero base current loss, very low dropout voltage, and 2% accuracy output voltage. Typical ground current remains approximately

65µA, from no load to maximum loading conditions. Dropout voltage is exceptionally low. Output current limiting and thermal limiting are built in to provide maximal protection to the AIC1740 against fault conditions.




The AIC1740 comes in the popular SOT-223, TO-251 and TO-252 packages.

**AIC1740**

■ ORDERING INFORMATION

AIC1740-XCX

PACKAGING TYPE
E: TO-252
F: TO-251
Y: SOT-223
OUTPUT VOLTAGE
18: 1.8V
20: 2.0V
25: 2.5V
27: 2.7V
30: 3.0V

ORDER NUMBER	PIN CONFIGURATION
AIC1740-18CE AIC1740-20CE AIC1740-25CE AIC1740-27CE AIC1740-30CE (TO-252)	FRONT VIEW 1: VOUT 2: GND 3: VIN 
AIC1740-18CF AIC1740-20CF AIC1740-25CF AIC1740-27CF AIC1740-30CF (TO-251)	FRONT VIEW 1: VOUT 2: GND 3: VIN 
AIC1740-18CY AIC1740-20CY AIC1740-25CY AIC1740-27CY AIC1740-30CY (SOT-223)	FRONT VIEW 1: VOUT 2: GND 3: VIN 

■ ABSOLUTE MAXIMUM RATINGS

Input Supply Voltage	-0.3~12V
Operating Junction Temperature Range	-40°C~ 85°C
Storage Temperature Range	-65°C~150°C
Power Dissipation	0.85W
Thermal Resistance θ_{JC}	TO-251, TO-252 Package	12.5°C/W
	SOT-223 Package	15°C/W

■ TEST CIRCUIT

Refer to the TYPICAL APPLICATION CIRCUIT

**AIC1740****ELECTRICAL CHARACTERISTICS** ($T_a=25^\circ C$, $C_{IN}=1\text{mF}$, $C_{OUT}=10\text{mF}$, unless otherwise specified.)

PARAMETER	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	No Load				
	AIC1740-30	$V_{IN}=4.0\sim12V$	2.940	3.0	3.060
	AIC1740-27	$V_{IN}=4.0\sim12V$	2.646	2.7	2.754
	AIC1740-25	$V_{IN}=4.0\sim12V$	2.450	2.5	2.550
	AIC1740-20	$V_{IN}=4.0\sim12V$	1.960	2.0	2.040
	AIC1740-18	$V_{IN}=4.0\sim12V$	1.764	1.8	1.836
Output Voltage Temperature Coefficient	(Note 1)		50		PPM/ $^\circ C$
Line Regulation	$I_L=1\text{mA}$, $V_{IN}=4.0\sim12V$		3	10	mV
Load Regulation (Note 2)	$V_{IN}=5V$, $I_L=0.1\sim500\text{mA}$		20	50	mV
Current Limit (Note 3)	$V_{IN}=5V$, $V_{OUT}=0V$		650		mA
Dropout Voltage (Note 4)	AIC1740s	$I_L=0.1\text{mA}$	0.2	10	mV
	AIC1740-30	$I_L=500\text{mA}$	900	1050	
	AIC1740-27		950	1100	
	AIC1740-25		1000	1150	mV
	AIC1740-20		1260	1410	
	AIC1740-18		1370	1520	
Ground Current	$I_G=0.1\text{mA}\sim I_{MAX}$, $V_{IN}=4V\sim12V$	65	90	μA	






Note 1: Guaranteed by design.

Note 2: Regulation is measured at constant junction temperature, using pulse testing with a low ON time.


Note 3: Current limit is measured by pulsing a short time.

Note 4: Dropout voltage is defined as the input to output differential at which the output voltage drops 100mV below the value measured with a 1V differential.

■ TYPICAL PERFORMANCE CHARACTERISTICS

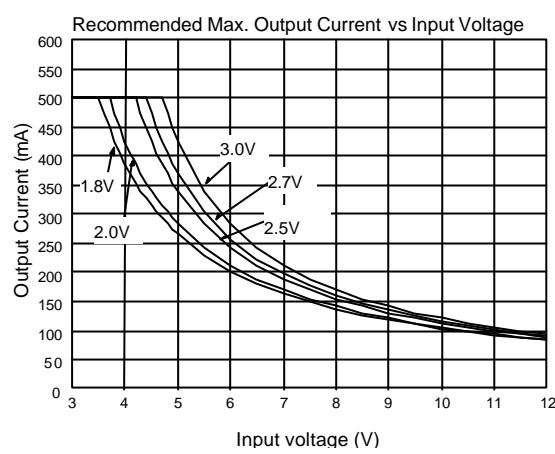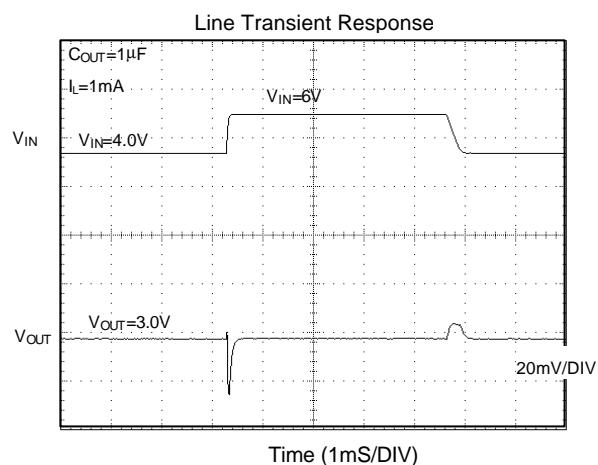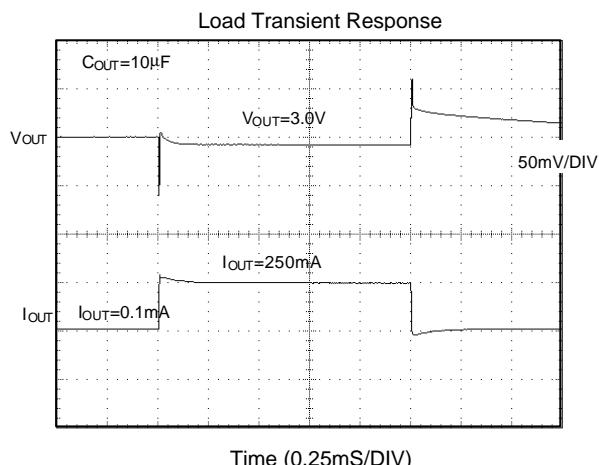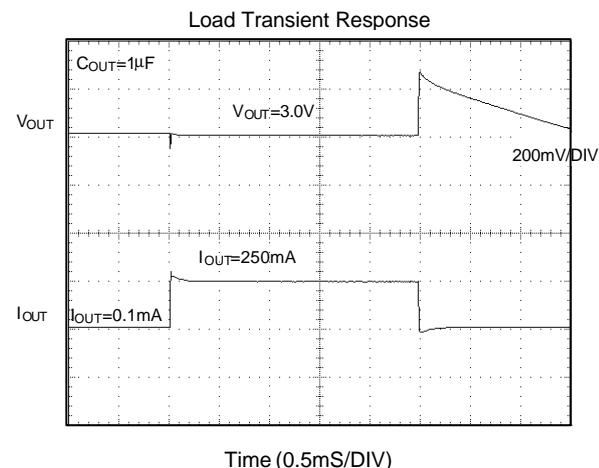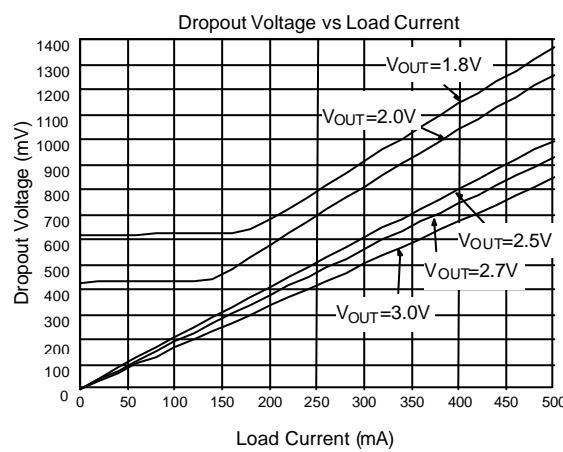

■ BLOCK DIAGRAM

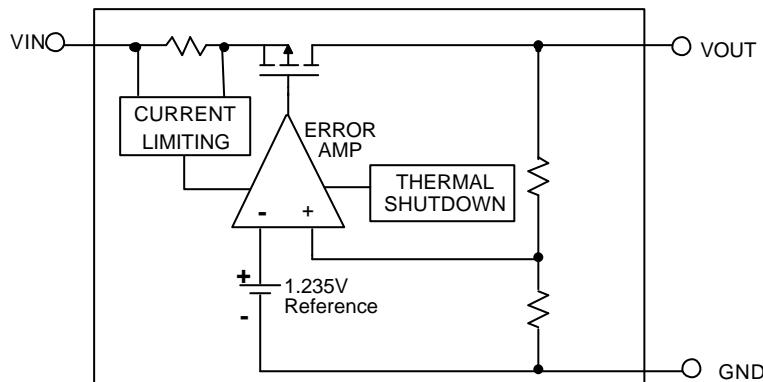

■ PIN DESCRIPTION

VOUT PIN - Output pin.

GND PIN - Power GND.

VIN PIN - Power Supply Input.

■ APPLICATION INFORMATIONS


A $4.7\mu F$ (or greater) capacitor is required between the AIC1740 output and ground for stability. Without this capacitor the part will oscillate. Even though most types of capacitor may work, the equivalent series resistance (ESR) should be held to 5Ω or less if Aluminum electrolytic type is used. Many Aluminum electrolytics have electrolytes that freeze at about $-30^{\circ}C$, so solid tantalums are

recommended for operation below $-25^{\circ}C$. The value of this capacitor may be increased without limit.

A $0.1\mu F$ capacitor (or greater) should be placed from the AIC1740 input to ground if the lead inductance between the input and power source exceeds $500nH$ (approximately 10 inches of trace).


■ PHYSICAL DIMENSIONS

- TO-251 (unit: mm)

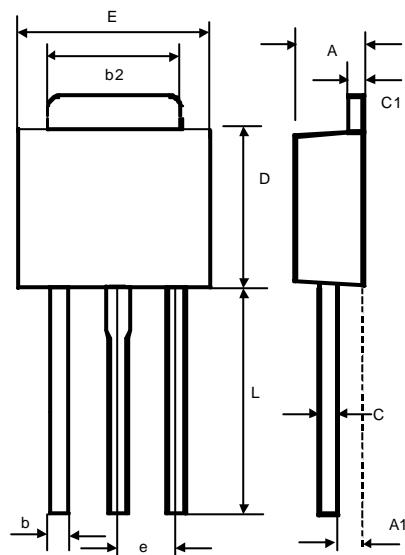


SYMBOL	MIN	MAX
A	2.19	2.38
A1	1.02	1.27
b	0.55	0.89
b2	5.21	5.46
C	0.46	0.58
C1	0.46	0.58
D	5.33	5.59
E	6.35	6.73
e	2.28 (TYP.)	
L	7.62 (TYP.)	

- TO-252 (unit: mm)

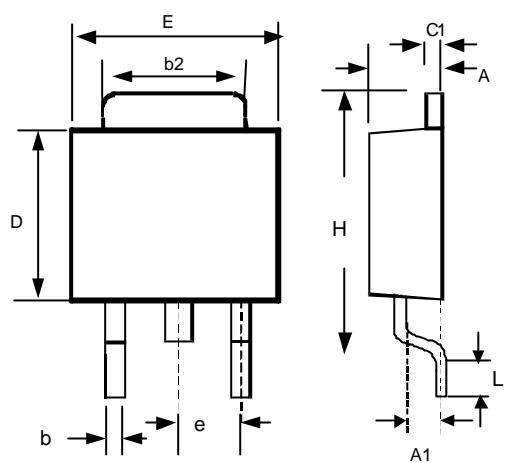

SYMBOL	MIN	MAX
A	2.19	2.38
A1	1.02	1.27
b	0.64	0.88
b2	5.21	5.46
C1	0.46	0.58
D	5.33	5.59
E	6.35	6.73
e	2.28 (TYP.)	
H	9.40	10.42
L	0.51	-

- SOT-223 (unit: mm)

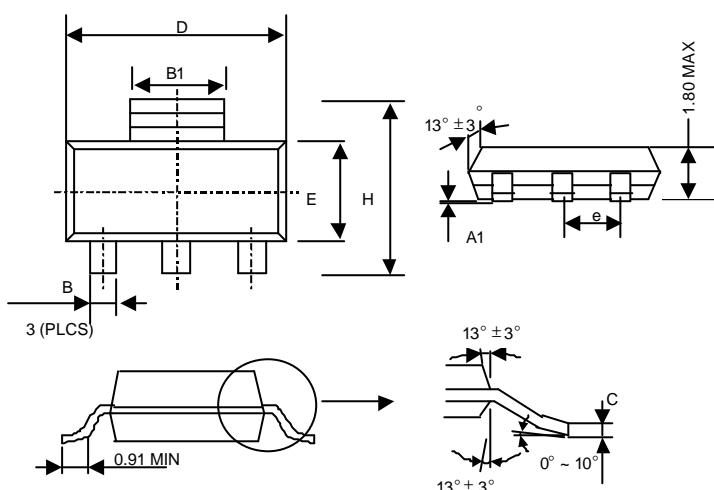

SYMBOL	MIN	MAX
A1	0.02	0.12
B	0.60	0.80
B1	2.90	3.15
C	0.24	0.35
D	6.30	6.80
E	3.30	3.70
e	2.30 (TYP.)	
H	6.70	7.30

- SOT-223 MARKING

Part No.	Marking
AIC1740-18	AZ18
AIC1740-20	AZ20
AIC1740-25	AZ25
AIC1740-27	AZ27
AIC1740-30	AZ30