

19-1164; Rev 1; 3/97

EVALUATION KIT MANUAL  
FOLLOWS DATA SHEET

**MAXIM**

## 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

### General Description

### Features

The MAX4158/MAX4159/MAX4258/MAX4259 are wide-band, 2-channel, noninverting video amplifiers with input multiplexing, capable of driving  $\pm 2.5\text{V}$  signals into  $50\Omega$  or  $75\Omega$  loads. These devices are current-mode feedback amplifiers; gain is set by external feedback resistors. The MAX4158/MAX4159 are optimized for unity gain (0dB) with a -3dB bandwidth of 350MHz. The MAX4258/MAX4259 are optimized for gains of two (6dB) or more with a 250MHz -3dB bandwidth. These devices have low (0.01%/0.01°) differential gain and phase errors, and operate from  $\pm 5\text{V}$  supplies.

These devices are ideal for use in broadcast and graphics video systems because of their low, 2pF input capacitance, channel-to-channel switching time of only 20ns, and wide, 130MHz 0.1dB bandwidth. In addition, the combination of ultra-high speed and low power makes them suitable for use in general-purpose high-speed applications, such as medical imaging, industrial instrumentation, and communications systems.

The MAX4159/MAX4259 have address latching and high-impedance output disabling, allowing them to be incorporated into large switching arrays. They are available in 14-pin SO and 16-pin QSOP packages. The MAX4158/MAX4258 have no address latching or output disabling, but are available in space-saving 8-pin  $\mu\text{MAX}$  and SO packages.

### Applications


Video-Signal Multiplexing  
Video Crosspoint Switches  
Pixel Switching  
Coaxial Cable Drivers  
Workstations  
High-Definition TV (HDTV)  
Broadcast Video  
Multimedia Products  
High-Speed Signal Processing

- ◆ **Excellent Video Specifications:**
  - 0.1dB Gain Flatness to 130MHz
  - 0.01%/0.01° Differential Gain/Phase Error
- ◆ **High Speed:**
  - 350MHz -3dB Bandwidth (MAX4158/4159)
  - 250MHz -3dB Bandwidth (MAX4258/4259)
  - 700V/ $\mu\text{s}$  Slew Rate (MAX4158/4159)
  - 1000V/ $\mu\text{s}$  Slew Rate (MAX4258/4259)
  - 20ns Settling Time to 0.1%
- ◆ **Fast Switching:**
  - 20ns Channel-Switching Time
  - <70mV Switching Transient
- ◆ **Low Power: 100mW**
- ◆ **Directly Drive  $75\Omega$  or  $50\Omega$  Cables**
- ◆ **High Output Current Drive: >70mA**
- ◆ **Address Latch and High-Z Output Disable**

### Ordering Information

| PART       | TEMP. RANGE    | PIN-PACKAGE       |
|------------|----------------|-------------------|
| MAX4158ESA | -40°C to +85°C | 8 SO              |
| MAX4158EUA | -40°C to +85°C | 8 $\mu\text{MAX}$ |
| MAX4159ESD | -40°C to +85°C | 14 SO             |
| MAX4159EEE | -40°C to +85°C | 16 QSOP           |
| MAX4258ESA | -40°C to +85°C | 8 SO              |
| MAX4258EUA | -40°C to +85°C | 8 $\mu\text{MAX}$ |
| MAX4259ESD | -40°C to +85°C | 14 SO             |
| MAX4259EEE | -40°C to +85°C | 16 QSOP           |

### Pin Configurations

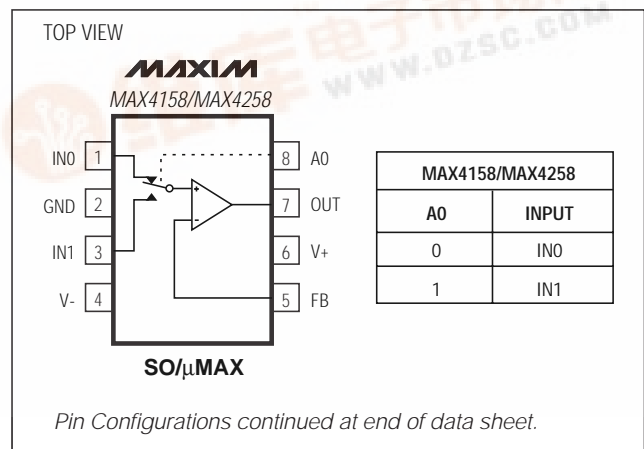

MAX4158/MAX4159/MAX4258/MAX4259

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## ABSOLUTE MAXIMUM RATINGS

|   |                            |   |                 |
|---|----------------------------|---|-----------------|
| Positive Supply Voltage (V+ to GND) .....                 | +6V                        | Continuous Power Dissipation (T <sub>A</sub> = +70°C) |                 |
| Negative Supply Voltage (V- to GND).....                  | -6V                        | 8-Pin SO (derate 5.88mW/°C above +70°C).....          | 471mW           |
| Amplifier Input Voltage (IN0 or IN1) .....                | (V- - 0.3V) to (V+ + 0.3V) | 8-Pin μMAX (derate 4.10mW/°C above +70°C) .....       | 330mW           |
| FB Current .....  | ±20mA                      | 14-Pin SO (derate 8.33mW/°C above +70°C).....         | 667mW           |
| Digital Input Voltage (A0, $\overline{EN}$ , or LE) ..... | -0.3V to (V+ + 0.3V)       | 16-Pin QSOP (derate 8.33mW/°C above +70°C).....       | 667mW           |
| Output Short Circuit to GND (Note 1).....                 | Continuous                 | Operating Temperature Range .....                     | -40°C to +85°C  |
| Output Short-Circuit Current to V+, V- (Note 1).....      | 5sec                       | Storage Temperature Range .....                       | -65°C to +160°C |
|   |                            | Lead Temperature (soldering, 10sec) .....             | +300°C          |

**Note 1:** Continuous power dissipation maximum rating must also be observed.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## DC ELECTRICAL CHARACTERISTICS

(V+ = +5V, V- = -5V, V<sub>IN</sub> = 0V, V<sub>OUT</sub> = 0V, R<sub>L</sub> = ∞, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.)

| PARAMETER   | SYMBOL              | CONDITIONS  |             | MIN  | TYP  | MAX  | UNITS |
|---|---------------------|---|-------------|------|------|------|-------|
| Operating Supply-Voltage Range                                | V+, V-              | Inferred from the PSRR test   |             | ±4.5 |      | ±5.5 | V     |
| Input Voltage Range   | V <sub>IN</sub>     | Inferred from the CMRR test   |             | ±2.5 | ±3.0 |      | V     |
| Input Offset Voltage (Either Channel)                         | V <sub>OS</sub>     |   |             |      | ±1   | ±6   | mV    |
| Input Offset Voltage Temperature Coefficient (Either Channel) | TCV <sub>OS</sub>   |   |             |      | 2    |      | μV/°C |
| Input Bias Current (Channel On)                               | I <sub>IN</sub>     | T <sub>A</sub> = +25°C  |             |      | ±2   | ±10  | μA    |
|   |                     | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>                                 |             |      |      | ±18  |       |
| FB Pin Bias Current   | I <sub>FB</sub>     | T <sub>A</sub> = +25°C  |             |      | ±2   | ±12  | μA    |
|   |                     | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>                                 |             |      |      | ±20  |       |
| Input Resistance  | R <sub>IN</sub>     | V <sub>IN</sub> = -2.5V to 2.5V   | Channel on  | 100  | 550  |      | kΩ    |
|   |                     |   | Channel off | 1    | 20   |      | MΩ    |
| FB Pin Input Resistance                                       | R <sub>IN(FB)</sub> |   |             |      | 50   |      | Ω     |
| Output Resistance   | R <sub>OUT</sub>    | f = 0Hz   |             |      | 40   |      | mΩ    |
| Disabled Output Resistance                                    | R <sub>OUT(d)</sub> | MAX4159/MAX4259 only, $\overline{EN}$ = 5V, V <sub>OUT</sub> = -3.0V to 3.0V (Note 2) |             | 1    | 10   |      | MΩ    |
| Open-Loop Transimpedance                                      | Z <sub>T</sub>      | V <sub>OUT</sub> = -2.5V to 2.5V, R <sub>L</sub> = 100Ω                               |             | 1.5  | 3.0  |      | MΩ    |
| DC Common-Mode Rejection Ratio                                | CMRR                | V <sub>IN</sub> = -2.5V to 2.5V   |             | 50   | 60   |      | dB    |
| DC Power-Supply Rejection Ratio                               | PSRR                | Open loop, V+ = +4.5V to +5.5V, V- = -4.5V to -5.5V                                   |             | 60   | 78   |      | dB    |
| Output Voltage Swing  | V <sub>OUT</sub>    | R <sub>L</sub> = open circuit   |             | ±3.0 | ±4.0 |      | V     |
|   |                     | R <sub>L</sub> = 50Ω  |             | ±2.5 | ±3.5 |      |       |
| Output Current  | I <sub>OUT</sub>    | V <sub>OUT</sub> = -2.5V to 2.5V  |             | 70   | 100  |      | mA    |
| Output Short-Circuit Current                                  | I <sub>SC</sub>     | Sinking or sourcing to ground   |             |      | 120  |      | mA    |
| Positive Supply Current                                       | I+                  | MAX4158/MAX4258   |             |      | 10.9 | 13.0 | mA    |
|   |                     | $\overline{EN}$ = GND, MAX4159/MAX4259  |             |      | 10.9 | 13.0 |       |
|   |                     | $\overline{EN}$ = V+, MAX4159/MAX4259   |             |      | 6.3  | 8.0  |       |
| Negative Supply Current                                       | I-                  | MAX4158/MAX4258   |             |      | 9.9  | 12.0 | mA    |
|   |                     | $\overline{EN}$ = GND, MAX4159/MAX4259  |             |      | 9.9  | 12.0 |       |
|   |                     | $\overline{EN}$ = V+, MAX4159/MAX4259   |             |      | 5.0  | 7.0  |       |

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

MAX4158/MAX4159/MAX4258/MAX4259

## DC ELECTRICAL CHARACTERISTICS (continued)

(V<sub>+</sub> = +5V, V<sub>-</sub> = -5V, V<sub>IN</sub> = 0V, V<sub>OUT</sub> = 0V, R<sub>L</sub> = ∞, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.)

| PARAMETER                             | SYMBOL          | CONDITIONS                                     | MIN | TYP | MAX | UNITS |
|---------------------------------------|-----------------|--|-----|-----|-----|-------|
| <b>LOGIC CHARACTERISTICS</b> (Note 3) |                 |  |     |     |     |       |
| Logic-Low Threshold                   | V <sub>IL</sub> |  |     |     | 0.8 | V     |
| Logic-High Threshold                  | V <sub>IH</sub> |  | 2.0 |     |     | V     |
| Logic-Low Input Current               | I <sub>IL</sub> | V <sub>IL</sub> = 0V                           |     | -2  | -20 | μA    |
| Logic-High Input Current              | I <sub>IH</sub> | V <sub>IH</sub> = 5.5V, V <sub>+</sub> = +5.5V |     | 130 | 300 | μA    |

## AC ELECTRICAL CHARACTERISTICS—MAX4158/MAX4159

(V<sub>+</sub> = +5V, V<sub>-</sub> = -5V, V<sub>IN</sub> = 0V, V<sub>OUT</sub> = 0V, R<sub>L</sub> = 100Ω, T<sub>A</sub> = +25°C, unless otherwise noted.)

| PARAMETER                          | SYMBOL              | CONDITIONS   | MIN | TYP  | MAX | UNITS   |
|------------------------------------|---------------------|--|-----|------|-----|---------|
| <b>AMPLIFIER CHARACTERISTICS</b>   |                     |  |     |      |     |         |
| -3dB Bandwidth                     | BW                  | A <sub>v</sub> = 0dB, V <sub>IN</sub> = 20mVp-p (Note 4)                                 |     | 350  |     | MHz     |
| Bandwidth for ±0.1dB Gain Flatness | BW(0.1)             | A <sub>v</sub> = 0dB, V <sub>IN</sub> = 20mVp-p (Note 4)                                 |     | 100  |     | MHz     |
| Full-Power Bandwidth               | FPBW                | A <sub>v</sub> = 0dB, V <sub>OUT</sub> = 2Vp-p (Note 4)                                  |     | 155  |     | MHz     |
| Slew Rate                          | SR                  | A <sub>v</sub> = 0dB, V <sub>OUT</sub> = 2Vp-p (Note 4)                                  |     | 700  |     | V/μs    |
| Settling Time to 0.1%              | t <sub>s</sub>      | V <sub>OUT</sub> = 2V step, A <sub>v</sub> = 0dB (Note 4)                                |     | 10   |     | ns      |
| Differential Gain Error            | DG                  | A <sub>v</sub> = 0dB (Notes 4, 5)  |     | 0.01 |     | %       |
| Differential Phase Error           | DP                  | A <sub>v</sub> = 0dB (Notes 4, 5)  |     | 0.01 |     | degrees |
| Channel-to-Channel Crosstalk       | Xtalk               | f = 30MHz, R <sub>S</sub> = 50Ω, A <sub>v</sub> = 0dB, V <sub>IN</sub> = ±2Vp-p (Note 4) |     | 70   |     | dB      |
| Output Impedance                   | Z <sub>OUT</sub>    | f = 30MHz, A <sub>v</sub> = 0dB (Note 4)   |     | 9    |     | Ω       |
| Total Harmonic Distortion          | THD                 | f = 30MHz, V <sub>OUT</sub> = 2Vp-p, A <sub>v</sub> = 0dB (Note 4)                       |     | 50   |     | dBc     |
| Off-Isolation (MAX4159 only)       | A <sub>ISO</sub>    | f = 30MHz, A <sub>v</sub> = 0dB, $\overline{EN}$ = 5V, V <sub>IN</sub> = ±2Vp-p (Note 4) |     | 105  |     | dB      |
| Output Capacitance                 | C <sub>OUT</sub>    |  |     | 3    |     | pF      |
| Input Capacitance                  | C <sub>IN</sub>     | Channel on or off  |     | 2    |     | pF      |
| Input Voltage-Noise Density        | e <sub>n</sub>      | f = 100kHz   |     | 2    |     | nV/√Hz  |
| Input Current-Noise Density        | i <sub>n</sub>      | f = 100kHz   |     | 2    |     | pA/√Hz  |
| FB Current-Noise Density           | i <sub>n</sub> (FB) | f = 100kHz   |     | 22   |     | pA/√Hz  |
| <b>SWITCHING CHARACTERISTICS</b>   |                     |  |     |      |     |         |
| Channel Switching Time             | t <sub>SW</sub>     | (Notes 6, 7)   |     | 20   |     | ns      |
| Address Setup Time                 | t <sub>s</sub>      | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> (Notes 6, 8)                       | 10  |      |     | ns      |
| Address Hold Time                  | t <sub>TH</sub>     | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> (Notes 6, 8)                       | 10  |      |     | ns      |
| Latch Propagation Delay            | t <sub>LPD</sub>    | (Note 6)   |     | 20   |     | ns      |
| Latch Pulse Width                  | t <sub>LPW</sub>    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> (Notes 6, 8)                       | 10  |      |     | ns      |
| Enable Delay Time                  | t <sub>PDE</sub>    | (Notes 6, 9)   |     | 20   |     | ns      |
| Disable Delay Time                 | t <sub>PDD</sub>    | (Notes 6, 9)   |     | 20   |     | ns      |
| Switching Transient                | V <sub>TRAN</sub>   | A <sub>v</sub> = 0dB (Notes 4, 10)   |     | ±70  |     | mV      |

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## AC ELECTRICAL CHARACTERISTICS—MAX4258/MAX4259

( $V_+ = +5V$ ,  $V_- = -5V$ ,  $V_{IN} = 0V$ ,  $V_{OUT} = 0V$ ,  $R_L = 100\Omega$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

| PARAMETER                               | SYMBOL     | CONDITIONS   | MIN | TYP      | MAX | UNITS          |
|---|------------|--|-----|----------|-----|----------------|
| <b>AMPLIFIER CHARACTERISTICS</b>        |            |  |     |          |     |                |
| -3dB Bandwidth                          | BW         | $A_V = 6dB$ , $V_{IN} = 20mVp-p$ (Note 4)  |     | 250      |     | MHz            |
| Bandwidth for $\pm 0.1dB$ Gain Flatness | BW(0.1)    | $A_V = 6dB$ , $V_{IN} = 20mVp-p$ (Note 4)  |     | 130      |     | MHz            |
| Full-Power Bandwidth                    | FPBW       | $A_V = 6dB$ , $V_{OUT} = 2Vp-p$ (Note 4)   |     | 200      |     | MHz            |
| Slew Rate                               | SR         | $A_V = 6dB$ , $V_{OUT} = 2Vp-p$ (Note 4)   |     | 1000     |     | V/ $\mu s$     |
| Settling Time to 0.1%                   | $t_s$      | $V_{OUT} = 2V$ step, $A_V = 6dB$ (Note 4)  |     | 10       |     | ns             |
| Differential Gain Error                 | DG         | $A_V = 6dB$ (Notes 4, 5)   |     | 0.01     |     | %              |
| Differential Phase Error                | DP         | $A_V = 6dB$ (Notes 4, 5)   |     | 0.02     |     | degrees        |
| Channel-to-Channel Crosstalk            | Xtalk      | $f = 30MHz$ , $R_S = 50\Omega$ , $A_V = 6dB$ , $V_{IN} = \pm 1Vp-p$ (Note 4)     |     | 70       |     | dB             |
| Output Impedance                        | $Z_{OUT}$  | $f = 30MHz$ , $A_V = 6dB$ (Note 4)   |     | 9        |     | $\Omega$       |
| Total Harmonic Distortion               | THD        | $f = 30MHz$ , $V_{OUT} = 2Vp-p$ , $A_V = 6dB$ (Note 4)                           |     | 50       |     | dBc            |
| Off-Isolation (MAX4259)                 | $A_{ISO}$  | $f = 30MHz$ , $A_V = 6dB$ , $\overline{EN} = 5V$ , $V_{IN} = \pm 1Vp-p$ (Note 4) |     | 110      |     | dB             |
| Output Capacitance                      | $C_{OUT}$  |  |     | 3        |     | pF             |
| Input Capacitance                       | $C_{IN}$   | Channel on or off  |     | 2        |     | pF             |
| Input Voltage-Noise Density             | $e_n$      | $f = 100kHz$   |     | 2        |     | $nV/\sqrt{Hz}$ |
| Input Current-Noise Density             | $i_n$      | $f = 100kHz$   |     | 2        |     | $pA/\sqrt{Hz}$ |
| FB Current-Noise Density                | $i_n(FB)$  | $f = 100kHz$   |     | 22       |     | $pA/\sqrt{Hz}$ |
| <b>SWITCHING CHARACTERISTICS</b>        |            |  |     |          |     |                |
| Channel-Switching Time                  | $t_{SW}$   | (Notes 6, 7)   |     | 20       |     | ns             |
| Address-Setup Time                      | $t_s$      | $T_A = T_{MIN}$ to $T_{MAX}$ (Notes 6, 8)  | 10  |          |     | ns             |
| Address-Hold Time                       | $t_{TH}$   | $T_A = T_{MIN}$ to $T_{MAX}$ (Notes 6, 8)  | 10  |          |     | ns             |
| Latch Propagation Delay                 | $t_{LPD}$  | (Note 6)   |     | 20       |     | ns             |
| Latch Pulse Width                       | $t_{LPW}$  | $T_A = T_{MIN}$ to $T_{MAX}$ (Notes 6, 8)  | 10  |          |     | ns             |
| Enable Delay Time                       | $t_{PDE}$  | (Notes 6, 9)   |     | 20       |     | ns             |
| Disable Delay Time                      | $t_{PDD}$  | (Notes 6, 9)   |     | 20       |     | ns             |
| Switching Transient                     | $V_{TRAN}$ | $A_V = 6dB$ (Notes 4, 10)  |     | $\pm 90$ |     | mV             |

**Note 2:** Does not include external feedback network resistance.

**Note 3:** Applies to all digital input pins ( $\overline{EN}$ , LE, and A0).

**Note 4:** Specified with feedback network chosen for optimal AC performance. See Tables 1 and 2 for recommended component values.

**Note 5:** Input test signal: 3.58MHz sine wave of amplitude 40IRE superimposed on a linear ramp (0IRE to 100IRE). IRE is a unit of video-signal amplitude developed by the International Radio Engineers. 140IRE = 1.0V.

**Note 6:** See timing diagram (Figure 5).

**Note 7:** Channel-switching time specified for switching between the two input channels; does not include signal rise/fall times for switching between channels with different input voltages.

**Note 8:** Guaranteed by design; not production tested.

**Note 9:** Output enable/disable delay times do not include amplifier output slewing times.










**Note 10:** Switching transient measured while switching between two grounded channels.

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## Typical Operating Characteristics

( $V_+ = +5V$ ,  $V_- = -5V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)










MAX4158/MAX4159/MAX4258/MAX4259

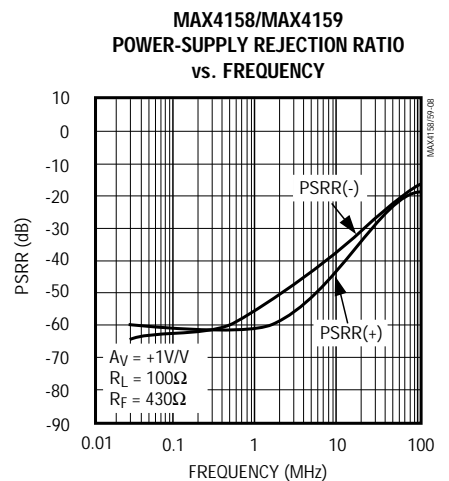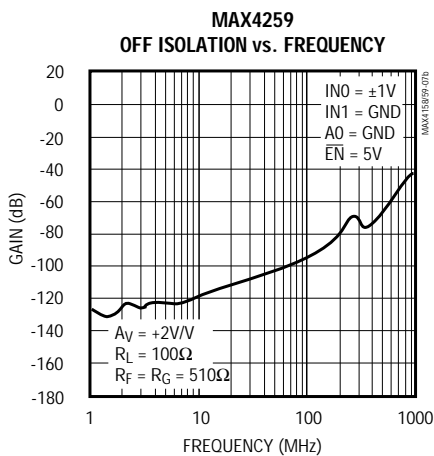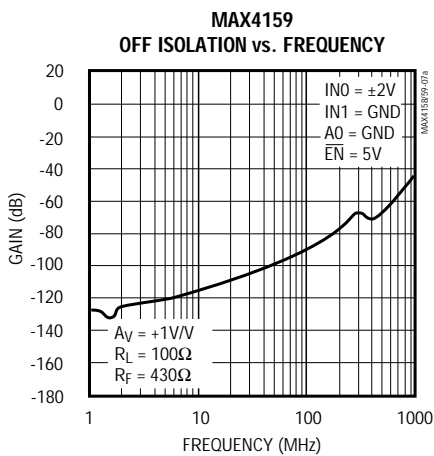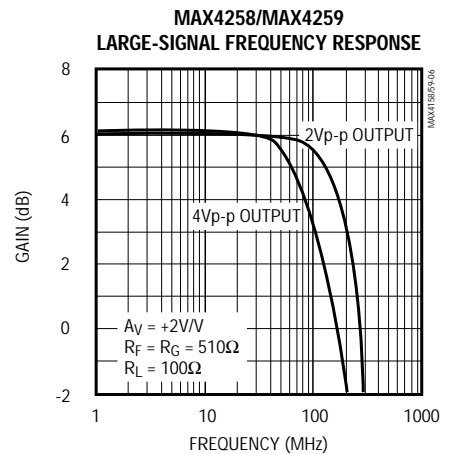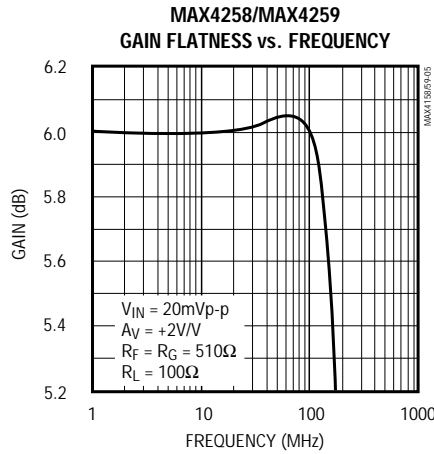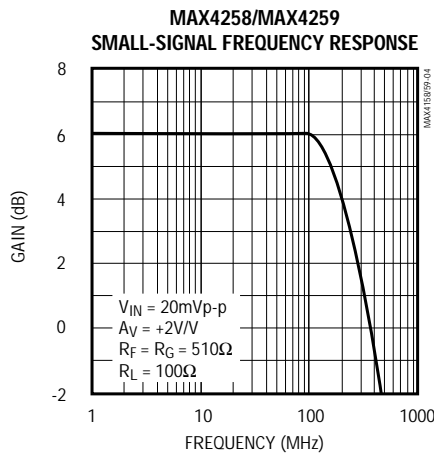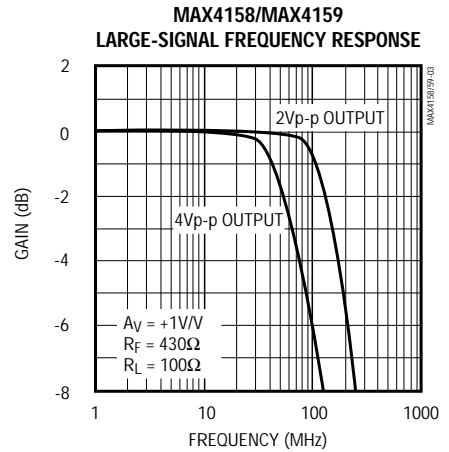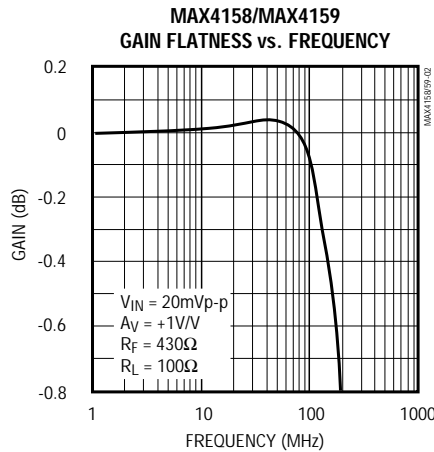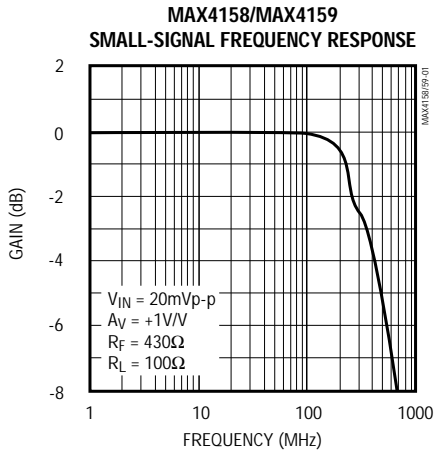

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## Typical Operating Characteristics (continued)

( $V_+ = +5V$ ,  $V_- = -5V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

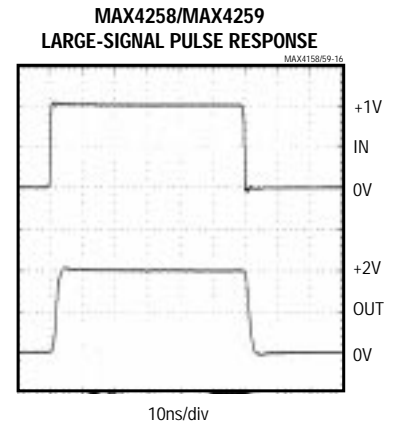
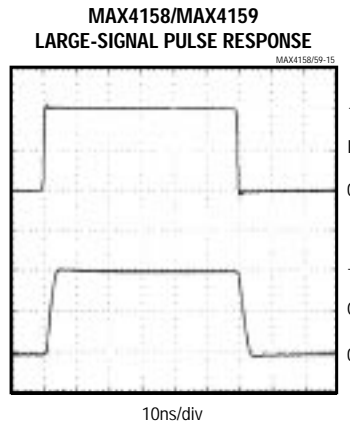
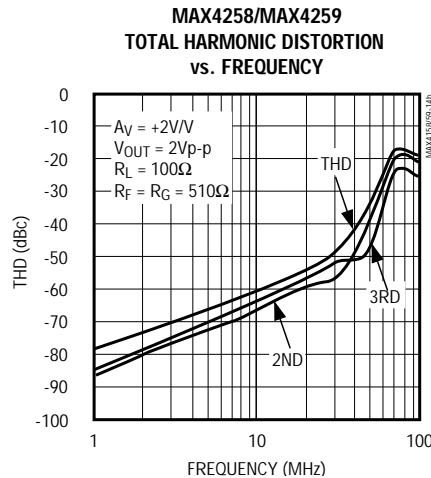
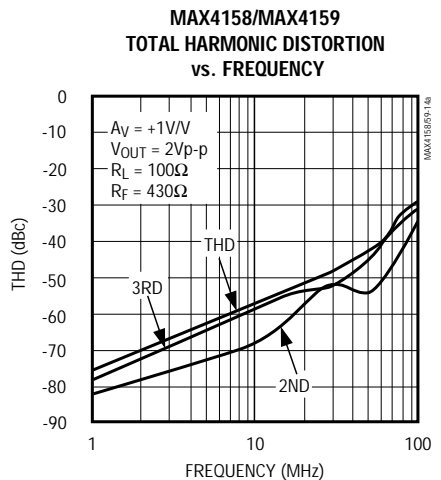
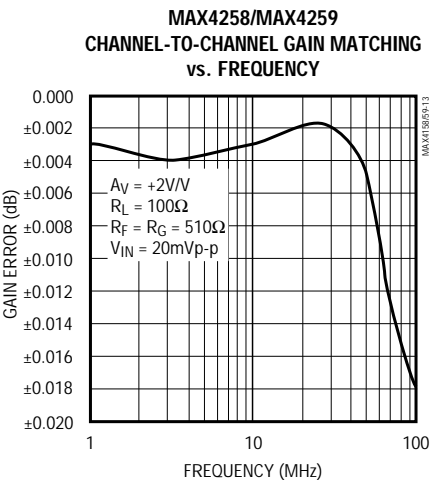
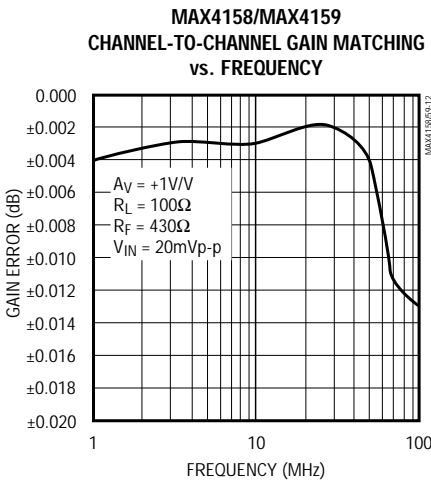
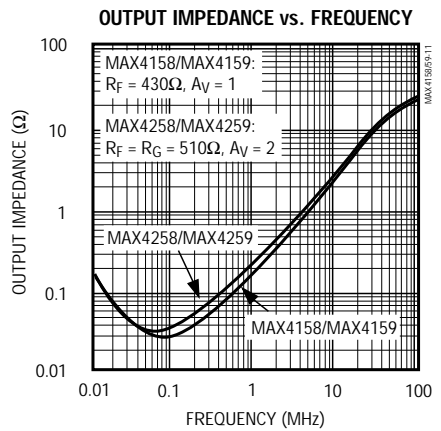
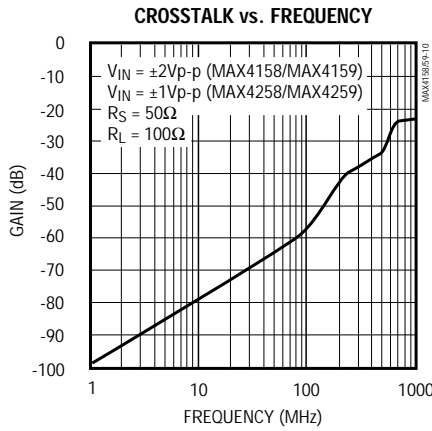
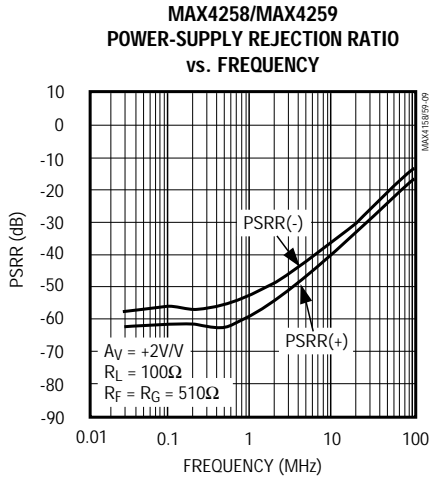


# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## Typical Operating Characteristics (continued)

(V+ = +5V, V- = -5V, T<sub>A</sub> = +25°C, unless otherwise noted.)









MAX4158/MAX4159/MAX4258/MAX4259

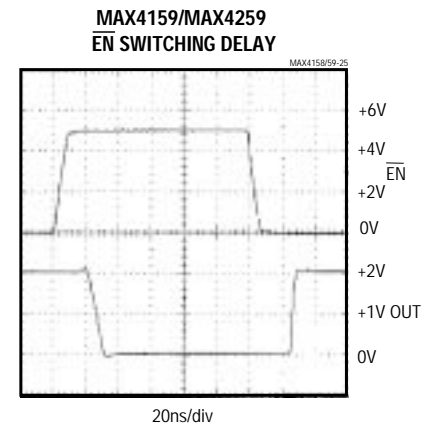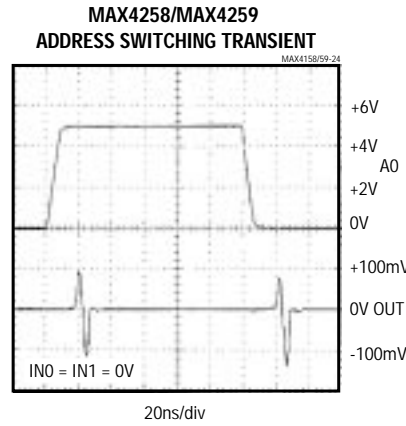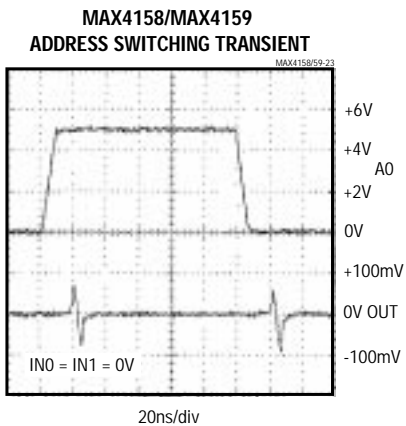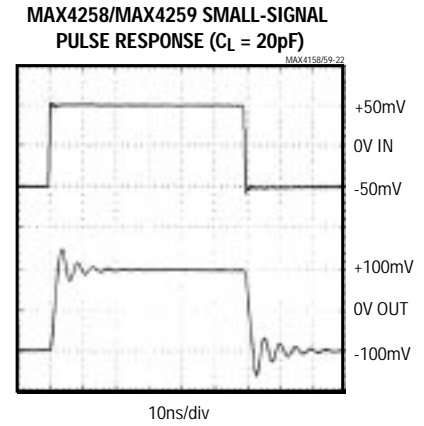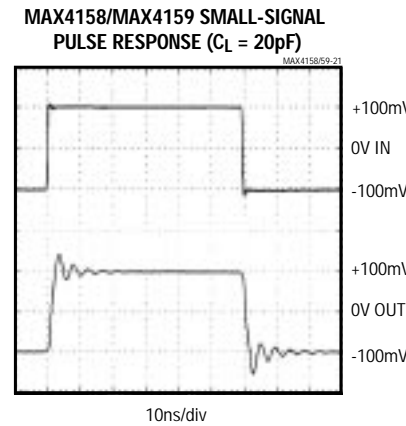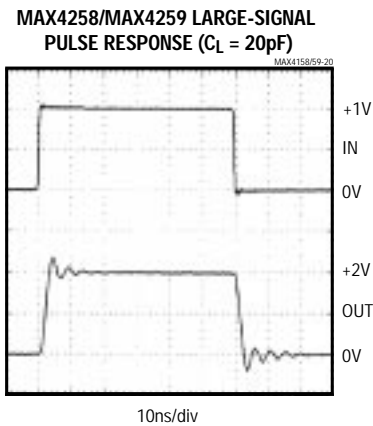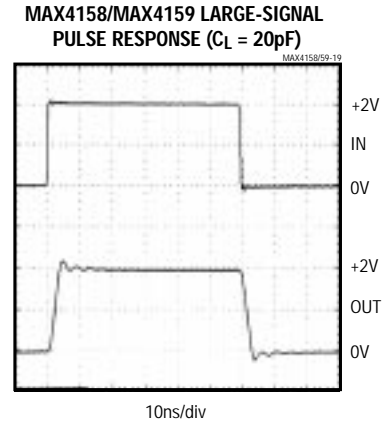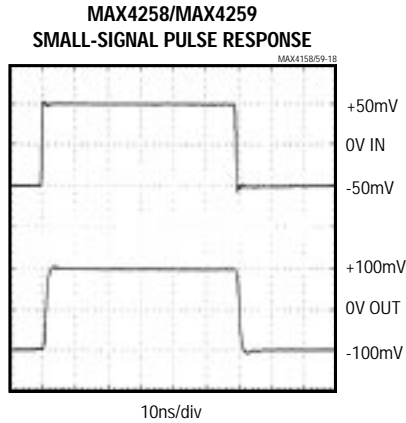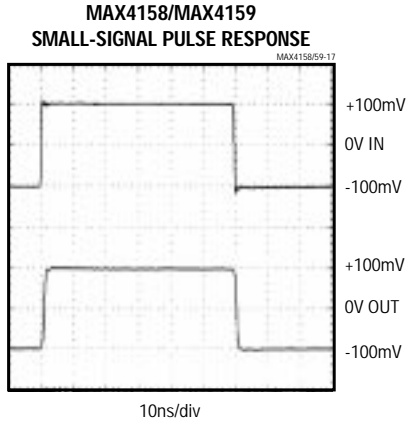

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## Typical Operating Characteristics (continued)

(V+ = +5V, V- = -5V, TA = +25°C, unless otherwise noted.)

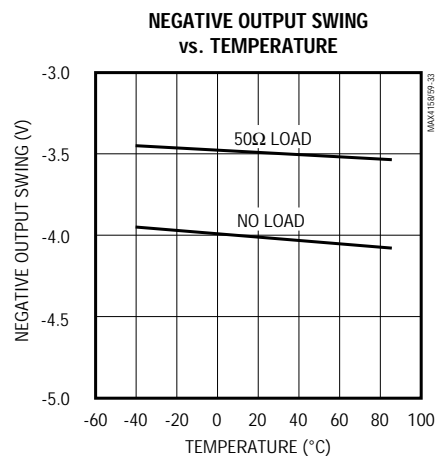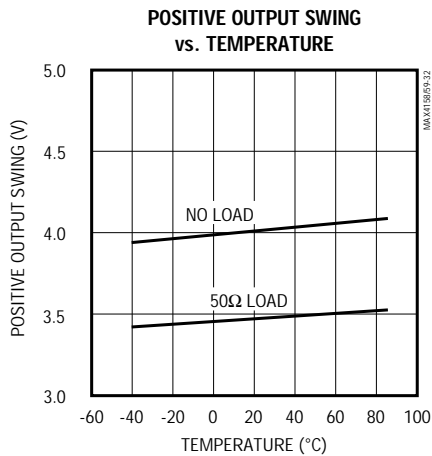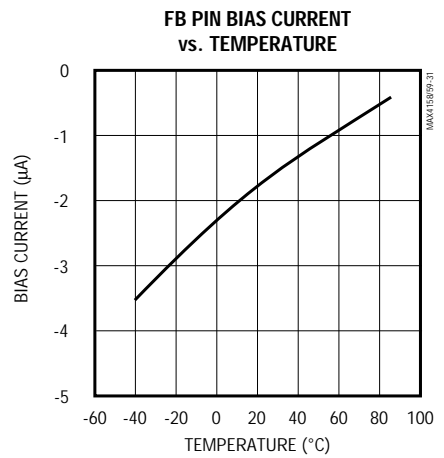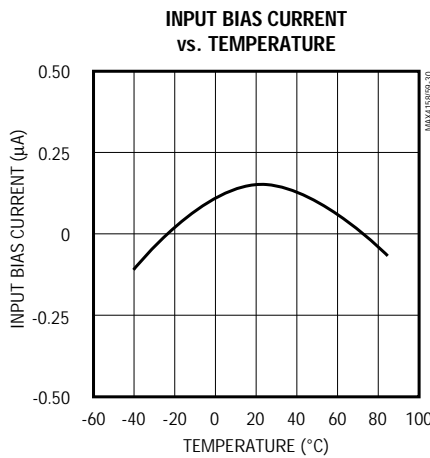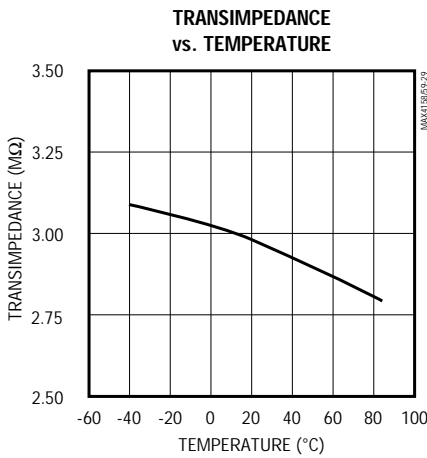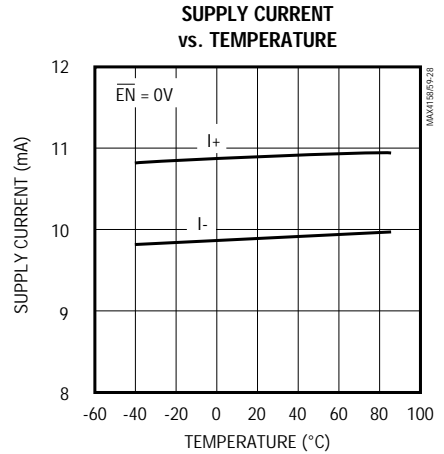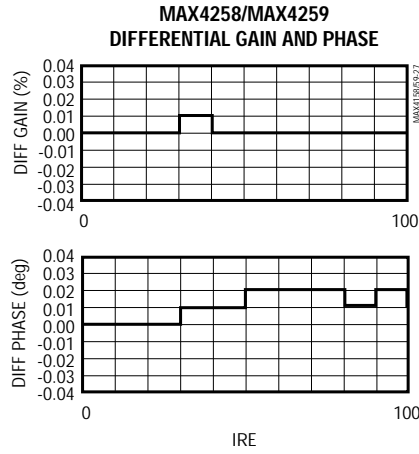
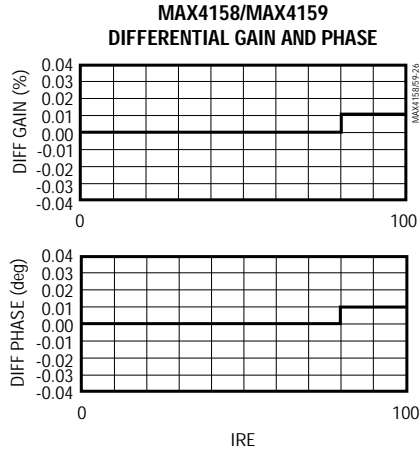




# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## Typical Operating Characteristics (continued)

(V+ = +5V, V- = -5V, T<sub>A</sub> = +25°C, unless otherwise noted.)

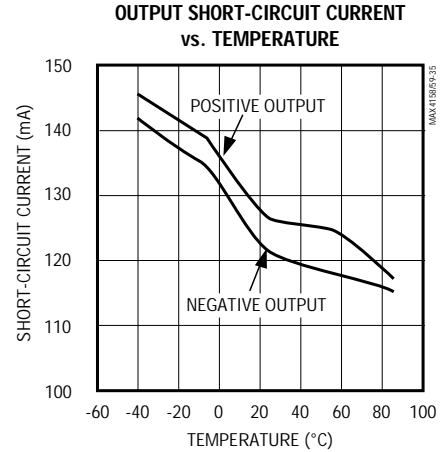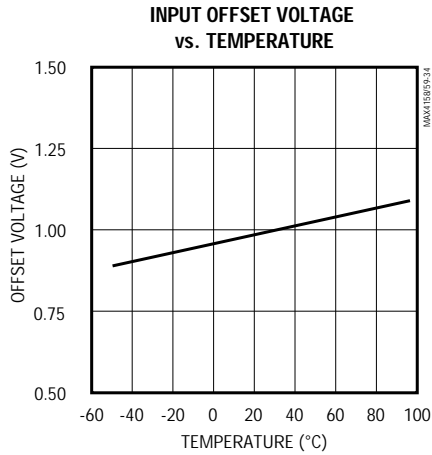

## Pin Description

| MAX4158<br>MAX4258 | PIN                |                   | NAME                   | FUNCTION  |
|--------------------|--------------------|-------------------|------------------------|---|
|                    | MAX4159<br>MAX4259 |                   |                        |   |
|                    | SO                 | QSOP              |                        |   |
| —                  | 1                  | 1                 | $\overline{\text{EN}}$ | Output Enable Logic Input. Connect $\overline{\text{EN}}$ to logic low or leave open for normal operation. Connect to logic high to disconnect amplifier output (output is high impedance). |
| 1                  | 3                  | 3                 | IN0                    | Amplifier Input, Channel 0  |
| 2                  | 2, 4, 6,<br>8, 10  | 2, 4, 6,<br>9, 11 | GND                    | Power Supply, Analog and Digital Ground. Connect GND to ground plane for best RF performance.   |
| 3                  | 5                  | 5                 | IN1                    | Amplifier Input, Channel 1  |
| —                  | —                  | 7, 15             | N.C.                   | No Connect. Not internally connected. Connect to ground plane for best RF performance.  |
| 4                  | 7                  | 8                 | V-                     | Negative Power-Supply Voltage   |
| 5                  | 9                  | 10                | FB                     | Amplifier Feedback Input  |
| 6                  | 11                 | 12                | V+                     | Positive Power-Supply Voltage   |
| 7                  | 12                 | 13                | OUT                    | Amplifier Output  |
| 8                  | 13                 | 14                | A0                     | Channel-Address Logic Input (see <i>Truth Table</i> )   |
| —                  | 14                 | 16                | LE                     | Latch-Enable Logic Input (see <i>Truth Table</i> )  |

MAX4158/MAX4159/MAX4258/MAX4259

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## Detailed Description

The MAX4158/MAX4159 are optimized for closed-loop gains ( $A_{VCL}$ ) of 1V/V (0dB) or greater; the MAX4258/MAX4259 are optimized for closed-loop gains of 2V/V (6dB) or greater. These low-power, high-speed, current-mode feedback amplifiers operate from  $\pm 5V$  supplies. They drive video loads (including  $50\Omega$  and  $75\Omega$  cables) with excellent distortion characteristics. Differential gain and phase errors are 0.01%/0.01° for MAX4158/MAX4159 and 0.01%/0.02° for MAX4258/MAX4259, respectively.

The input multiplexers feature very short switching times and small switching transients. They also have high input resistance and constant input capacitance, so overall input impedance can be set by external input terminating resistors. Each video input is isolated by an AC-ground pin, which reduces channel-to-channel capacitance and minimizes crosstalk.

The MAX4159/MAX4259 have address latching and an output enable function that places the output in a high-impedance state. These functions allow multiple mux/amps to be paralleled together to form larger switching arrays.

## Truth Tables

### Input Control Logic

| LOGIC INPUTS |    | AMPLIFIER INPUT | FUNCTION   |
|--------------|----|-----------------|--|
| LE           | A0 |                 |  |
| 0            | 0  | IN0             | Channel 0 selected                                     |
| 0            | 1  | IN1             | Channel 1 selected                                     |
| 1            | X  | [LAST]          | Channel addresses latched; retains last input address. |

X = Don't Care

### MAX4159/MAX4259 Output Control Logic

| LOGIC INPUT (EN) | AMPLIFIER OUTPUT | FUNCTION                   |
|------------------|------------------|----------------------------|
| 0                | On               | Output on                  |
| 1                | Off              | Output off; high impedance |

All logic levels ( $\overline{EN}$ , LE, and A0) default low (0) if left open circuit. Output disable is completely independent of input address and latch.

## Applications Information

### Theory of Operation

Since the MAX4158/MAX4159/MAX4258/MAX4259 are current-mode feedback amplifiers, their open-loop transfer function is expressed as a transimpedance,  $\Delta V_{OUT}/\Delta I_{FB}$ , or  $Z_T$ . The frequency behavior of this open-loop transimpedance is similar to the open-loop gain of a voltage-mode feedback amplifier. That is, it has a large DC value and decreases at approximately 6dB per octave at high frequency.

Analyzing the current-mode feedback amplifier in a gain configuration (Figure 1) yields the following transfer function:

$$V_{OUT} / V_{IN} = G \times Z_T(S) / (Z_T(S) + G \times R_{IN(FB)} + R_F)$$

where  $G = A_{VCL} = 1 + R_F / R_G$ .

At low gains,  $G \times R_{IN(FB)} \ll R_F$ . Therefore, unlike traditional voltage-mode feedback amplifiers, the closed-loop bandwidth is essentially independent of closed-loop gain. Note also that at low frequencies,  $Z_T \gg [G \times R_{IN(FB)} + R_F]$  so:

$$V_{OUT} / V_{IN} = G = 1 + R_F / R_G$$

### Layout and Power-Supply Bypassing

The MAX4158/MAX4159/MAX4258/MAX4259 have extremely high bandwidth, and consequently require careful board layout, including the possible use of constant-impedance microstrip or stripline techniques.

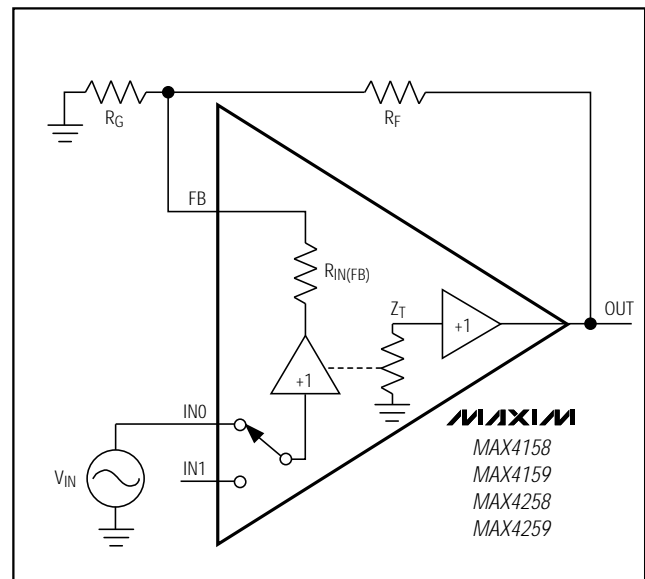


Figure 1. Current-Mode Feedback Amplifier

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

MAX4158/MAX4159/MAX4258/MAX4259

## Choosing Feedback and Gain Resistors

To realize the full AC performance of these high-speed amplifiers, pay careful attention to power-supply bypassing and board layout. The PC board should have at least two layers: a signal and power layer on one side, and a large, low-impedance ground plane on the other side. The ground plane should be as free of voids as possible, with one exception: the feedback pin (FB) should have as low a capacitance to ground as possible. This means that there should be no ground plane under FB or under the components ( $R_F$  and  $R_G$ ) connected to it. With multilayer boards, locate the ground plane on a layer that incorporates no signal or power traces.

Regardless of whether or not a constant-impedance board is used, it is best to observe the following guidelines when designing the board:

- 1) Do not use wire-wrap boards (they are much too inductive) or breadboards (they are much too capacitive).
- 2) Do not use IC sockets. IC sockets increase reactances.
- 3) Keep lines as short and as straight as possible. Do not make 90° turns; round all corners.
- 4) Observe high-frequency bypassing techniques to maintain the amplifier's accuracy and stability.
- 5) Bear in mind that, in general, surface-mount components have shorter bodies and lower parasitic reactance, giving much better high-frequency performance than through-hole components.

The bypass capacitors should include a 10nF ceramic surface-mount capacitor between each supply pin and the ground plane, located as close to the package as possible. Optionally, place a 10 $\mu$ F tantalum capacitor at the power-supply pins' points of entry to the PC board to ensure the integrity of incoming supplies. The power-supply trace should lead directly from the tantalum capacitor to the V+ and V- pins. To minimize parasitic inductance, keep PC traces short and use surface-mount components.

Ground pins have been placed between input channels to minimize crosstalk between the two input channels. (The grounds extend inside the package all the way to the silicon.) These pins should be connected to a common ground plane on the PC board.

Input termination resistors and output back-termination resistors, if used, should be surface-mount types, and should be placed as close to the IC pins as possible.

As with all current-mode feedback amplifiers, the frequency response of the MAX4158/MAX4159/MAX4258/MAX4259 is critically dependent on the value of the feedback resistor  $R_F$ .  $R_F$ , in conjunction with an internal compensation capacitor, forms the dominant pole in the feedback loop. Reducing  $R_F$ 's value increases the pole frequency and the -3dB bandwidth, but also increases peaking due to interaction with other nondominant poles. Increasing  $R_F$ 's value reduces peaking and bandwidth.

Tables 1 and 2 show optimal values for the feedback resistor ( $R_F$ ) and gain-setting resistor ( $R_G$ ) for all parts. Note that the MAX4258/MAX4259 offer superior AC performance for all gains except unity gain (0dB). These values provide optimal AC response using surface-mount resistors and good layout techniques. The MAX4159/MAX4259 evaluation kit provides a practical example of such layout techniques.

Stray capacitance at FB causes feedback resistor decoupling and produces peaking in the frequency-response curve. Keep the capacitance at FB as low as possible by using surface-mount resistors, and avoiding the use of a ground plane beneath or beside these resistors and the FB pin. Some capacitance is unavoidable; if necessary, its effects can be counteracted by adjusting  $R_F$ . 1% resistors are recommended to maintain consistency over a wide range of production lots.

**Table 1. MAX4158/MAX4159 Bandwidth and Gain vs. Gain-Setting Resistors**

| GAIN  |      | $R_G$<br>( $\Omega$ ) | $R_F$<br>( $\Omega$ ) | -3dB BW<br>(MHz) | 0.1dB BW<br>(MHz) |
|-------|------|-----------------------|-----------------------|------------------|-------------------|
| (V/V) | (dB) |                       |                       |                  |                   |
| 1     | 0    | $\infty$              | 430                   | 350              | 100               |
| 2     | 6    | 110                   | 110                   | 200              | 110               |
| 5     | 14   | 32.5                  | 130                   | 80               | 12                |
| 10    | 20   | 14.5                  | 130                   | 40               | 6                 |

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

**Table 2. MAX4258/MAX4259 Bandwidth and Gain vs. Gain-Setting Resistors**

| GAIN  |      | R <sub>G</sub><br>(Ω) | R <sub>F</sub><br>(Ω) | -3dB BW<br>(MHz) | 0.1dB BW<br>(MHz) |
|-------|------|-----------------------|-----------------------|------------------|-------------------|
| (V/V) | (dB) |                       |                       |                  |                   |
| 2     | 6    | 510                   | 510                   | 250              | 130               |
| 5     | 14   | 45                    | 180                   | 195              | 92                |
| 10    | 20   | 20                    | 180                   | 90               | 14                |

### DC Errors and Noise

The MAX4158/MAX4159/MAX4258/MAX4259 output offset voltage, V<sub>OUT</sub> (Figure 2) can be calculated with the following equation:

$$V_{OUT} = V_{OS} \times [1 + R_F / R_G] + I_B \times R_S \times [1 + R_F / R_G] + I_{FB} \times R_F$$

where:

- V<sub>OS</sub> = input offset voltage (in volts)
- 1 + R<sub>F</sub> / R<sub>G</sub> = amplifier closed-loop gain (dimensionless)
- I<sub>B</sub> = input bias current (in amps)
- I<sub>FB</sub> = feedback input bias current (in amps)
- R<sub>G</sub> = gain-setting resistor (in ohms)
- R<sub>F</sub> = feedback resistor (in ohms)
- R<sub>S</sub> = source resistor (in ohms)

The following equation represents output noise density:

$$e_n(OUT) = (1 + R_F / R_G) \times \sqrt{[i_n \times R_S]^2 + [i_n(FB) \times (R_F \parallel R_G)]^2} + [e_n]^2$$

where:

- i<sub>n</sub> = input noise current density (in A/√Hz)
- e<sub>n</sub> = input noise voltage density (in V/√Hz)

The MAX4158/MAX4159/MAX4258/MAX4259 have a very low, 2nV/√Hz noise voltage. The current noise at the input (i<sub>n</sub>) is 2pA/√Hz, and the current noise at the feedback input (i<sub>n(FB)</sub>) is 22pA/√Hz.

An example of DC-error calculations, using the MAX4258 typical data and the typical operating circuit with R<sub>F</sub> = R<sub>G</sub> = 510Ω (R<sub>F</sub> ∥ R<sub>G</sub> = 255Ω) and R<sub>S</sub> = 50Ω, gives:

$$V_{OUT} = [1 \times 10^{-3} \times (1 + 1)] + [2 \times 10^{-6} \times 50 \times (1 + 1)] + [2 \times 10^{-6} \times 510]$$

$$V_{OUT} = 3.22mV$$

Calculating total output noise in a similar manner yields the following:

$$e_n(OUT) = (1 + 1) \times \sqrt{[(2 \times 10^{-12}) \times 50]^2 + [(22 \times 10^{-12}) \times 255]^2 + (2 \times 10^{-9})^2}$$

$$e_n(OUT) = 11.9nV/\sqrt{Hz}$$

With a 200MHz system bandwidth, this calculates to 168μV<sub>RMS</sub> (approximately 1.01mV<sub>p-p</sub>, using the six-sigma calculation).

### Video Line Driver

The MAX4158/MAX4159/MAX4258/MAX4259 are optimized to drive coaxial transmission lines when the cable is terminated at both ends (Figure 3). Cable frequency response may cause variations in the flatness of the signal.

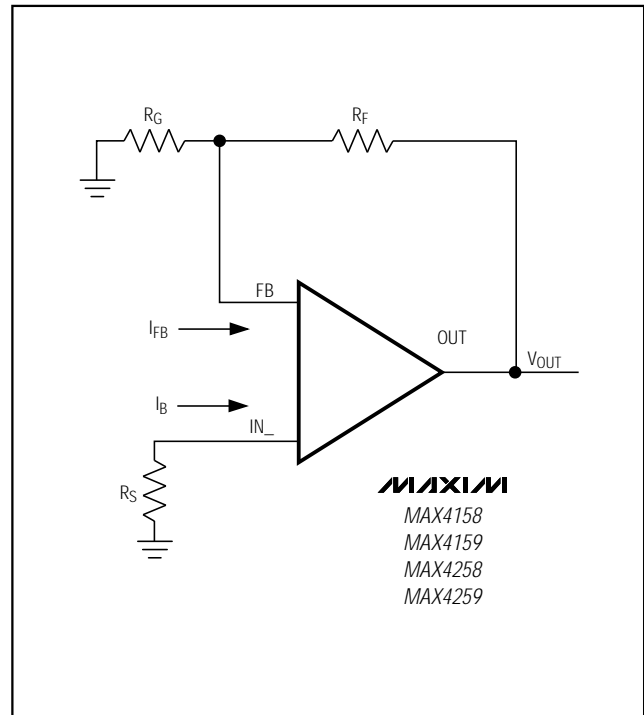


Figure 2. Output Offset Voltage

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

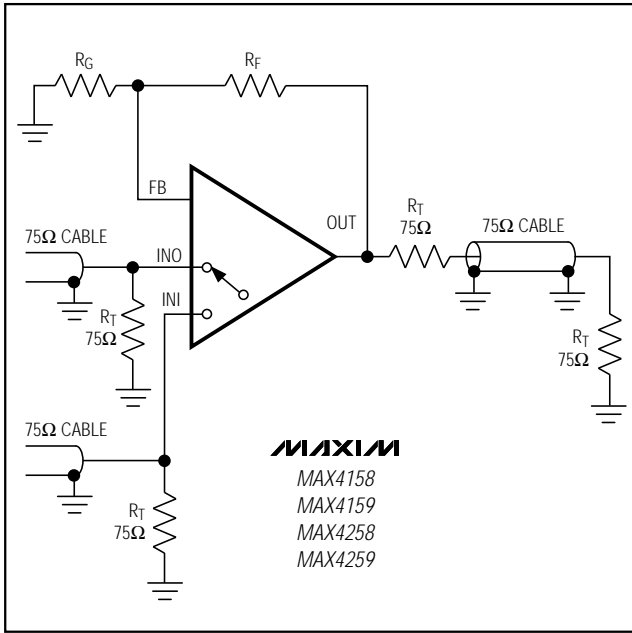


Figure 3. Video Line Driver

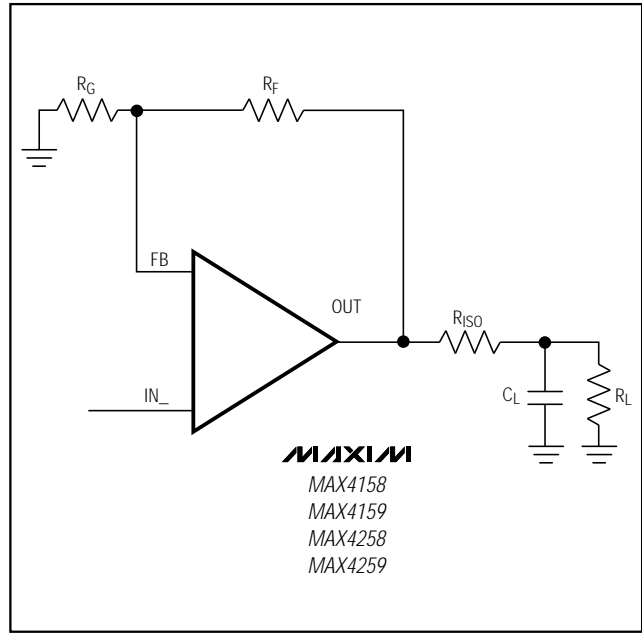


Figure 4. Using an Isolation Resistor ( $R_{ISO}$ ) for High Capacitive Loads

## Driving Capacitive Loads

A correctly terminated transmission line is purely resistive and presents no capacitive load to the amplifier. Consequently, the MAX4158/MAX4159/MAX4258/MAX4259 are optimized for AC performance and are not designed to drive highly capacitive loads. Reactive loads will decrease phase margin and may produce excessive ringing and oscillation (see *Typical Operating Characteristics*). The circuit of Figure 4 reduces this problem. The small (usually  $5\Omega$  to  $20\Omega$ ) isolation resistor  $R_{ISO}$ , placed before the reactive load, prevents ringing and oscillation. At higher capacitive loads, AC performance is limited by the interaction of load capacitance with the isolation resistor.

MAX4158/MAX4159/MAX4258/MAX4259

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

### Input Voltage Range

The guaranteed input voltage range is  $\pm 2.5V$ . Exceeding this value can cause unpredictable results, including output clipping, excessive input current, and switching delays.

### Multiplexer

The input multiplexer (mux) is controlled by TTL/CMOS-compatible address inputs (see *Truth Tables*.) There is no internal memory except the address latch (LE) on

the MAX4159/MAX4259. If power is first applied with the latch enabled, IN0 is selected.

Input capacitance is a constant, low 2pF for either input channel, regardless of whether or not the channel is selected.

All logic levels ( $\overline{EN}$ , LE, and A0) default low if left open-circuit.

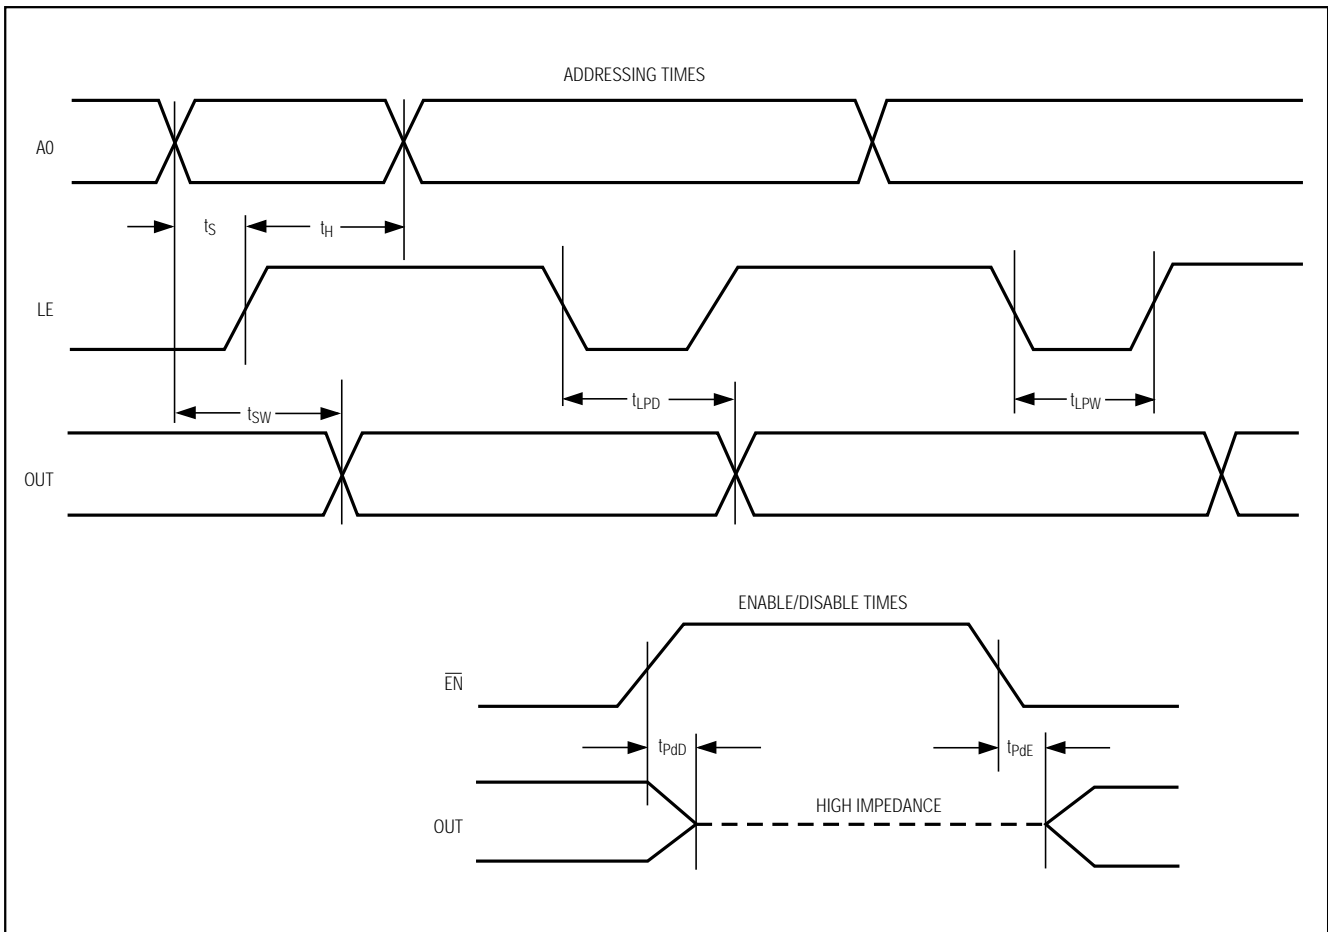




Figure 5. Switching Timing Diagram

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## Pin Configurations/Functional Diagrams/Truth Tables

MAX4158/MAX4159/MAX4258/MAX4259

TOP VIEW

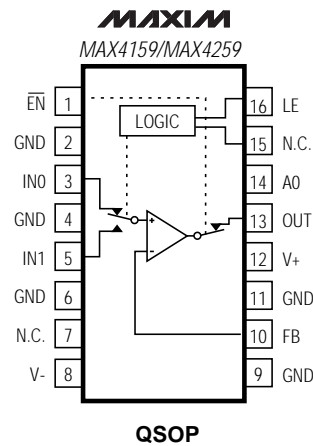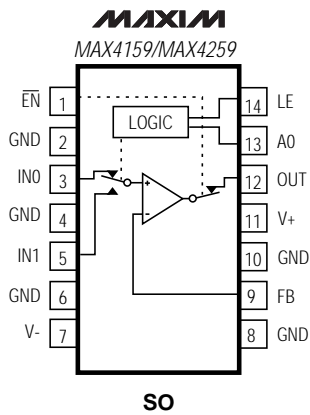

| MAX4159/MAX4259 |    |       |
|-----------------|----|-------|
| LE              | A0 | INPUT |
| 0               | 0  | IN0   |
| 0               | 1  | IN1   |
| 1               | X  | LAST  |

X = DON'T CARE

| MAX4159/MAX4259 |            |
|-----------------|------------|
| EN              | OUTPUT     |
| 0               | ON         |
| 1               | OFF (HI-Z) |

N.C. = NOT INTERNALLY CONNECTED

## Chip Information

TRANSISTOR COUNT: 239

# 350MHz/250MHz, 2-Channel Video Multiplexer-Amplifiers

## Package Information

