



DS3144DK

Quad DS3/E3 Framer

Design Kit Daughter Card

www.maxim-ic.com

GENERAL DESCRIPTION

The DS3144 design kit is an easy-to-use evaluation board for the DS3144 quad DS3/E3 framer. It is intended to be used as a daughter card with the DK101 motherboard or the DK2000 motherboard. The DS3144DK comes complete with a DS3144 quad framer, DS3154 quad LIU, transformers, termination resistors, network connectors, and motherboard connectors. Interface to the DK101/DK2000 and Dallas' ChipView software give point-and-click access to configuration and status registers from a personal computer. On-board LEDs indicate loss-of-signal, out-of-frame, and interrupt status. An on-board FPGA contains mux logic to connect framer ports to one another or to the DK2000 in a variety of configurations.

DESIGN KIT CONTENTS

DS3144DK Board

Download from www.maxim-ic.com/DS3144DK:

DS3144DK Data Sheet


ChipView Software

FEATURES

- Demonstrates Key Functions of DS3144 Quad DS3/E3 Framer
- Includes DS3154 Quad LIU, Transformers, BNC Connectors, and Termination Passives for Communication with Test Equipment over Coax
- Compatible with DK101 and DK2000 Demo Kit Motherboards
- DK101/DK2000 Interface and ChipView Software Provide Point-and-Click Access to the DS3144 Register Set
- All Equipment-Side Framer Pins are Easily Accessible for External Data Source/Sink
- Memory-Mapped FPGA Provides Flexible Clock/Data/Sync Connections Among Framer Ports and DK2000 Motherboard
- LEDs for Out-of-Frame, Loss-of-Signal, and Interrupt
- Easy-to-Read Silk Screen Labels Identify the Signals Associated with all Connectors, Jumpers, and LEDs


ORDERING INFORMATION

| PART | DESCRIPTION |
|----------|---------------------------------|
| DS3144DK | DS3144 Design Kit Daughter Card |

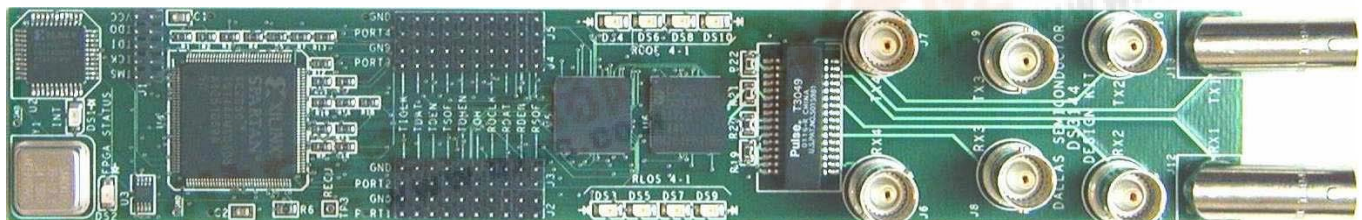

COMPONENT LIST

| DESIGNATION | QTY | DESCRIPTION | SUPPLIER | PART |
|---|-----|--|----------------------|--------------------------------------|
| C1, C2, C15 | 3 | 0.1 μ F 10%, 16V ceramic capacitors (0805) | Panasonic | ECJ-2VB1C104K |
| C3–C9, C11–C14, C16, C20, C22, C23, C25–C32 | 23 | 0.1 μ F 10%, 16V ceramic capacitors (0603) | Phycomp | 06032R104K7B20D |
| C10, C17, C18, C24 | 4 | 1 μ F 10%, 16V ceramic capacitors (1206) | Panasonic | ECJ-3YB1C105K |
| C19, C21 | 2 | 10 μ F 20%, 10V ceramic capacitors (1206) | Panasonic | ECJ-3YB1A106M |
| DS1, DS3–DS10 | 9 | LED, red, SMD | Panasonic | LN1251C |
| DS2 | 1 | LED, green, SMD | Panasonic | LN1351C |
| J1 | 1 | 10-pin connector, dual-row vertical | Digi-Key | S2012-05-ND |
| J2–J5 | 4 | 20-pin headers, dual-row vertical | Samtec | HDR-TSW-110-14-T-D |
| J6–J11 | 6 | 5-pin BNC connectors, right-angle vertical | Cambridge | CP-BNCPC-004 |
| J12, J13 | 2 | 5-pin BNC connectors, right-angle | Kruid | UCBJR220 |
| J14, J15 | 2 | 50-pin connectors, dual-row vertical | Samtec | TFM-125-02-S-D-LC |
| R1–R5, R7–R18, R23, R28–R59 | 49 | 30 Ω 5%, 1/16W resistors (0603) | Panasonic | ERJ-3GEYJ300V |
| R6 | 1 | 470 Ω 5%, 1/10W resistor (0805) | Panasonic | ERJ-6GEYJ471V |
| R19–R22, R69–R72 | 8 | 332 Ω 1%, 1/10W resistors (0805) | Panasonic | ERJ-6ENF3320V |
| R24 | 1 | 10k Ω 5%, 1/10W resistor (0805) | Panasonic | ERJ-6GEYJ103V |
| R25, R26 | 2 | 330 Ω 5% 1/10W MF resistors (0805) | Panasonic | ERA-6YEB331V |
| R27 | 1 | Not populated | — | — |
| R60 | 1 | 10k Ω 5%, 1/10W resistor (0805) | Panasonic | ERJ-6ENF1002V |
| R61–R68 | 8 | 100 Ω 1/16W 5% resistors (0603) | Panasonic | ERJ-3GEYJ101V |
| T1 | 1 | XFMR, XMIT/RCV, 1 to 2, SMT 32-pin | Pulse Engineering | T3049 |
| U1 | 1 | Serial configuration EEPROM for Xilinx, 65kB 8-pin DIP. Socketed (not populated) | Atmel | AT17LV65EUA and 61499-30831007000-ND |
| U2 | 1 | 1M PROM for FPGA 44-pin TQFP (not populated) | Xilinx | XC18V01VQ44C_U |
| U3 | 1 | 8-Pin μ MAX $V_{OUT} = 2.5V$ or Adj | Maxim | MAX1792EUA25 |
| U4 | 1 | Xilinx Spartan 2.5V FPGA, 20mm X 20mm 144-pin TQFP | Xilinx | XC2S50-5TQ144C |
| U5 | 1 | Quad DS3/E3 framer 144-pin BGA, 0°C to +70°C | Dallas Semiconductor | DS3144 |
| U6 | 1 | Quad DS3/E3/STS-1 LIU 144-pin BGA | Dallas Semiconductor | DS3154 |
| Y1 | 1 | 3.3V, 34.368MHz crystal clock oscillator | SaRonix | NTH089AA3-34.368 |

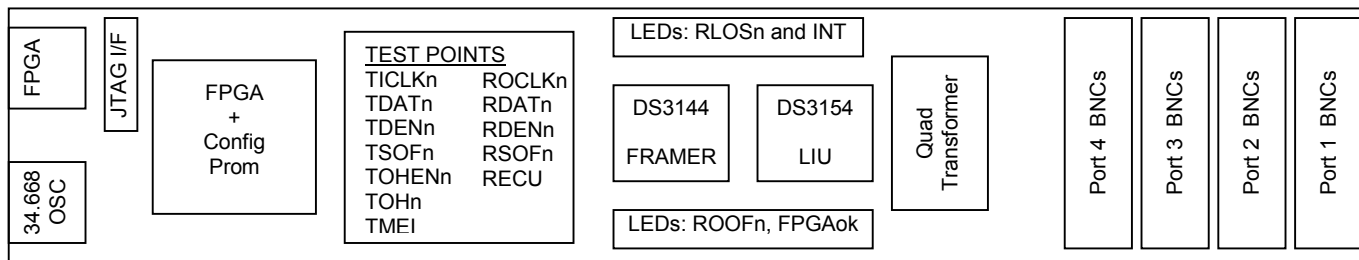BOARD FLOORPLAN

LINE-SIDE CONNECTIONS

The DS3144DK implements the transmit (Tx) and receive (Rx) line interface networks recommended in the DS3154 data sheet. The BNC connectors are labeled TX1 through TX4 and RX1 through RX4. Note that the purpose of the DS3144DK is to evaluate the DS3144 framer, not the DS3154 LIU. The DS3144DK is not an impedance-matched board and therefore has not been designed to have transmit waveforms with optimal template fit. To evaluate the analog performance of the DS3154, request a DS3154DK demo kit.

INTERFACE CONNECTORS

Two 50-pin connectors (J14, J15) on the bottom of the DS3144DK daughter card provide the processor interface, DS3 clock, and power supply from the DK2000 and DK101 motherboards. These connectors also provide a bidirectional clock/data/sync connection with the DK2000.

CONNECTION TO A COMPUTER

Refer to the DK101 and DK2000 data sheets for information. After power is applied, if the DS3144DK is working correctly, the FPGA status LED (green) is lit, the INT LED (red) on the DS3144DK is not lit, and the RLOS and ROOF LEDs (red) may or may not be lit.

QUICK SETUP (REGISTER VIEW)

- 1) Connect the DS3144DK daughter card to the DK101 motherboard or the DK2000 motherboard.
- 2) Connect the motherboard to a PC and a power supply as described in the motherboard data sheet.
- 3) Install and run the ChipView software, as described in the motherboard data sheet.
- 4) ChipView offers a choice between Register View, Demo, and Terminal Mode. Select Register View.
- 5) In the Definition File Assignment window, select the file DS3144DC_FPGA.def. This definition file will, in turn, load DS3154DC.def, DS3144_1_DC.def, DS3144_2_DC.def, DS3144_3_DC.def, and DS3144_4_DC.def.
- 6) Next the Register View Screen appears, showing the register names, acronyms, and values for the DS3144, DS3154, and the FPGA. Select among the register views using the pulldown menu box on the right.

Several register initialization (.INI) files are available for the DS3144DK. Initialization files are loaded by selecting the menu option File→Register .INI File→Load .INI File.

- 7) Load the .INI file DS3144_1_txPRBS215-1_Cbit.ini.
- 8) Switch to the DS3154 register view (DS3154DC.def) and set TCR1 = 0 and RCR1 = 0 on the DS3154 (this clears the transmit tri-state and receive tri-state bits that are set on power-up in the DS3154).
- 9) Loopback port 1 by either (a) connecting a length of coax cable between the TX1 BNC and the RX1 BNC, or (b) setting the GCR1:LLB (local loopback) bit in the DS3154.
- 10) Switch to the DS3144 port 1 register view (DS3144_1_DC.def). Toggle BCR1:TC high then low to begin transmitting a $2^{15} - 1$ PRBS pattern. Toggle BCR1:RESYNC high then low to resynchronize the BERT receiver.
- 11) At this point the following may be observed:
 - Port 1 RLOS and ROOF LEDs are not lit, meaning the port 1 framer has acquired frame sync. This can also be observed in the port 1 T3E3SR status register.
 - The port 1 BSR:SYNC bit is set, indicating the BERT receiver is receiving the $2^{15} - 1$ PRBS pattern.

This is a very basic setup designed to build familiarity with the DS3144DK. Many other configurations are possible. Consult the DS3144 data sheet and the remainder of this data sheet for further information.

MEMORY MAP

DK101 daughter card address space begins at 0x81000000.

DK2000 daughter card address space begins at:

0x30000000 for slot 0

0x40000000 for slot 1

0x50000000 for slot 2

0x60000000 for slot 3

All offsets in [Table 1](#) below are relative to the beginning of the daughter card address space.

Table 1. Daughter Card Address Map

| DS3/E3 PORT NUMBER | DS3144 OFFSET | DS3154 OFFSET | FPGA OFFSET |
|-----------------------|------------------|------------------|------------------|
| 1 | 0x1300 to 0x13FF | 0x2030 to 0x203F | 0x0010 to 0x001F |
| 2 | 0x1000 to 0x10FF | 0x2010 to 0x201F | 0x0020 to 0x002F |
| 3 | 0x1100 to 0x11FF | 0x2020 to 0x202F | 0x0030 to 0x003F |
| 4 | 0x1200 to 0x12FF | 0x2000 to 0x200F | 0x0040 to 0x004F |

All offsets in [Table 2](#) below are relative to the daughter card address space *plus* the DS3/E3 port offset in Table 1.

Table 2. DS3144DK FPGA Register Map

| OFFSET | REGISTER | TYPE | DESCRIPTION |
|--------|----------|-----------|---------------------------------|
| 0x0000 | BID | Read-Only | Board ID |
| 0x0002 | XBIDH | Read-Only | High Nibble Extended Board ID |
| 0x0003 | XBIDM | Read-Only | Middle Nibble Extended Board ID |
| 0x0004 | XBIDL | Read-Only | Low Nibble Extended Board ID |
| 0x0005 | BREV | Read-Only | Board Fab Revision |
| 0x0006 | AREV | Read-Only | Board Assembly Revision |
| 0x0007 | PREV | Read-Only | PLD Revision |
| 0x000A | PCTC_SR | Control | PCM_TXCLK Source |
| 0x000B | PCTS_SR | Control | PCM_TSYNC Source |
| 0x000C | PCR_X_SR | Control | PCM_RXD Source |
| 0x000D | PCRC_SR | Control | PCM_RXCLK Source |
| 0x000E | PCRS_SR | Control | PCM_RSYNC Source |
| 0x0010 | TDAT_SR | Control | DS3144 TDAT Source |
| 0x0020 | | | |
| 0x0030 | | | |
| 0x0040 | | | |
| 0x0011 | TICK_SR | Control | DS3144 TICK Source |
| 0x0021 | | | |
| 0x0031 | | | |
| 0x0041 | | | |
| 0x0012 | TSOF_SR | Control | DS3144 TSOF Source |
| 0x0022 | | | |
| 0x0032 | | | |
| 0x0042 | | | |

Registers in the FPGA can be easily modified using the ChipView software and the definition file named DS3144DC_FPGA.def. Registers 0x00 through 0x07 (excluding register 0x01, which has no function on the DS3144DK) are read-only and are programmed at the factory to document board identification and revision information. The remaining registers in the FPGA control the connection of the DS3144's equipment-side framer pins. With these control registers, the framers within the DS3144 can be looped back on themselves externally, connected to each other back-to-back, or connected to the DK2000 motherboard.

In [Table 2](#) and the control register descriptions below, PCM_TXCLK, PCM_TXD, and PCM_TSYNC are clock/data/sync lines over which the DS3144 can transmit a DS3/E3 data stream to the DK2000 motherboard or other daughter cards plugged into the DK2000. PCM_RXCLK, PCM_RXD, and PCM_RSYNC are clock/data/sync lines over which the DS3144DK can receive a DS3/E3 data stream from the DK2000 or a daughter card plugged into the DK2000. See the DS3144DK schematics for additional details.

Note that the DS3/E3 port numbers of the DS3144DK (as silk-screened on the board) do not match the DS3144 port numbers and the DS3154 port numbers. [Table 3](#) details the mapping of device port numbers to board port numbers. This mapping is reflected in the address ranges shown in [Table 1](#).

Table 3. Relationship of Silk-Screened Port Numbers to IC Ports Numbers

| SILK-SCREENED PORT NUMBER ON BNCs AND RLOS/ROOF LEDs | DS3144 PORT | DS3154 PORT |
|---|-------------|-------------|
| 1 | 4 | 4 |
| 2 | 1 | 2 |
| 3 | 2 | 3 |
| 4 | 3 | 1 |

From this it can be seen that, for example, the BNCs and LEDs for DS3144DK port 4 are associated with port 3 of the DS3144 and port 1 of the DS3154.

CONTROL REGISTERS

Register Name: **PCTC_SR**
 Register Description: **PCM_TXCLK Source**
 Register Address Offset: **0x0A**

| Bit # | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|------|------|------|
| Name | — | — | — | — | — | PCS2 | PCS1 | PCS0 |
| Default | — | — | — | — | — | 0 | 0 | 0 |

Bits 2 to 0: PCM_TXCLK Source (PCS[2:0])

000 = Tri-state PCM_TXCLK
 001 = Drive PCM_TXCLK with TDEN/TGCLK1
 010 = Drive PCM_TXCLK with TDEN/TGCLK2
 011 = Drive PCM_TXCLK with TDEN/TGCLK3
 100 = Drive PCM_TXCLK with TDEN/TGCLK4

Register Name: **PCTS_SR**
 Register Description: **PCM_TSYNC Source**
 Register Address Offset: **0x0B**

| Bit # | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|------|------|------|
| Name | — | — | — | — | — | PSS2 | PSS1 | PSS0 |
| Default | — | — | — | — | — | 0 | 0 | 0 |

Bits 2 to 0: PCM_TSYNC Source (PSS[2:0])

000 = Tri-state PCM_TSYNC
 001 = Drive PCM_TSYNC with TSOF1
 010 = Drive PCM_TSYNC with TSOF2
 011 = Drive PCM_TSYNC with TSOF3
 100 = Drive PCM_TSYNC with TSOF4

Note: Only use non-zero settings of PSS[2:0] when the TSOFx pin is configured as an output by setting MC3:TSOFC = 1 in the corresponding DS3144 framer.

Register Name: **PCRX_SR**
 Register Description: **PCM_RXD Source**
 Register Address Offset: **0x0C**

| Bit # | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|-------|-------|-------|
| Name | — | — | — | — | — | PRXS2 | PRXS1 | PRXS0 |
| Default | — | — | — | — | — | 0 | 0 | 0 |

Bits 2 to 0: PCM_RXD Source (PRXS[2:0])

000 = Tri-state PCM_RXD
 001 = Drive PCM_RXD with RDAT1
 010 = Drive PCM_RXD with RDAT2
 011 = Drive PCM_RXD with RDAT3
 100 = Drive PCM_RXD with RDAT4

Register Name: **PCRC_SR**
 Register Description: **PCM_RXCLK Source**
 Register Address Offset: **0x0D**

| Bit # | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|-------|-------|-------|
| Name | — | — | — | — | — | PRCS2 | PRCS1 | PRCS0 |
| Default | — | — | — | — | — | 0 | 0 | 0 |

Bits 2 to 0: PCM_RXCLK Source (PRCS[2:0])

000 = Tri-state PCM_RXCLK
 001 = Drive PCM_RXCLK with RDEN/RGCLK1
 010 = Drive PCM_RXCLK with RDEN/RGCLK2
 011 = Drive PCM_RXCLK with RDEN/RGCLK3
 100 = Drive PCM_RXCLK with RDEN/RGCLK4

Register Name: **PCRS_SR**
 Register Description: **PCM_RSYNC Source**
 Register Address Offset: **0x0E**

| Bit # | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|-------|-------|-------|
| Name | — | — | — | — | — | PRSS2 | PRSS1 | PRSS0 |
| Default | — | — | — | — | — | 0 | 0 | 0 |

Bits 2 to 0: PCM_RSYNC Source (PRSS[2:0])

000 = Tri-state PCM_RSYNC
 001 = Drive PCM_RSYNC with RSOF1
 010 = Drive PCM_RSYNC with RSOF2
 011 = Drive PCM_RSYNC with RSOF3
 100 = Drive PCM_RSYNC with RSOF4

Register Name: **TDAT_SR**
 Register Description: **DS3144 TDATx Source**
 Register Address Offset: **0x10, 0x20, 0x30, 0x40**

| Bit # | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|----------|----------|----------|
| Name | — | — | — | — | — | TDS2 | TDS1 | TDS0 |
| Default | — | — | — | — | — | See note | See note | See note |

Bits 2 to 0: TDATx Source (TDS[2:0])

000 = Tri-state TDATx
 001 = Drive TDATx with RDAT1
 010 = Drive TDATx with RDAT2
 011 = Drive TDATx with RDAT3
 100 = Drive TDATx with RDAT4
 101 = Drive TDATx with PCM_TXD

Note: Initial values are such that TDAT1←RDAT1, TDAT2←RDAT2, TDAT3←RDAT3, TDAT4←RDAT4, which corresponds to address 0x10 = 001, address 0x20 = 010, address 0x30 = 011, and address 0x40 = 100.

Register Name: **TICK_SR**
 Register Description: **DS3144 TCLKx Source**
 Register Address Offset: **0x11, 0x21, 0x31, 0x41**

| Bit # | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|------|------|------|
| Name | — | — | — | — | — | TCS2 | TCS1 | TCS0 |
| Default | — | — | — | — | — | 1 | 0 | 1 |

Bits 2 to 0: TCLKx Source (TCS[2:0])

000 = Tri-state TCLKx
 001 = Drive TCLKx with ROCLK1
 010 = Drive TCLKx with ROCLK2
 011 = Drive TCLKx with ROCLK3
 100 = Drive TCLKx with ROCLK4
 101 = Drive TCLKx with DS3_CLK
 110 = Drive TCLKx with E3_CLK

Register Name: **TSOF_SR**
 Register Description: **DS3144 TSOFx Source**
 Register Address Offset: **0x12, 0x22, 0x32, 0x42**

| Bit # | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|---|---|---|---|---|------|------|------|
| Name | — | — | — | — | — | TSS2 | TSS1 | TSS0 |
| Default | — | — | — | — | — | 0 | 0 | 0 |

Bits 2 to 0: TSOFx Source (TSS[2:0])

000 = Tri-state TSOFx
 001 = Drive TSOFx with RSOF1
 010 = Drive TSOFx with RSOF2
 011 = Drive TSOFx with RSOF3
 100 = Drive TSOFx with RSOF4

Note: Only use non-zero settings of TSS[2:0] when the TSOFx pin is configured as an input by setting MC3:TSOFC = 0 in the corresponding DS3144 framer.

FPGA CONTROL EXAMPLES

The control registers in the DS3144DK's FPGA support a number of different connection scenarios. [Figure 1](#) shows three example scenarios, and [Table 4](#) lists the FPGA control registers settings required to implement them.

Figure 1. Example Connection Scenarios

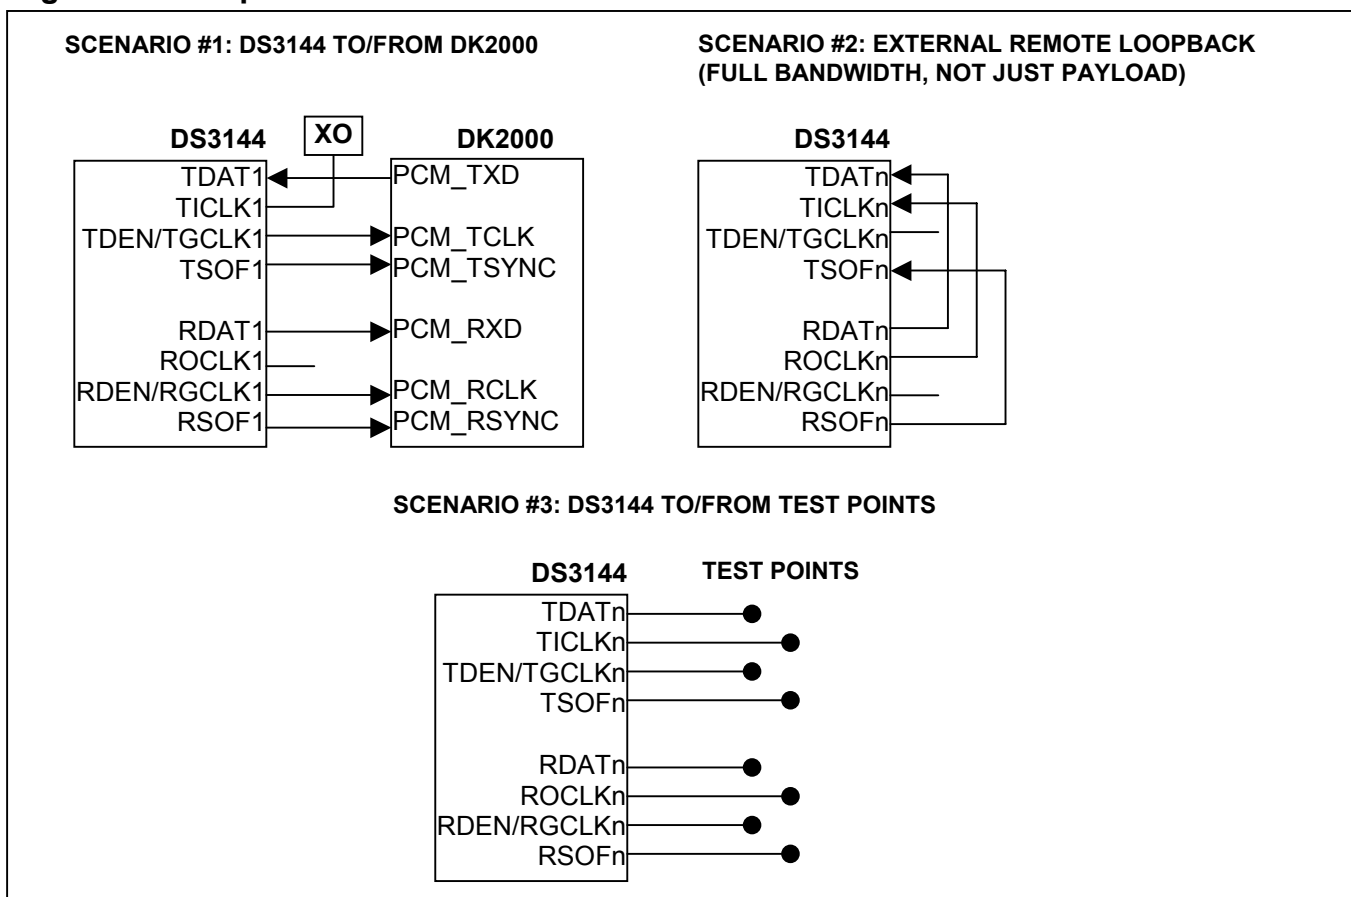


Table 4. Register Settings for Sample Configurations

| OFFSET(S) | REGISTER | SCENARIO #1 (PORT 1 ONLY) | SCENARIO #2 (ALL PORTS) | SCENARIO #3 (ALL PORTS) |
|-----------|----------|------------------------------|----------------------------|----------------------------|
| 0x000A | PCTC_SR | 001 | N/A | N/A |
| 0x000B | PCTS_SR | 001 | N/A | N/A |
| 0x000C | PCRX_SR | 001 | N/A | N/A |
| 0x000D | PCRC_SR | 001 | N/A | N/A |
| 0x000E | PCRS_SR | 001 | N/A | N/A |
| 0x0010 | TDAT_SR | 101 | 001 | 000 |
| 0x0020 | | N/A | 010 | 000 |
| 0x0030 | | N/A | 011 | 000 |
| 0x0040 | | N/A | 100 | 000 |
| 0x0011 | TICK_SR | 101 | 001 | 000 |
| 0x0021 | | N/A | 010 | 000 |
| 0x0031 | | N/A | 011 | 000 |
| 0x0041 | | N/A | 100 | 000 |
| 0x0012 | TSOF_SR | 000 | 001 | 000 |
| 0x0022 | | N/A | 010 | 000 |
| 0x0032 | | N/A | 011 | 000 |
| 0x0042 | | N/A | 100 | 000 |

DS3144 INFORMATION

For more information about the DS3144 quad DS3/E3 framer, please consult the DS3144 data sheet, available on our website at www.maxim-ic.com/DS3144.

DS3154 INFORMATION

For more information about the DS3154 quad DS3/E3/STS-1 LIU, please consult the DS3154 data sheet, available on our website at www.maxim-ic.com/DS3154.

DS3144DK INFORMATION

The latest DS3144DK data sheet is available from our website at www.maxim-ic.com/DS3144DK.

DS3144DK SUPPORT FILES AND CHIPVIEW SOFTWARE

The latest support files (.DEF, .INI etc.) for the DS3144DK are included in the ChipView install package. Dallas Semiconductor regularly updates ChipView with feature enhancements and additional demo kit support files. The latest ChipView software release is available on our website at www.maxim-ic.com/DS3144DK.

DK101/DK2000 INFORMATION

For more information about the DK101 or DK2000, please consult their respective data sheets, available on our website at www.maxim-ic.com/DK101 or www.maxim-ic.com/DK2000.

TECHNICAL SUPPORT

For additional technical support, please email your questions to telecom.support@dalsemi.com.

DS3144 DESIGN KIT

CONTENTS


1. COVER PAGE
2. DS3144 CONTROL / ADDRESS DATA BUS
3. DS3154 CONTROL / ADDRESS DATA BUS
4. FRAMER AND LIU PORTS
5. LIU BUILD-OUT AND FPGA CROSS CONNECT FOR RX / TX SIGNALS
6. TIM ADDRESS DATA BUS CONNECTION
7. JTAG CONNECTIONS, FPGA CONTROL AND PROM
8. FPGA CLOCKS / ADDRESS DATA BUS
9. SUPPLY DECOUPLING
10. SIGNAL CROSS-REFERENCE
11. COMPONENT CROSS-REFERENCE


TITLE:


DS3144DK01


ENGINEER:

SWS


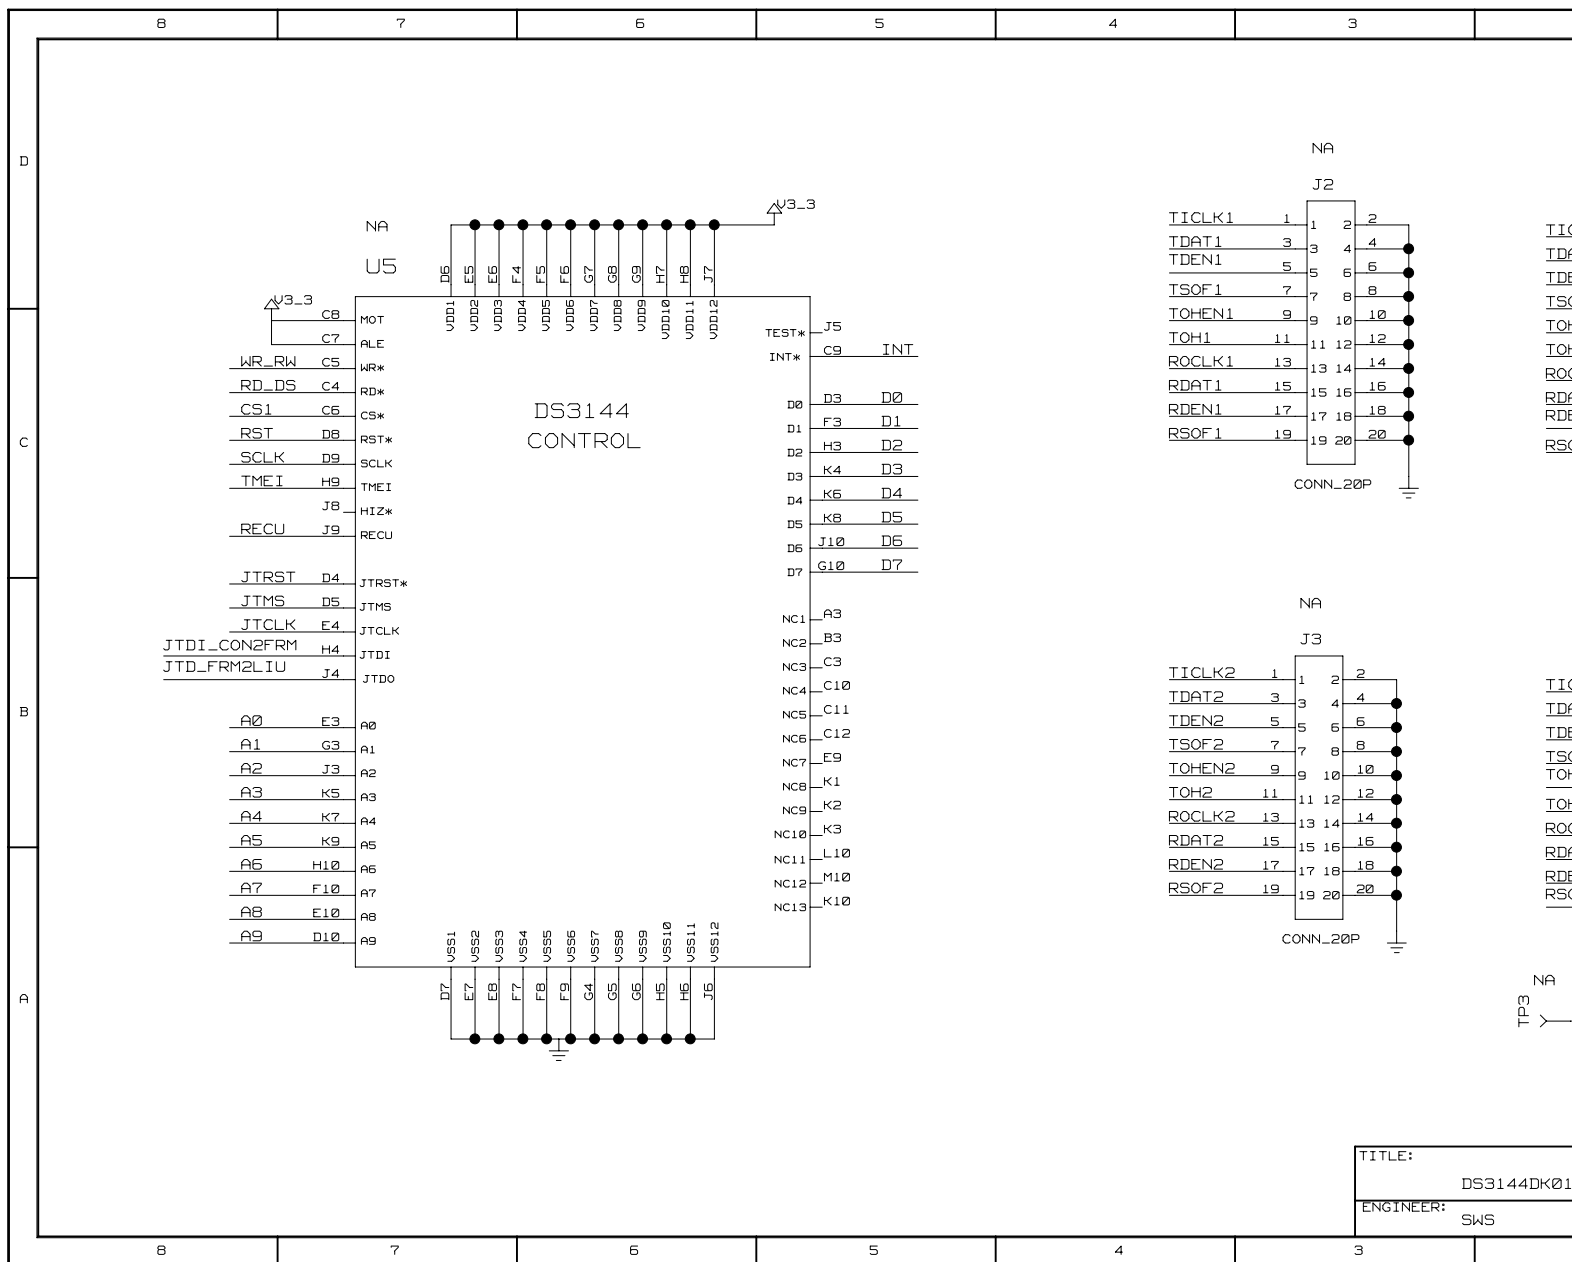


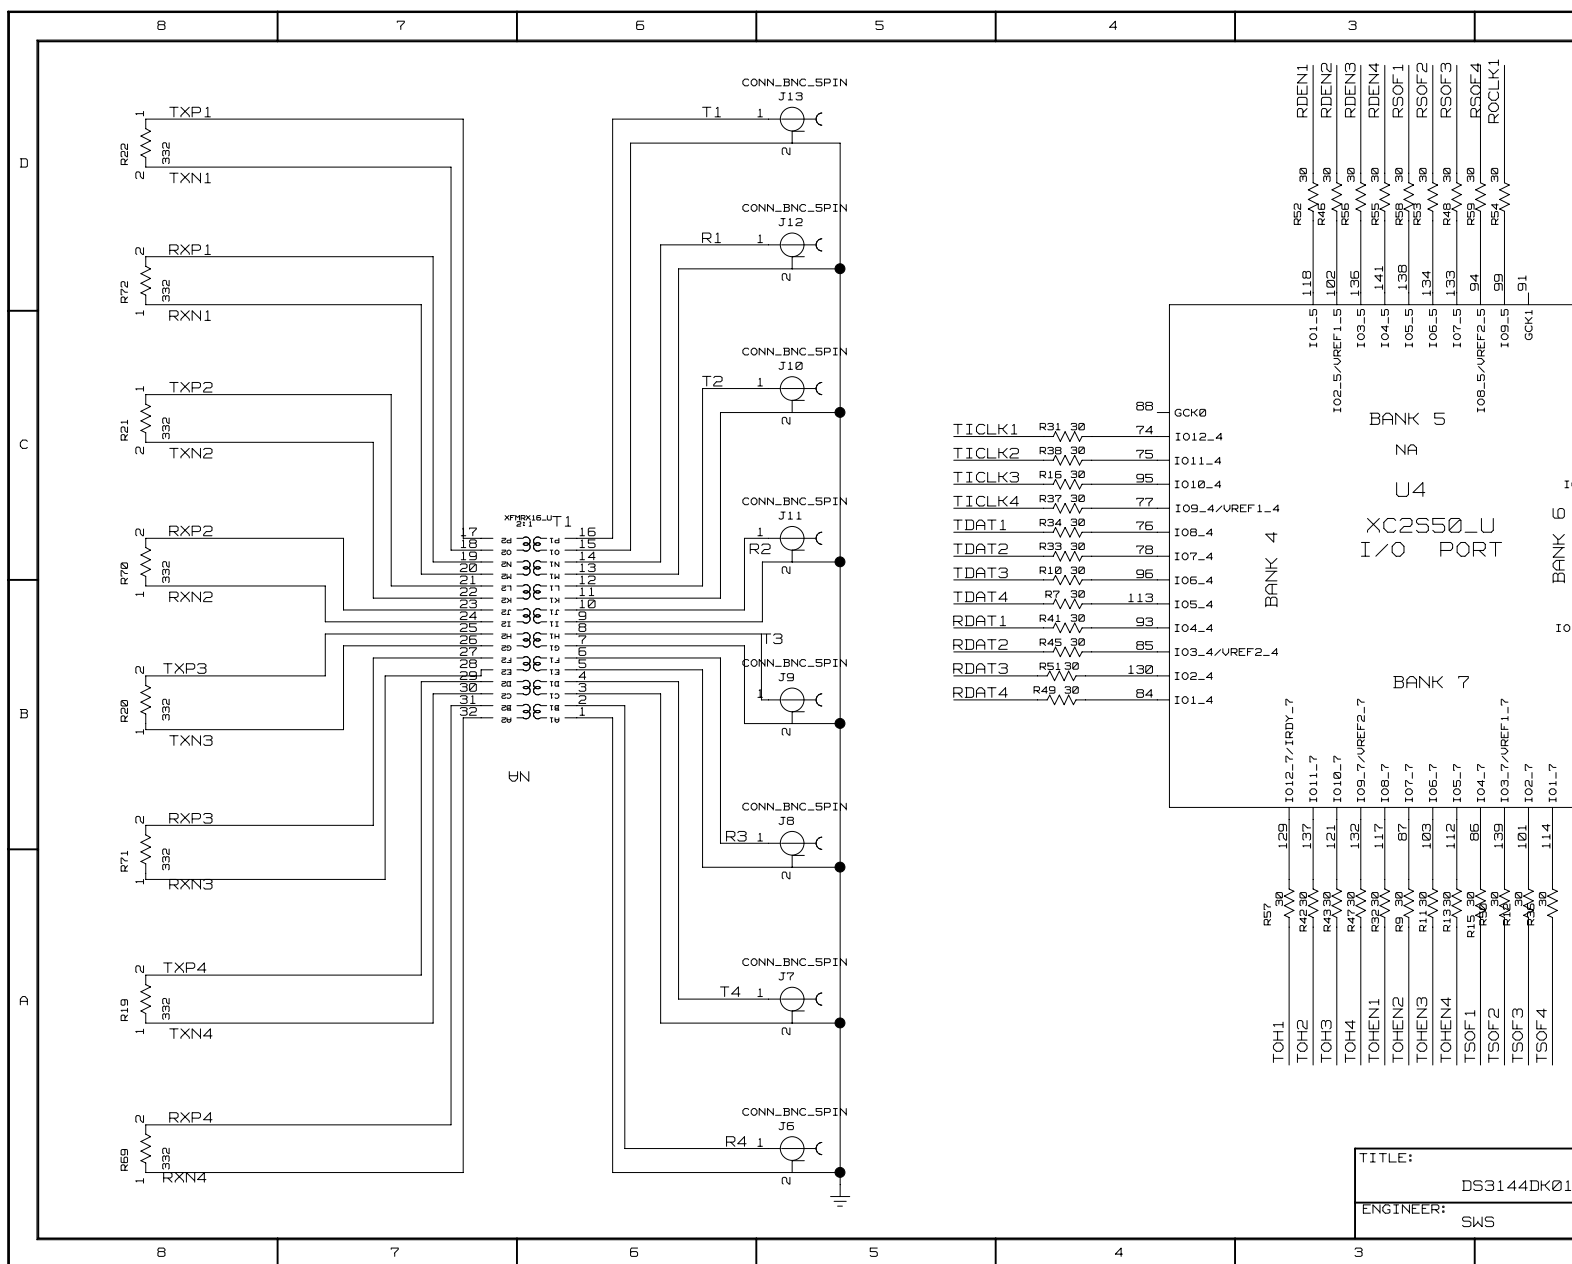

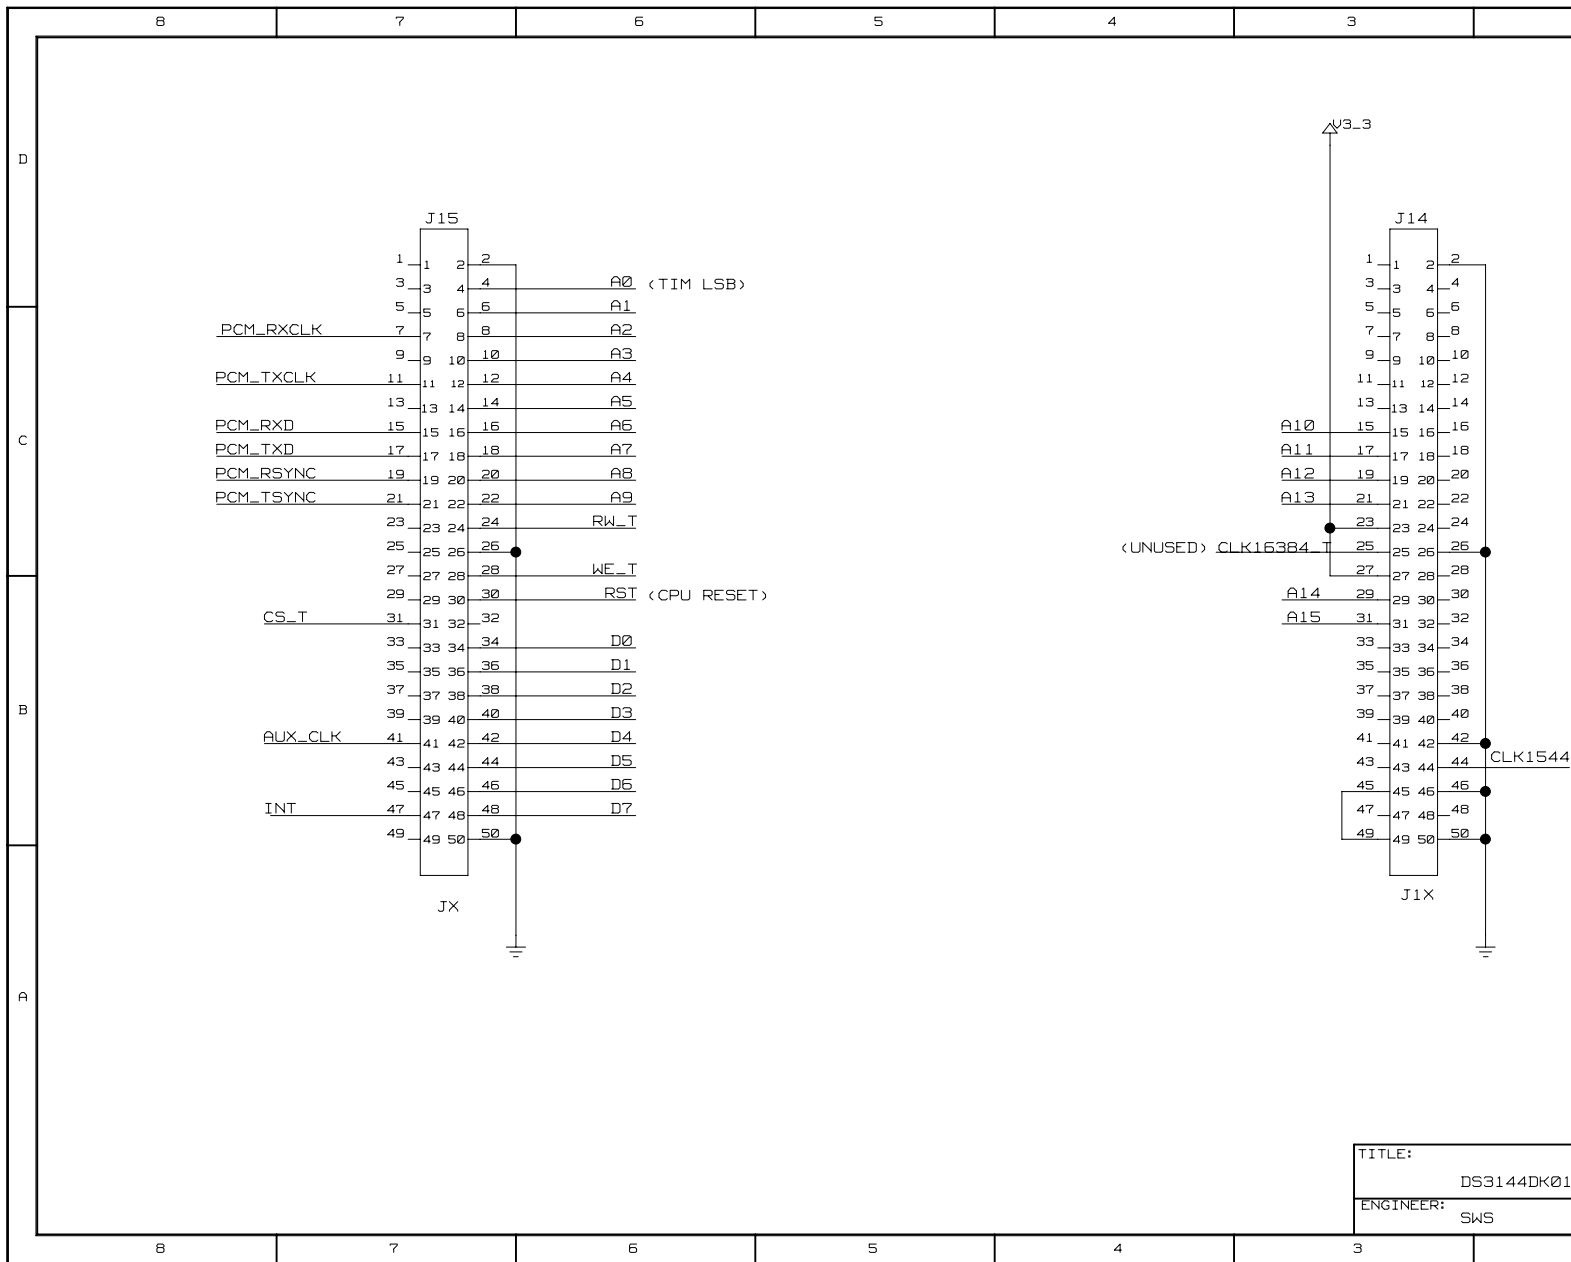


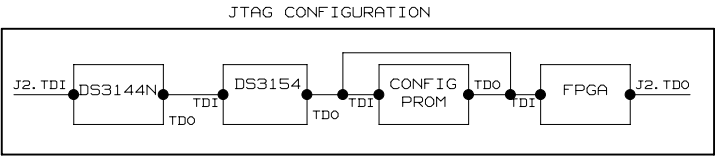

NOTE: CONFIG PROM HAS BEEN REPLACED WITH SERIAL EEPROM.
R23 NOW CONNECTS CONFIG PROM JTDI AND JTDO

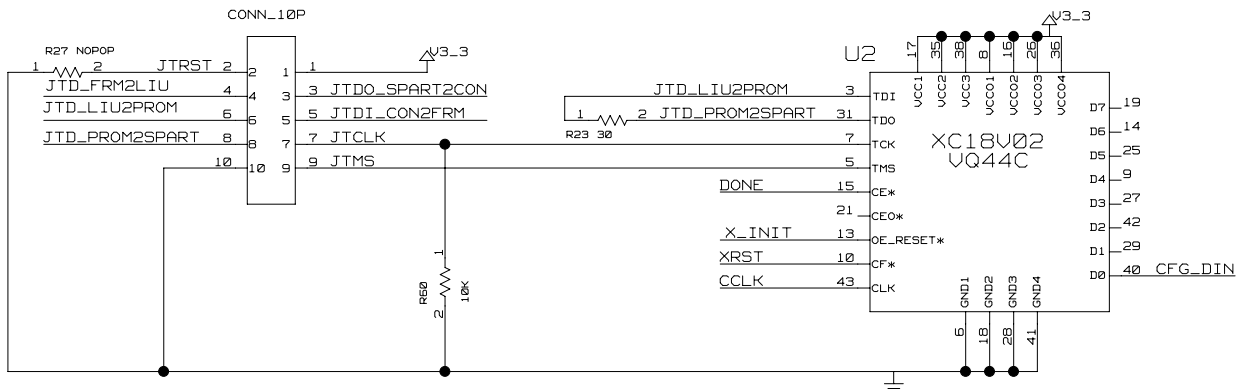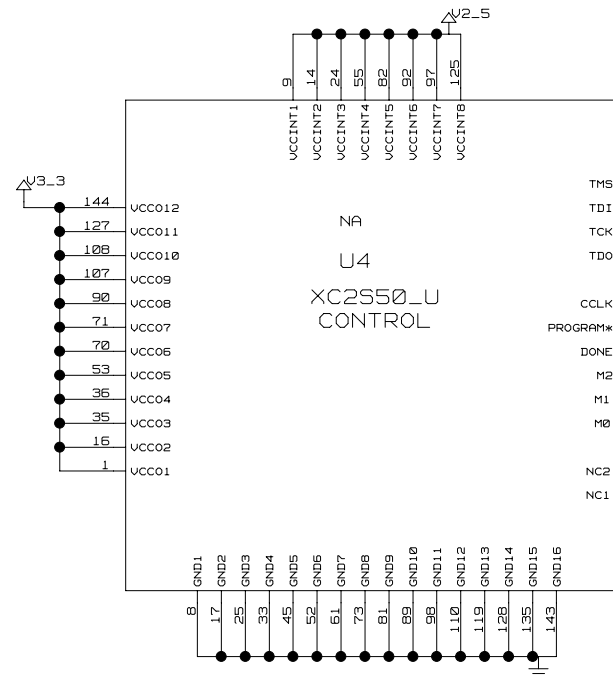

TITLE:
DS3144DK01
ENGINEER:
SWS



| | | 8 | 7 | 6 | 5 | 4 | 3 | |
|----------------|---------------------|--|---------------------|-----------|--------------------------|------|----------------|---|
| D | | *** Signal Cross-Reference for the entire design *** | | RNEG3 | 4B4< 4C5< | TXP3 | 4B3< 5B8< | |
| | | A0 | 6D6< 8C5< 2B8< 3B4< | RNEG4 | 4B2< 4C2< | | 4B1< 5A8< | |
| | | A1 | 6C6< 8C5< 2B8< 3B4< | ROCLK1 | 2C4< 4C8< 5D2< | | 6B6< 8C1< | |
| C | | A2 | 6C6< 8B5< 2B8< 3B4< | ROCLK2 | 2B4< 4C6< 5C1< | | 8B1< 2C8< 3B4< | |
| | | A3 | 6C6< 8B5< 2B8< 3B4< | ROCLK3 | 2C2< 4C5< 5C1< | | 7A3< 7A5< 7C2< | |
| | | A4 | 6C6< 8B5< 2B8< 3B4< | ROCLK4 | 2B2< 4C2< 5C1< | | 7A5< 8A2< 9D4< | |
| | | A5 | 6C6< 8B5< 2B8< 3B4< | ROOF1 | 4C7< 8A7< | | | |
| | | A6 | 6C6< 8B5< 2A8< | ROOF2 | 4C5< 8A7< | | | |
| | | A7 | 6C6< 8B5< 2A8< | ROOF3 | 4C3< 8A7< | | | |
| | | A8 | 6C6< 8A4< 2A8< | ROOF4 | 4C1< 8A7< | | | |
| | | A9 | 6C6< 8A4< 2A8< | RPOS1 | 4B8< 4C8< | | | |
| | | A10 | 6C3< | RPOS2 | 4B6< 4C6< | | | |
| | | A11 | 6C3< | RPOS3 | 4B4< 4C5< | | | |
| B | | A12 | 6C3< 8A3< | RPOS4 | 4B2< 4C2< | | | |
| | | A13 | 6C3< 8A3< | RSOF1 | 2C4< 4D7< 5D3< | | | |
| | | A14 | 6B3< 8A3< | RSOF2 | 2A4< 4D5< 5D3< | | | |
| | | A15 | 6B3< 8A3< | RSOF3 | 2C2< 4D3< 5D3< | | | |
| | | AUX_CLK | 6B8< 8D3< | RSOF4 | 2A2< 4D1< 5D2< | | | |
| | | BRD_O5C | 8C6< 8D3< | RST | 6B6< 8B1< 2C8< 3B8< 7C1< | | | |
| | | CLKK | 7A3< 7A5< 7C1< | RWLT | 6C6< 8C1< | | | |
| | | CFG_DIN | 7A3< 7A3< 8B1< | RXN1 | 4B8< 5C8< | | | |
| | | CLK1544_T | 6B2< | RXN2 | 4B6< 5B8< | | | |
| | | CLK163B4_T | 6C4< | RXN3 | 4B4< 5A8< | | | |
| A | | CS1 | 8B1< 2C8< | RXN4 | 4B2< 5A8< | | | |
| | | CS2 | 8B1< 3B4< | RXP1 | 4B8< 5D8< | | | |
| | | CS_T | 6B8< 8C1< | RXP2 | 4B6< 5C8< | | | |
| | | D0 | 2C5< 3C4< 6B6< 8D3< | RXP3 | 4B4< 5B8< | | | |
| | | D1 | 2C5< 3C4< 6B6< 8D3< | RXP4 | 4B2< 5A8< | | | |
| | | D2 | 2C5< 3C4< 6B6< 8D3< | SCLK | 2C8< 8D2< | | | |
| | | D3 | 2C5< 3C4< 6B6< 8D3< | T1 | 5D6< | | | |
| | | D4 | 2C5< 3C4< 6B6< 8D3< | T2 | 5C6< | | | |
| | | D5 | 2C5< 3C4< 6B6< 8D3< | T3 | 5B6< | | | |
| | | D6 | 2C5< 3C4< 6B6< 8D4< | T3_CLK | 3C8< 8D3< | | | |
| D7 | 2C5< 3C4< 6B6< 8D4< | T4 | 5A6< | | | | | |
| DONE | 7A5< 7C1< | TCLK1 | 4D8< 4B7< | | | | | |
| E3_CLK | 3C8< 8D2< | TCLK2 | 4D6< 4B5< | | | | | |
| INT | 2C5< 3A4< 6B8< 8A3< | TCLK3 | 4D5< 4B3< | | | | | |
| INT_IND | 8A3< 8B5< | TCLK4 | 4D2< 4B1< | | | | | |
| JTCLK | 7A7< 2B8< 3C8< 7C1< | TDAT1 | 2D4< 4D8< 5C5< | | | | | |
| JTD1_CON2FRM | 7A6< 2B8< | TDAT2 | 2B4< 4D6< 5C5< | | | | | |
| JTD0_SPART2CON | 7A6< 7C1< | TDAT3 | 2D2< 4D5< 5B5< | | | | | |
| JTD_FRM2LIU | 2B8< 7A8< 3C8< | TDAT4 | 2B2< 4D2< 5B5< | | | | | |
| JTD_LIU2PROM | 3C8< 7A8< 7A6< | TDEN1 | 2D4< 4C7< 5C1< | | | | | |
| JTD_PROM2SPART | 7A6< 7A8< 7D1< | TDEN2 | 2B4< 4C5< 5C1< | | | | | |
| JTM5 | 7A7< 2B8< 3C8< 7D1< | TDEN3 | 2D2< 4C3< 5C1< | | | | | |
| JTRST | 7B8< 2B8< 3C8< | TDEN4 | 2B2< 4C1< 5C1< | | | | | |
| PCLM_RSYNC | 6C8< 5B1< | TICLK1 | 2D4< 4D8< 5C5< | | | | | |
| PCLM_RXCLK | 6C8< 5B1< | TICLK2 | 2B4< 4D6< 5C5< | | | | | |
| PCLM_RXD | 6C8< 5B1< | TICLK3 | 2D2< 4D5< 5C5< | | | | | |
| PCLM_TSYNC | 6C8< 5B1< | TICLK4 | 2B2< 4D2< 5C5< | | | | | |
| PCLM_TXCLK | 6C8< 5B1< | TME1 | 8A3< 2C8< | | | | | |
| PCLM_TXD | 6C8< 5B1< | TNEG1 | 4C7< 4B7< | | | | | |
| R1 | 5D6< | TNEG2 | 4C5< 4B5< | | | | | |
| R2 | 5C6< | TNEG3 | 4C3< 4B3< | | | | | |
| R3 | 5B6< | TNEG4 | 4C1< 4B1< | | | | | |
| R4 | 5A6< | TOH1 | 2C4< 4D8< 5A3< | | | | | |
| RCLK1 | 4B8< 4C8< | TOH2 | 2B4< 4D6< 5A3< | | | | | |
| RCLK2 | 4B6< 4C6< | TOH3 | 2C2< 4D5< 5A3< | | | | | |
| RCLK3 | 4B4< 4C5< | TOH4 | 2B2< 4D2< 5A3< | | | | | |
| RCLK4 | 4B2< 4C2< | TOHEN1 | 2C4< 4C8< 5A3< | | | | | |
| RDAT1 | 2C4< 4D7< 5B5< | TOHEN2 | 2B4< 4C6< 5A3< | | | | | |
| RDAT2 | 2B4< 4D5< 5B5< | TOHEN3 | 2C2< 4C5< 5A3< | | | | | |
| RDAT3 | 2C2< 4D3< 5B5< | TOHEN4 | 2B2< 4C2< 5A3< | | | | | |
| RDAT4 | 2A2< 4D1< 5B5< | TPOS1 | 4C7< 4B7< | | | | | |
| RDEN1 | 2C4< 4D7< 5D3< | TPOS2 | 4C5< 4B5< | | | | | |
| RDEN2 | 2A4< 4D5< 5D3< | TPOS3 | 4C3< 4B3< | | | | | |
| RDEN3 | 2C2< 4D3< 5D3< | TPOS4 | 4C1< 4B1< | | | | | |
| RDEN4 | 2A2< 4D1< 5D3< | TSOF1 | 2D4< 4C7< 5A2< | | | | | |
| RD_DS | 8B1< 2C8< 3B4< | TSOF2 | 2B4< 4C5< 5A2< | | | | | |
| RECU | 2A2< 8A3< 2C8< | TSOF3 | 2C2< 4C3< 5A2< | | | | | |
| RL0S1 | 4D7< 8A5< | TSOF4 | 2B2< 4C1< 5A2< | | | | | |
| RL0S2 | 4D5< 8A5< | TXN1 | 4B7< 5D8< | | | | | |
| RL0S3 | 4D3< 8A5< | TXN2 | 4B5< 5C8< | | | | | |
| RL0S4 | 4D1< 8A5< | TXN3 | 4B3< 5B8< | | | | | |
| RNEG1 | 4B8< 4C8< | TXN4 | 4B1< 5A8< | | | | | |
| RNEG2 | 4B6< 4C6< | TXP1 | 4B7< 5D8< | | | | | |
| | | TXP2 | 4B5< 5C8< | | | | | |
| | | 8 | 7 | 6 | 5 | | 4 | 3 |
| | | TITLE: | | ENGINEER: | | | | |

| | | | | | | | | |
|---|--|------|---------------|-----|------|----------------|---------------------|--|
| | | 8 | 7 | 6 | 5 | 4 | 3 | |
| D | *** Part Cross-Reference for the entire design *** | | | | | | | |
| | C1 | CAP1 | 9D2 | R19 | RES1 | 5A8 | | |
| | C2 | CAP1 | 9D2 | R20 | RES1 | 5B8 | | |
| | C3 | CAP | 9B3 | R21 | RES1 | 5C8 | | |
| | C4 | CAP | 9B3 | R22 | RES1 | 5D8 | | |
| | C5 | CAP | 9B8 | R23 | RES1 | 7A6 | | |
| | C6 | CAP | 9B1 | R24 | RES | 9D4 | | |
| | C7 | CAP | 9B2 | R25 | RES1 | 8B6 | | |
| | C8 | CAP | 9B7 | R26 | RES1 | 8A2 | | |
| | C9 | CAP | 9B2 | R27 | RES | 7B8 | | |
| C | C10 | CAP | 9D3 | R28 | RES1 | 8D2 | | |
| | C11 | CAP | 9B1 | R29 | RES1 | 8D3 | | |
| | C12 | CAP | 9B5 | R30 | RES1 | 5B1 | | |
| | C13 | CAP | 9B4 | R31 | RES1 | 5C4 | | |
| | C14 | CAP | 9B2 | R32 | RES1 | 5A3 | | |
| | C15 | CAP1 | 9D2 | R33 | RES1 | 5C4 | | |
| | C16 | CAP | 9B2 | R34 | RES1 | 5C4 | | |
| | C17 | CAP | 9B8 | R35 | RES1 | 5C1 | | |
| | C18 | CAP | 9D2 | R36 | RES1 | 5A2 | | |
| | C19 | CAP | 9B8 | R37 | RES1 | 5C4 | | |
| B | C20 | CAP | 9B4 | R38 | RES1 | 5C4 | | |
| | C21 | CAP | 9D3 | R39 | RES1 | 5C1 | | |
| | C22 | CAP | 9B5 | R40 | RES1 | 5C1 | | |
| | C23 | CAP | 9B7 | R41 | RES1 | 5B4 | | |
| | C24 | CAP | 9C4 | R42 | RES1 | 5A3 | | |
| | C25 | CAP | 9B5 | R43 | RES1 | 5A3 | | |
| | C26 | CAP | 9B2 | R44 | RES1 | 5C1 | | |
| | C27 | CAP | 9B6 | R45 | RES1 | 5B4 | | |
| | C28 | CAP | 9B3 | R46 | RES1 | 5D3 | | |
| | C29 | CAP | 9B7 | R47 | RES1 | 5A3 | | |
| A | C30 | CAP | 9B2 | R48 | RES1 | 5D3 | | |
| | C31 | CAP | 9B4 | R49 | RES1 | 5B4 | | |
| | C32 | CAP | 9B6 | R50 | RES1 | 5A2 | | |
| | D51 | LED | 8B5 | R51 | RES1 | 5B4 | | |
| | D52 | LED | 8A2 | R52 | RES1 | 5D3 | | |
| | D53 | LED | 8A6 | R53 | RES1 | 5D3 | | |
| | D54 | LED | 8A7 | R54 | RES1 | 5D2 | | |
| | D55 | LED | 8A6 | R55 | RES1 | 5D3 | | |
| | D56 | LED | 8A7 | R56 | RES1 | 5D3 | | |
| | D57 | LED | 8A6 | R57 | RES1 | 5A3 | | |
| | | D58 | LED | 8A7 | R58 | RES1 | 5D3 | |
| | | D59 | LED | 8B6 | R59 | RES1 | 5D3 | |
| | | D510 | LED | 8B7 | R60 | RES1 | 7A7 | |
| | | J1 | CONN_18P | 7B7 | R61 | RES1 | 8A6 | |
| | | J2 | CONN_20P | 2D3 | R62 | RES1 | 8A8 | |
| | | J3 | CONN_20P | 2B3 | R63 | RES1 | 8A6 | |
| | | J4 | CONN_20P | 2D2 | R64 | RES1 | 8A8 | |
| | | J5 | CONN_20P | 2B2 | R65 | RES1 | 8A6 | |
| | | J6 | CONN_BNC_SPIN | 5A5 | R66 | RES1 | 8A8 | |
| | | J7 | CONN_BNC_SPIN | 5A5 | R67 | RES1 | 8A6 | |
| | | J8 | CONN_BNC_SPIN | 5B5 | R68 | RES1 | 8A8 | |
| | | J9 | CONN_BNC_SPIN | 5B5 | R69 | RES1 | 5A8 | |
| | | J10 | CONN_BNC_SPIN | 5C5 | R70 | RES1 | 5B8 | |
| | | J11 | CONN_BNC_SPIN | 5C5 | R71 | RES1 | 5A8 | |
| | | J12 | CONN_BNC_SPIN | 5D5 | R72 | RES1 | 5C8 | |
| | | J13 | CONN_BNC_SPIN | 5D5 | T1 | XFRX16_U | 5C5 | |
| | | J14 | CONN_50P2 | 6D3 | TP1 | TESTPOINT | 9B3 | |
| | | J15 | CONN_50P2 | 6D7 | TP2 | TESTPOINT | 9B4 | |
| | | R1 | RES1 | 8C3 | TP3 | TESTPOINT | 2A2 | |
| | | R2 | RES1 | 5B1 | U1 | AT17LV65 | 7A2 | |
| | | R3 | RES1 | 5B1 | U2 | XC18V02V044C_U | 7B5 | |
| | | R4 | RES1 | 5C1 | U3 | MAX1792 | 9D4 | |
| | | R5 | RES1 | 5C1 | U4 | XC2550_U | 5C3 7C3 8C3 | |
| | | R6 | RES | 7C2 | U5 | DS3144 | 2D7 4D2 4D4 4D6 4D8 | |
| | | R7 | RES1 | 5B4 | U6 | DS3154_SK_U2 | 3C6 4B2 4B4 4B6 4B8 | |
| | | R8 | RES1 | 5C1 | Y1 | OSC2_U | 8C7 | |
| | | R9 | RES1 | 5A3 | | | | |
| | | R10 | RES1 | 5C4 | | | | |
| | | R11 | RES1 | 5A3 | | | | |
| | | R12 | RES1 | 5A2 | | | | |
| | | R13 | RES1 | 5A3 | | | | |
| | | R14 | RES1 | 5B1 | | | | |
| | | R15 | RES1 | 5A3 | | | | |
| | | R16 | RES1 | 5C4 | | | | |
| | | R17 | RES1 | 5B1 | | | | |
| | | R18 | RES1 | 5C1 | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |