


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE:	250 VAC, 50/60 Hz
CAPACITANCE:	1500 pF ± 20%
DISSIPATION FACTOR:	≤1.3 MEASURED AT 1 KHZ
MAXIMUM PULSE RISE TIME:	du/dt 2000V / USEC
DIELECTRIC:	METALLIZED PAPER
TEST VOLTAGE:	(ELECTRODE/ELECTRODE) 2700 VDC 1 SEC
INSULATION RESISTANCE:	120000 MΩ 500 VDC 1 MIN.
COATING:	PLASTIC CAN, EPOXY RESIN SEALED, FLAME RETARDANT

NOTES:
1. APPROVALS INCLUDE VDE, SEV, DEMKO, SEMKO, NEMKO, UL, IMQ, DVE, DEMKO, EL, CSA.

LTR	DESCRIPTION	DATE	AP
1	RELEASED PER ECO #2212	JW 10/11/90	B
2	REVISED PER E910258	JW 5/14/91	R

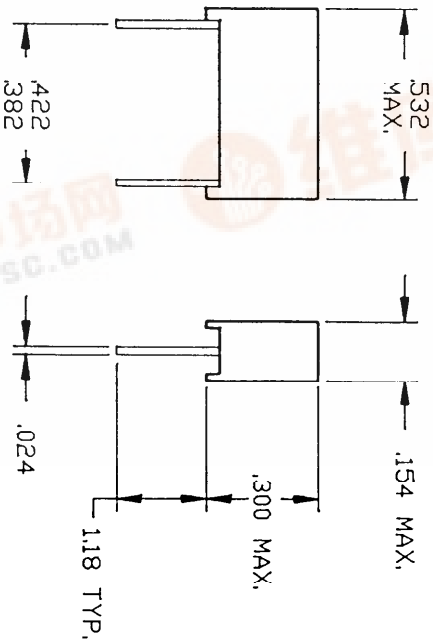

COPY

DRAWN	J. WITTEK	9/90
CHECKED		
APPR		5/91

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING
NEXT ASSY:

VICOR ANDOVER, MA, U.S.A.	
AG-PAPER-CAPACITOR	
1500 pF, 250 VAC, (Y)	
TOLERANCES (EXCEPT AS NOTED)	DRAWING NO.
XX ± .01	00770
XXX ± .005	
FRACT ± 1/64	
ANGLES ± 1°	
SCALE 2X	SHEET 1 OF 1

CONFORMS TO MIL-STD-883C IN PART

