


LTR.	DESCRIPTION	DATE	APP'D.
1	PRELIMINARY RELEASE PCD# 044	2/18/88	WJL

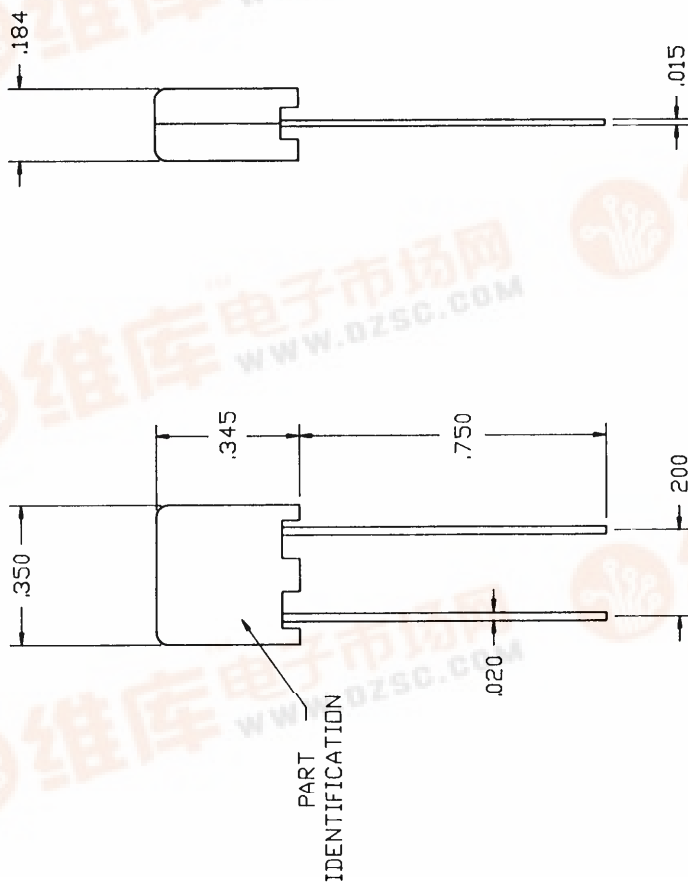

COPY

NOTES:
1. BUSS #PCD5-125 OR APPROVED EQUIVALENT.

DRAWN	2/88	VICOR	ANDOVER, MA. U.S.A.
CHECKED	3/88	FUSE, 5AMP,	
APPR.		125V, PCD5	
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)		TOLERANCES (EXCEPT AS NOTED)	DRAWING NO.
DO NOT SCALE DRAWING		XX ± .01 XXX ± .005 FRACT ± 1/64 ANGLES ± 1.0	01526
NEXT ASST.		SCALE NOTE	REV. 1
			SHEET 1 OF 1

SPECIFICATIONS:
INTERUPTING AND VOLTAGE RATINGS:
10,000 A @ 125Vac
TIME-CURRENT CHARACTERISTICS:
CARRY 100% OF RATING FOR FOUR HOURS MINIMUM, OPEN AT 200% OF RATING IN TEN SECONDS MAXIMUM.
(NON-TIME-DELAY).
AGENCY APPROVALS:
U.L. RECOGNIZED; FILE E19180
CSA CERTIFIED; FILE 42731, CLASS 1421-01
COLD RESISTANCE DATA (10% RATED CURRENT)
NOMINAL VALUE:
0.026 Ω