

Fuse Blocks, Holders and Accessories



POWR-SAFE “Dead Front” Holders




Littelfuse POWR-SAFE “Dead Front” holders provide optimum protection to personnel. Indicating and non-indicating versions are available in 1, 2, 3, or 4 poles for Class CC and Midget fuses.

FEATURES/BENEFITS

- Meets “Dead Front” requirements and IEC Type IP20 Protection
- Mountable on 35mm Din Rail
- Blown fuse identification (Indicating versions only)
- Easy installation and removal of fuses. No special fuse pullers or tools required.
- UL Listed for branch circuit protection (Class CC versions only)
- Compact design
- Ventilated design for cooler operation
- Indicates above 80 volts (ID versions only)

DIMENSIONS in inches (mm in parentheses)

■ LPSM/LPSC POWR-SAFE Holders

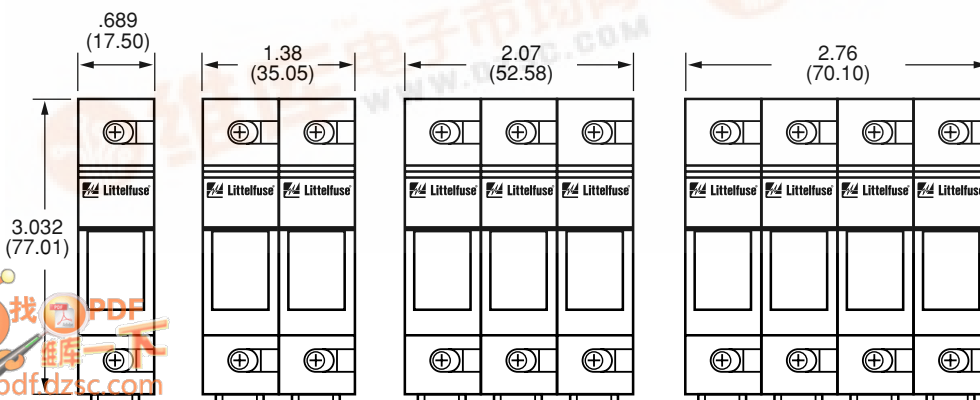

SPECIFICATIONS

Voltage Rating: 600 Volts

Ampere Rating: 30 amperes

Interrupting Rating: 200 kA (Class CC)
100 kA (Midget)

Terminal type: Pressure plate

Suggested Torque: 15 lb.

Wire Range: #6—#14CU

Material: Thermo-Plastic

Flammability Rating: 94VO

Approvals: UL Listed (LPSC File No: E14721)

UL Recognized (LPSM File No: E14721)

CSA Certified (LPSC/LPSM File No: LR7316)

IEC Type IP20 Protection

CE Certified

ORDERING INFORMATION

Indicating Part Number	Non-Indicating Part Number	Fuse Type	Number of Poles
LPSC001ID	LPSC001	Class CC	1
LPSC002ID	LPSC002	Class CC	2
LPSC003ID	LPSC003	Class CC	3
LPSC004ID	LPSC004	Class CC	4
LPSM001ID	LPSM001	Midget	1
LPSM002ID	LPSM002	Midget	2
LPSM003ID	LPSM003	Midget	3
LPSM004ID	LPSM004	Midget	4

Multi-pole Assembly Kit: Order No: CYHP001
(Kit contains 20 connector pincers and 10 handle pins.)


NOTE: Contact factory for DC rated versions.

Fuse Blocks, Holders and Accessories

Class J POWR-SAFE Holders



NEW

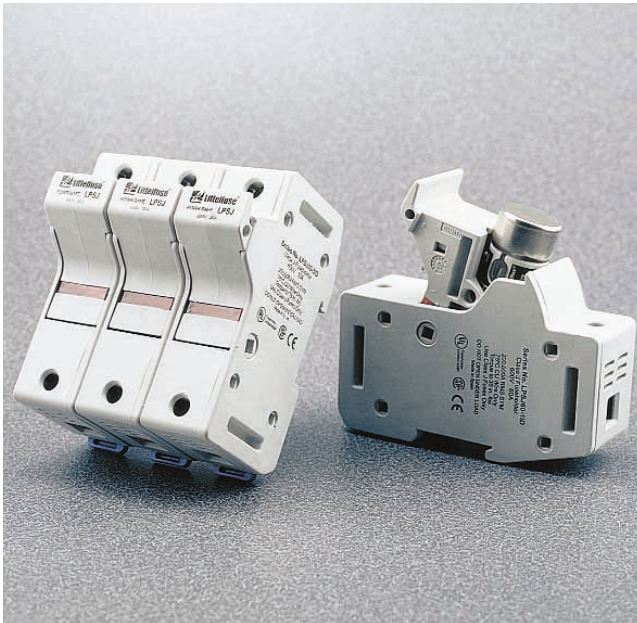

Littelfuse POWR-SAFE “Dead Front” fuseholders provide optimum protection to personnel. An integral DIN-Rail adapter system allows fuse holders to be mounted on 35mm DIN-Rail without the use of tools or special parts. Indicating and non-indicating versions are available in 1, 2, or 3 poles for Class J fuses.

SPECIFICATIONS

Voltage Rating: 600 VAC

Interrupting Rating: 200 kA

Ampere Rating: 30 and 60 amperes

Terminal Type: Pressure plate

Suggested Torque: 30A – 35 inch-pounds
60A – 45 inch-pounds

Wire Range: #2 – #14CU

Material: Thermo-plastic


Flammability Rating: 94V0

Approvals: UL Listed
CSA Certified
IEC Type IP20 Protection
CE


FEATURES/BENEFITS

- Meets “Dead Front” requirements and IEC Type IP20 protection.
- Mountable on 35mm DIN-Rail.
- Blown fuse identification (Indicating versions only).
- Easy installation and removal of fuses. No special fuse pullers or tools required.
- UL listed for branch circuit protection.
- Ventilated design for cooler operation.

DIMENSIONS in inches (mm in parentheses)

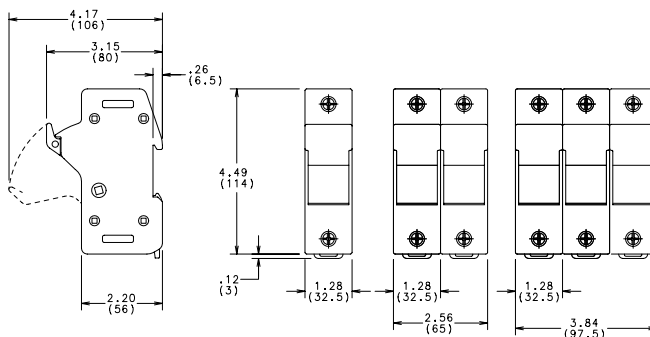

30 Amp

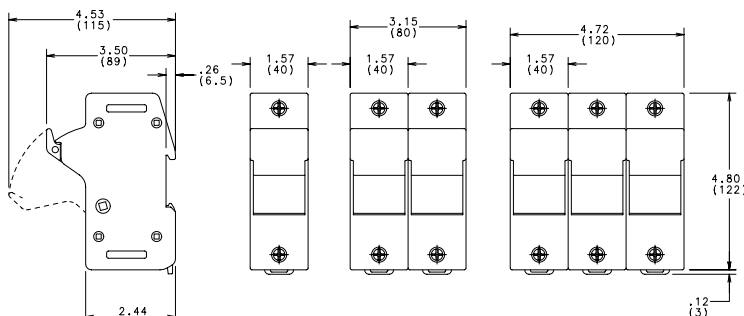

60 Amp

ORDERING INFORMATION

Littelfuse Catalog No.	Littelfuse System No.	No. of Poles	Pack Qty.	Voltage Rating	Ampere Rating	Options
LPSJ30-1	LPSJ301.Z	1	6	600V	30A	–
LPSJ30-2	LPSJ302.Z	2	3	600V	30A	–
LPSJ30-3	LPSJ303.Z	3	2	600V	30A	–
LPSJ30-1ID	LPSJ301.ZXID	1	6	600V	30A	Indicating
LPSJ30-2ID	LPSJ302.ZXID	2	3	600V	30A	Indicating
LPSJ30-3ID	LPSJ303.ZXID	3	2	600V	30A	Indicating
LPSJ60-1	LPSJ601.Z	1	6	600V	60A	–
LPSJ60-2	LPSJ602.Z	2	3	600V	60A	–
LPSJ60-3	LPSJ603.Z	3	2	600V	60A	–
LPSJ60-1ID	LPSJ601.ZXID	1	6	600V	60A	Indicating
LPSJ60-2ID	LPSJ602.ZXID	2	3	600V	60A	Indicating
LPSJ60-3ID	LPSJ603.ZXID	3	2	600V	60A	Indicating

