



TDA7466

DIGITALLY CONTROLLED AUDIO PROCESSOR WITH SRS SURROUND SOUND AND VOICE CANCELLER




The Device incorporates the SRS (Sound Retrieval System) under licence from SRS Labs, Inc.

- 1 STEREO INPUT
- INPUT ATTENUATION CONTROL IN 0.5dB STEP
- TREBLE MIDDLE AND BASS CONTROL
- VOICE CANCELLER IS AVAILABLE
- STEREO SRS SURROUND SOUND WITH CENTER & SPACE CONTROL IS AVAILABLE
- THREE STANDARD SURROUND MODES ARE AVAILABLE:
 - MUSIC IN 4 DIFFERENT SELECTABLE RESPONSES
 - MOVIE AND SIMULATED IN 256 DIFFERENT SELECTABLE RESPONSES
- 2 SPEAKERS OUTPUTS
 - INDEPENDENT ATTENUATORS IN 1dB STEP FOR BALANCE FACILITY
 - ZERO CROSSING ATTENUATION AVAILABLE
 - AVAILABILITY OF LOUDSPEAKERS EQUALIZATION FIXED BY EXTERNAL COMPONENTS
 - INDEPENDENT MUTE FUNCTION
- 2 RECORD OUTPUTS
 - INDEPENDENT ATTENUATORS IN 1dB STEP FOR BALANCE FACILITY
 - MUX AVAILABLE FOR PROCESSES SIGNAL SELECTION
 - INDEPENDENT MUTE FUNCTION
- ALL FUNCTIONS PROGRAMMABLE VIA SERIAL BUS

DESCRIPTION

The TDA7466 is a volume tone (bass middle and treble) balance (Left/Right) processors with stereo SRS and voice canceller for quality audio applications in car radio, Hi-Fi, TV systems.

It reproduces SRS (Sound Retrieval System) sound by external components and surround sound by using phase shifters and a signal matrix. The AC signal setting is obtained by resistor networks and switches combined with operational amplifiers according to the SRS laboratories specification. Control of all the functions is ac-



SDIP42

ORDERING NUMBER: TDA7466

PIN CONNECTION

V _S	1	42	CREF
PS4	2	41	NBRO
PS3	3	40	NBRIN
PS2	4	39	LPVC
PS1	5	38	R_IN
LP	6	37	VREFOUT
LP1	7	36	L_IN
HP1	8	35	NBLIN
HP2	9	34	NBLO
VAR_L	10	33	NETW2
BASSO_L	11	32	NETW1
VAR_R	12	31	RECOLUT_L
BASSO_R	13	30	RECOLUT_R
BASS_LO	14	29	L_OUT
BASS_LI	15	28	R_OUT
BASS_RO	16	27	DIG_GND
BASS RI	17	26	SCL
MIDDLE_LO	18	25	SDA
MIDDLE_LI	19	24	AGND
MIDDLE_RO	20	23	TREBLE_L
MIDDLE RI	21	22	TREBLE_R


D96AU445A

complished by serial bus.

Thanks to the used BIPOLEAR/CMOS Technology, Low Distortion, Low Noise and DC stepping are obtained.

TDA7466

BLOCK DIAGRAM

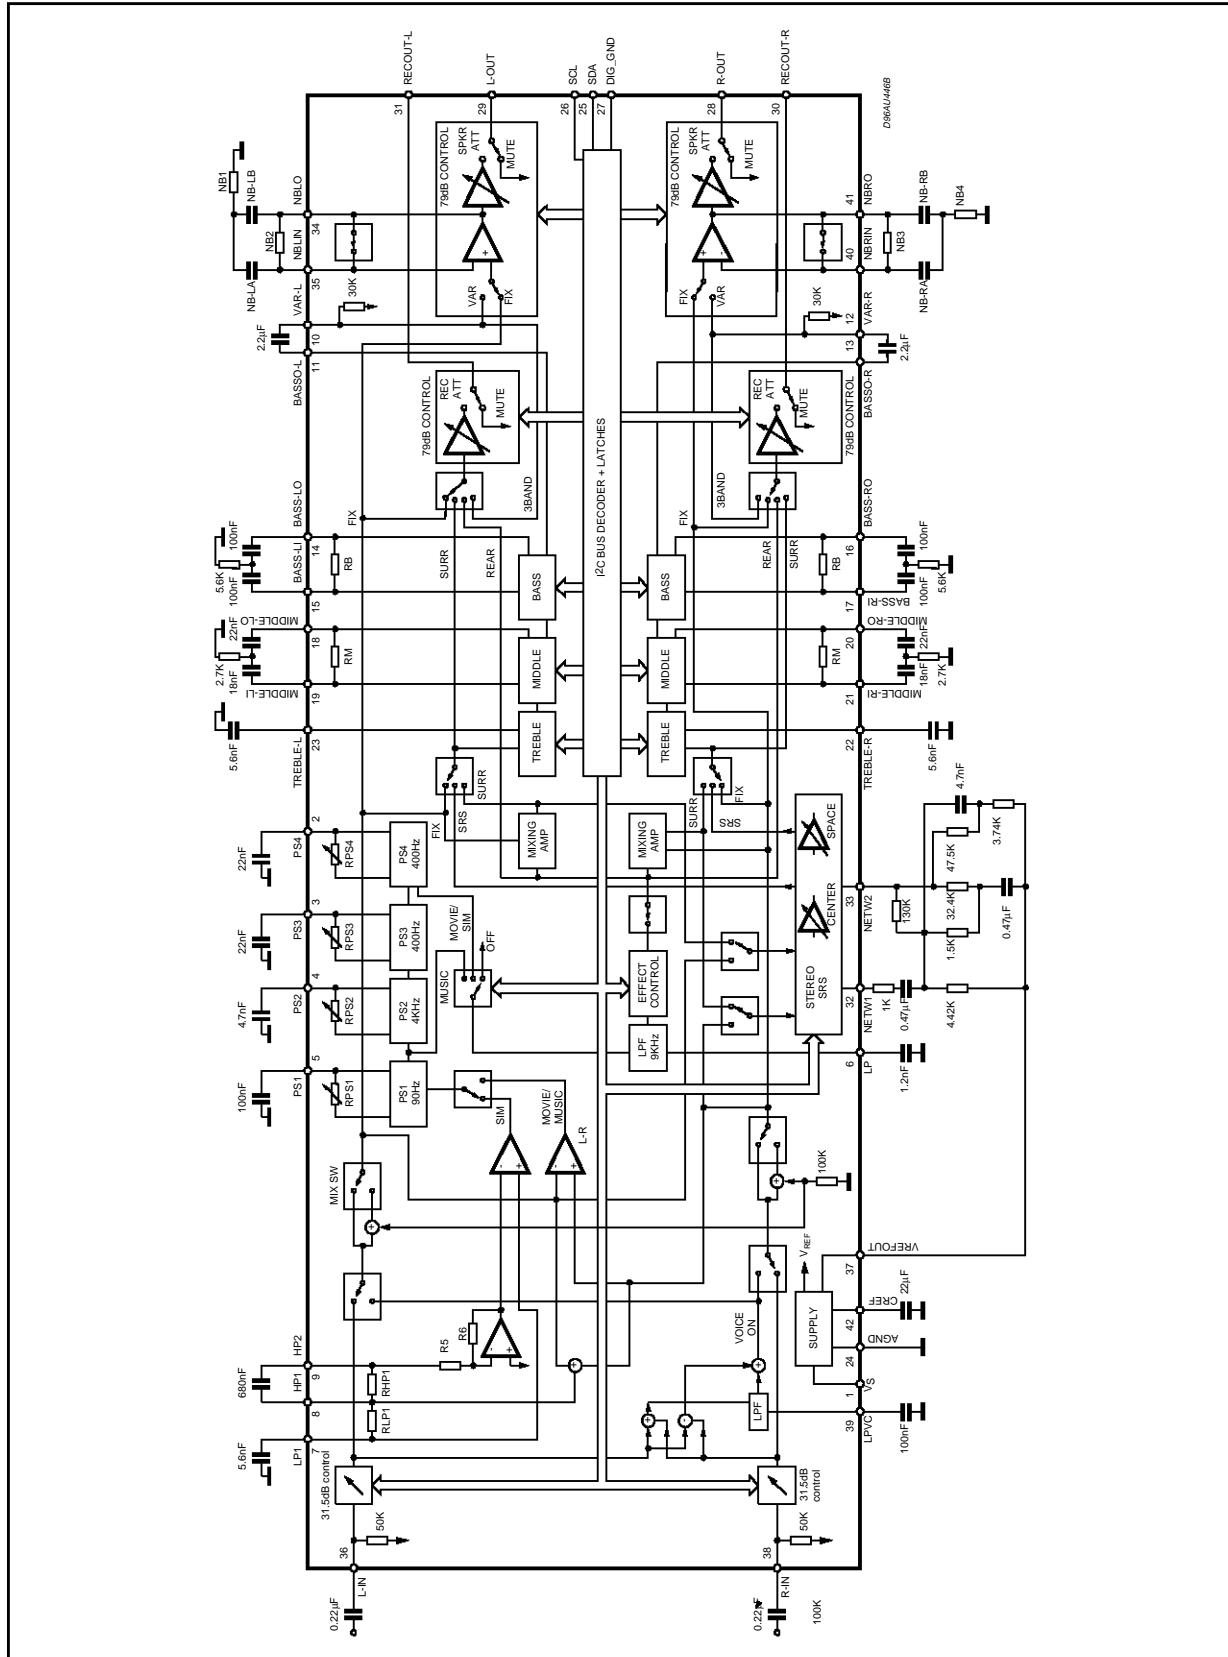

THERMAL DATA

Symbol	Description	Value	Unit
R _{th j-pins}	Thermal Resistance Junction-pins	Max.	85 °C/W

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _S	Operating Supply Voltage	11	V
T _{amb}	Operating Ambient Temperature	-10 to 85	°C
T _{stg}	Storage Temperature Range	-55 to +150	°C

QUICK REFERENCE DATA

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _S	Supply Voltage	7	9	10.2	V
V _{CL}	Max. input signal handling	2			Vrms
THD	Total Harmonic Distortion V = 1Vrms f = 1KHz		0.01	0.1	%
S/N	Signal to Noise Ratio V _{out} = 1Vrms (mode = OFF)		106		dB
S _C	Channel Separation f = 1KHz		90		dB
	Input Attenuation Control (0.5dB)	-31.5		0	dB
	Treble Control (2db step)	-14		+14	dB
	Middle Control (2db step)	-14		+14	dB
	Bass Control (2dB step)	-14		+14	dB
	Balance Control 1dB step (L _{CH} , R _{CH})	-79		0	dB
	Mute Attenuation		100		dB

ELECTRICAL CHARACTERISTICS (refer to the test circuit T_{amb} = 25°C, V_S = 9V, R_L = 10KΩ, V_{in} = 1Vrms; R_G = 600Ω, all controls flat (G = 0dB), Effect Ctrl = -6dB, MODE = OFF; f = 1KHz unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
SUPPLY						

V _S	Supply Voltage		7	9	10.2	V
I _S	Supply Current			25		mA
SVR	Ripple Rejection	L _{CH} / R _{CH} out, Mode = OFF	60	80		dB

INPUT STAGE

R _{IN}	Input Resistance		37.5	50	62.5	KΩ
V _{CL}	Clipping Level	THD = 0.3%	2	2.5		Vrms
A _{RANGE}	Attenuation Range			31.5		dB
A _{VMIN}	Min. Attenuation		-1	0	1	dB
A _{VMAX}	Max. Attenuation		31	31.5	32	dB
A _{STEP}	Step Resolution		-1	0.5	1	dB
V _{DC}	DC Steps	Adjacent att. step	-3	0	3	mV
A _{VO1}	Voice Canceller Output 1	L _{IN} = R _{IN} , R _{IN} = ON, V _{mix} = 0V FIX, 0dB attenuation	5	6	7	dB
A _{VO2}	Voice Canceller Output 2	L _{IN} = R _{IN} = 0V V _{mix} = 1V _{rms} FIX, 0dB attenuation	-1	0	1	dB

TDA7466

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
SUPPLY						
A _{VO3}	Voice Canceller Output 3	L _{IN} = -R _{IN} , V _{mix} = 0V FIX, 0dB attenuation	5	6	7	dB
R _{LPV}	Low Pass Filter Resistance		24	32	40	KΩ
BASS CONTROL						
G _b	Control Range	Max. Boost/cut	±12.0	±14.0	±16.0	dB
B _{STEP}	Step Resolution		1	2	3	dB
R _B	Internal Feedback Resistance		33	44	55	KΩ
MIDDLE CONTROL						
G _m	Control Range	Max. Boost/cut	±12.0	±14.0	±16.0	dB
M _{STEP}	Step Resolution		1	2	3	dB
R _M	Internal Feedback Resistance		18.75	25	31.25	KΩ
TREBLE CONTROL						
G _t	Control Range	Max. Boost/cut	±13.0	±14.0	±15.0	dB
T _{STEP}	Step Resolution		1	2	3	dB

STANDARD SURROUND SOUND MATRIX

TEST CONDITION (Phase Resistor Selection D0=0, D1=1, D2=0, D3=1, D4=0, D5=1, D6=0, D7=1

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
G _{OFF}	In-phase Gain (OFF)	Mode OFF, Input signal of 1kHz, 1.4 V _{p-p} , R _{in} → R _{out} , L _{in} → L _{out}	-1	0	1	dB
D _{GOFF}	LR In-phase Gain Difference (OFF)	Mode OFF, Input signal of 1kHz, 1.4 V _{p-p} , R _{in} → R _{out} , L _{in} → L _{out}	-1	0	1	dB
G _{MOV}	In-phase Gain (Movie)	Movie mode, Effect Ctrl = -6dB Input signal of 1kHz, 1.4 V _{p-p} , R _{in} → R _{out} , L _{in} → L _{out}		8		dB
D _{GMOV}	LR In-phase Gain Difference (Movie)	Movie mode, Effect Ctrl = -6dB Input signal of 1kHz, 1.4 V _{p-p} , (R _{in} → R _{out}) - (L _{in} → L _{out})		0		dB
G _{MUS}	In-phase Gain (Music)	Music mode, Effect Ctrl = -6dB Input signal of 1kHz, 1.4 V _{p-p} , (R _{in} → R _{out}), (L _{in} → L _{out})		7		dB
D _{GMUS}	LR In-phase Gain Difference (Music)	Music mode, Effect Ctrl = -6dB Input signal of 1kHz, 1.4 V _{p-p} , (R _{in} → R _{out}) - (L _{in} → L _{out})		0		dB
L _{MON1}	Simulated L Output 1	Simulated Mode, Effect Ctrl = -6dB Input signal of 250Hz, 1.4 V _{p-p} , R _{in} and L _{in} → L _{out}		4.5		dB
L _{MON2}	Simulated L Output 2	Simulated Mode, Effect Ctrl = -6dB Input signal of 1kHz, 1.4 V _{p-p} , R _{in} and L _{in} → L _{out}		-4.0		dB
L _{MON3}	Simulated L Output 3	Simulated Mode, Effect Ctrl = -6dB Input signal of 3.6kHz, 1.4 V _{p-p} , R _{in} and L _{in} → L _{out}		7.0		dB

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
R _{MON1}	Simulated R Output 1	Simulated Mode, Effect Ctrl = -6dB Input signal of 250Hz, 1.4 V _{p-p} , R _{in} and L _{in} → R _{out}		- 4.5		dB
R _{MON2}	Simulated R Output 2	Simulated Mode, Effect Ctrl = -6dB Input signal of 1kHz, 1.4 V _{p-p} , R _{in} and L _{in} → R _{out}		3.8		dB
R _{MON3}	Simulated R Output 3	Simulated Mode, Effect Ctrl = -6dB Input signal of 3.6kHz, 1.4 V _{p-p} , R _{in} and L _{in} → R _{out}		- 20		dB
R _{LP1}	Low Pass Filter Resistance		7.5	10	12.5	KΩ
R _{HPI}	High Pass Filter Resistance		45	60	75	KΩ
R _{LPF}	LP Pin Impedance		7.5	10	12.5	KΩ

STANDARD SURROUND SOUND EFFECT CONTROL

C _{RANGE}	Control Range		- 21		- 6	dB
S _{STEP}	Step Resolution			1		dB

SURROUND SOUND MATRIX PHASE

R _{PS10}	Phase Shifter 1: D1 = 0, D0 = 0		8.8	11.8	14.8	KΩ
R _{PS11}	Phase Shifter 1: D1 = 0, D0 = 1		10.6	14.1	17.6	KΩ
R _{PS12}	Phase Shifter 1: D1 = 1, D0 = 0		13.4	17.9	22.4	KΩ
R _{PS13}	Phase Shifter 1: D1 = 1, D0 = 1		28	37.3	46.6	KΩ
R _{PS20}	Phase Shifter 2: D3 = 0, D2 = 0		4.2	5.6	7	KΩ
R _{PS21}	Phase Shifter 2: D3 = 0, D2 = 1		5.1	6.8	8.5	KΩ
R _{PS22}	Phase Shifter 2: D3 = 1, D2 = 0		6.3	8.4	10.5	KΩ
R _{PS23}	Phase Shifter 2: D3 = 1, D2 = 1		13.7	18.3	22.9	KΩ
R _{PS30}	Phase Shifter 3: D5 = 0, D4 = 0		9	12.1	15.1	KΩ
R _{PS31}	Phase Shifter 3: D5 = 0, D4 = 1		10.9	14.5	18.1	KΩ
R _{PS32}	Phase Shifter 3: D5 = 1, D4 = 0		13.6	18.1	22.6	KΩ
R _{PS33}	Phase Shifter 3: D5 = 1, D4 = 1		29.3	39.1	48.9	KΩ
R _{PS40}	Phase Shifter 4: D7 = 0, D6 = 0		9	12.1	15.1	KΩ
R _{PS41}	Phase Shifter 4: D7 = 0, D6 = 1		10.9	14.5	18.1	KΩ
R _{PS42}	Phase Shifter 4: D7 = 1, D6 = 0		13.6	18.1	22.6	KΩ
R _{PS43}	Phase Shifter 4: D7 = 1, D6 = 1		29.3	39.1	48.9	KΩ

SRS SURROUND SOUND MATRIX

CENTER	SRS Control Range		-31		0	dB
Step _C	Center Step Resolution			1		dB
SPACE	SRS Space Control Range			-31	0	dB
Step _S	Space Step Resolution			1		dB
P _{ERSP1}	Perspective 1	Input Signal of 125Hz SPACE = 0dB, CENTER = MUTE R _{in} = GND; L _{in} → R _{out}		12		dB
P _{ERSP2}	Perspective 2	Input Signal of 2.15KHz SPACE = 0dB, CENTER = MUTE R _{in} = GND; L _{in} → R _{out}		0		dB
L+R	L+ R SRS Curve	SPACE = MUTE, CENTER =0dB R _{in} = GND; L _{in} → R _{out}		-8.5		dB

TDA7466

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
SPEAKER & RECORD ATTENUATORS						
C_{range}	Control Range			79		dB
S_{STEP}	Step Resolution		0.5	1	1.5	dB
E_A	Attenuation set error	$A_v = 0$ to -20 dB	-1.5	0	1.5	dB
		$A_v = -20$ to -79 dB	-3	0	2	dB
V_{DC}	DC Steps	Adjacent att. steps	-3	0	3	mV
A_{MUTE}	Output Mute Condition		70	100		dB
R_{VAR}	Input Impedance		22.5	30	37.5	K Ω
SPEAKER ATTENUATORS						
V_{TH}	Zero Crossing Threshold	$D7 = 0$	$\frac{V_S}{2} + 20$		mV	
AUDIO OUTPUTS						
$N_{O(OFF)}$	Output Noise (OFF)	Output Mute, Flat $B_W = 20Hz$ to $20KHz$		4 5		μV_{rms} μV_{rms}
$N_{O(MOV)}$	Output Noise (Movie) Standard Surround Sound	Mode = Movie , $B_W = 20Hz$ to $20KHz$		30		μV_{rms}
$N_{O(MUS)}$	Output Noise (Music) Standard Surround Sound	Mode = Music , $B_W = 20Hz$ to $20KHz$,		30		μV_{rms}
$N_{O(SIM)}$	Output Noise (Simulated) Standard Surround Sound	Mode = Simulated, $B_W = 20Hz$ to $20KHz$		30		μV_{rms}
$N_{O(SRS)}$	Output Noise (SRS) Surround Sound	$B_W = 20Hz$ to $20KHz$		50		μV_{rms}
d	Distortion	$A_v = 0 ; V_{in} = 1V_{rms}$		0.01	0.1	%
S_c	Channel Separation		70	90		dB
V_{OCL}	Clipping Level	$d = 0.3\%$	2	2.5		Vrms
R_{OUT}	Output Resistance		10	30	50	Ω
V_{OUT}	DC Voltage Level			3.8		V
BUS INPUTS						
V_{IL}	Input Low Voltage				1	V
V_{IH}	Input High Voltage		3			V
I_{IN}	Input Current		-5		+5	μA
V_o	Output Voltage SDA Acknowledge	$I_o = 1.6mA$			0.4	V

I²C BUS INTERFACE

Data transmission from microprocessor to the TDA7466 and viceversa takes place through the 2 wires I²C BUS interface, consisting of the two lines SDA and SCL (pull-up resistors to positive supply voltage must be connected).

Data Validity

As shown in fig. 3, the data on the SDA line must be stable during the high period of the clock. The HIGH and LOW state of the data line can only change when the clock signal on the SCL line is LOW.

Start and Stop Conditions

As shown in fig.4 a start condition is a HIGH to LOW transition of the SDA line while SCL is HIGH. The stop condition is a LOW to HIGH transition of the SDA line while SCL is HIGH.

Byte Format

Every byte transferred on the SDA line must contain 8 bits. Each byte must be followed by an ac-

knowledge bit. The MSB is transferred first.

Acknowledge

The master (μ P) puts a resistive HIGH level on the SDA line during the acknowledge clock pulse (see fig. 5). The peripheral (audioprocessor) that acknowledges has to pull-down (LOW) the SDA line during this clock pulse.

The audioprocessor which has been addressed has to generate an acknowledge after the reception of each byte, otherwise the SDA line remains at the HIGH level during the ninth clock pulse time. In this case the master transmitter can generate the STOP information in order to abort the transfer.

Transmission without Acknowledge

Avoiding to detect the acknowledge of the audioprocessor, the μ P can use a simpler transmission: simply it waits one clock without checking the slave acknowledging, and sends the new data.

This approach of course is less protected from misworking.

Figure 3: Data Validity on the I²CBUS

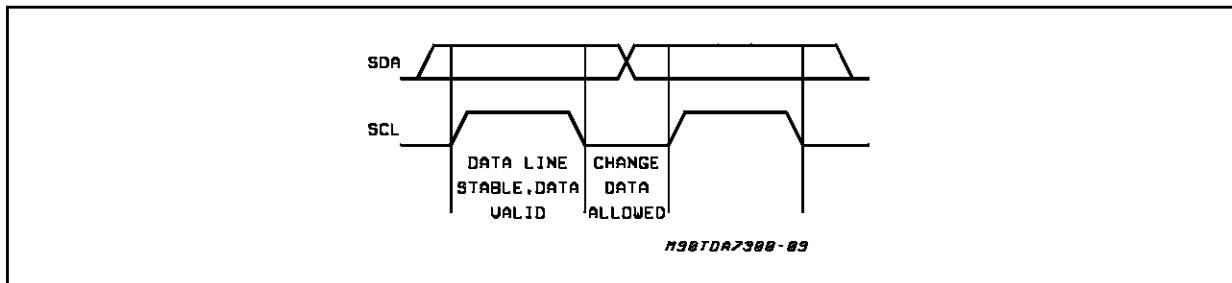


Figure 4: Timing Diagram of I²CBUS


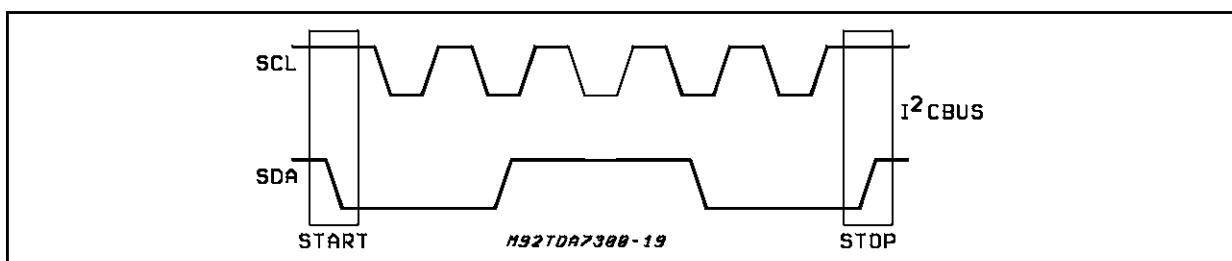


Figure 5: Acknowledge on the I²CBUS

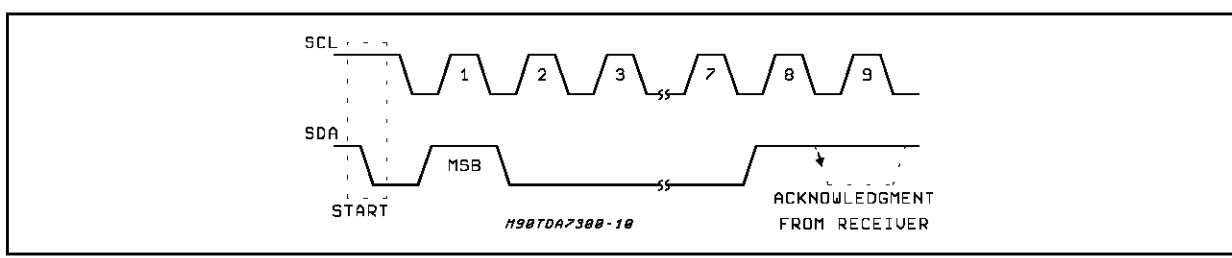

TDA7466

SOFTWARE SPECIFICATION


Interface Protocol

The interface protocol comprises:

- A start condition (S)
- A chip address byte, containing the TDA7466

address

- A subaddress bytes
- A sequence of data (N byte + acknowledge)
- A stop condition (P)

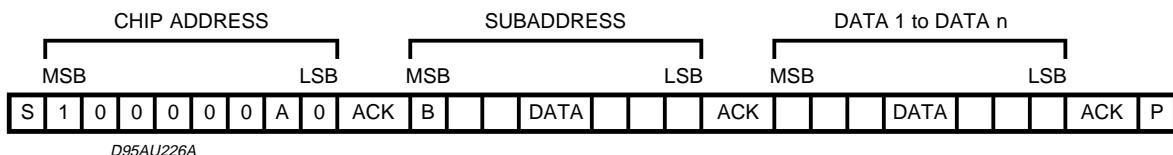

ACK = Acknowledge

S = Start

P = Stop

A = Address


B = Auto Increment

EXAMPLES

No Incremental Bus

The TDA7466 receives a start condition, the cor-

rect chip address, a subaddress with the MSB = 0 (no incremental bus), N-data (all these data concern the subaddress selected), a stop condition.

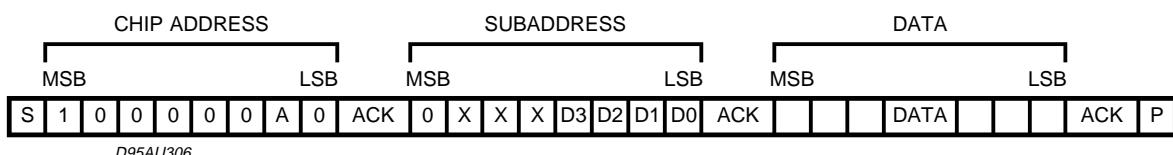


Incremental Bus

The TDA7466 receives a start condition, the correct chip address, a subaddress with the MSB = 1 (incremental bus): now it is in a loop condition with an autoincrease of the subaddress whereas

SUBADDRESS from "1XXX1010" to "1XXX1111" of DATA are ignored.

The DATA 1 concerns the subaddress sent, and the DATA 2 concerns the subaddress sent plus one in the loop etc. and, at the end, it receives the stop condition.

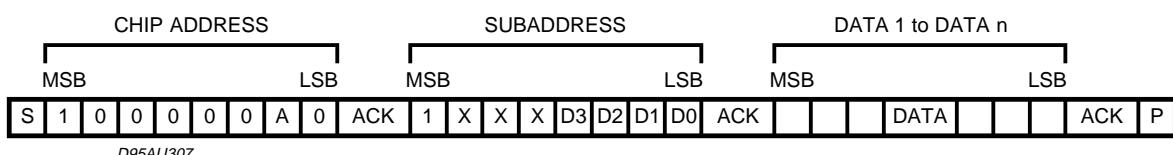

DATA BYTES (Address = 80(HEX)):**FUNCTION SELECTION:**

The first byte (subaddress)

MSB								LSB	SUBADDRESS
D7	D6	D5	D4	D3	D2	D1	D0		
B	X	X	X	0	0	0	0		INPUT ATTENUATION
B	X	X	X	0	0	0	1		SURROUND & OUT & EFFECT CONTROL
B	X	X	X	0	0	1	0		PHASE RESISTOR
B	X	X	X	0	0	1	1		BASS & NATURAL BASE
B	X	X	X	0	1	0	0		MIDDLE & TREBLE
B	X	X	X	0	1	0	1		SPEAKER ATTENUATION "L"
B	X	X	X	0	1	1	0		SPEAKER ATTENUATION "R"
B	X	X	X	0	1	1	1		RECORD ATTENUATION "L"
B	X	X	X	1	0	0	0		RECORD ATTENUATION "R"
B	X	X	X	1	0	0	1		INPUT MULTIPLEXER, VOICE CANCELLER & REC OUT
B	X	X	X	1	0	1	0		SRS / SPACE ATTENUATION
B	X	X	X	1	0	1	1		SRS / CENTER ATTENUATION

B = 1 INCREMENTAL BUS; ACTIVE

B = 0 NO INCREMENTAL BUS;

X = DONT'CARE

INPUT ATTENUATION SELECTION

MSB								LSB	INPUT ATTENUATION
D7	D6	D5	D4	D3	D2	D1	D0		0.5 dB STEPS
	1					0	0	0	0
	1					0	0	1	-0.5
	1					0	1	0	-1
	1					0	1	1	-1.5
	1					1	0	0	-2
	1					1	0	1	-2.5
	1					1	1	0	-3
	1					1	1	1	-3.5
									4 dB STEPS
	1	0	0	0					0
	1	0	0	1					-4
	1	0	1	0					-8
	1	0	1	1					-12
	1	1	0	0					-16
	1	1	0	1					-20
	1	1	1	0					-24
	1	1	1	1					-28

INPUT ATTENUATION = 0 ~ -31.5dB

TDA7466

STANDARD SURROUND SELECTION

MSB								LSB	
D7	D6	D5	D4	D3	D2	D1	D0	SURROUND MODE	
							0	0	SIMULATED
							0	1	MUSIC
							1	0	OFF
							1	1	MOVIE
									OUT
						0			VAR
						1			FIX
									EFFECT CONTROL
	0	0	0	0					-6
	0	0	0	1					-7
	0	0	1	0					-8
	0	0	1	1					-9
	0	1	0	0					-10
	0	1	0	1					-11
	0	1	1	0					-12
	0	1	1	1					-13
	1	0	0	0					-14
	1	0	0	1					-15
	1	0	1	0					-16
	1	0	1	1					-17
	1	1	0	0					-18
	1	1	0	1					-19
	1	1	1	0					-20
	1	1	1	1					-21

PHASE RESISTOR SELECTION

MSB								LSB	SURROUND PHASE RESISTOR
D7	D6	D5	D4	D3	D2	D1	D0	PHASE SHIFT 1 (KΩ)	
							0	0	12
							0	1	14
							1	0	18
							1	1	37
									PHASE SHIFT 2 (KΩ)
					0	0			6
					0	1			7
					1	0			8
					1	1			18
									PHASE SHIFT 3 (KΩ)
		0	0						12
		0	1						14
		1	0						18
		1	1						39
									PHASE SHIFT 4 (KΩ)
0	0								12
0	1								14
1	0								18
1	1								39

BASS SELECTION									
MSB	D7	D6	D5	D4	D3	D2	D1	LSB	BASS
	D0	2 dB STEPS							
					0	0	0	0	-14
					0	0	0	1	-12
					0	0	1	0	-10
					0	0	1	1	-8
					0	1	0	0	-6
					0	1	0	1	-4
					0	1	1	0	-2
					0	1	1	1	0
					1	1	1	1	0
					1	1	1	0	2
					1	1	0	1	4
					1	1	0	0	6
					1	0	1	1	8
					1	0	1	0	10
					1	0	0	1	12
					1	0	0	0	14
								NATURAL BASE	
			0					NBRIN, NBRO, NBLIN, NBLO PIN ACTIVE	
			1					NO NBRIN, NBRO, NBLIN, NBLO PIN	

When external components aren't connected, the data from NATURAL BASE must put "OFF"

TDA7466

MIDDLE & TREBLE SELECTION									
MSB	D7	D6	D5	D4	D3	D2	D1	LSB	MIDDLE
					0	0	0	0	-14
					0	0	0	1	-12
					0	0	1	0	-10
					0	0	1	1	-8
					0	1	0	0	-6
					0	1	0	1	-4
					0	1	1	0	-2
					0	1	1	1	0
					1	1	1	1	0
					1	1	1	0	2
					1	1	0	1	4
					1	1	0	0	6
					1	0	1	1	8
					1	0	1	0	10
					1	0	0	1	12
					1	0	0	0	14
									TREBLE
									2 dB STEPS
0	0	0	0	0					-14
0	0	0	0	1					-12
0	0	0	1	0					-10
0	0	0	1	1					-8
0	0	1	0	0					-6
0	0	1	0	1					-4
0	1	0	0	0					-2
0	1	0	0	1					0
0	1	1	0	0					0
1	1	1	1	1					0
1	1	1	1	0					2
1	1	1	0	1					4
1	1	1	0	0					6
1	0	1	1	1					8
1	0	1	0	0					10
1	0	0	1	1					12
1	0	0	0	0					14

LEFT CHANNEL SPEAKER ATTENUATION SELECTION								LSB	SPEAKER/RECORD ATT
MSB	D7	D6	D5	D4	D3	D2	D1	D0	1 dB STEPS
						0	0	0	0
						0	0	1	-1
						0	1	0	-2
						0	1	1	-3
						1	0	0	-4
						1	0	1	-5
						1	1	0	-6
						1	1	1	-7
								8 dB STEPS	
	0	0	0	0					0
	0	0	0	1					-8
	0	0	1	0					-16
	0	0	1	1					-24
	0	1	0	0					-32
	0	1	0	1					-40
	0	1	1	0					-48
	0	1	1	1					-56
	1	0	0	0					-64
	1	0	0	1					-72
								MUTE	
	1	0	1	X					
	1	1	X	X					
LEFT & RIGHT CHANNELS BOTH									
MSB	D7	D6	D5	D4	D3	D2	D1	D0	ZERO CROSS ATT. MODE
	D7	D6	D5	D4	D3	D2	D1	D0	1 dB STEPS
	0								ON
	1								OFF

X = DON'T CARE

SPEAKER/RECORD ATTENUATION = 0dB ~ -79dB

TDA7466

RECORD AND RIGHT CHANNEL SPEAKER ATTENUATION SELECTION									
MSB	D7	D6	D5	D4	D3	D2	D1	LSB	SPEAKER/RECORD ATT
	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	1	1	-1
	0	0	0	0	0	1	0	0	-2
	0	0	0	0	0	1	1	1	-3
	0	0	0	0	1	0	0	0	-4
	0	0	0	0	1	0	1	1	-5
	0	0	0	0	1	1	0	0	-6
	0	0	0	0	1	1	1	1	-7
	8 dB STEPS								
	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	1	0	0	-8
	0	0	0	1	0	0	0	0	-16
	0	0	1	0	0	0	0	0	-24
	0	0	1	1	0	0	0	0	-32
	0	1	0	0	0	0	0	0	-40
	0	1	0	1	0	0	0	0	-48
	0	1	1	0	0	0	0	0	-56
	0	1	1	1	0	0	0	0	-64
	1	0	0	0	0	0	0	0	-72
	MUTE								
	1	0	1	X					
	1	1	X	X					

X = DON'T CARE

SPEAKER/RECORD ATTENUATION = 0dB ~ -79dB

VOICE CANCELLER/INPUT/RECOUT L & R SELECTION									
MSB	D7	D6	D5	D4	D3	D2	D1	LSB	
D0	VOICE CANCELLER								
1						1	1	0	OFF
1						1	1	1	ON
	REC OUT "L"								
1				0	0	1	1	1	VAR 1 (3BAND)
1				0	1	1	1	1	VAR 2 (SURR)
1				1	0	1	1	1	VAR 3 (REAR)
1				1	1	1	1	1	FIX
	REC OUT "R"								
1	0	0				1	1	1	VAR 1(3BAND)
1	0	1				1	1	1	VAR 2 (SURR)
1	1	0				1	1	1	VAR 3 (REAR)
1	1	1				1	1	1	FIX

SRS SPACE CONTROL: ATTENUATION SELECTION							LSB	SPACE ATTENUATION	
MSB	D7	D6	D5	D4	D3	D2	D1	D0	1 dB STEPS
						0	0	0	0
						0	0	1	-1
						0	1	0	-2
						0	1	1	-3
						1	0	0	-4
						1	0	1	-5
						1	1	0	-6
						1	1	1	-7
							8 dB STEPS		
		0	0	0					0
		0	0	1					-8
		0	1	0					-16
		0	1	1					-24
							MUTE		
		1	X	X	X	X	X	X	

X = DON'T CARE

SPEAKER/RECORD ATTENUATION = 0dB ~ -31dB

SRS CENTER CONTROL: ATTENUATION SELECTION							LSB	CENTER ATTENUATION	
MSB	D7	D6	D5	D4	D3	D2	D1	D0	1 dB STEPS
						0	0	0	0
						0	0	1	-1
						0	1	0	-2
						0	1	1	-3
						1	0	0	-4
						1	0	1	-5
						1	1	0	-6
						1	1	1	-7
							8 dB STEPS		
		0	0	0					0
		0	0	1					-8
		0	1	0					-16
		0	1	1					-24
							MUTE		
		1	X	X	X	X	X	X	
							SRS INPUT		
	0								NO SURROUND SIGNAL
	1								SURROUND SIGNAL
							SRS SWITCH		
0									SRS ON
1									SRS OFF

X = DON'T CARE

SPACE ATTENUATION = 0dB ~ -31dB


RECOMMENDED TO ATTENUATE -3dB IN INPUT ATTENUATION DURING "SRS OFF"
TO FULFILL SRS BYPASS MODE WHEN SRS FUNCTION IS USED

TDA7466


POWER ON RESET	
SURROUND & OUT CONTROL+ EFFECT CONTROL	OFF + FIX + MAX ATTENUATION
SPEAKER/RECORD ATTENUATION L & R MODE	MUTE + ZERO CROSS ATT.OFF
INPUT ATTENUATION + REAR SWITCH	MAX ATTENUATION + ON
NATURAL BASE	OFF
VOICE CANCELLER	OFF
INPUT	IN1
MIX SWITCH	NO MIX PIN
SRS SURROUND	OFF + MAX ATTENUATION
BASS & MIDDLE	2dB
TREBLE	0dB

PIN DESCRIPTION


PIN: L-OUT, R-OUT, RECOUT-L, RECOUT-R

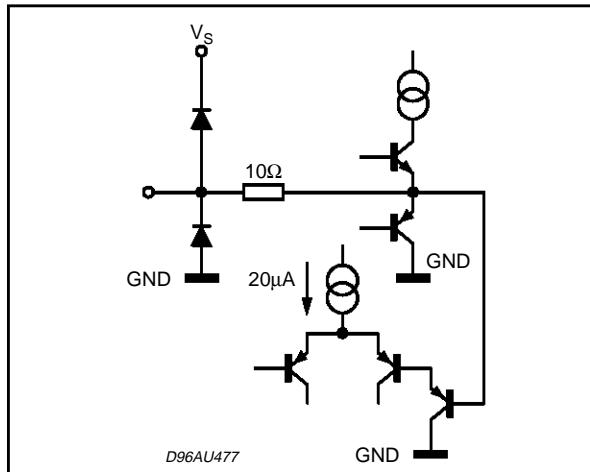


PIN: HP1

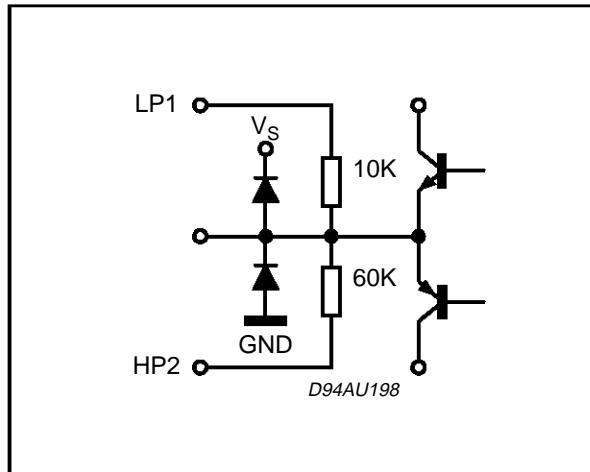


PIN: HP2

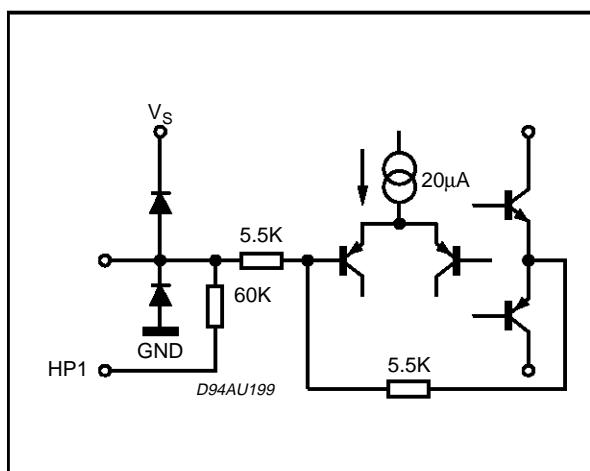


PIN: L-IN, R-IN

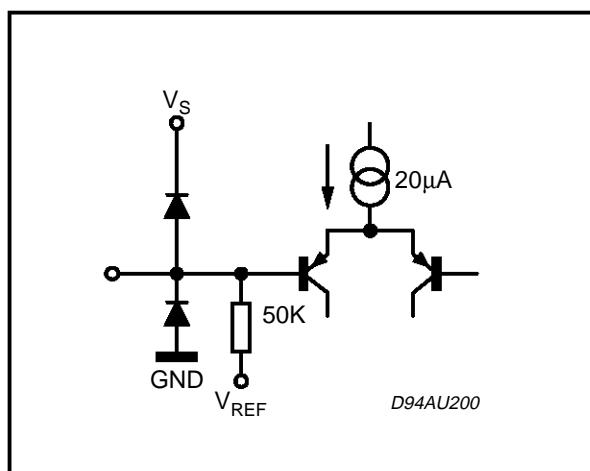


PIN: VAR-L, VAR-R,

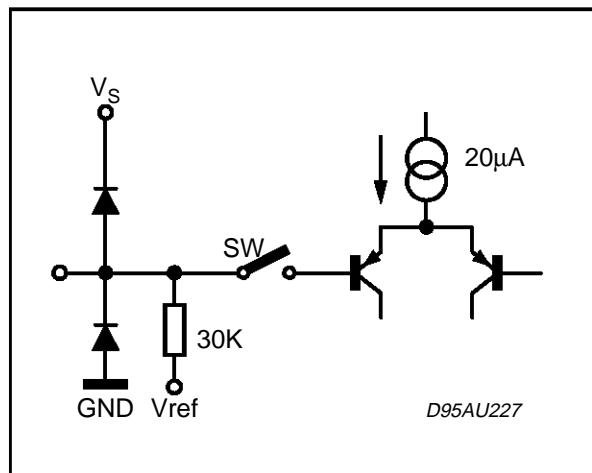


PIN: CREF

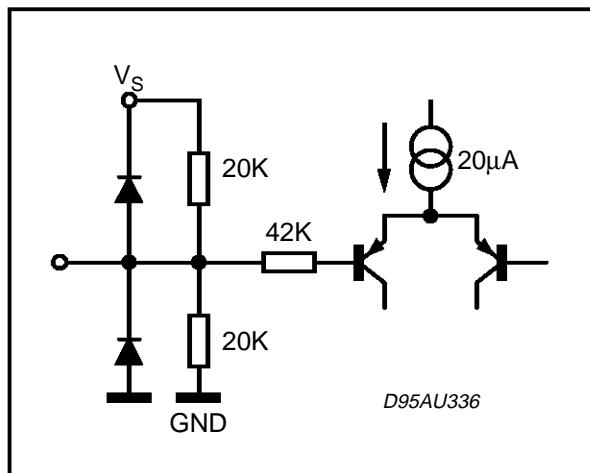


PIN: LP1

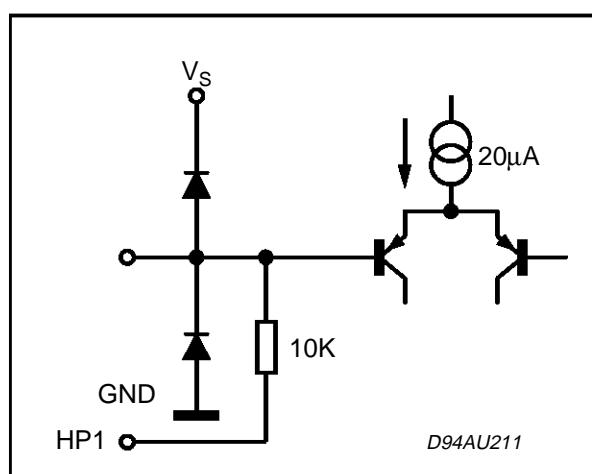


PIN: SCL, SDA

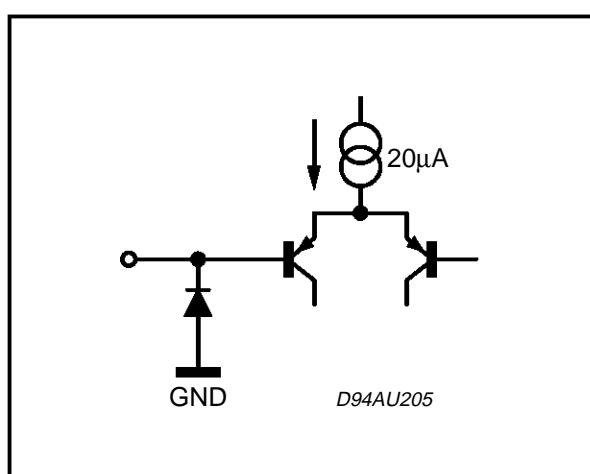

PIN: PS1, PS2, PS3, PS4, LP

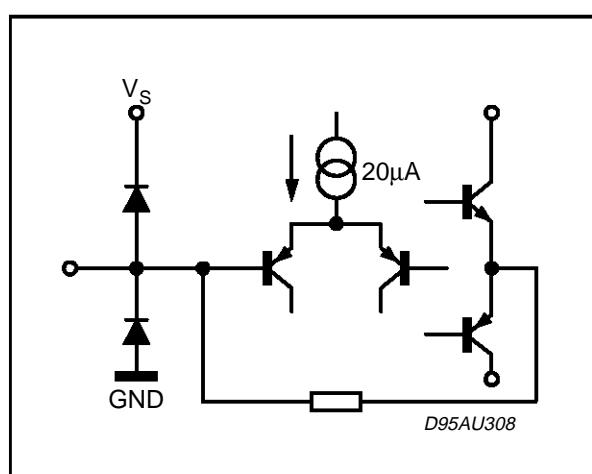


PIN: NETW2

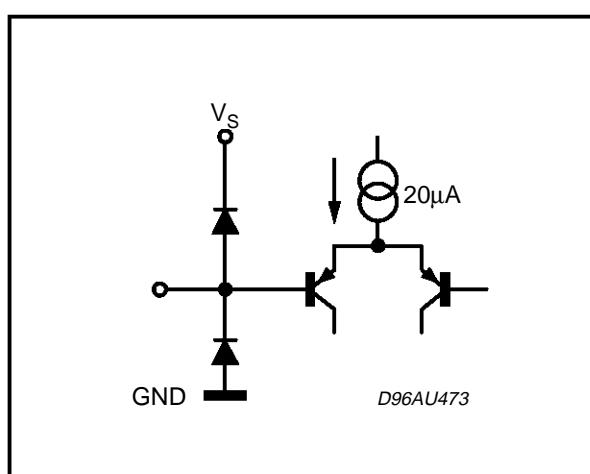


TDA7466


PIN: BASSO-L, BASSO-R, NETW1

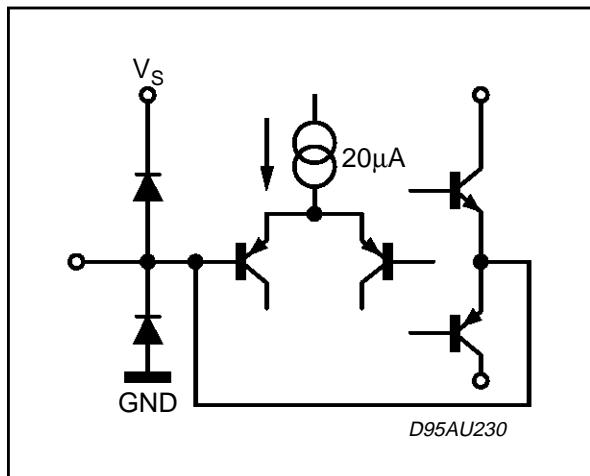


PIN: BASS-LI,BASS-RI,MIDDLE-LI,MIDDLE-RI,

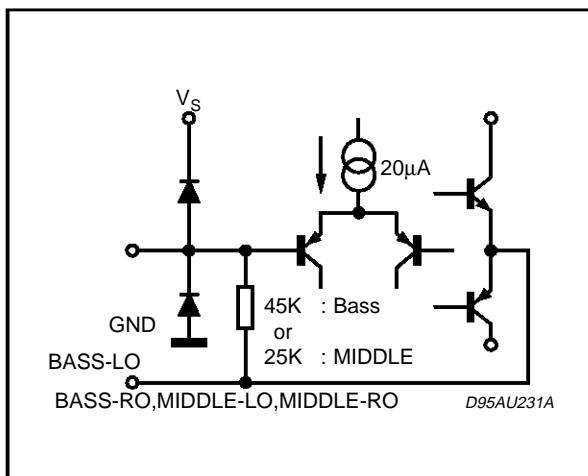


PIN: BASS-LO,BASS-RO,MIDDLE-LO,MIDDLE-RO,

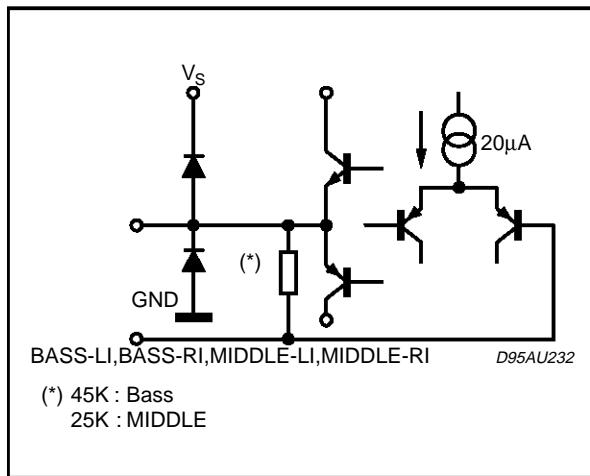


PIN: TREBLE-L,TREBLE-R

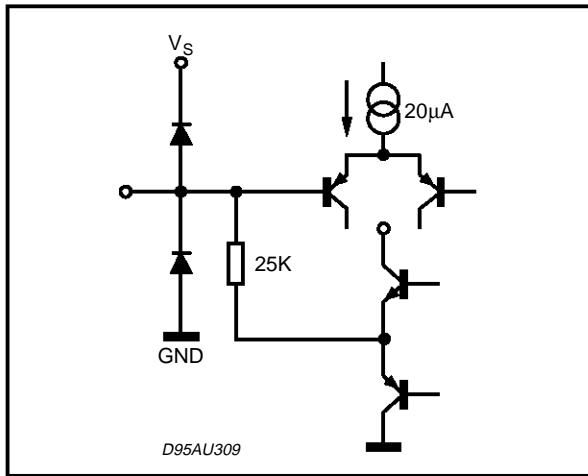


PIN: VOUT REF

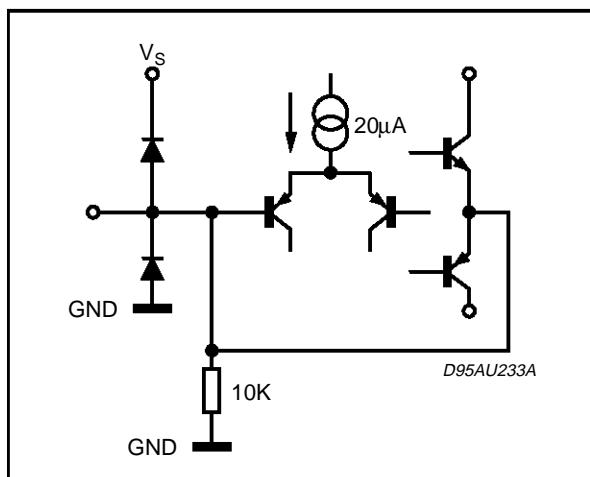

PIN: NBLIN,NBRIN

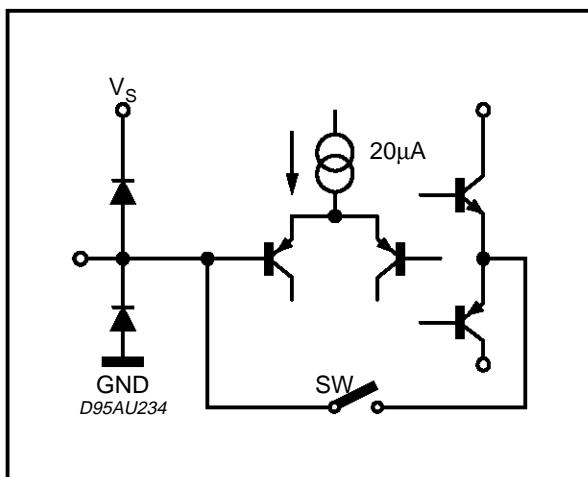


PIN: NBLO, NBRO

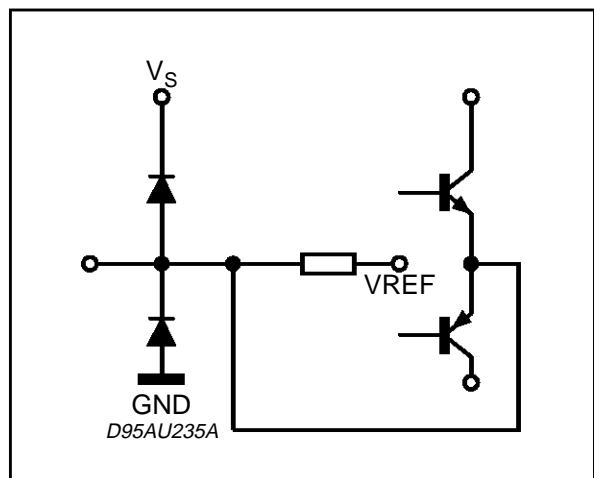

TDA7466

SDIP42 PACKAGE MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			5.08			0.20
A1	0.51			0.020		
A2	3.05	3.81	4.57	0.120	0.150	0.180
B	0.38	0.46	0.56	0.0149	0.0181	0.0220
B1	0.89	1.02	1.14	0.035	0.040	0.045
c	0.23	0.25	0.38	0.0090	0.0098	0.0150
D	36.58	36.83	37.08	1.440	1.450	1.460
E	15.24		16.00	0.60		0.629
E1	12.70	13.72	14.48	0.50	0.540	0.570
e		1.778			0.070	
e1		15.24			0.60	
e2			18.54			0.730
e3			1.52			0.060
L	2.54	3.30	3.56	0.10	0.130	0.140

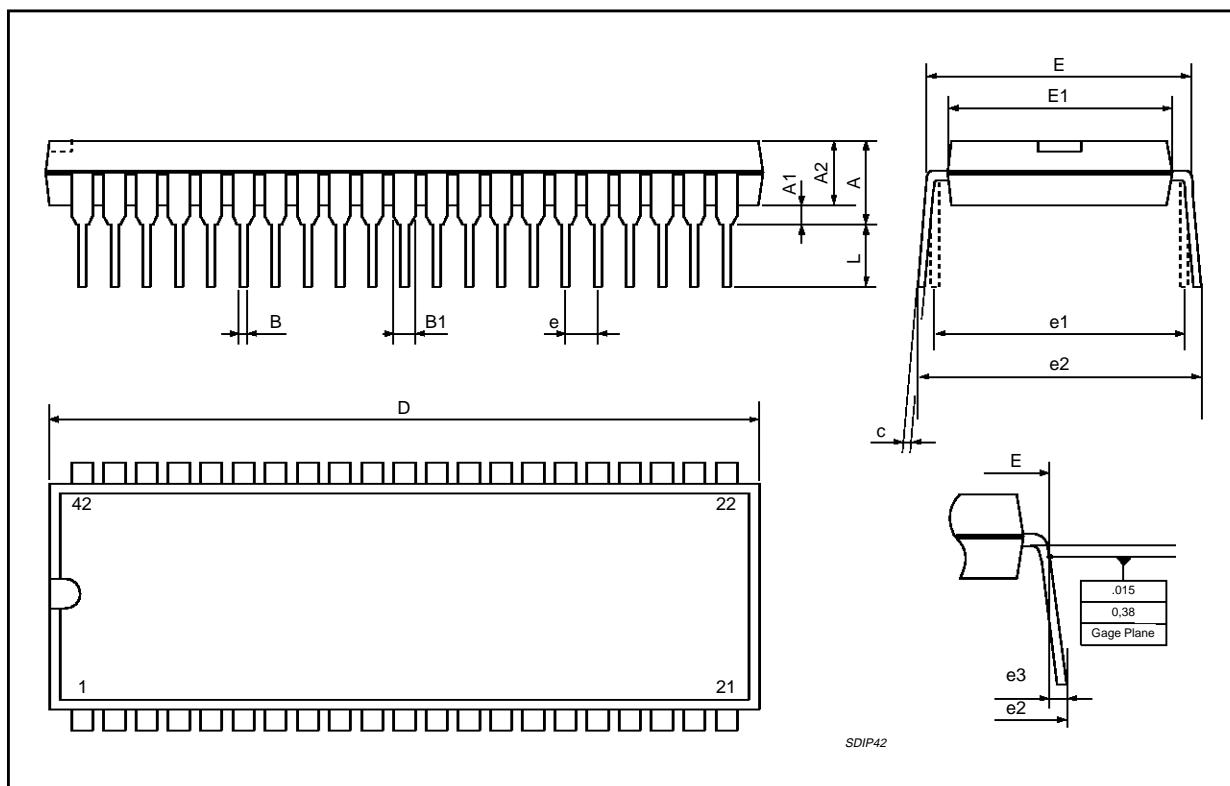

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics – Printed in Italy – All Rights Reserved

The Sound Retrieval System and **SRS**  are registered trademarks of SRS Labs, Inc.

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.