


LTR.	DESCRIPTION	DATE	APP'D.
01	RELEASED PER ECO #2321	JC	11/5/91

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

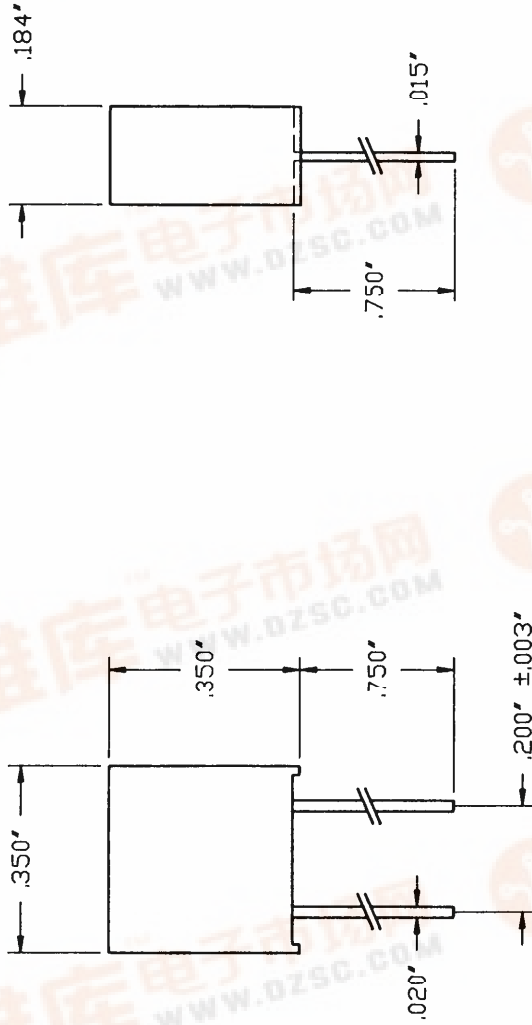

NOTES:  
 1. UL RECOGNIZED, FILE E19180;  
 GUIDE JDYX2; CSA CERTIFIED  
 FILE 42731, CLASS 1421-01.

**COPY**

VICOR ANDOVER, MA. U.S.A.	
FUSE	
3 AMPS, 250 VOLTS	
TOLERANCES (EXCEPT AS NOTED)	DRAWING NO.
.XX ± .01	02178
.XXX ± .005	REV.
FRACT ± 1/64	01
ANGLES ± .10	SHEET 1 OF 1
SCALE: 2:1	
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)	
DO NOT SCALE DRAWING	
NEXT ASSY:	

ELECTRICAL SPECIFICATIONS

AMPERAGE	_____	3 AMPS
VOLTAGE	_____	250 VOLTS
INTERRUPTING & VOLTAGE RATINGS	_____	50 AMPS
TIME-CURRENT CHARACTERISTICS	_____	CARRY 100% FOR 4 HRS MIN. OPEN AT 200% IN 10 SEC. MAX.
COLD RESISTANCE DATA	_____	0.071 Ω