

**Giant Magneto Resistive Position Sensor****S 4****Preliminary Data**


This angle sensor is based on the brand new **Giant Magneto Resistive (GMR)** technology. It is outstanding for the huge tolerances it offers to the user in assembly.

**Features**

- GMR sensor on copper leadframe
- Sensitive to the direction, not to the intensity of the magnetic field
- Constant  $T_C$  of basic resistance  $R$  and magneto resistance  $\Delta R$

**Typical Applications**

- Rotation sensing with large air gaps according to sketch below
- Angle encoders
- Contactless potentiometers

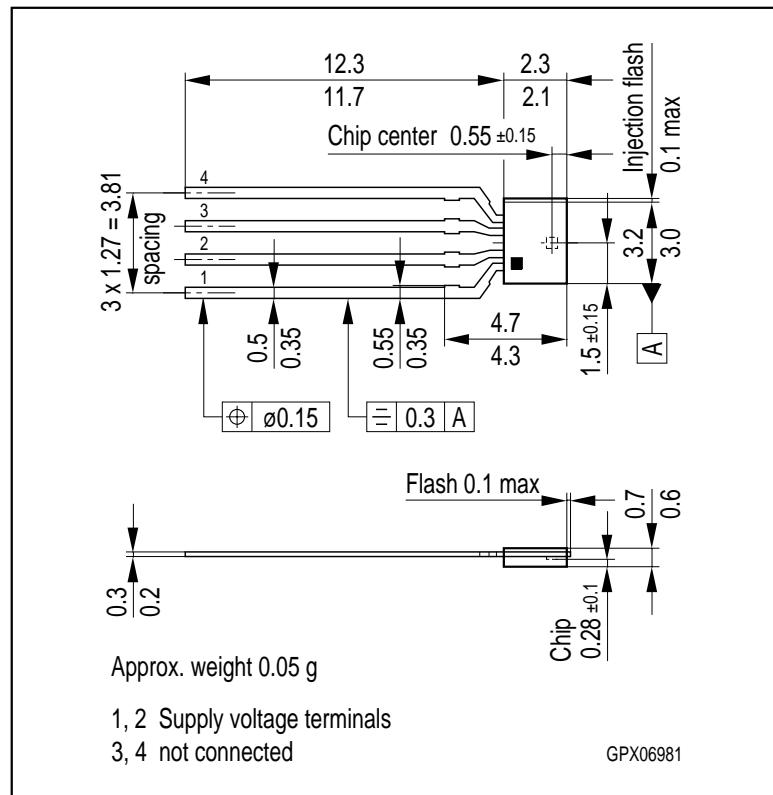


Dimensions in mm

Internal magnetization is in direction of the longest side of the housing.

Type	Marking	Ordering Code
S 4 (GMR)	S 4	Q62705-K5002

The GMR S 4 is an angle sensor based on sputtered metallic multilayer technology. The outstanding feature of this magnetic sensor is the fact that it is **sensitive to the orientation of the magnetic field** and not to its intensity as long as the field is in a range between 5 ... 15 kA/m. **This means, the signal output of this sensor is independent of the sensor position relative to the magnet in lateral, axial or rotational direction in the range of several millimeters.** Optimum results are achieved by using magnetic targets like permanent magnets or magnetic pole-wheels. **There is no need for a biasing magnet!** Due to the linear change of both, basic and field dependent part of the resistance vs. temperature, simple and efficient electronic compensation of  $T_C$  ( $R, \Delta R$ ) is possible.

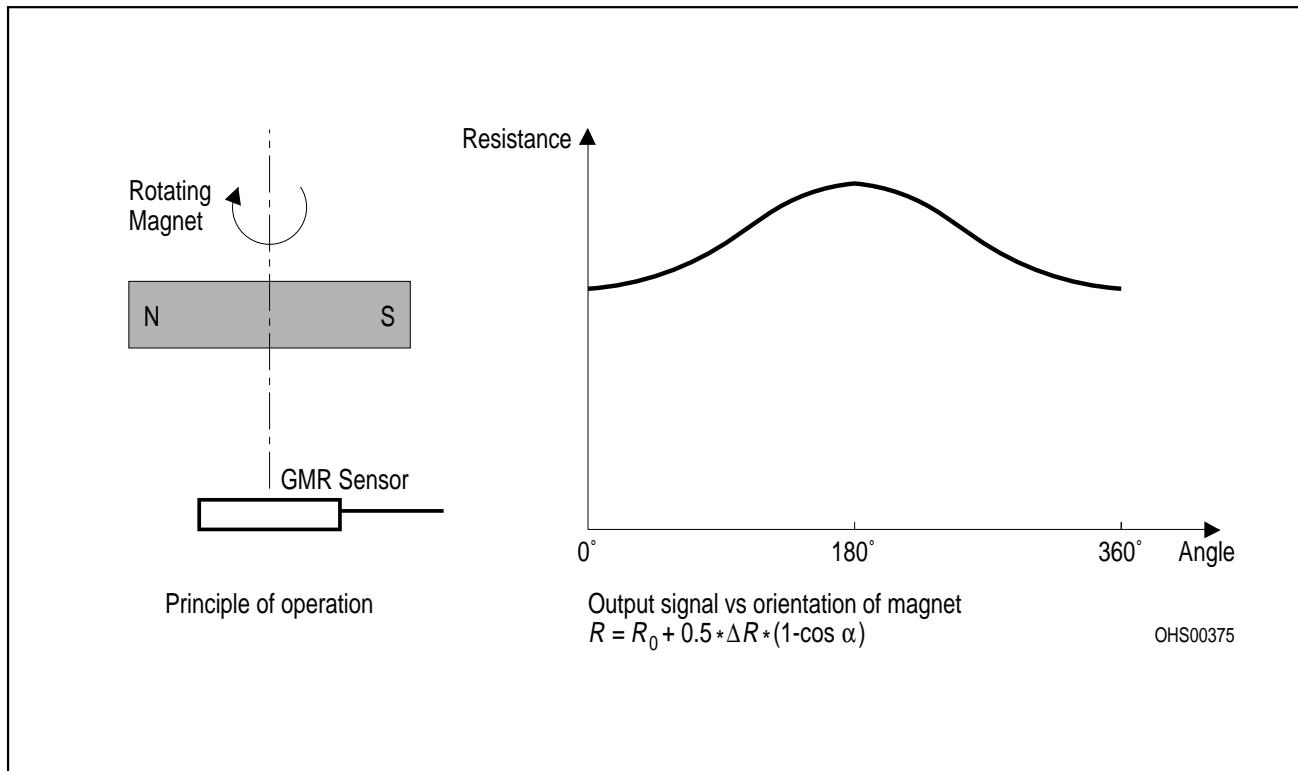

## Maximum Ratings

Parameter	Symbol	Value	Unit
Operating temperature	$T_A$	- 40 ... + 150	°C
Storage temperature	$T_{stg}$	- 50 ... + 150	°C
Supply current	$I_1$	5	mA
Thermal conductivity	$G_{thC}$ A $G_{thC}$ C	> 2.2 > 5	mW/K mW/K
Magnetic field <sup>1)</sup>	$H_{rot}$	< 15	kA/m

<sup>1)</sup> larger fields may reduce the magnetoresistive effect irreversibly

## Characteristics ( $T_A = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Nominal supply current	$I_{1N}$	4	mA
Basic resistance	$R_0$	> 700	$\Omega$
Magnetoresistive effect $H_{\text{rot}} = 5 \dots 10 \text{ kA/m}$	$\Delta R/R_0$	$\approx 4$	%
Temperature coefficient of basic resistance	$TC_{R0}$	+ 0.09 ... + 0.12	%/K
Temperature coefficient of magnetoresistance	$TC_{\Delta R}$	- 0.12 ... - 0.09	%/K
Temperature coefficient of magnetoresistive effect	$TC_{\Delta R/R0}$	- 0.27 ... - 0.23	%/K
Hysteresis at $H_{\text{rot}} = 10 \text{ kA/m}$	$H_{\text{ys}}$	< 2	degrees

## Application Hints

The application mode of the GMR position sensor is preferably as a bridge or halfbridge circuit. In every case this type of circuit compensates for the  $T_C$  of the resistance value  $R_0$ . To compensate for the  $T_C$  of the GMR effect  $\Delta R/R_0$ , if there is the necessity, is left to the application circuit and can be done for example with a NIC circuit. When operated over a complete  $360^\circ$  turn, a total signal of  $\approx 20 \text{ mV/V}$  is achieved at  $25^\circ\text{C}$  with a halfbridge. The output signal is doubled when a fullbridge circuit is used. In the case of linear position sensing, the electrical circuit remains unchanged.