


THIS DOCUMENT AND THE DATA DISCLOSED
HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
USED, OR DISCLOSED IN WHOLE OR IN PART
TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

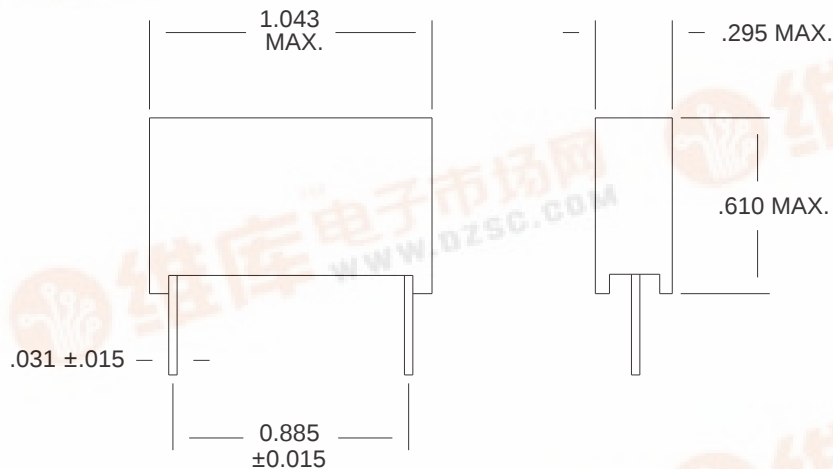

NOTES:

- 1: CAPACITORS - DIELECTRIC, POLYESTER-FILM.
- 2: INTERNATIONAL SAFETY AGENCY APPROVALS
AND MARKINGS FROM: VDE, SEV, DEMKO, SEMKO,
NEMKO, SETI, UL, IMQ, OVE.

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE	250 VAC, 50/60HZ
CAPACITANCE	.15uF, ± 20%
CLASS X2	
DISSIPATION FACTOR	1% MEASURED AT 1 kHz.
MAX. PULSE RATE TIME	Du/Dt ACC.TO VDE 5651 100 V /uSEC.

VICOR ANDOVER, MA. U.S.A.

DRAWN:	10/89	AC-CAPACITOR .15uF, 250VAC, (X2)	
CHECKED: M L S			
APPD:			
ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE DRAWING		TOLERANCES (EXCEPT AS NOTED) .XX ± .01 .XXX ± .005 FRACT ± 1/64 ANGLES ± 1°	DRAWING NO.
			03269
NEXT ASSY:		SCALE: NTS	REV. A
		SHEET 1 OF 1	