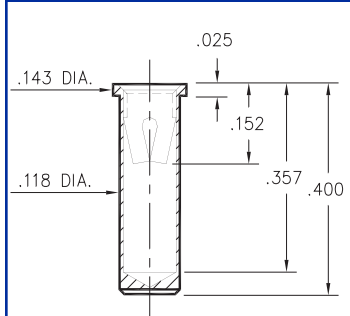
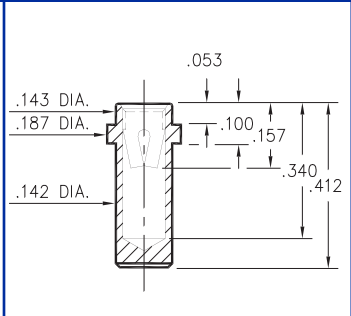
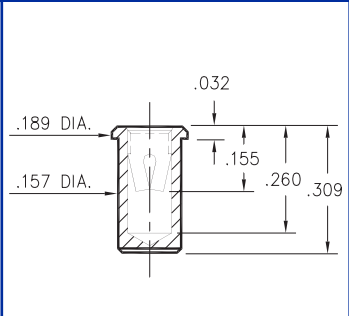
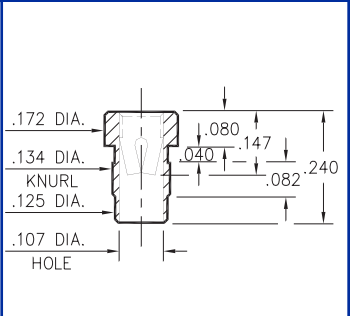
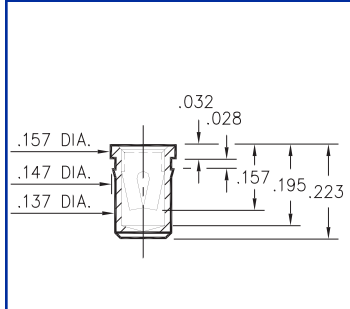
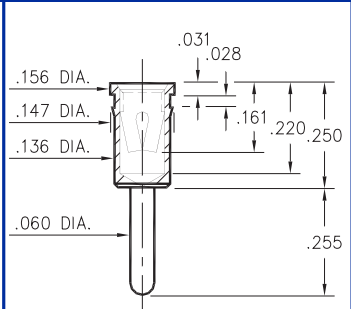
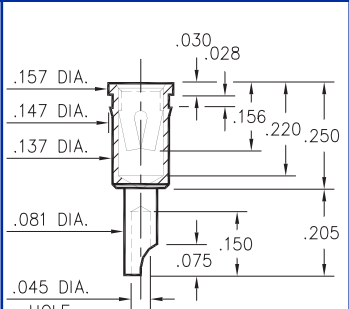
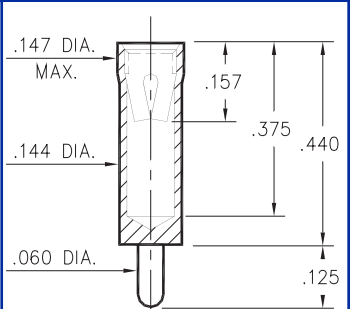
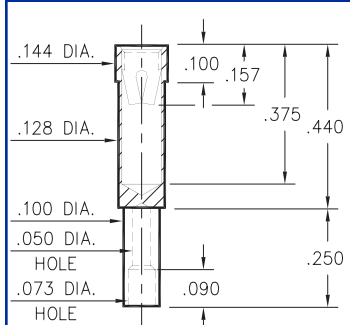
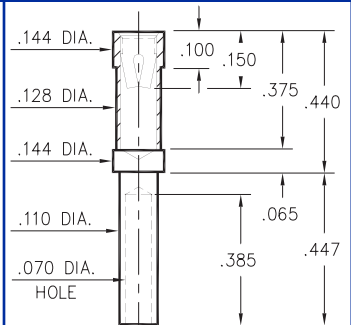
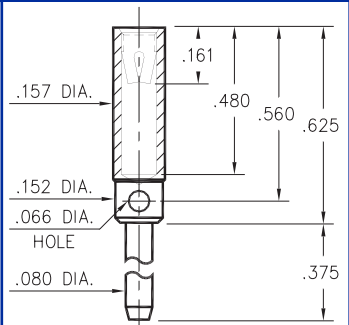
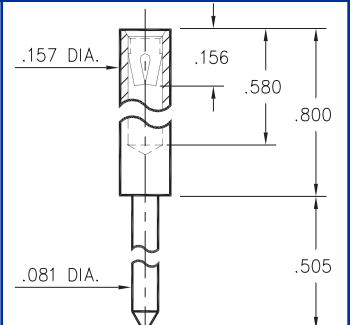


| 0394 | 0393 | 0391 | 9016 |
|--|--|--|---|
|  <p>0394-0-15-XX-07-XX-10-0 Solder mount in .120 min. mounting hole</p> |  <p>0393-0-15-XX-07-XX-10-0 Solder mount in .144 min. mounting hole</p> |  <p>0391-0-15-XX-07-XX-10-0 Solder mount in .159 min. mounting hole</p> |  <p>9016-0-15-XX-07-XX-10-0 Press-fit in .131 mounting hole</p> |
| 0493 | 0490 | 0616 | 0387 |
|  <p>0493-0-15-XX-07-XX-10-0 Press-fit in .144 mounting hole</p> |  <p>0490-0-15-XX-07-XX-04-0 Press-fit in .144 mounting hole</p> |  <p>0616-0-18-XX-07-XX-10-0 Press-fit in .144 mounting hole</p> |  <p>0387-0-15-XX-07-XX-04-0 Solder mount in .063 min. mounting hole</p> |
| 0370 | 4040 | 0491 | 9214 |
|  <p>0370-0-19-XX-07-XX-10-0 #18 Gage crimp barrel</p> |  <p>4040-0-19-XX-07-XX-10-0 Wire Termination</p> |  <p>0491-0-19-XX-07-XX-04-0 For use in stackable patch cords</p> |  <p>9214-0-15-XX-07-XX-10-0 Solder mount in .083 min. mounting hole</p> |
| <p>SPECIFICATIONS</p> <p>SHELL MATERIAL: Brass Alloy 360, 1/2 Hard</p> <p>CONTACT MATERIAL: Beryllium Copper Alloy 172, HT</p> <p>DIMENSION IN INCHES TOLERANCES ON: LENGTHS: ±.005 DIAMETERS: ±.002 ANGLES: ± 2°</p> | <p>ORDER CODE: XXXX - 0 - 1X - XX - 07 - XX - XX - 0</p> <p>BASIC PART # →</p> <p>SPECIFY SHELL FINISH: →</p> <p>01 200μ" TIN/LEAD OVER NICKEL 15 10μ" GOLD OVER NICKEL</p> <p>SPECIFY CONTACT FINISH: →</p> <p>01 200μ" TIN/LEAD OVER NICKEL 14 10μ" GOLD OVER NICKEL 27 30μ" GOLD OVER NICKEL</p> <p>↑ SELECT CONTACT</p> <p>#07 CONTACT (DATA ON PAGE 214)</p> | | |